Hood type dish & glasswasher - ECOMAX602

Single phase hood type dish & glasswasher for straight or corner applications

Benches etc not included

Product Advantages:

- **Easy-to-use** electronic controls with 2 cycles - 75 & 150 seconds
- Electronic temperature gauges
- Suitable for all dish & glass washing applications. **Useable chamber height of 440mm.** Able to wash 1/1 GN pans when using optional open ended tray racks
- **Low 2.9 litres per cycle rinse volume** dish / glasswasher
- **Fully enclosed 4 sided** hood design - avoiding loss of energy / steam
- Optimum hygienic - deep drawn tank with coved corners (no welds) and **SELF-CLEANING CYCLE**
- Polypropylene wash and stainless steel rinse arm with **patented WIDE ANGLE FAN** nozzle to maximise wash & rinse performance
- Wash pump inlet strainer to ensure machine reliability
- Includes fill hose, power lead / plug & pump-out drain for quick & easy installation
- Includes 1 x plate rack & 1 x cutlery holder
- Back flow prevention device as standard to meet Watermark Approval & ATS 5200.101

Technical Data

drain connection	Pump-out drain standard - 20mm inner / 25mm outer diam.
fresh water connection: pressure hose 1000mm flow pressure incoming water temperature	Connection size: 3/4" BSP 50-1000kPa 55-65°C
power cord	15amp single phase plug & lead
hose for detergent hose for rinse aid	Optional accessories
wash tank temperature	55-65°C
rinse water temperature (booster tank) low temp cut-out (thermostop) activated	Minimum 82°C Yes
cycle times	75 sec. 150 sec.
water consumption	2.9litres
tank capacity	21 litres
tank heating	2.5kW
power supply	240/50/1 - 15amp
booster loading	2.6kW
total loading	3.2kW
pump capacity	0.4kW
loading height	440mm
bench to bench - internal dimension	628mm

Water hardness should not exceed 3°dH, if higher we recommend using a water softener.

If mineral content is high a demineraliser may be advisable.

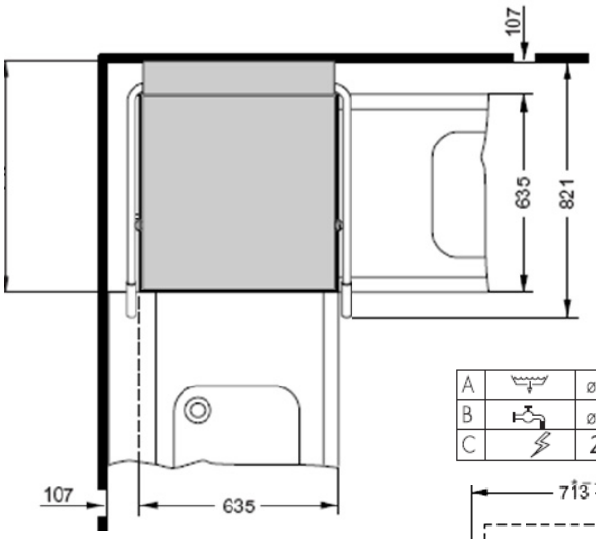
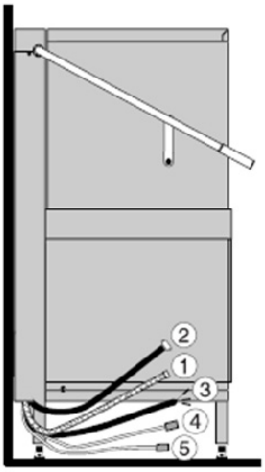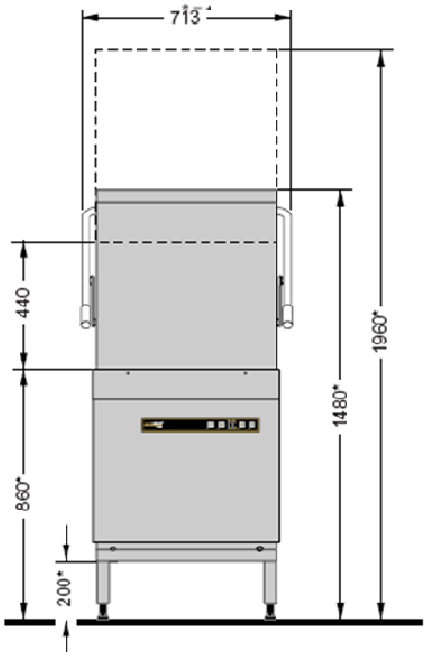
A		ø50 mm dia
B		ø3/4" ss hose
C		240/50/1