PROFI rack conveyor dishwasher - 120 / 180 racks / hour

Advantages:

- High performance **pre-wash "L"**
- **Heavy-duty "A" wash tank** for maximum wash results
- Stainless steel wash & rinse arms with **patented WIDE ANGLE FAN** nozzle to maximise wash and rinse performance
- Triple rinse for best rinse result low rinse volume - 160 litres / hr
- 2 speeds—120 / 180 racks / hr
- Heat recovery C20—fill on hot water and then run on cold
- **SMARTRONIC** Single button control ergonomically positioned at the entry of the machine. One button - on, fill, start, stop and drain.
- Optimum hygienic safety by deep drawn tank with coved corners (no welds)
- Stainless steel single piece strainer pan
- Stainless steel wash pump - self draining
- **RINSE PRESSURE PUMP** to guarantee rinse pressure and volume
- **Door insulation** for heat retention & a better work environment

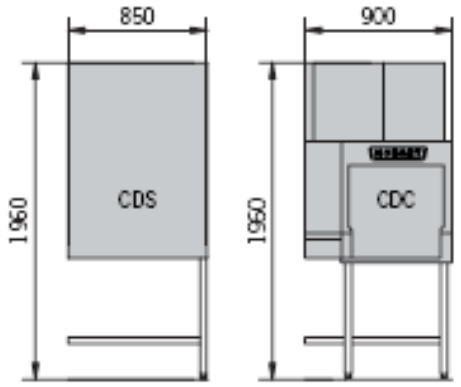

CDS straight dryer section adds 850mm to length of below machine & replaces 300mm exit "hood" as shown.
Dryer – fan 0.5kW / 510m^3/hr. Electrically heated – 3kW
CDC dryer section over exit curve adds 900mm to length of below machine and replaces 300mm exit "hood"

1	fresh water connection, soft	R 3/4" 0 -3°d, (0,5mmol/l); Max. 160 l/h; demineralized water Blended to have appr. 80 us/cm
1.1	hot water connection for separate tank fill (option)	R 3/4" 0 - 7°d; (1,4mmol/l)
2	drain	DN 50
3	power supply (depending on specific model and type of heating)	With standard model (incl. C20 / Incl. dryer 3.0 kW) Appr. 27.7kW 3 x 50 Amp., 5 x 16mm^2

4	Ventilation / vent. condition (depending on specific model)	with standard model (incl. C20) appr. 380 m^3/h, 35°C, 14 g/m^3 humidity
5	main switch	

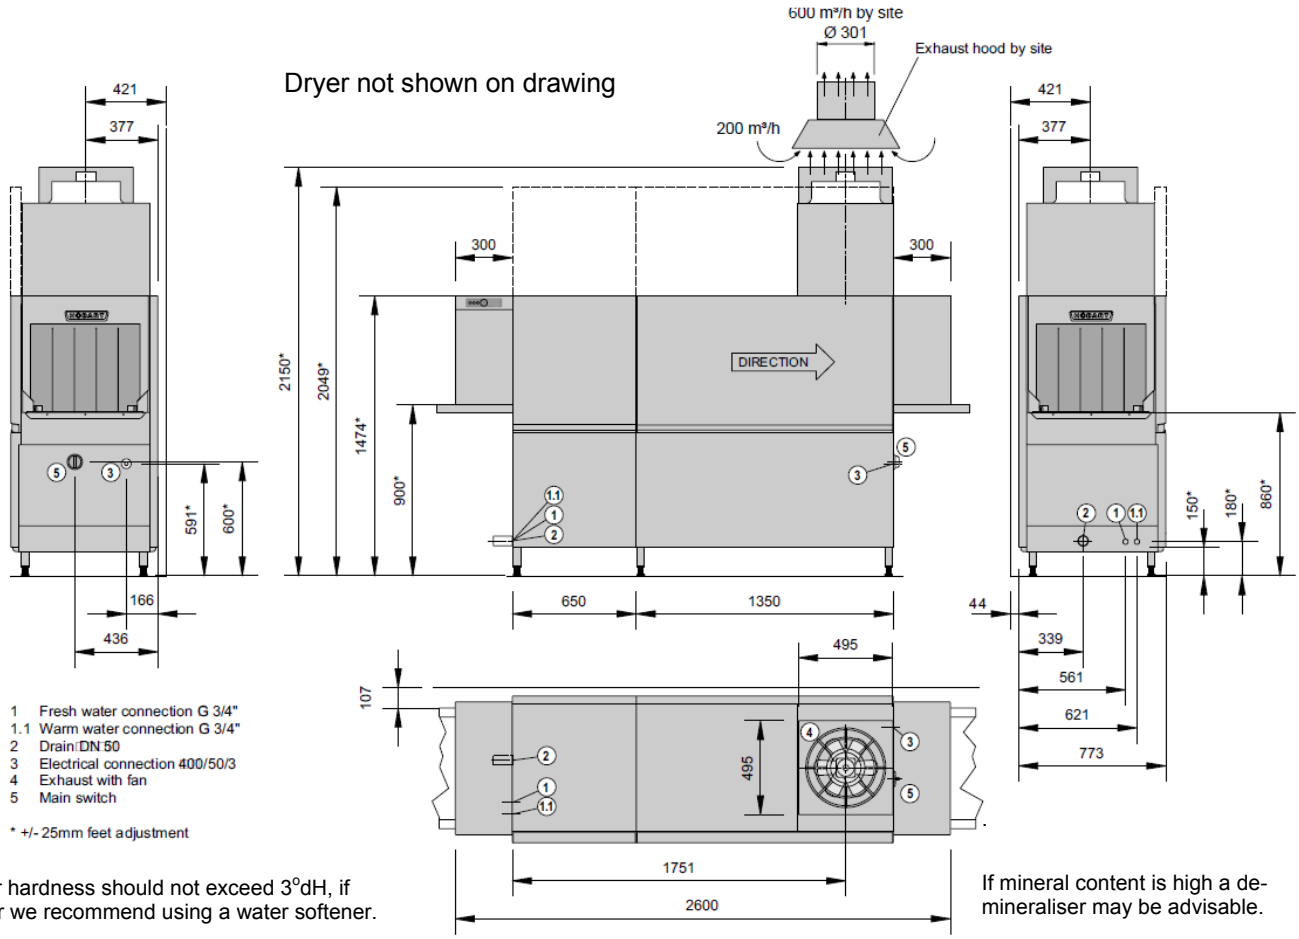

Water hardness should not exceed 3°dH, if higher we recommend using a water softener.

If mineral content is high a demineraliser may be advisable.