IRINOX

The Freshness Company®

blast chillers & shock freezers

EasyFresh

MultiFresh® MyA

holding cabinets

CP Multi

CP One

N*ICE

MultiFresh® the inimitable multi-functional assistant becomes MyA

Maximum flexibility: from -40°C to +85°C

Mya is extremely easy to use. With its simple, intuitive icons you can access MultiFresh®'s numerous functions and manage its cycles.
With Mya you can easily edit the parameters of each cycle, including ventilation, duration, temperature, etc., and create the ideal process for each food type.

- BLAST CHILLING
- SHOCK FREEZING
- THAWING
- HOLDING
- CHOCOLATE
- REGENERATION
- PASTEURIZATION
- PROOFING
- LOW TEMPERATURE COOKING

MyA: My Assistant, simply touch!

The new 7" touchscreen display makes the MultiFresh® series even easier to use.

- CREATE YOUR LIST OF FAVORITE CYCLES
- SAVE YOUR CYCLES
- ON-LINE GUIDE
- UNMOLDING
- CHANGE YOUR SETTINGS
- CONTINUOUS CYCLE

8 reasons for choosing Irinox

1
Labor cost savings

2
Organize production in advance

3
High product quality

4
Safer food

5
Increase shelf life

6
Prepare food quickly

7
Reduce food cost

8
Reduce waste



IRINOX BalanceSystem®

Perfectly sized components

Our blast chillers guarantee the fastest heat removal, also with boiling hot food, thanks to the Irinox Balance System®.
Irinox Balance System® means that the main refrigerating components (condenser, evaporator, compressor and fans) are accurately sized and built to the drawings and specifications of our engineering office so that our equipment provides unbeatable performance.

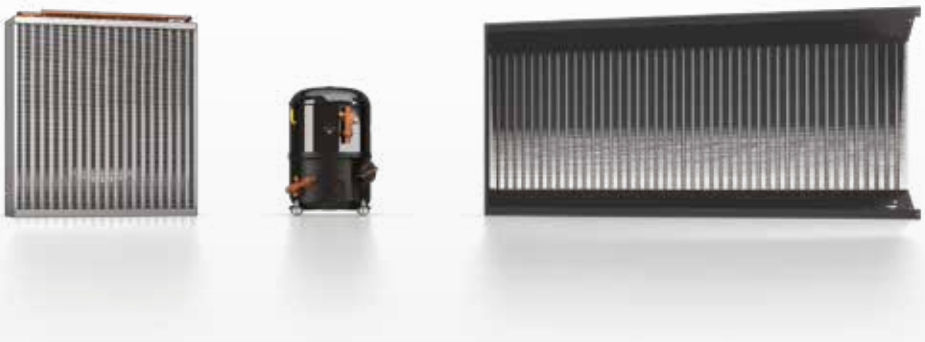

Sanigen®

24/7 sanification

The Irinox patented sanification system, sanitizes every part of the chamber, including the areas that are difficult to access for cleaning (e.g. the evaporator, etc.).
The system's efficiency, tested by Udine University and certified by the Ministry of Health, guarantees bacteria abatement by 99.5%. Sanigen® also acts to eliminate unpleasant odours that can occur at the end of the work cycle or the working day.

MultiFresh® MyA

the multi-function assistant nobody should be without

MF 25.1

Tray capacity nr.
from 4 to 8 (GN1/1 or 600x400 mm)
Dimensions 790 x 771 x 870 mm
Electrical data
W 1,2 kW A 6,5 A
V 230V-50Hz(1N+PE)

MF 30.2

Tray capacity nr.
from 4 to 8 (GN2/1 or 600x400 mm)
from 6 to 14 (GN1/1)
Dimensions 870 x 902 x 870 mm
Electrical data
W 2 kW A 10 A
V 230V-50Hz(1N+PE)

MF 45.1

Tray capacity nr.
from 9 to 18 (GN1/1 or 600x400 mm)
Dimensions 790 x 962 x 1595 mm
Electrical data
W 3,6 kW A 5,6 A
V 400V-50Hz(3N+PE)

MF 70.1

Tray capacity nr.
from 13 to 27 (GN1/1 or 600x400mm
Dimensions 790 x 962 x 1970 mm
Electrical data
W 5,3 kW A 10,8 A
V 400V-50Hz(3N+PE)

MF 180.2

Trolley capacity nr.
1 x 20 (GN2/1 or 600x800 mm)
2 x 20 (GN1/1 or 600x400 mm)
Dimensions 1600 x 1425 x 2150 mm
Electrical data
W 2,2 kW A 4,2 A
V 400V-50Hz(3N+PE)

MF 250.2

Trolley capacity nr.
1 x 20 (GN2/1 or 600x800 mm)
2 x 20 (GN1/1 or 600x400 mm)
Dimensions 1600 x 1425 x 2150 mm
Electrical data
W 2,2 kW A 4,2 A
V 400V-50Hz(3N+PE)

MF 300.2

Trolley capacity nr.
1 max dim. L 1050 x H 1050 mm
Dimensions 1880 x 1625 x 2150 mm
Electrical data
W 3,2 kW A 5,4 A
V 400V-50Hz(3N+PE)

MF 350.2 2T

Trolley capacity nr.
2 x 20 (GN2/1 or 600x800 mm)
4 x 20 (GN1/1 or 600x400 mm)
Dimensions 1600 x 2625 x 2150 mm
Electrical data
W 4,3 kW A 8,2 A
V 400V-50Hz(3N+PE)

Care for details is the secret behind Irinox construction quality

MULTI-POINT TEMPERATURE PROBE: MULTISENSOR®

MultiFresh® and EasyFresh are supplied with a MultiSensor® probe for perfect temperature control.
Core temperature readings provide software with extremely precise temperature readings which allow prompt regulation of ventilation, temperature and humidity in the chamber.
The conical shape of the MultiSensor® probe makes it easy to remove from food without using heat. The Irinox patented system of magnetic attachment to the door makes it easiliy stored and accessible.

OVERNIGHT DEFROSTING!

MultiFresh® by design defrosts manually at the end of the day. Most other blast chillers activate defrosting automatically during the work cycles. This damages the quality of products due to sudden changes of temperature and slow down the chilling process. MultiFresh® does not defrost automatically because it is constantly able to remove all the heat from the chamber, which prevents the formation of ice on the evaporator.

*Contains fluorinated greenhouse gases covered by the Kyoto Protocol.

MF 70.2

Tray capacity nr.
from 9 to 18 (GN2/1 or 600x400 mm)
from 16 to 34 (GN1/1)
Dimensions 870 x 1092 x 1595 mm
Electrical data
W 5,2 kW A 10,6 A
V 400V-50Hz(3N+PE)

MF 85.2

Tray capacity nr.
from 13 to 27 (GN2/1 or 600x400mm)
from 26 to 54 (GN1/1)
Dimensions 870 x 1092 x 1970 mm
Electrical data
W 6,2 kW A 16,5 A
V 400V-50Hz(3N+PE)

MF 100.1

Trolley capacity nr.
1 x 20 (GN1/1 or 600x400 mm)
Dimensions 1210 x 1115 x 2150 mm
Electrical data
W 1,1 kW A 2,5 A
V 400V-50Hz(3N+PE)

MF 130.2

Trolley capacity nr.
1 x 20 (GN2/1 or 600x800 mm)
2 x 20 (GN1/1 or 600x400 mm)
Dimensions 1500 x 1275 x 2150 mm
Electrical data
W 1,1 kW A 2,5 A
V 400V-50Hz(3N+PE)

MF 500.2 2T

Trolley capacity nr.
2 x 20 (GN2/1 or 600x800 mm)
4 x 20 (GN1/1 or 600x400 mm)
Dimensions 1600 x 2625 x 2150 mm
Electrical data
W 4,3 kW A 8,2 A
V 400V-50Hz(3N+PE)

MF 500.2 3T

Trolley capacity nr.
3 x 20 (GN2/1 or 600x800 mm)
6 x 20 (GN1/1 or 600x400 mm)
Dimensions 1600 x 3825 x 2150 mm
Electrical data
W 6,4 kW A 12,2 A
V 400V-50Hz(3N+PE)

MF 750.2 3T

Trolley capacity nr.
3 x 20 (GN2/1 or 600x800 mm)
6 x 20 (GN1/1 or 600x400 mm)
Dimensions 1600 x 3825 x 2150 mm
Electrical data
W 6,4 kW A 12,2 A
V 400V-50Hz(3N+PE)

DIMENSIONS
width x depth x height

ELECTRICAL DATA
W max absorbed power
A max absorbed current
V voltage

EVAPORATORS

Internally sealed evaporators entirely treated by safe anticorrosive cataphoresis so they last longer.

DOOR HANDLE

Designed by Irinox, entirely in stainless steel and free of sharp edges. Sturdy and easy-to-clean, with an ergonomic shape that is easy to grip.

FANS

New generation speed variation fans, with innovative design and materials, provide uniform ventilation throughout the chamber. They incorporate an immediate fan blocking system which prevents cold air from leaving the chamber when the door is opened.

OVEN COMPATIBILITY

The structure and size of MultiFresh® units are designed to be compatible with the carts and trolleys of major oven manufacturers. The MultiFresh® range perfectly integrates into the day-to-day processes of professional kitchens.

WIRELESS DATA TRANSFER

With the wireless data transfer system process all the data can be easily downloaded and saved in the dedicated software (HACCP control Software)

EasyFresh

4 cycles for blast chilling and shock freezing

EF 10.1

Tray capacity nr.
3 (GN1/1)
Dimensions 535 x 655 x 740 mm
Electrical data
W 0,9 kW A 5 A
V 230V-50Hz(1N+PE)

EF 20.1

Tray capacity nr.
from 4 to 8 (GN1/1 or 600x400 mm)
Dimensions 790 x 771 x 870 mm
Electrical data
W 1,2 kW A 6,3 A
V 230V-50Hz(1N+PE)

EF 30.1

Tray capacity nr.
from 9 to 18 (GN1/1 or 600x400 mm)
Dimensions 790 x 971 x 1595 mm
Electrical data
W 2,9 kW A 5,2 A
V 400V-50Hz(3N+PE)

EF 45.1

Tray capacity nr.
from 13 to 27 (GN1/1 or 600x400mm)
Dimensions 790 x 972 x 1970 mm
Electrical data
W 3,7 kW A 5,6 A
V 400V-50Hz(3N+PE)

Unbeatable performance.

DIMENSIONS
width x depth x height

ELECTRICAL DATA
W max absorbed power
A max absorbed current
V voltage

Blast chill +3°C.

Irinox blast chills all food to +3°C at the core, even boiled, **straight from the oven**, and considerably increases the product's shelf life.

Shock freeze -18°C.

In the freezing process to -18°C at the core, Irinox guarantees the formation of **microcrystals** that preserve the organoleptic properties of food.

DOUBLE CAPACITY: MULTIRACK®

Irinox patented the MultiRack®, an adjustable tray holder, which allows operators to double the number of trays loaded in each model. It is easy to set the distance between one tray and the next. This allows better air distribution on the product and greater temperature uniformity on all levels.
Every baker can choose the type of tray to work with.

EASY CLEANING, ABSOLUTE HYGIENE

Rounded corners guarantee easier cleaning and uniform air circulation. The condensation drip tray collects chamber condensation and is easily removed and emptied at any time. All components such as fans and evaporators, are designed and fitted inside the chamber for easy access and cleaning.

CP Multi

three functions, one unique shock freezer

CP 40 MULTI/CP 40 MULTI +

Tray capacity nr.
from 40 to 80
Dimensions 900 x 1245 x 2360 mm
Electrical data
W 1,3 kW A 5,5 A
V 230V-50Hz(1N+PE)

CP 80 MULTI/CP 80 MULTI +

Tray capacity nr.
from 80 to 160
Dimensions 1840 x 1245 x 2360 mm
Electrical data
W 2x1,3 kW A 2x5,5 A
V 230V-50Hz(1N+PE)

CP 120 MULTI

Tray capacity nr.
from 120 to 240
Dimensions 2770 x 1245 x 2360 mm
Electrical data
W 3x1,3 kW A 3x5,5 A
V 230V-50Hz(1N+PE)

CONDENSING UNIT CP 40 MULTI

Dimensions 840 x 560 x 430 mm
Electrical data
W 1,1 kW A 6,8 A
V 230V-50Hz(1N+PE)

CONDENSING UNIT CP 80 MULTI

Dimensions 840 x 730 x 550 mm
Electrical data
W 2 kW A 4 A
V 400V-50Hz(3N+PE)

CONDENSING UNIT CP 120 MULTI

Dimensions 670 x 1010 x 1010 mm
Electrical data
W 3 kW A 6,2 A
V 400V-50Hz(3N+PE)

CONDENSING UNIT CP 40 MULTI +

Dimensions 840 x 730 x 550 mm
Electrical data
W 2 kW A 4 A
V 400V-50Hz(3N+PE)

CONDENSING UNIT CP 80 MULTI +

Dimensions 670 x 1010 x 1010 mm
Electrical data
W 3 kW A 6,2 A
V 400V-50Hz(3N+PE)

DIMENSIONS
width x depth x height

ELECTRICAL DATA
W max absorbed power
A max absorbed current
V voltage

CP One

perfect preservation
for pastry and ice cream

CP ONE

Capacity
trays: da 33 a 66
pans: da 36 a 54
tubs: 200
Dimensions 810 x 1107 x 2085 mm
Electrical data
W 1,3 / 2 kW A 6,5 /9,2 A
V 230V 50Hz (1N+PE)

N*ice

compact dimensions
but plenty of internal space

NICE

Tray capacity nr
31 (GN2/1)
Dimensions 730 x 821 x 2060 mm
Electrical data
W 0,96 / 1,9 kW A 5,5 / 8,9 A
V 230V-50Hz (1N+PE)

IRINOX
Headquarter
via Madonna di Loreto 6/B
31020 Corbanese di Tarzo (TV) - Italy

Production site
via Caduti nei lager, 1
Z.I. Prealpi Trevigiane, loc. Scomigo
31015 Conegliano (TV) - Italy
P. +39 0438 2020
F. +39 0438 2023
irinox@irinox.com
www.irinoxprofessional.com

IRINOX USA
50 Oliver Street, Suite WI
North Easton | MA 02356
P. +1 508 230-5818
F. +1 508 230-5819
info@irinoxusa.com
www.irinoxusa.com

English
cod. 442154
03/2015