

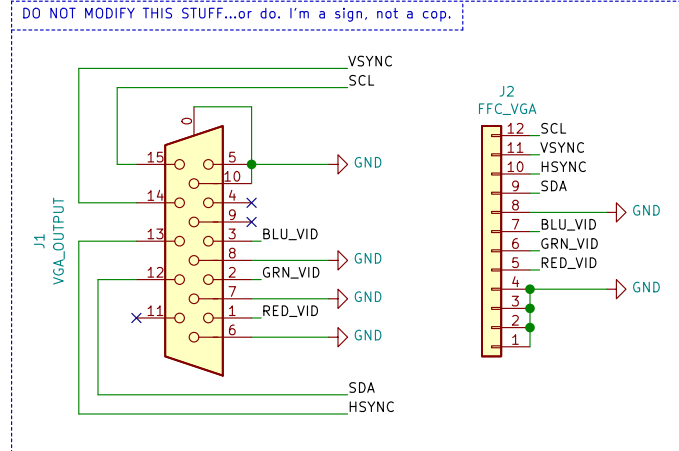


+++ Dual USB-2.0 port outputs +++  
 \* Decoupling capacitance  $\geq 150\mu\text{F}$   
 \* ESD protection  
 \* Recommended devices: up to 1.5MBit/s, up to 0.5A/port

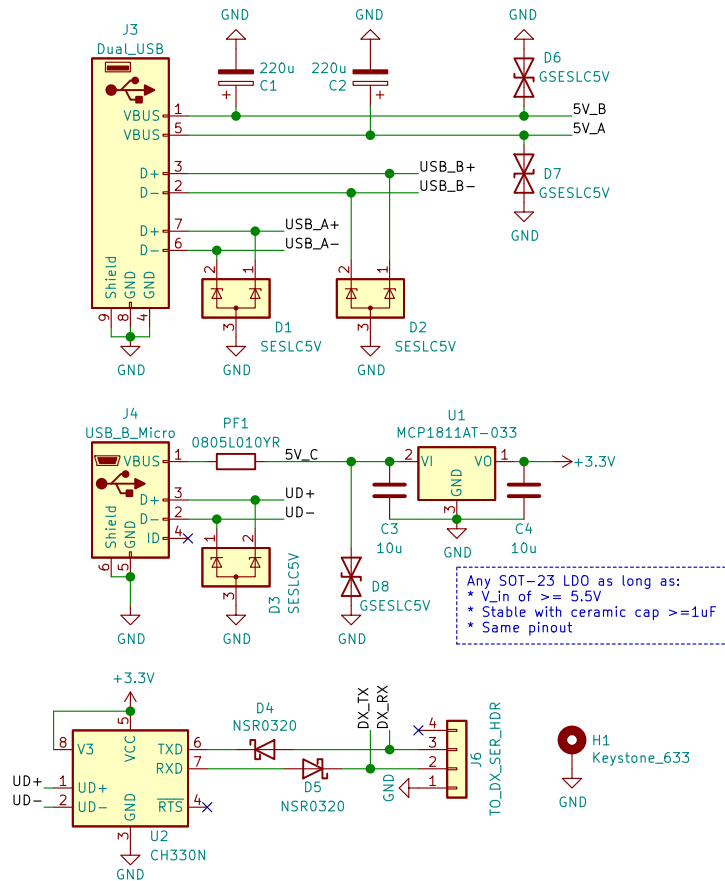

Power flags (ignore this stuff here).  
 KiCad complains with these missing.

PWR\_FLAG 5V\_A  
 PWR\_FLAG 5V\_B  
 PWR\_FLAG 5V\_C

# Molten Solder Labs

Sheet: /  
 File: dx4000\_vga\_usb\_serial\_combo\_pcb.sch

## Title: WD Sentinel DX 4000 VGA, USB, and Serial PCB

Size: USLetter Date: 2020-01-31

KiCad E.D.A. kicad 5.1.8-1.fc31

Rev: 1.1

Id: 1/1