



	1	2	3	4	5	6	7	8	
A	Q5 schematic index – 79 fitted PCB parts plus non-fitted test lands and mounts. Global net labels connect the functional sheets. Crosses explicitly mark unused physical pins. Q1 submitted files remain frozen. This candidate still requires ERC, layout, first-article and safety qualification.								A
	STM32, keys and USB boot controls		STM32, keys and USB boot controls / 2			STM32, keys and USB boot controls / 3			
	U1 / C31 / C32 / C33 / C34		C10 / C11 / C12 / C35 / C37 / C6			C7 / H1 / H2 / H3 / H4 / Q5			
B	File: mcu-1.kicad_sch STM32, keys and USB boot controls / 4		File: mcu-2.kicad_sch STM32, keys and USB boot controls / 5			File: mcu-3.kicad_sch STM32, keys and USB boot controls / 6			B
	R16 / R17 / R18 / R36 / R37 / SW1		SW2 / SW3 / TP1 / TP11 / TP12 / TP2			TP3 / TP4 / TP5 / TP6 / TP9			
	File: mcu-4.kicad_sch SPI OLED module and power control / 1		File: mcu-5.kicad_sch SPI OLED module and power control / 2			File: mcu-6.kicad_sch Independent SPI retained-count memory / 1			
C	C20 / C28 / D51 / R24 / R25 / R29		U6			C30 / C36 / R32 / R33 / U8			C
	File: display-1.kicad_sch USB, charging, soft power latch and common supply / 1		File: display-2.kicad_sch USB, charging, soft power latch and common supply / 2			File: memory-1.kicad_sch USB, charging, soft power latch and common supply / 3			
	C1 / C13 / C2 / C29 / C3 / C38		C39 / C5 / D1 / D2 / D3 / D4			J1 / R1 / R19 / R2 / R3 / R30			
D	File: usb-power-1.kicad_sch USB, charging, soft power latch and common supply / 4		File: usb-power-2.kicad_sch USB, charging, soft power latch and common supply / 5			File: usb-power-3.kicad_sch On-board LIR2032 holder and protection / 1			D
	R31 / R34 / R35 / R4 / R5 / R6		TP13 / U2 / U3 / U7			BT1 / C4 / Q1 / Q2 / R7 / R8			
	File: usb-power-4.kicad_sch On-board LIR2032 holder and protection / 2		File: usb-power-5.kicad_sch Independent charge-temperature window / 1			File: battery-1.kicad_sch Independent charge-temperature window / 2			
E	R9 / U4		C9 / Q3 / Q4 / R10 / R11 / R12			R13 / R14 / R15 / TH1 / U5			E
	File: battery-2.kicad_sch		File: thermal-1.kicad_sch			File: thermal-2.kicad_sch			
F	1	2	3	4	5	6	ENGINEERING CANDIDATE – NOT RELEASED FOR MANUFACTURE Count Fidget Sheet: / File: click-counter-Q5.kicad_sch Title: Count Fidget – Q5 engineering candidate Size: A3Date:KiCad E.D.A. 10.0.6 Rev: Q5 candidateId: 1/19	8	F

STM32L072CBT6. USB ROM DFU uses BOOT0 held high during NRST reset. PB2 holds the soft power latch; PA4 reads SYS_LOAD/2; PA5/PA6 read charger status. COUNT closes SYS to PWR_KEY; Q5 mirrors it onto COUNT_N.

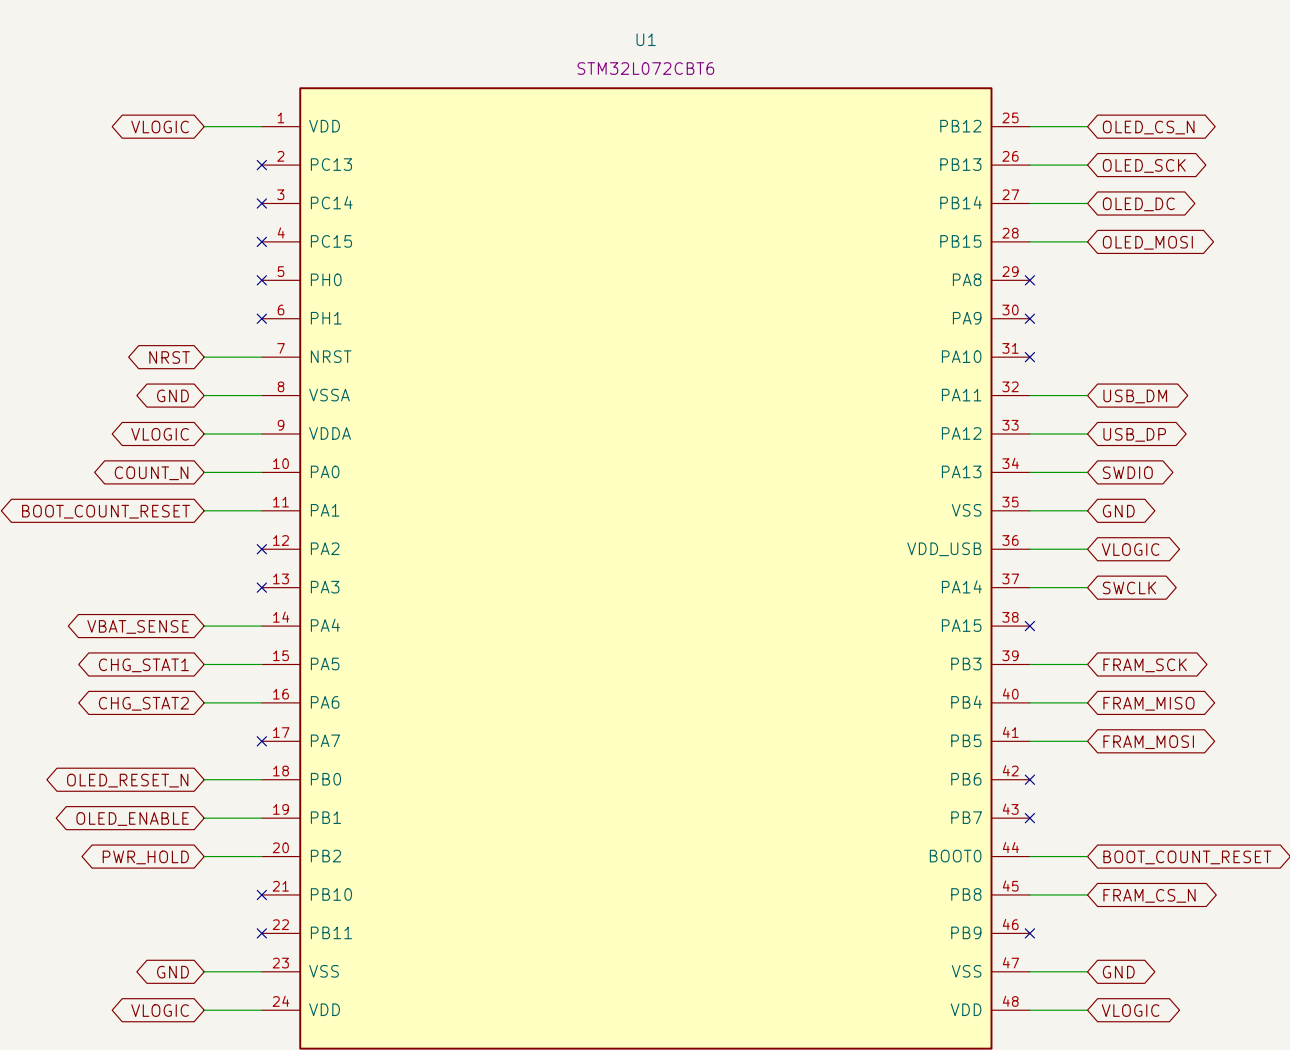

ENGINEERING CANDIDATE – NOT RELEASED FOR MANUFACTURE

Count Fidget

Sheet: /STM32, keys and USB boot controls/

File: mcu-1.kicad_sch

Title: STM32, keys and USB boot controls

Size: A3


Date:


Rev: Q5 candidate


KiCad E.D.A. 10.0.6


Id: 2/19




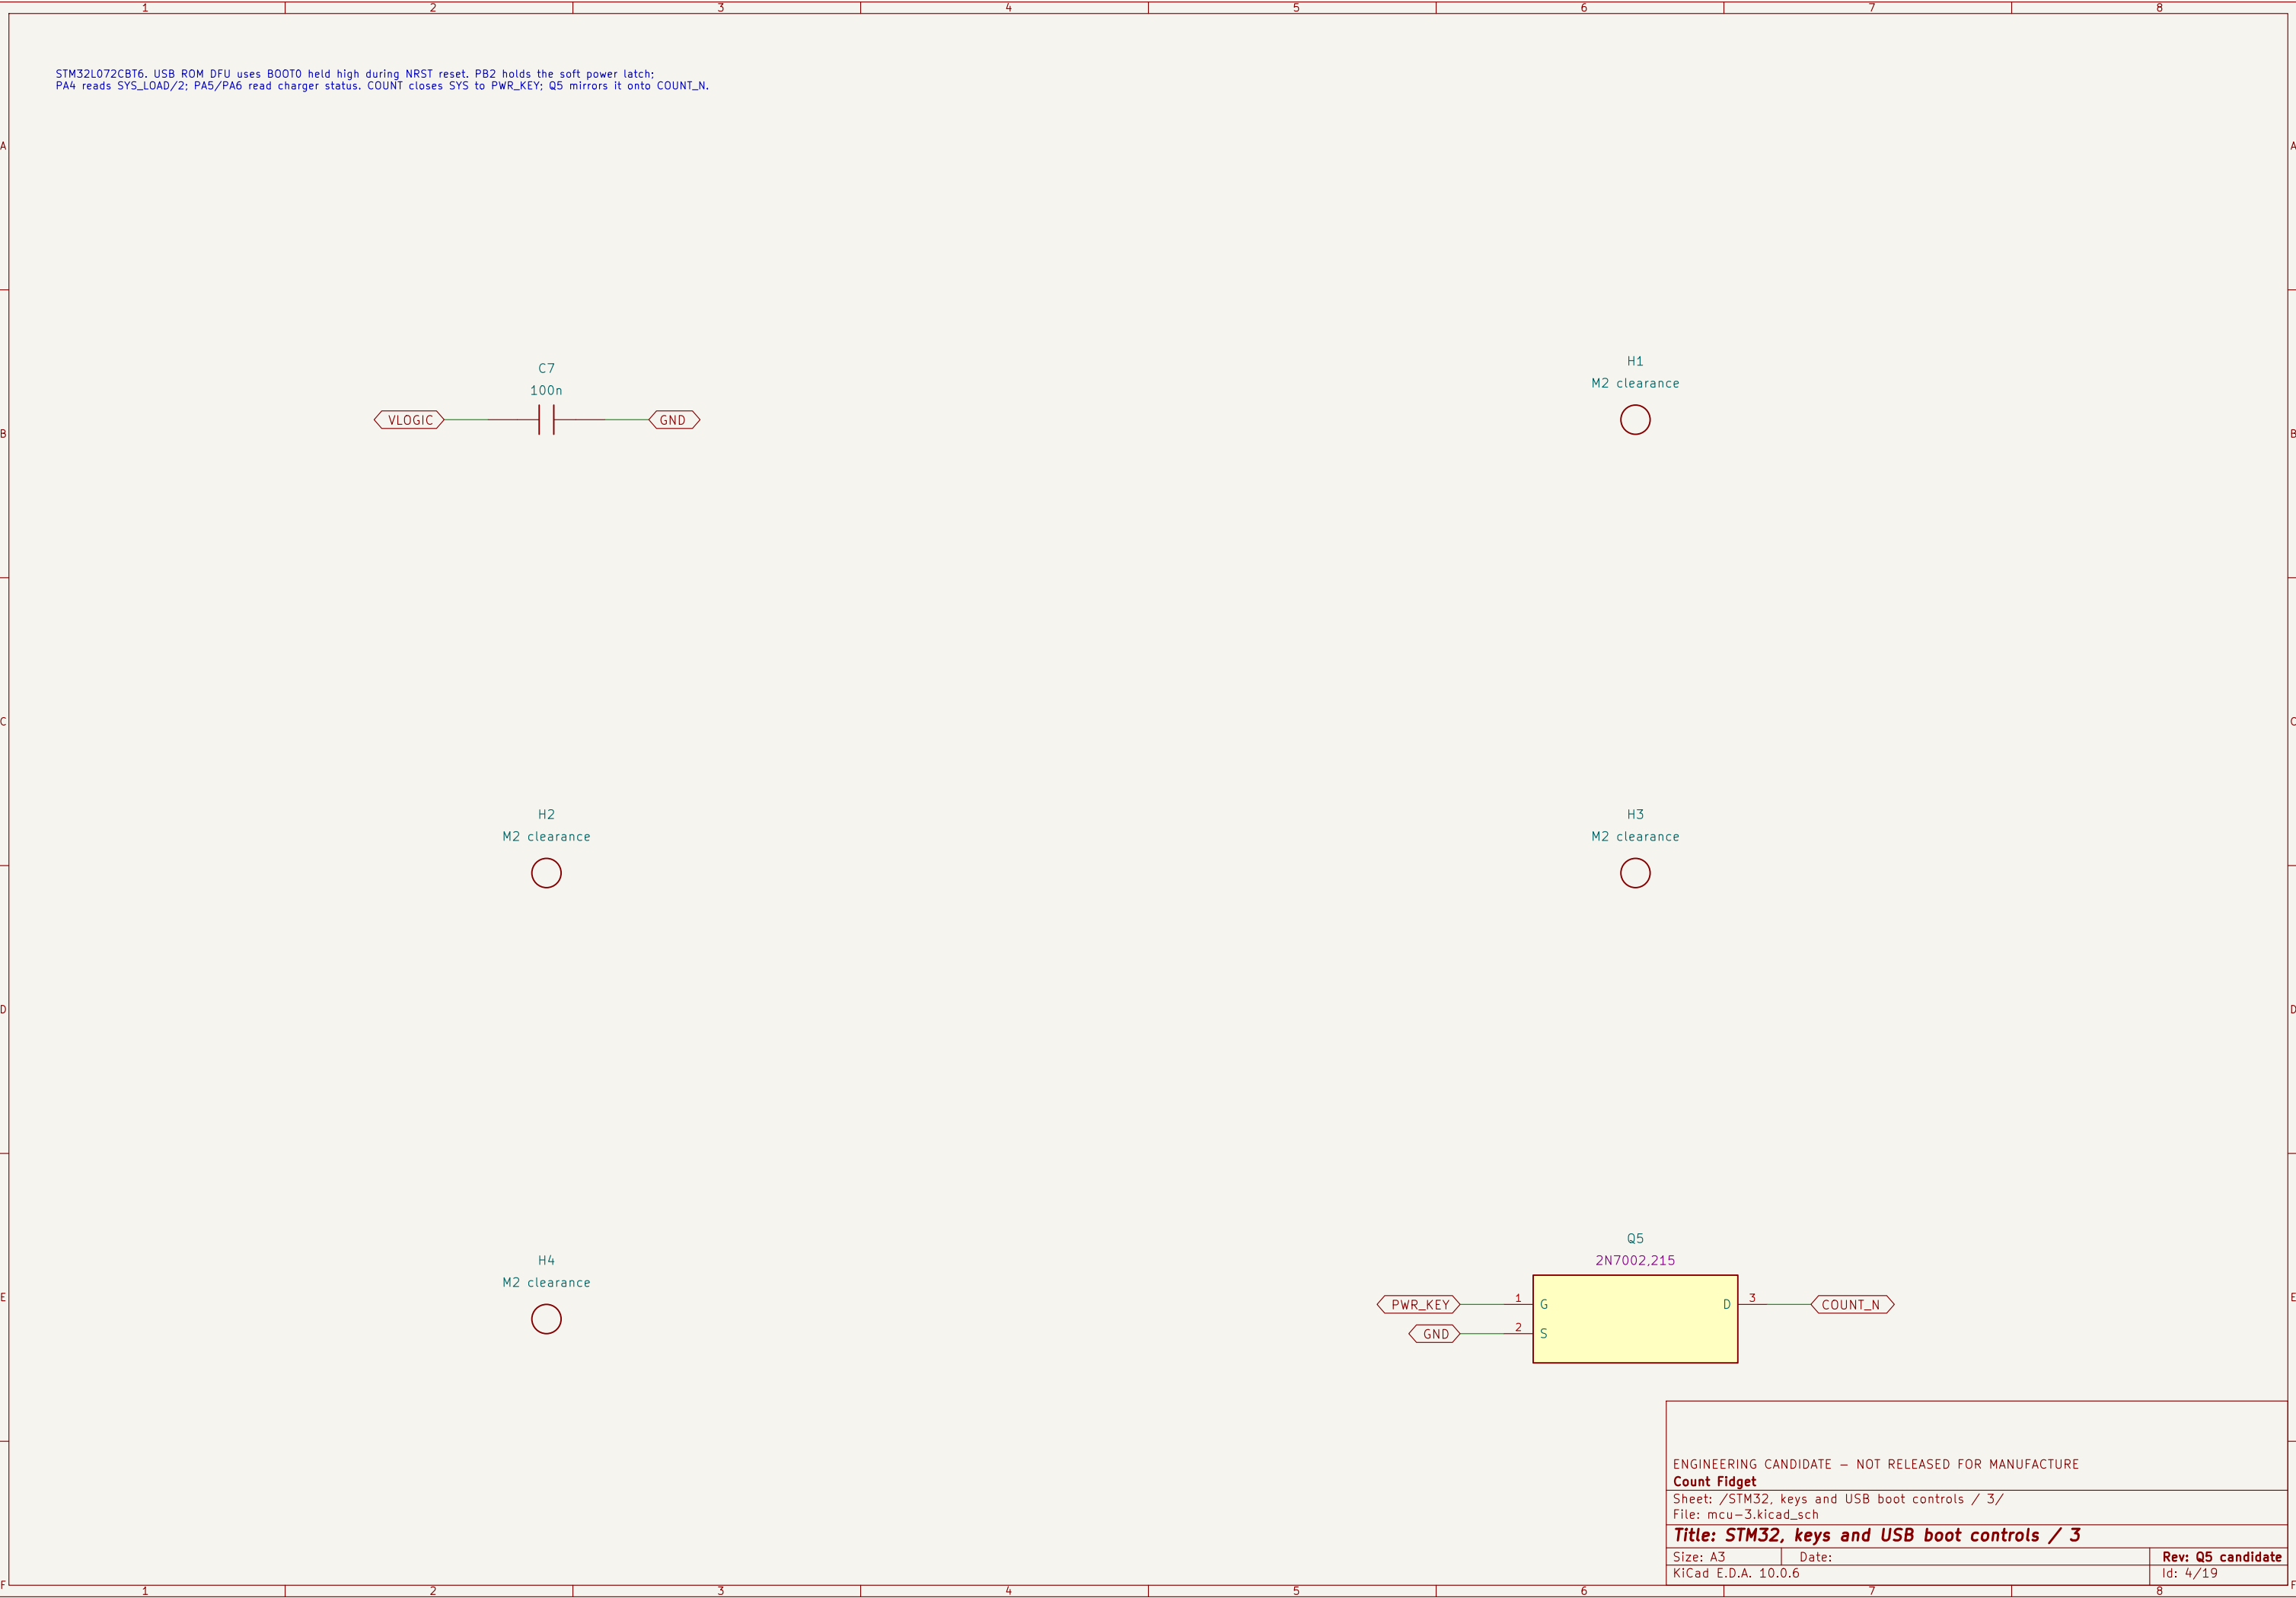


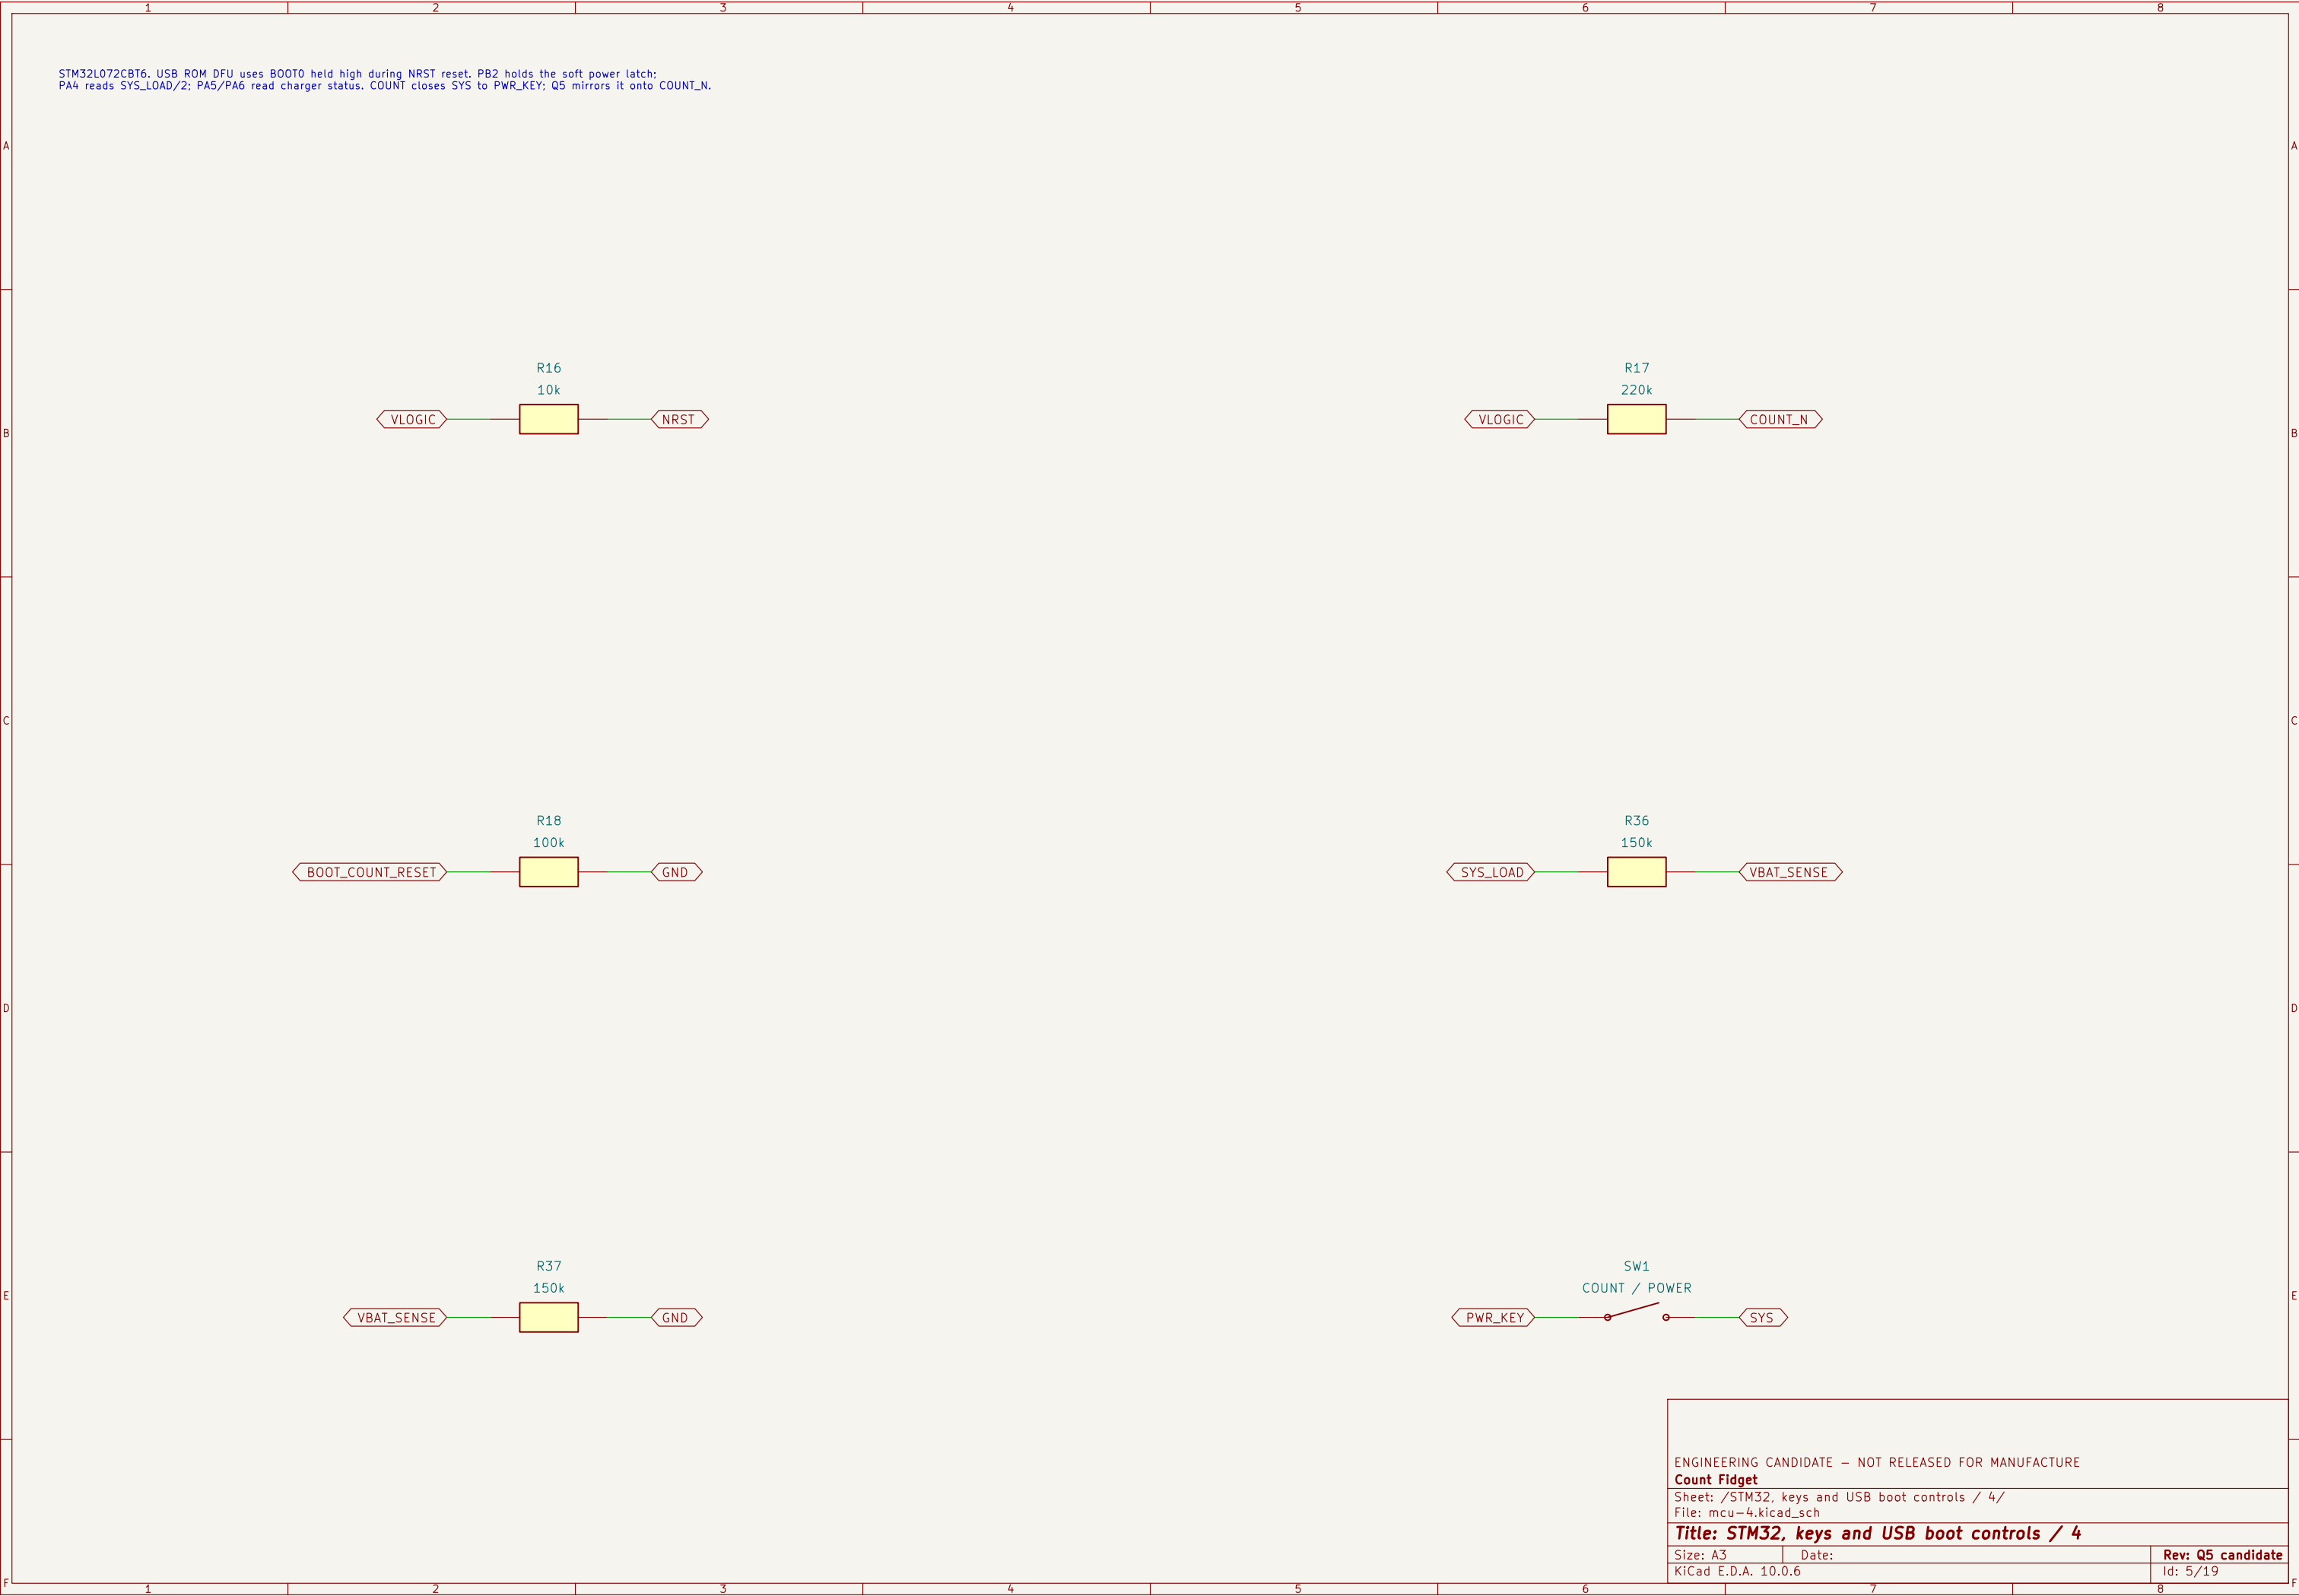


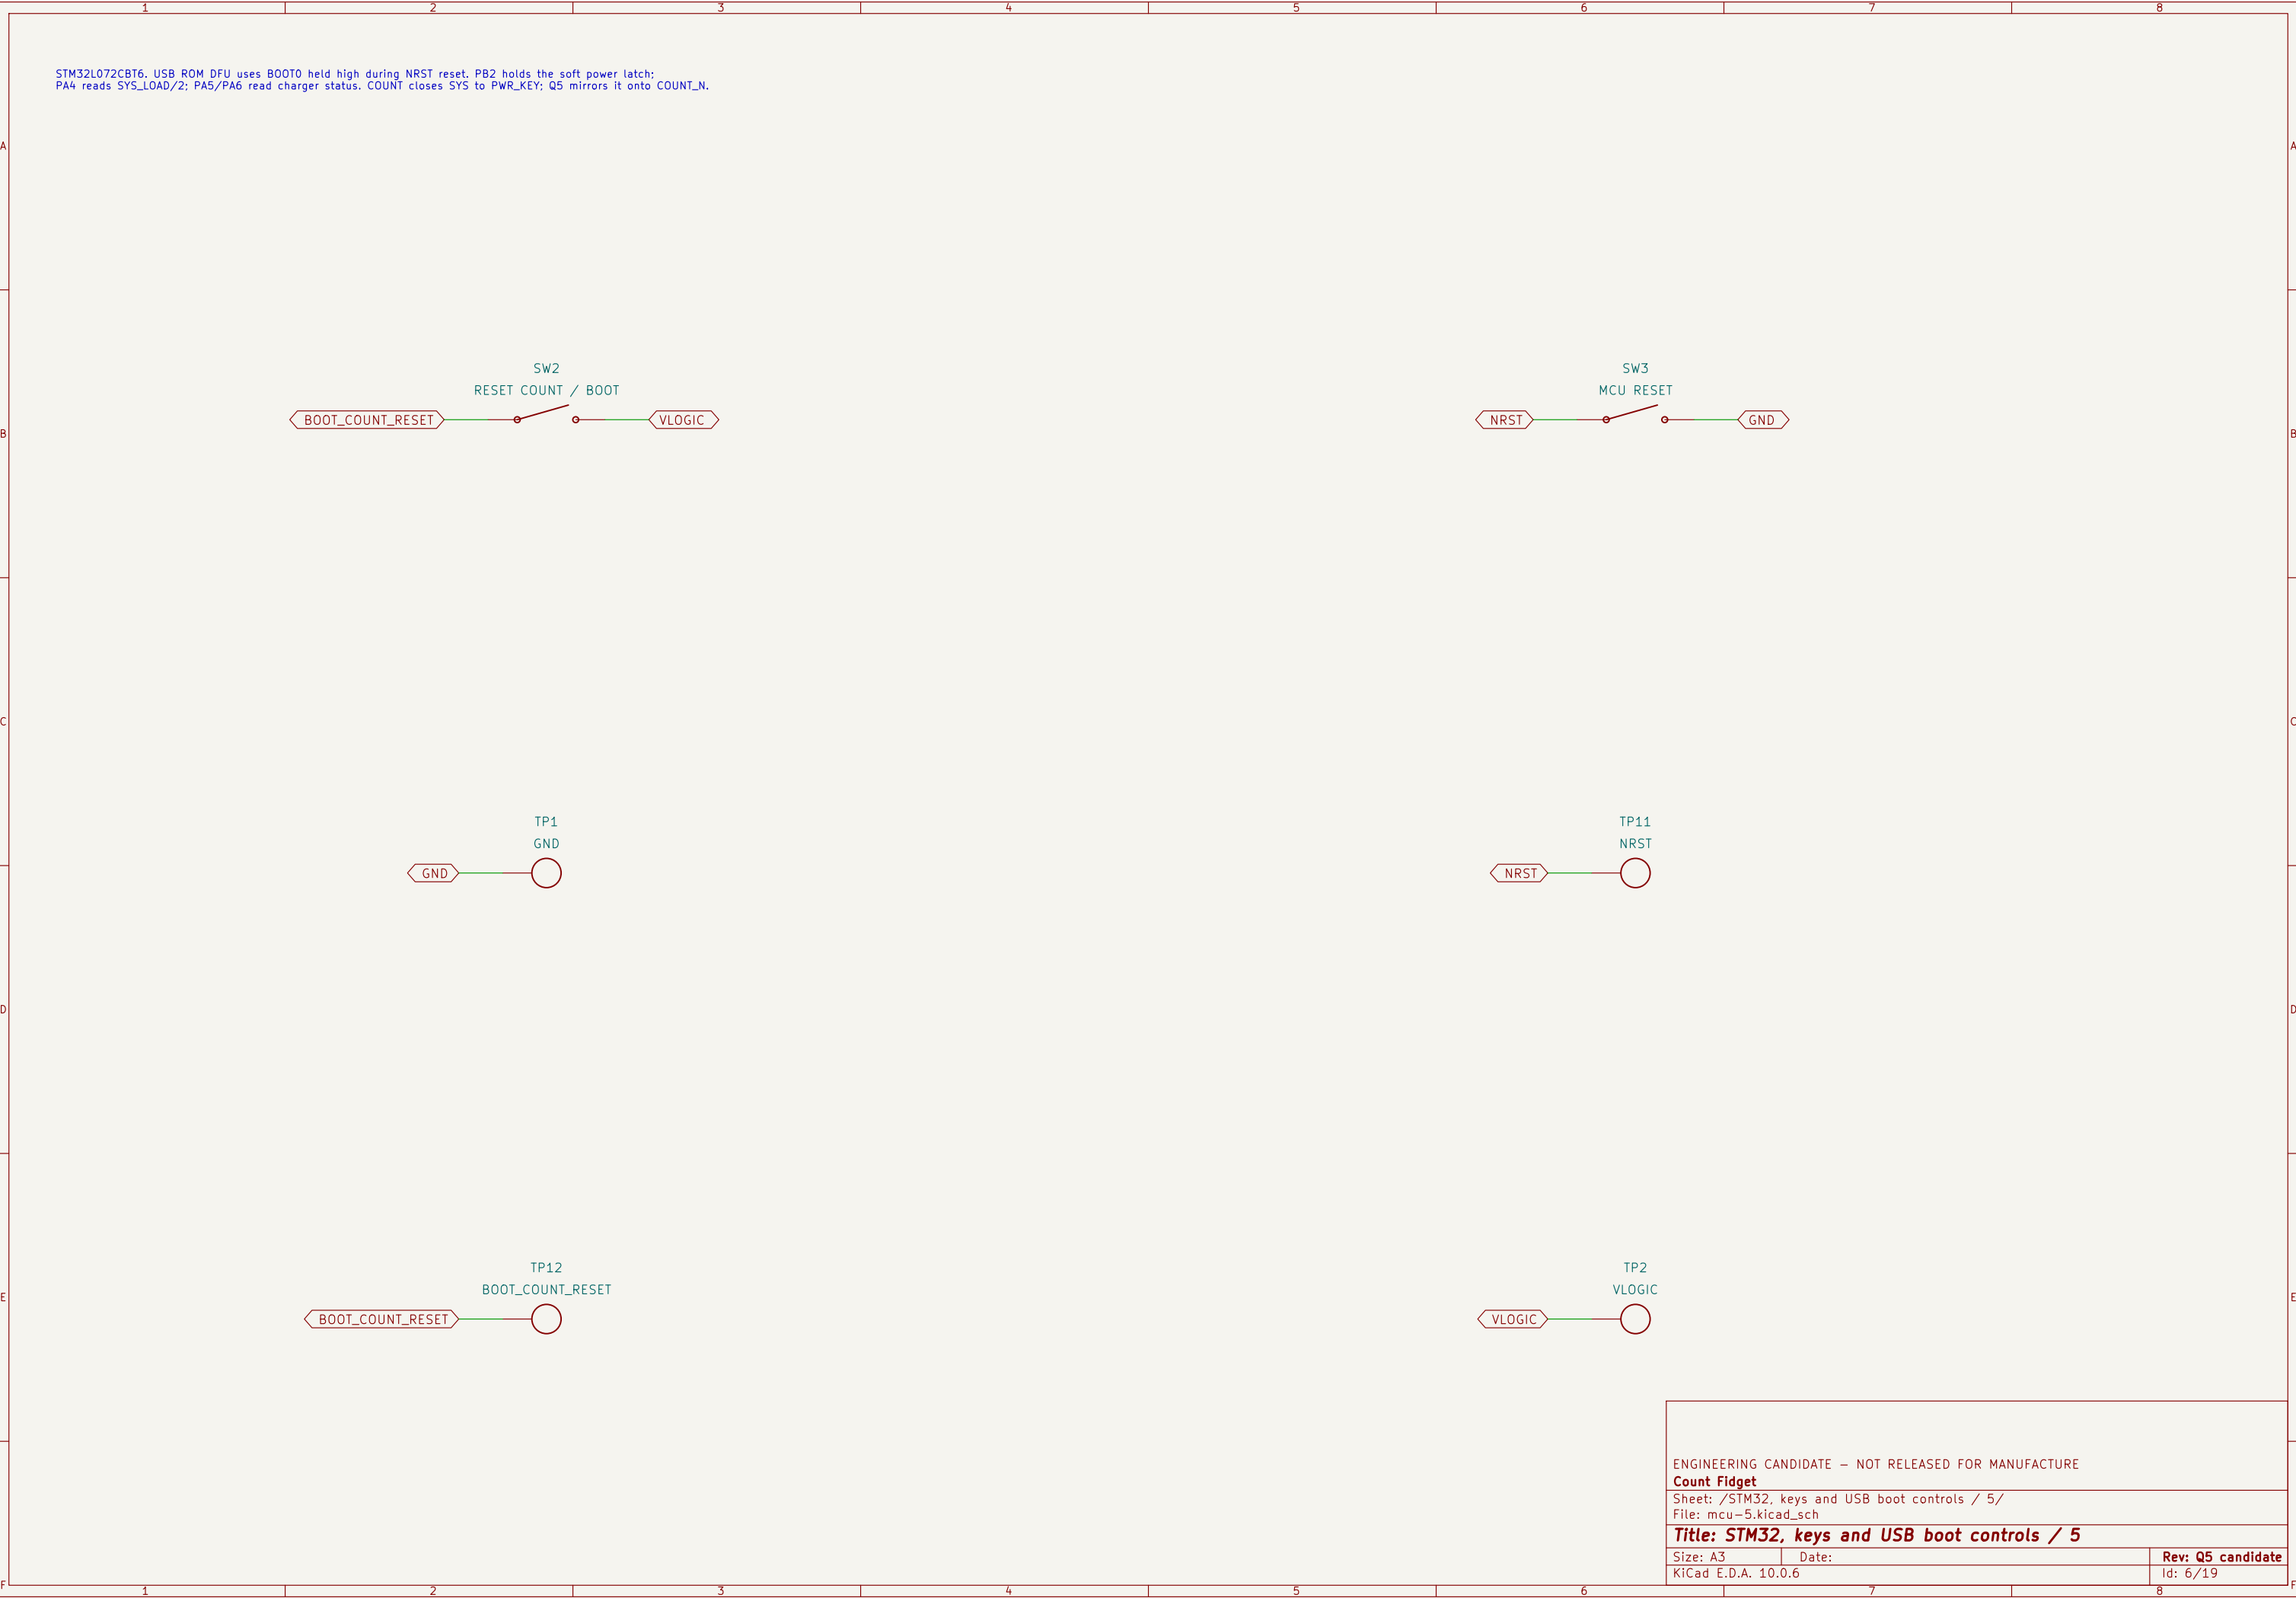


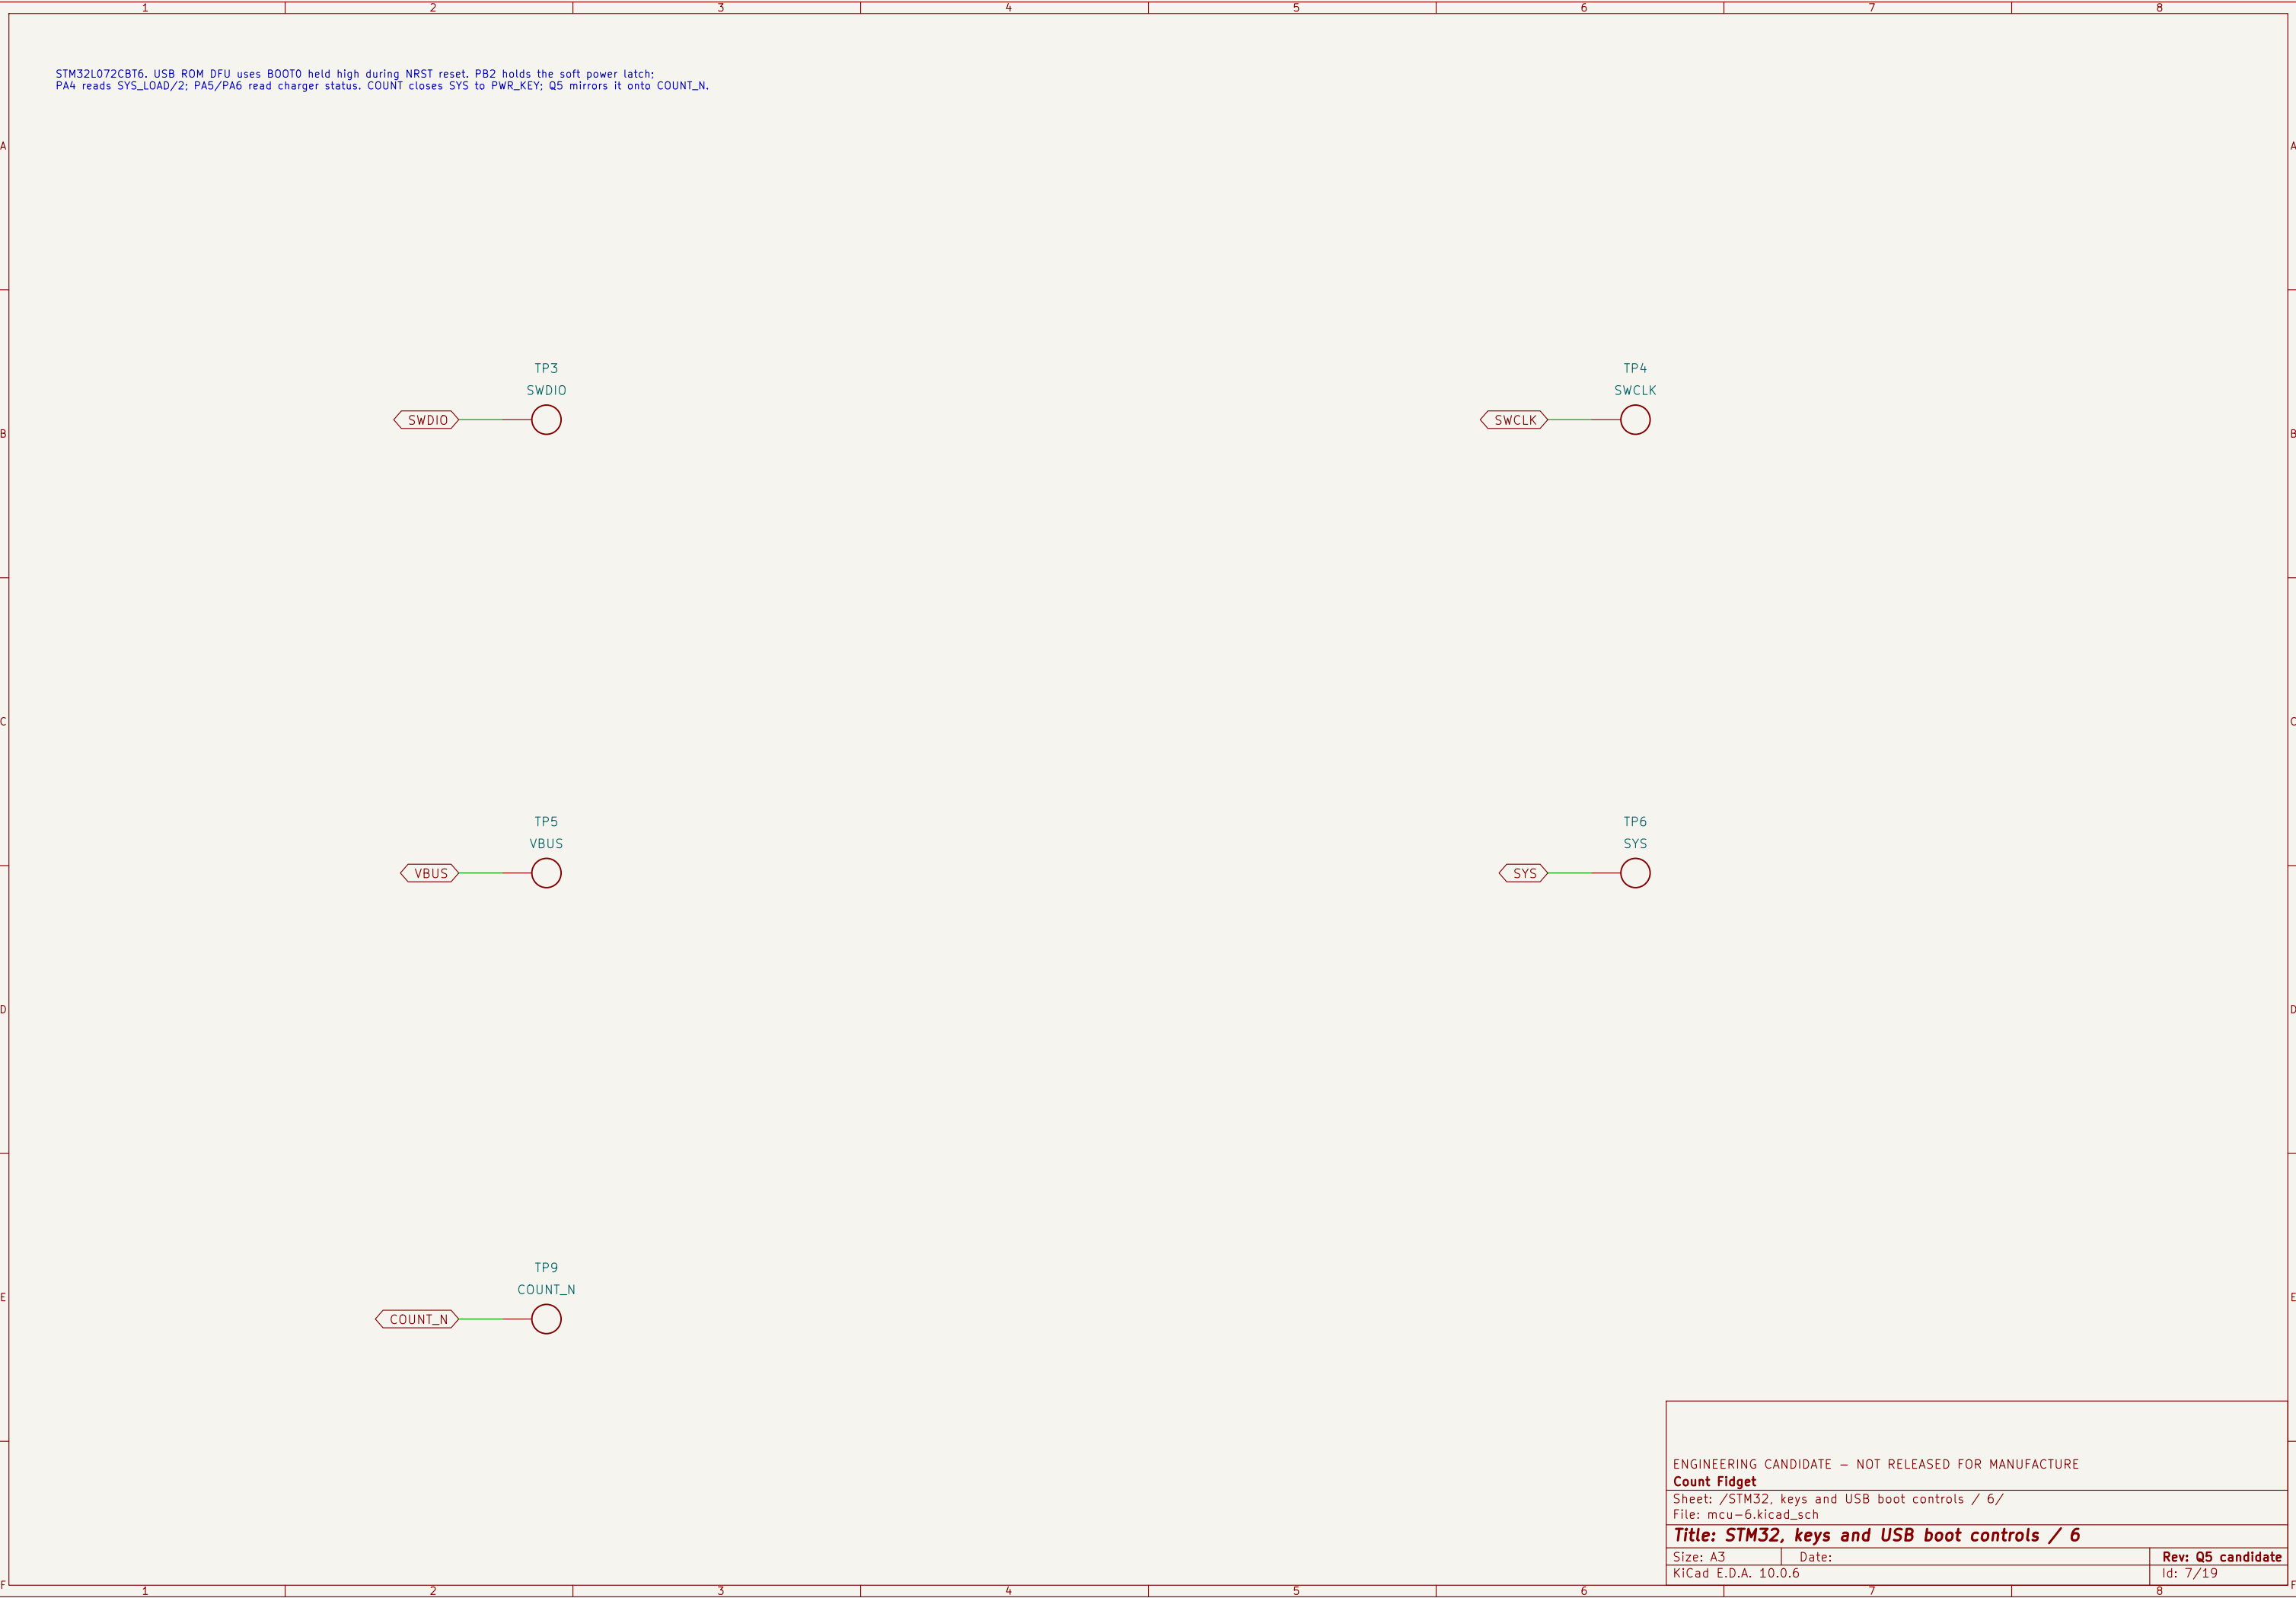


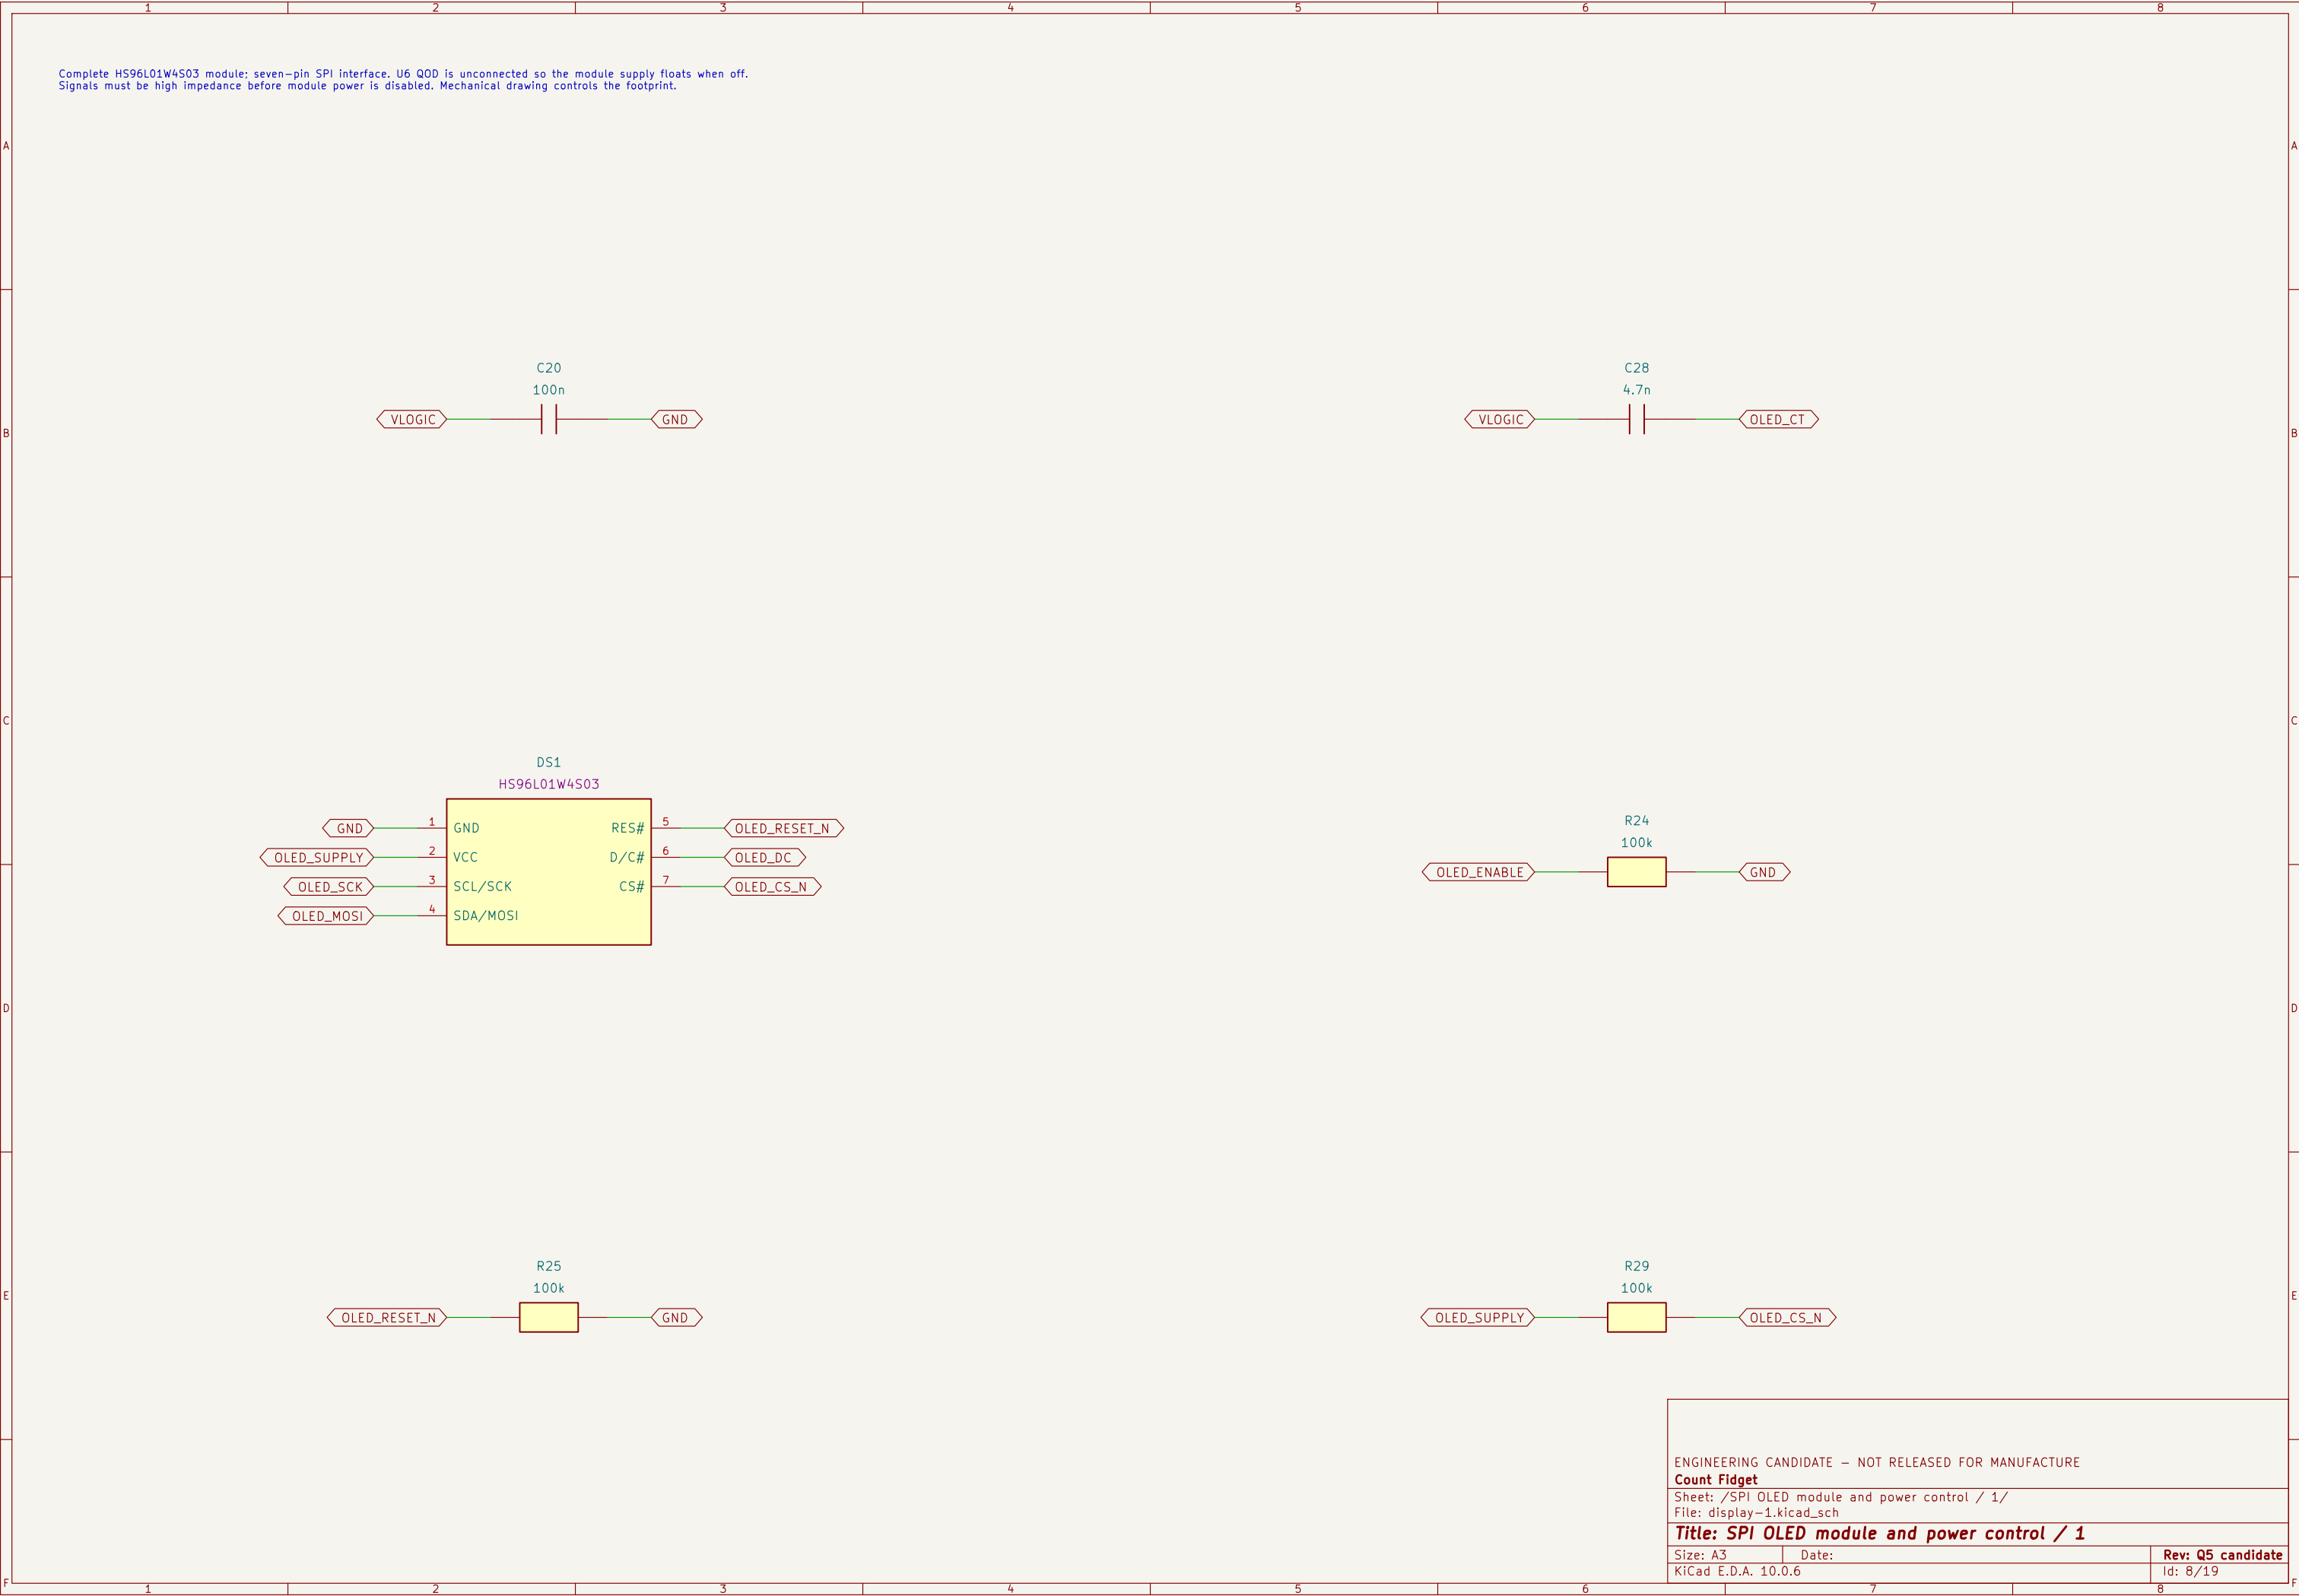


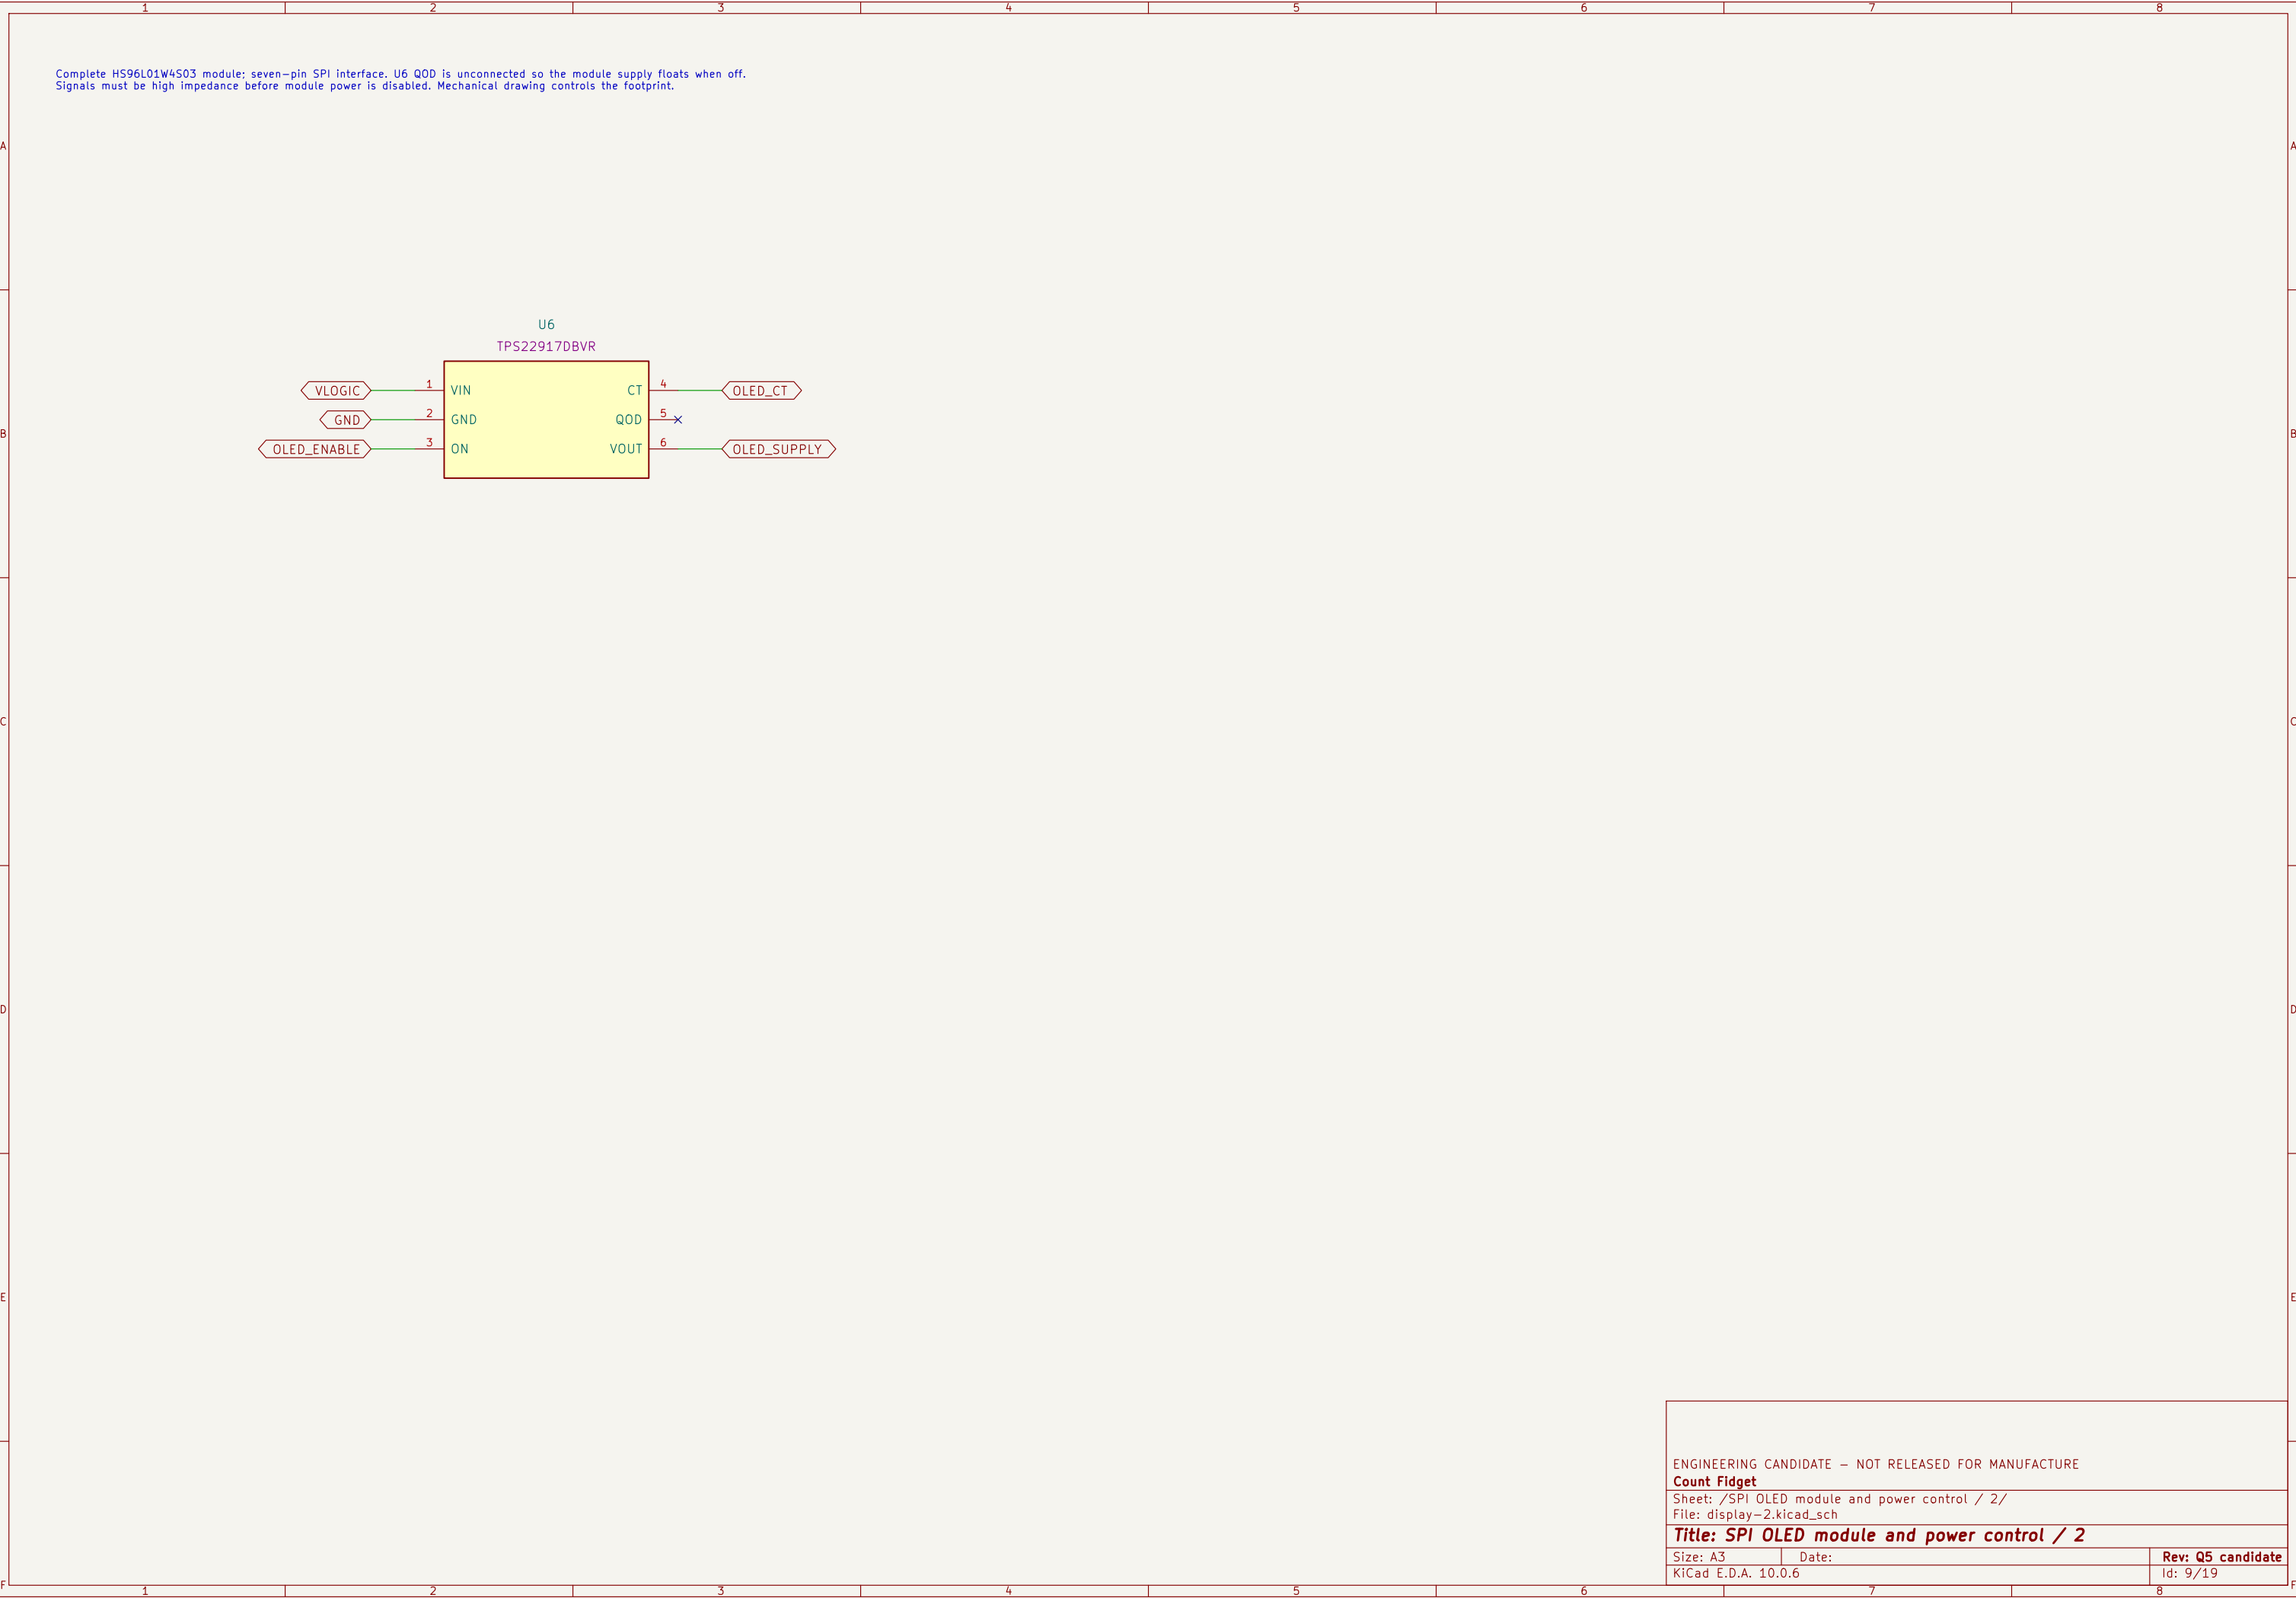


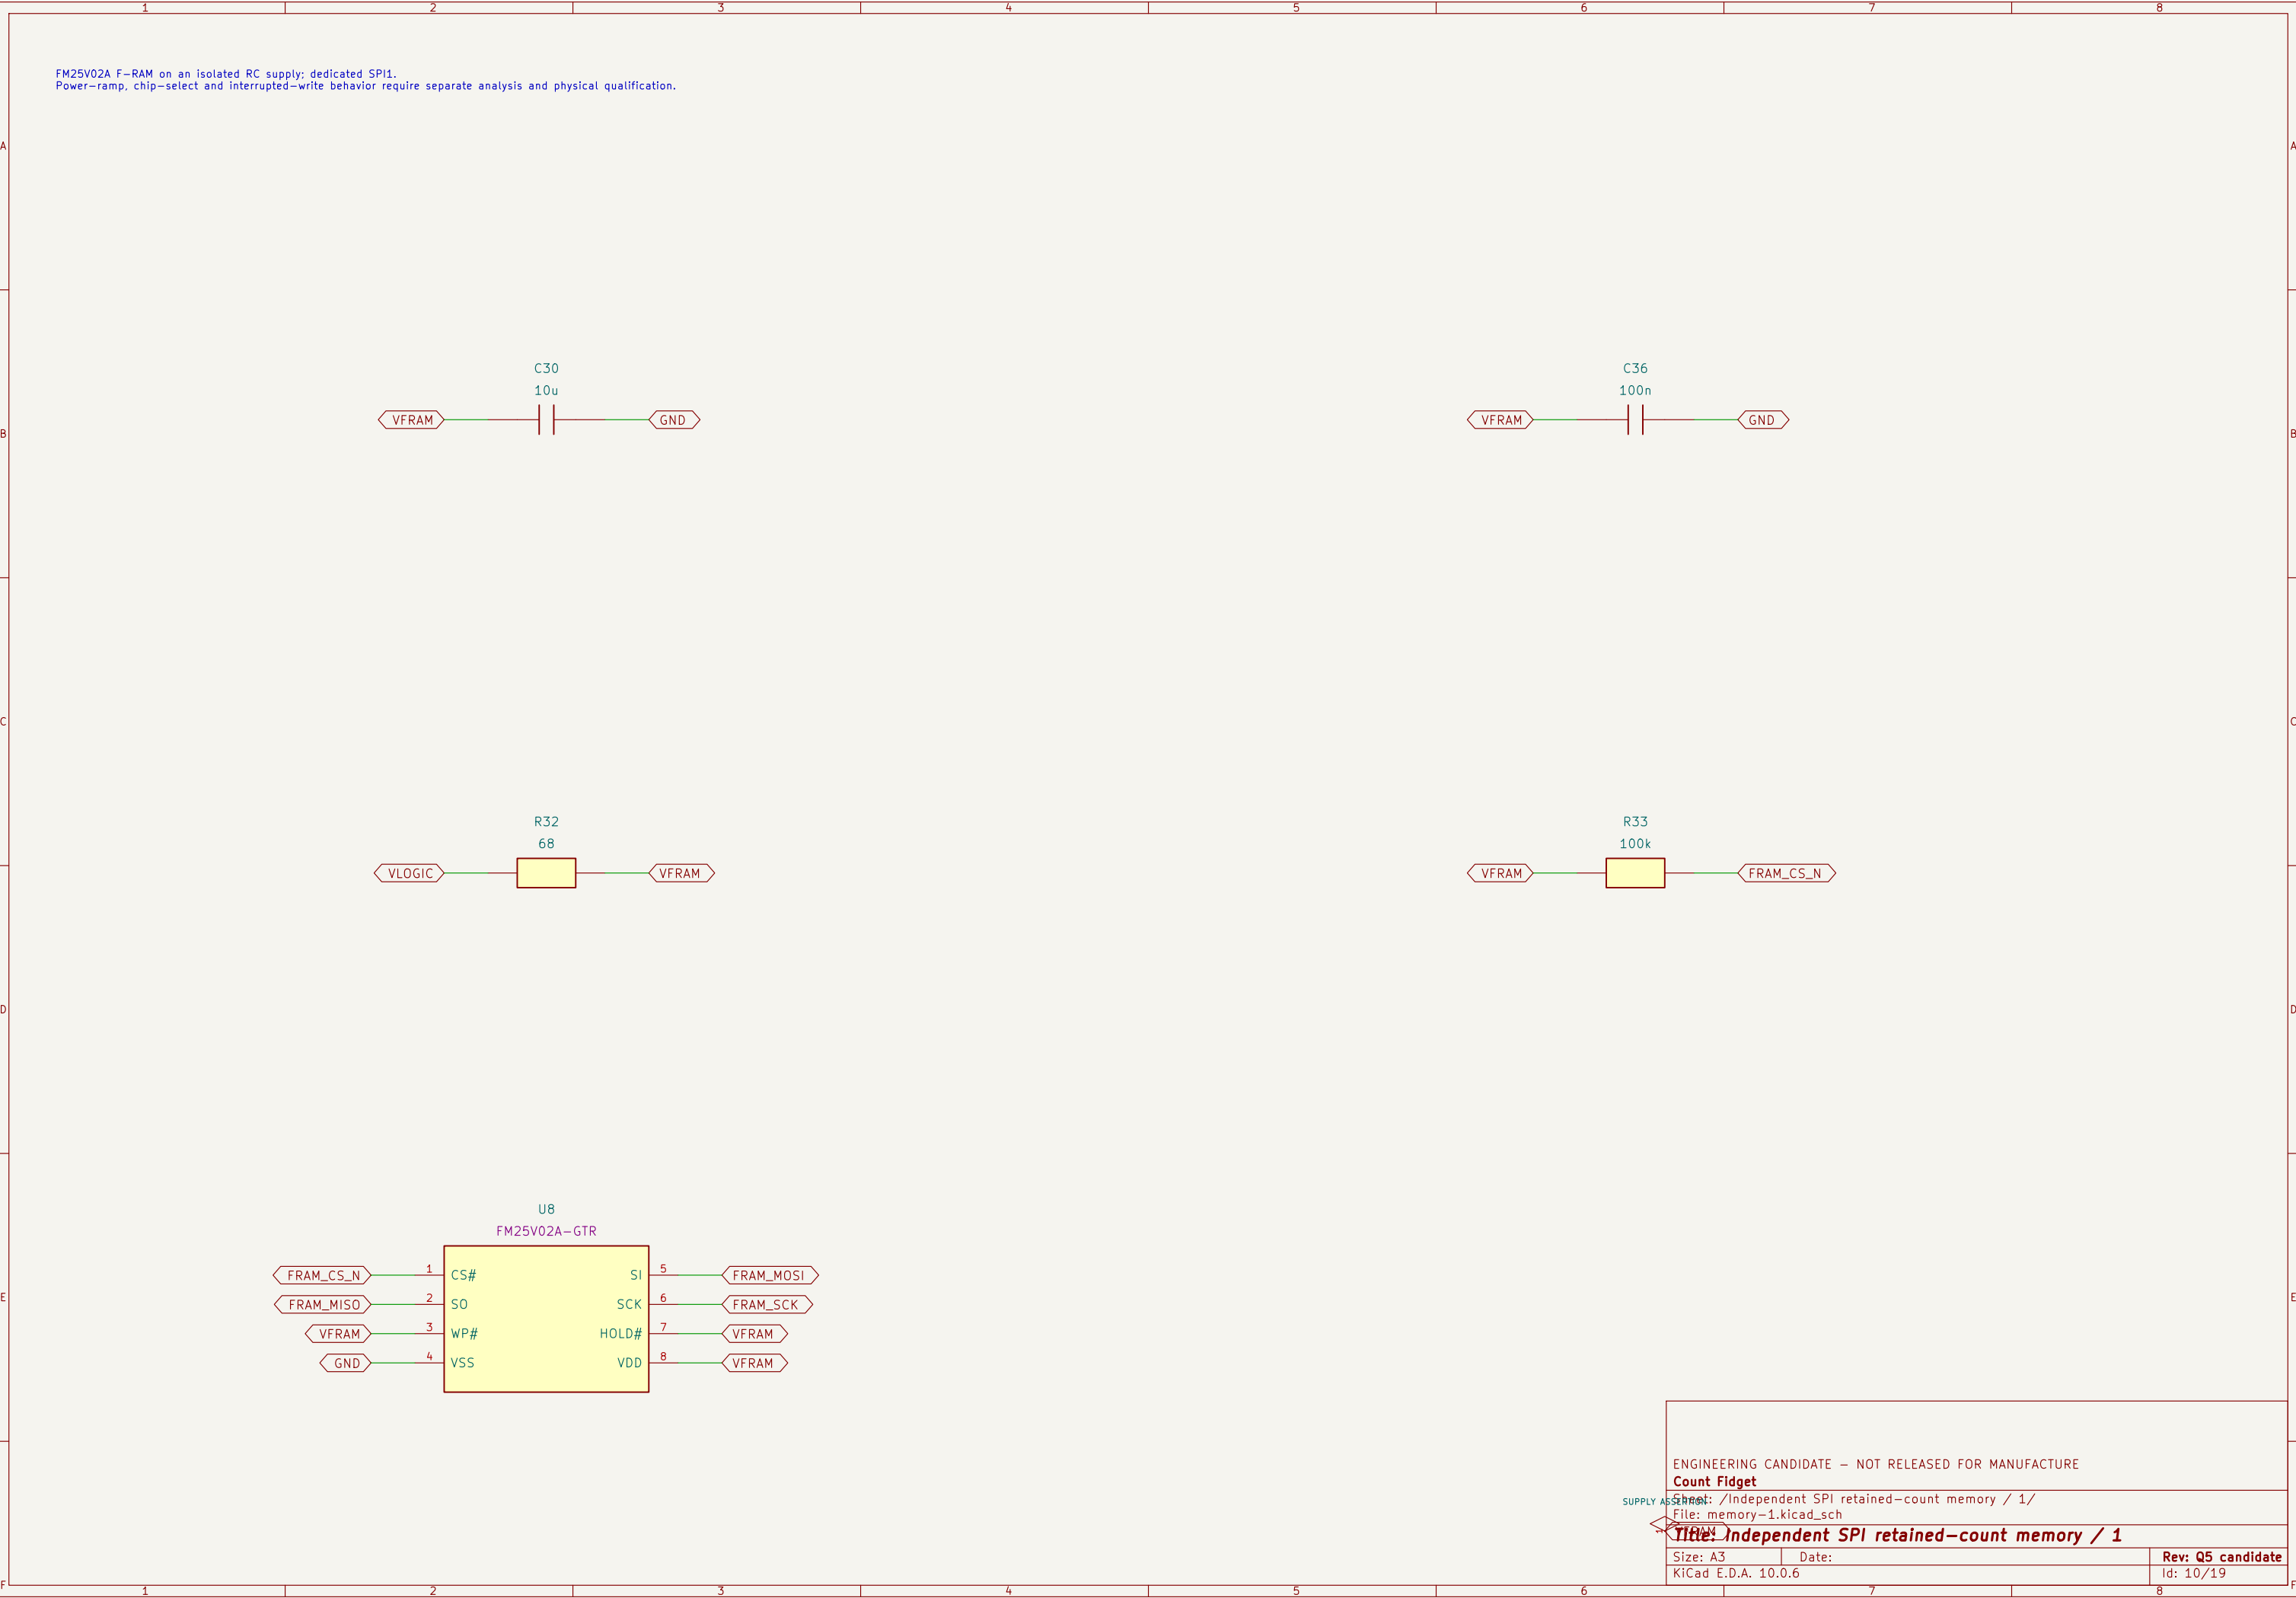


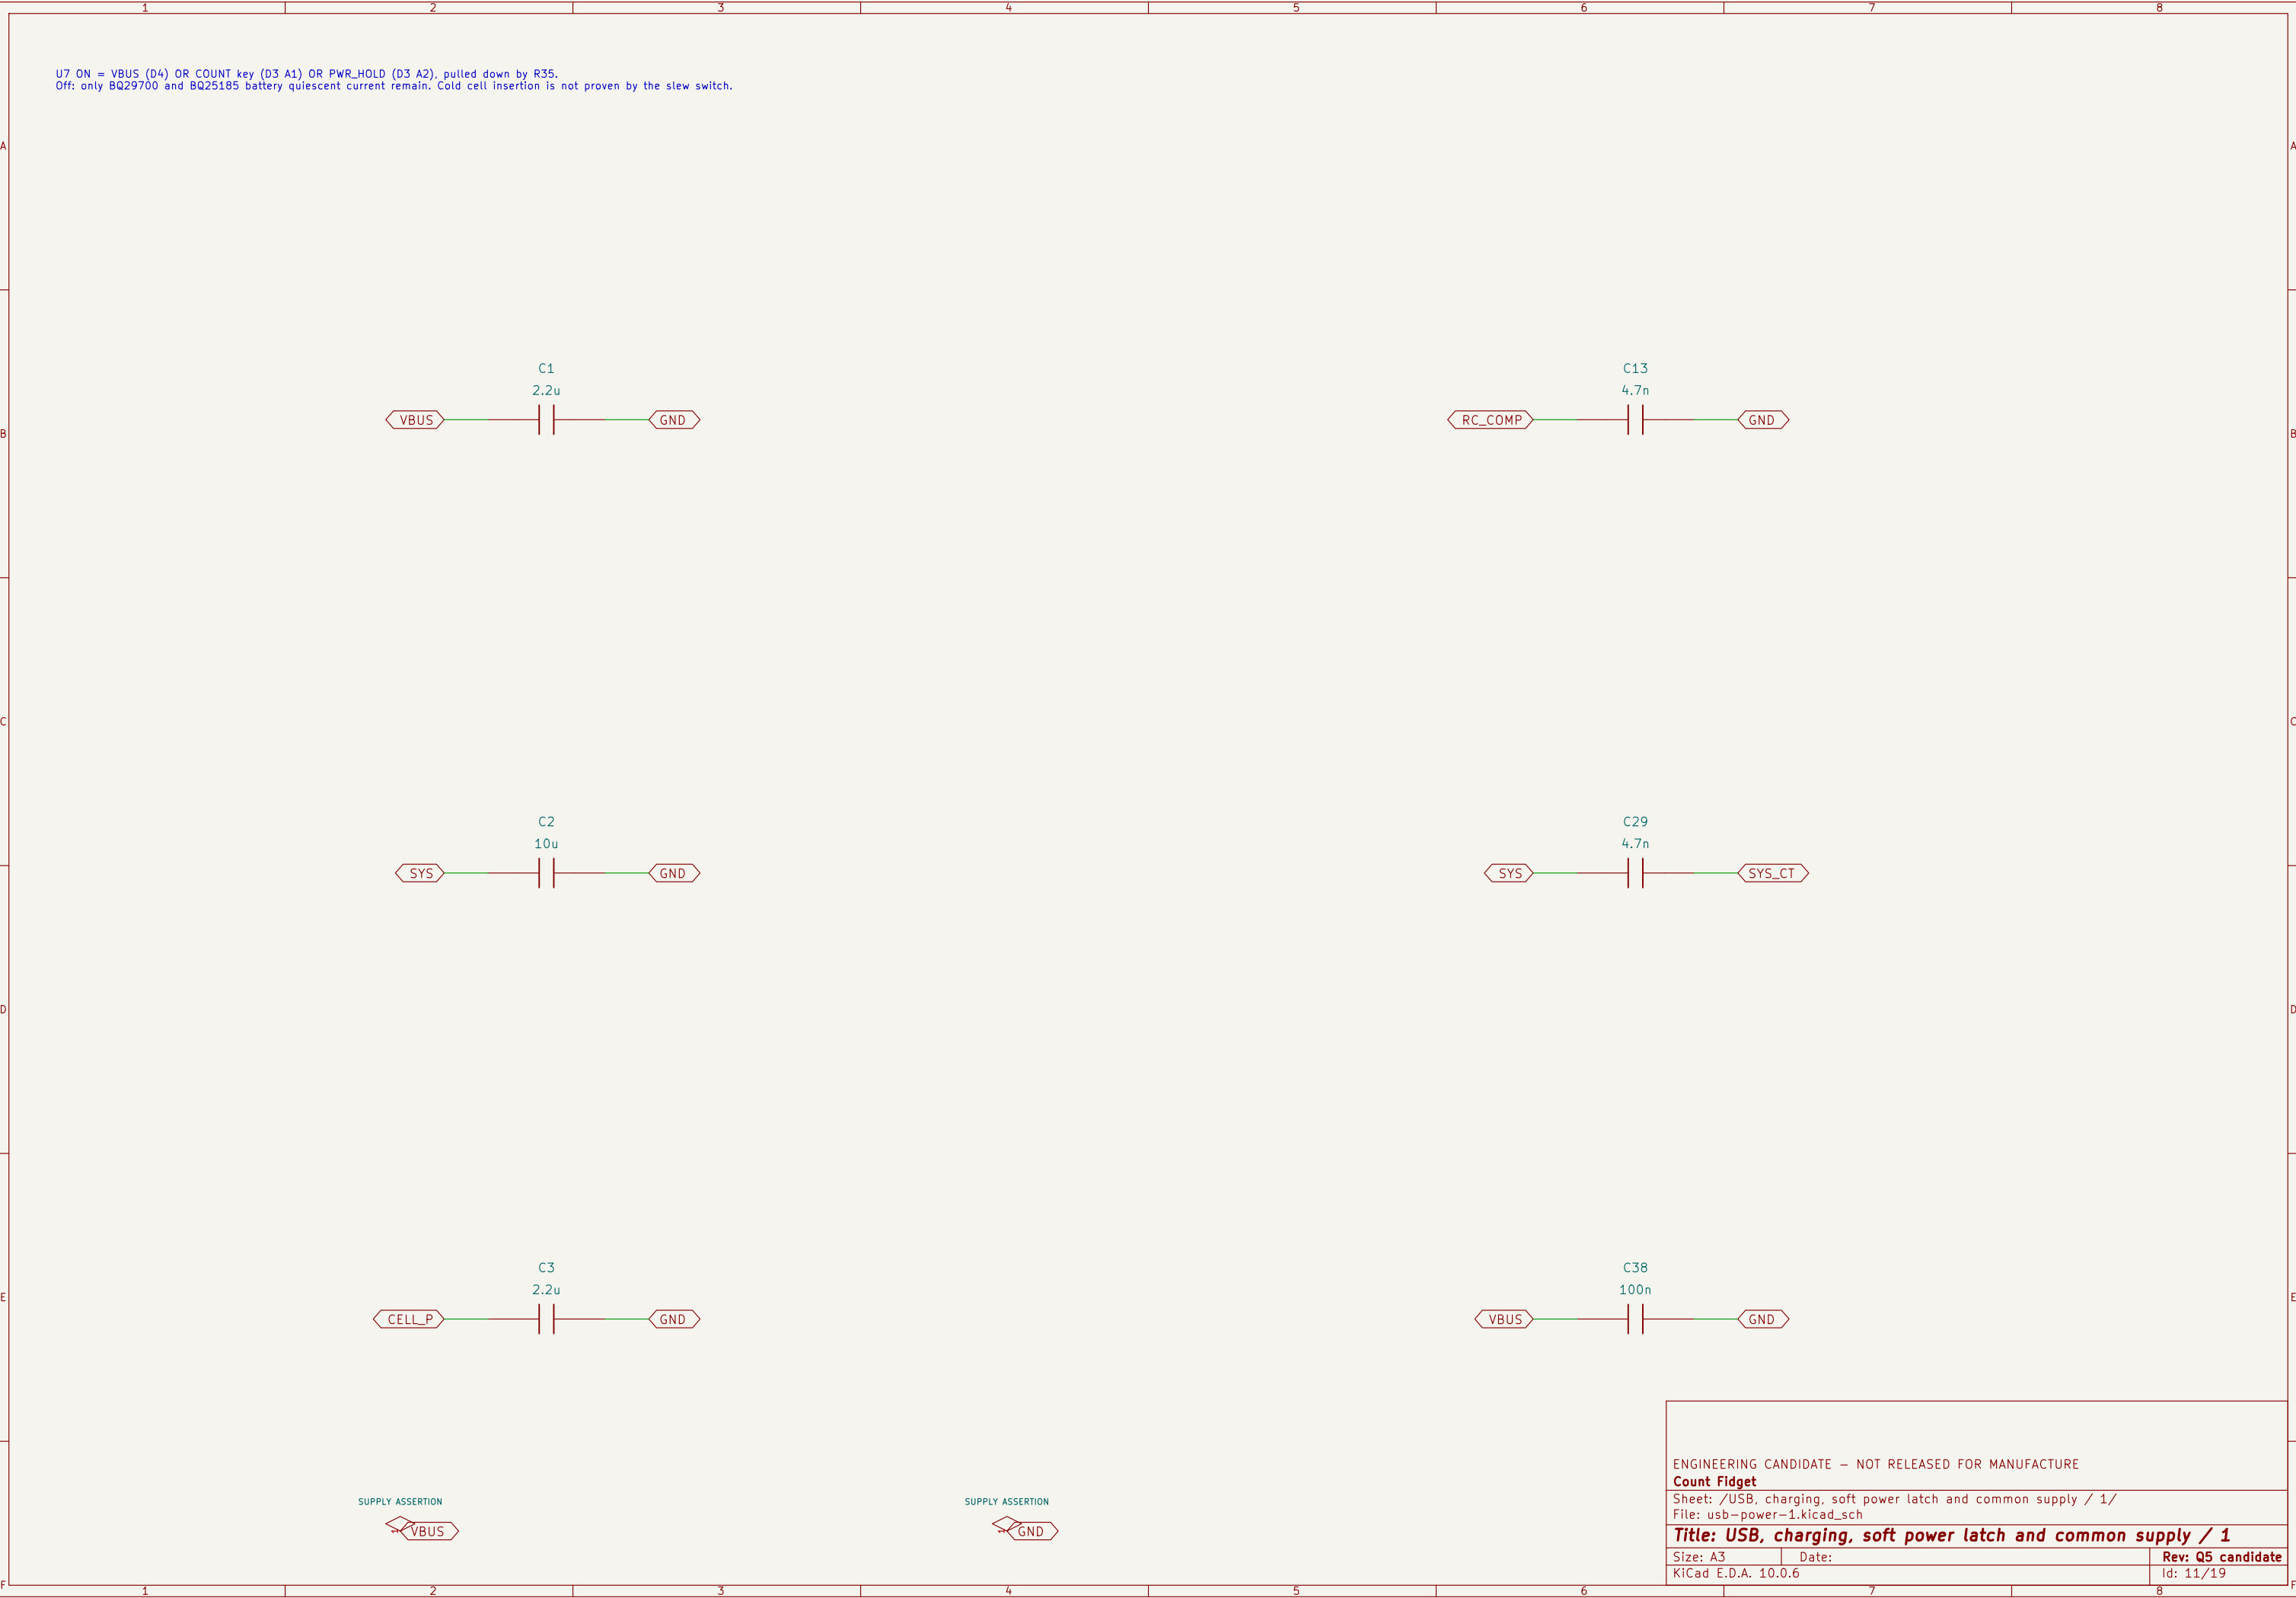


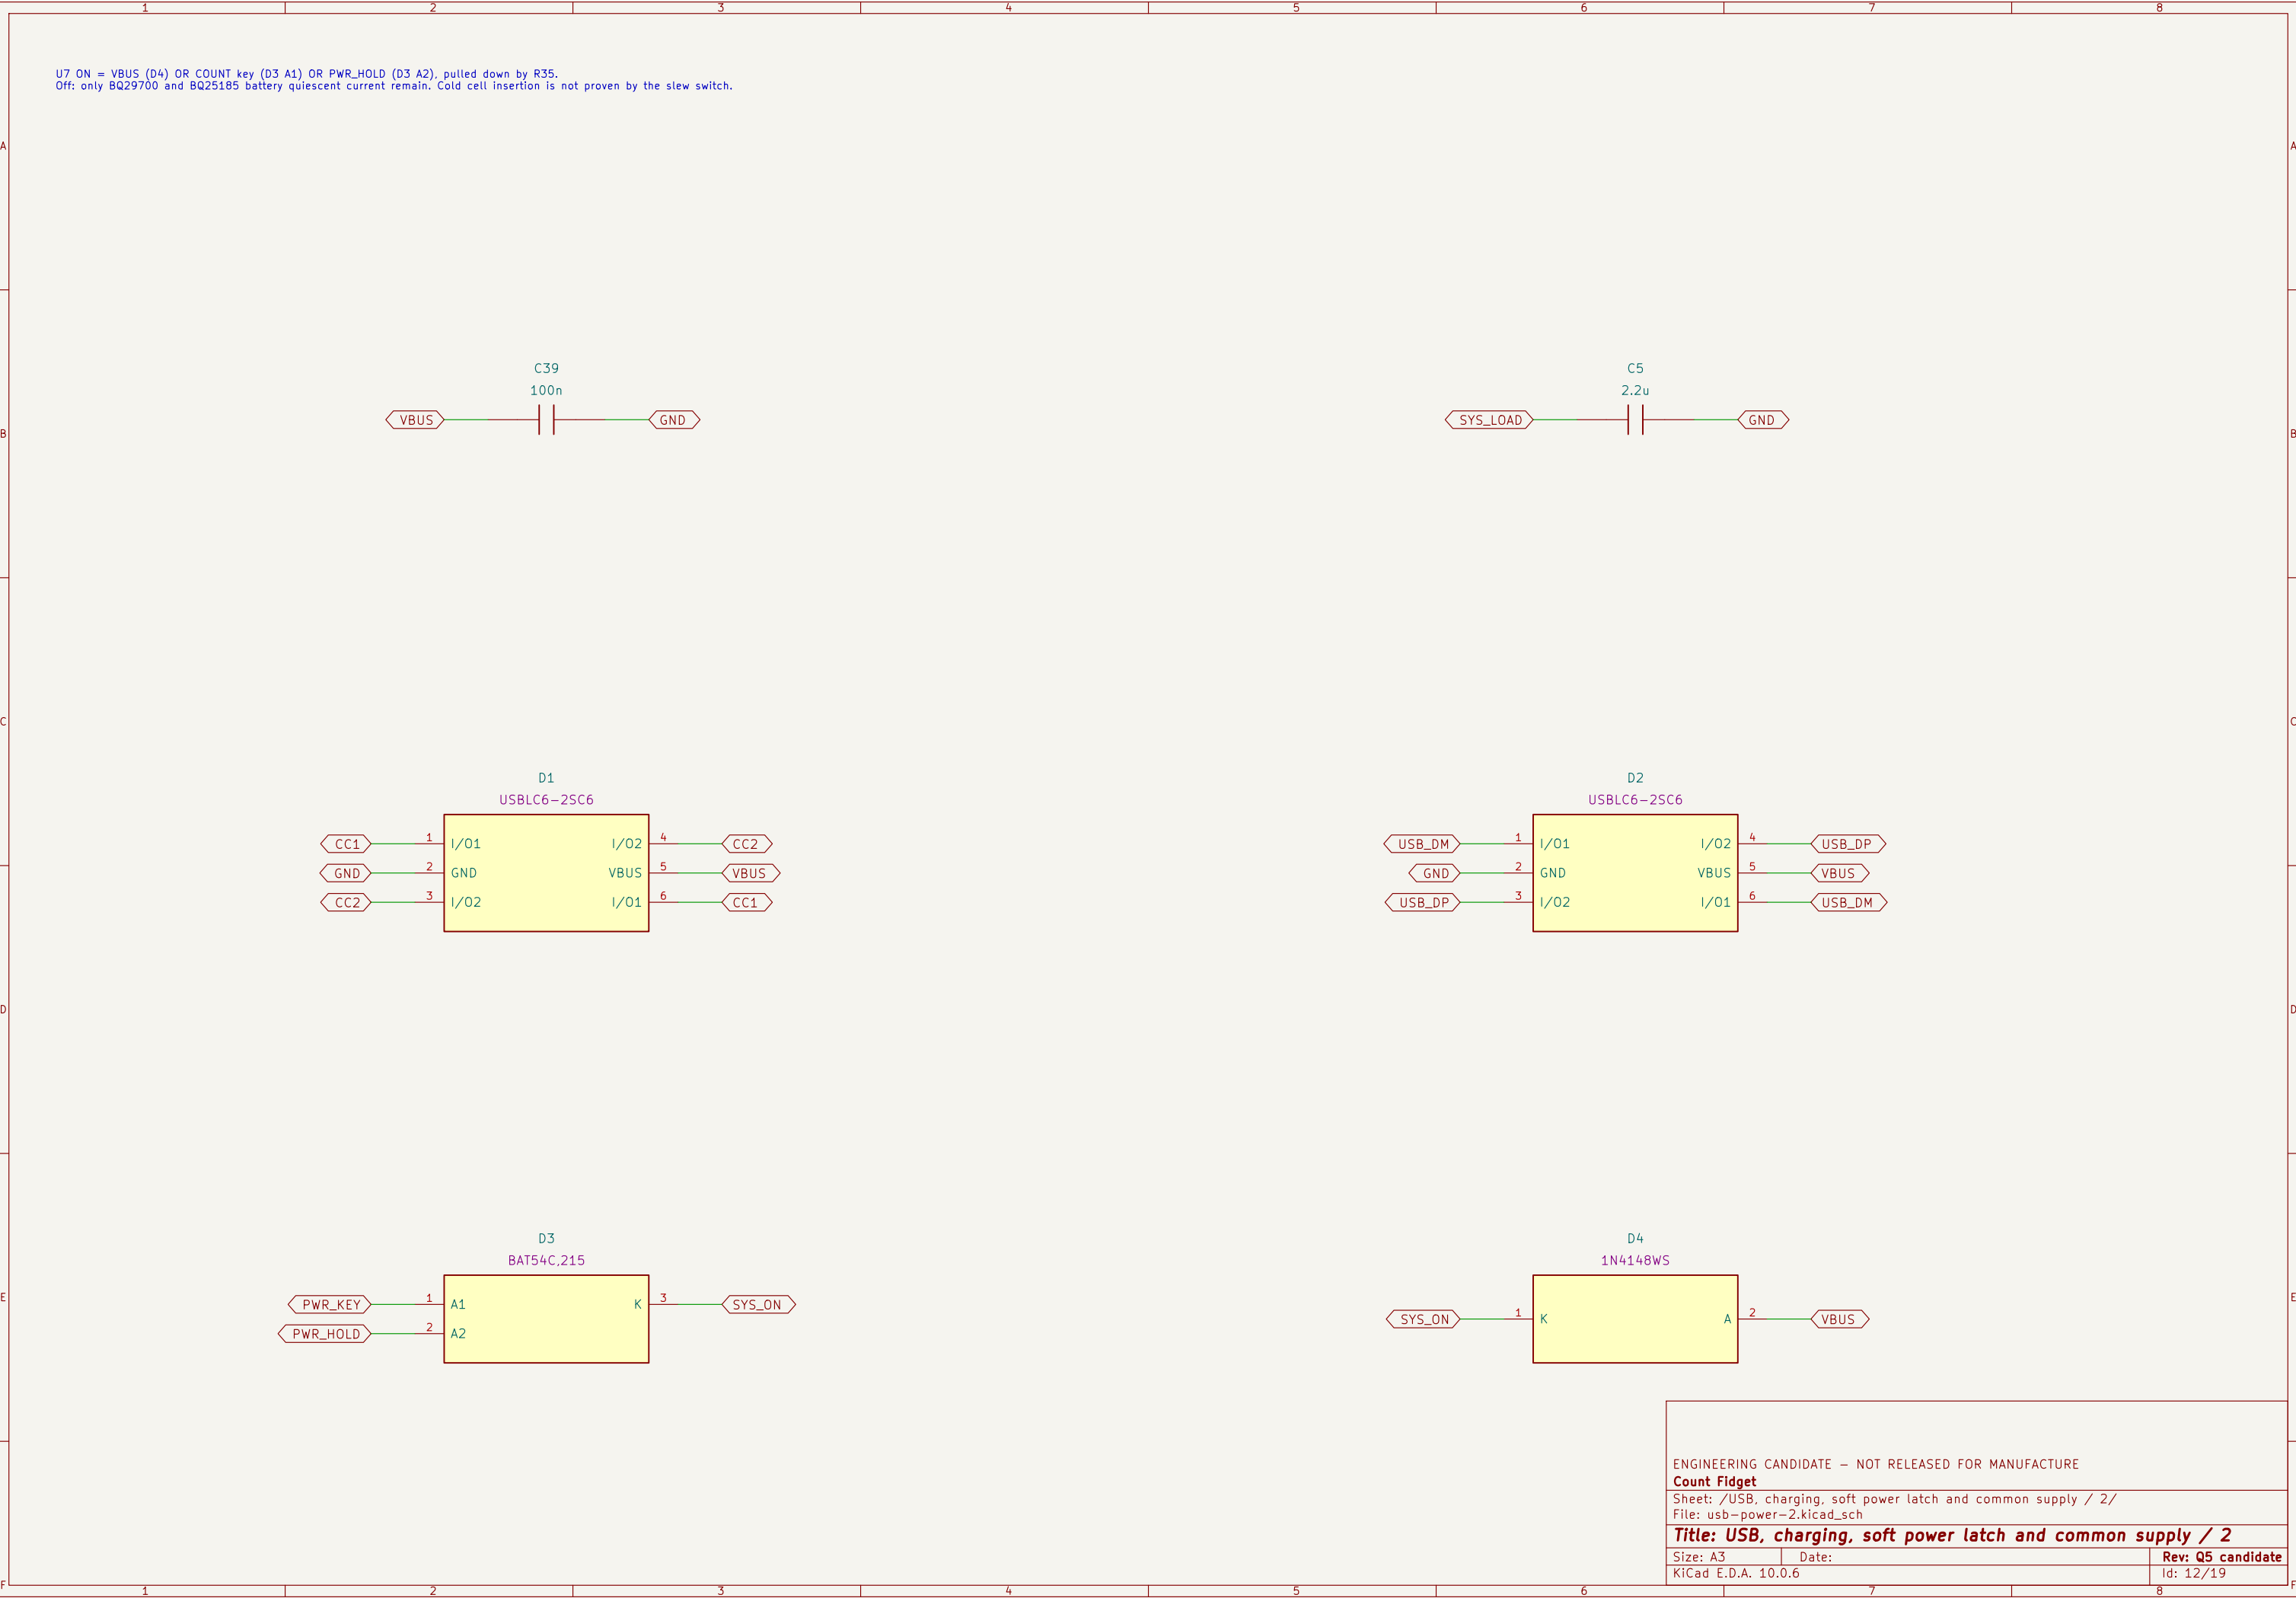


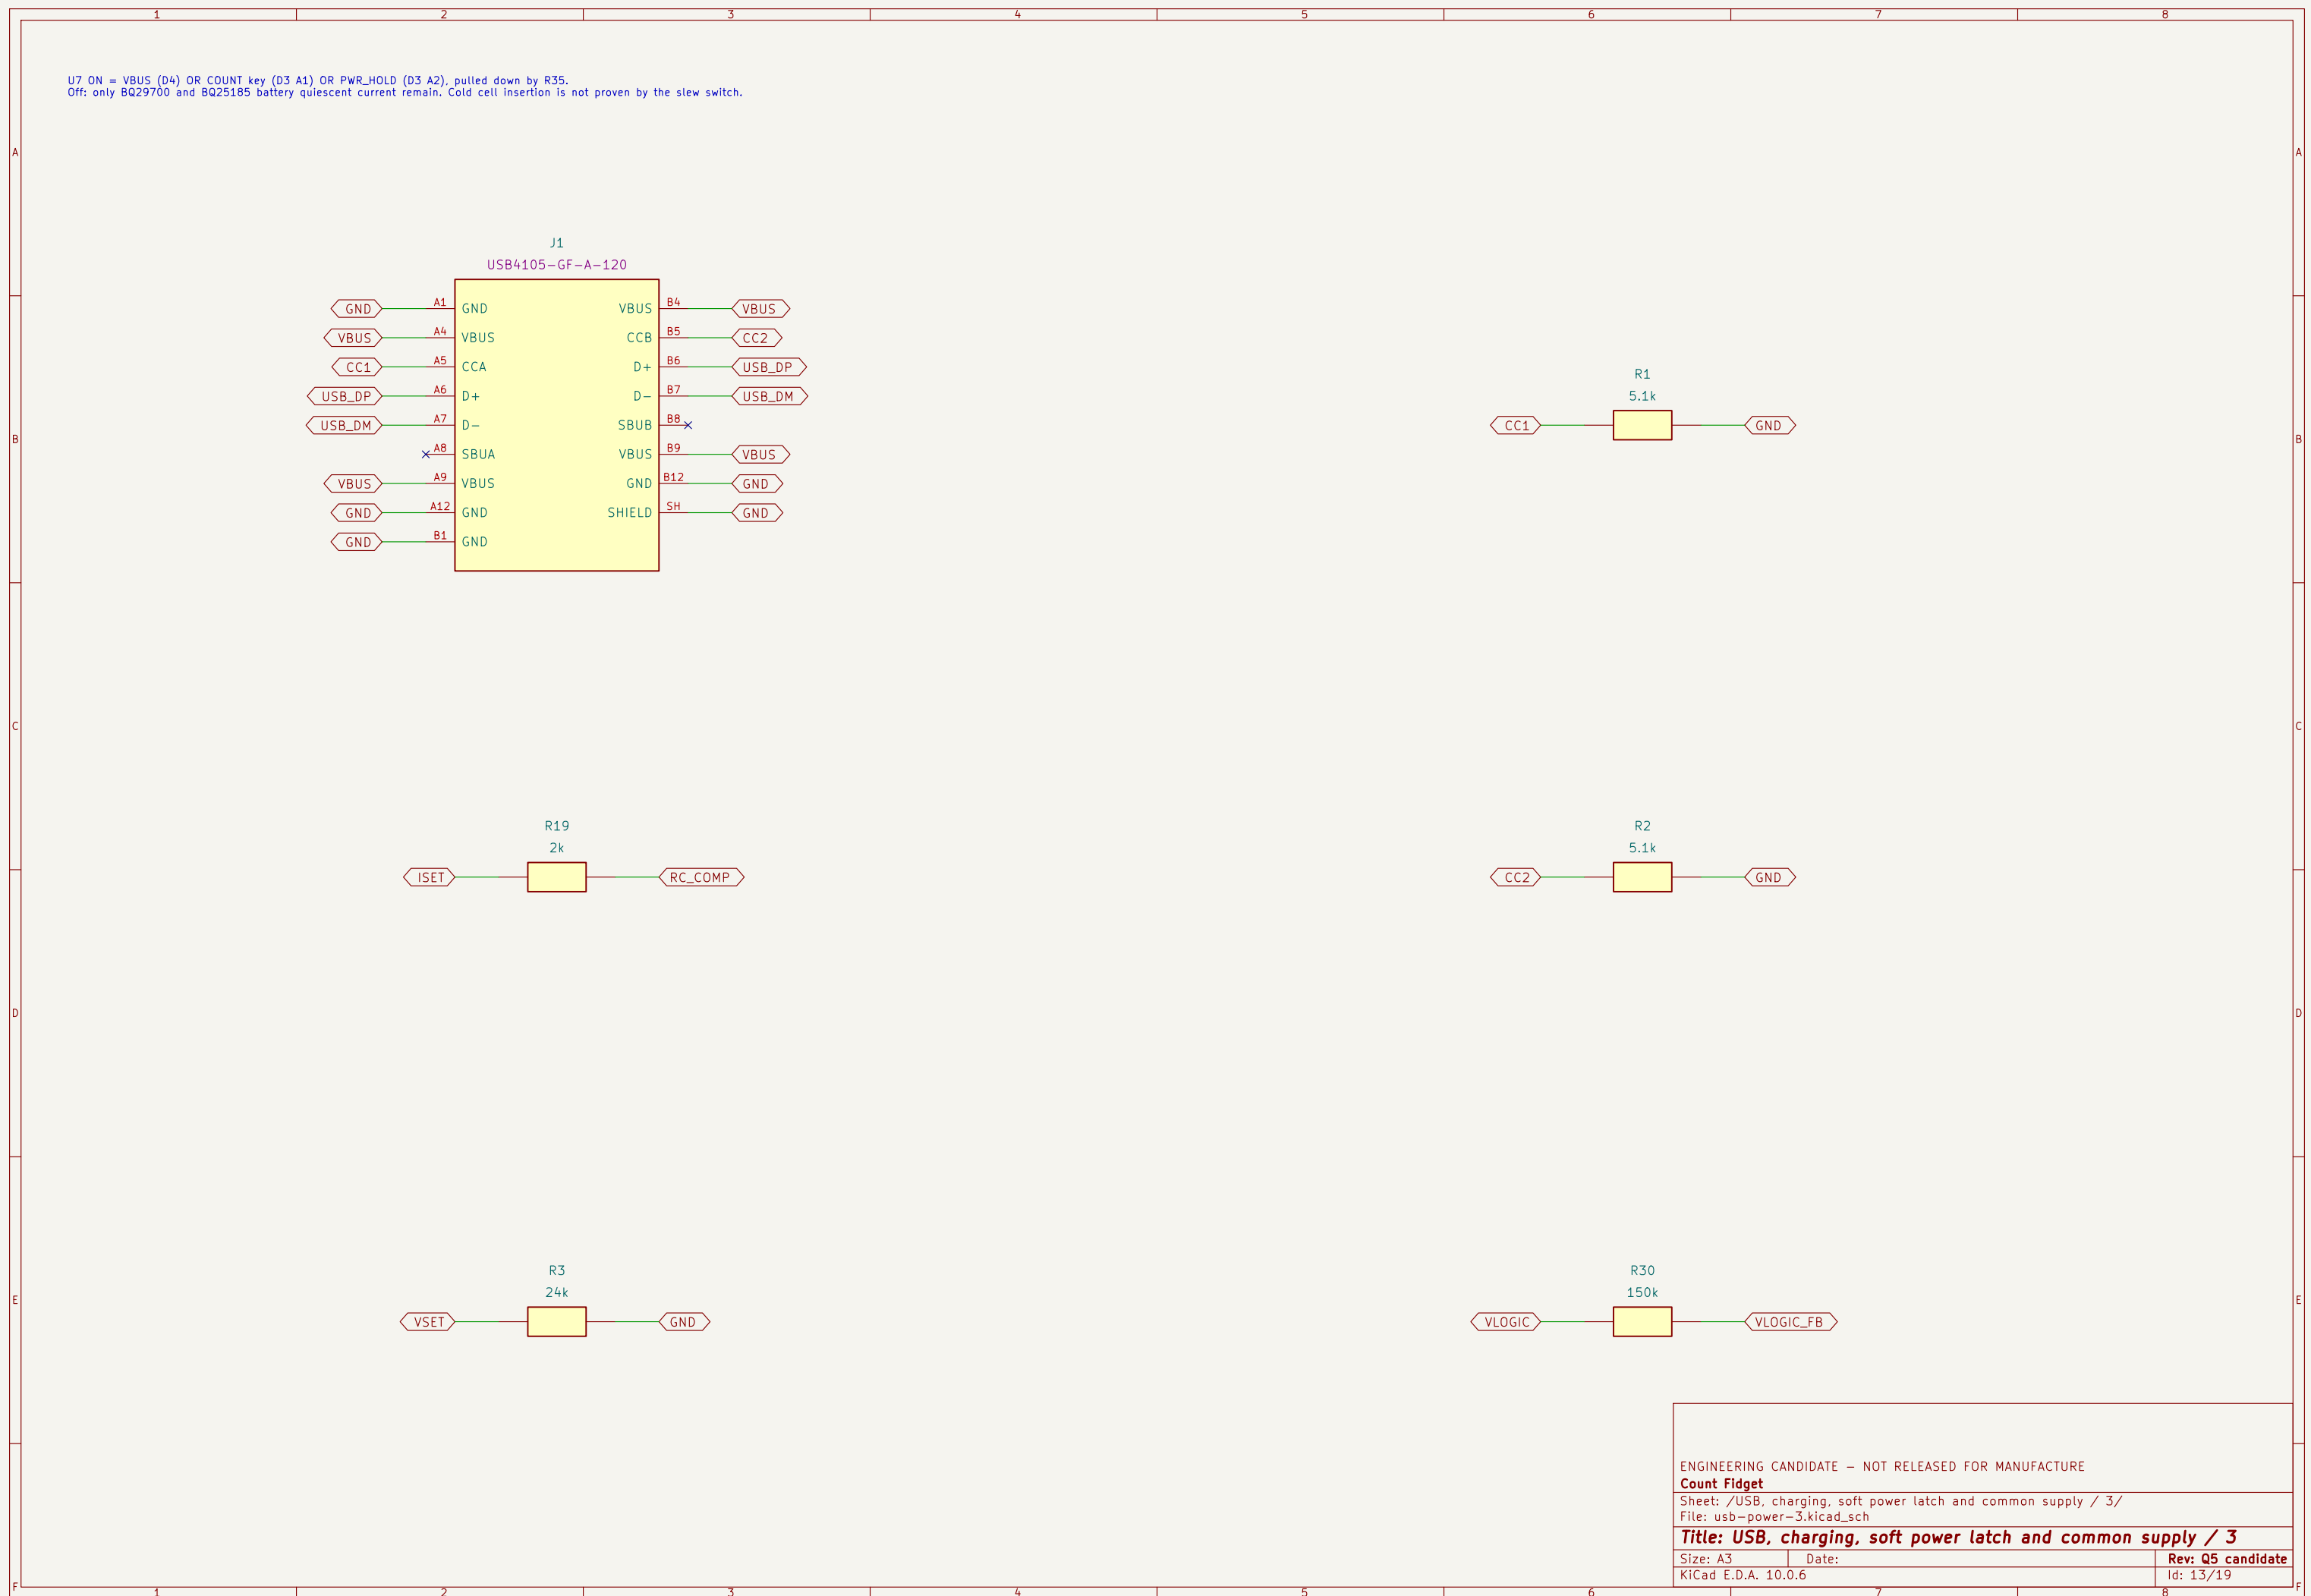

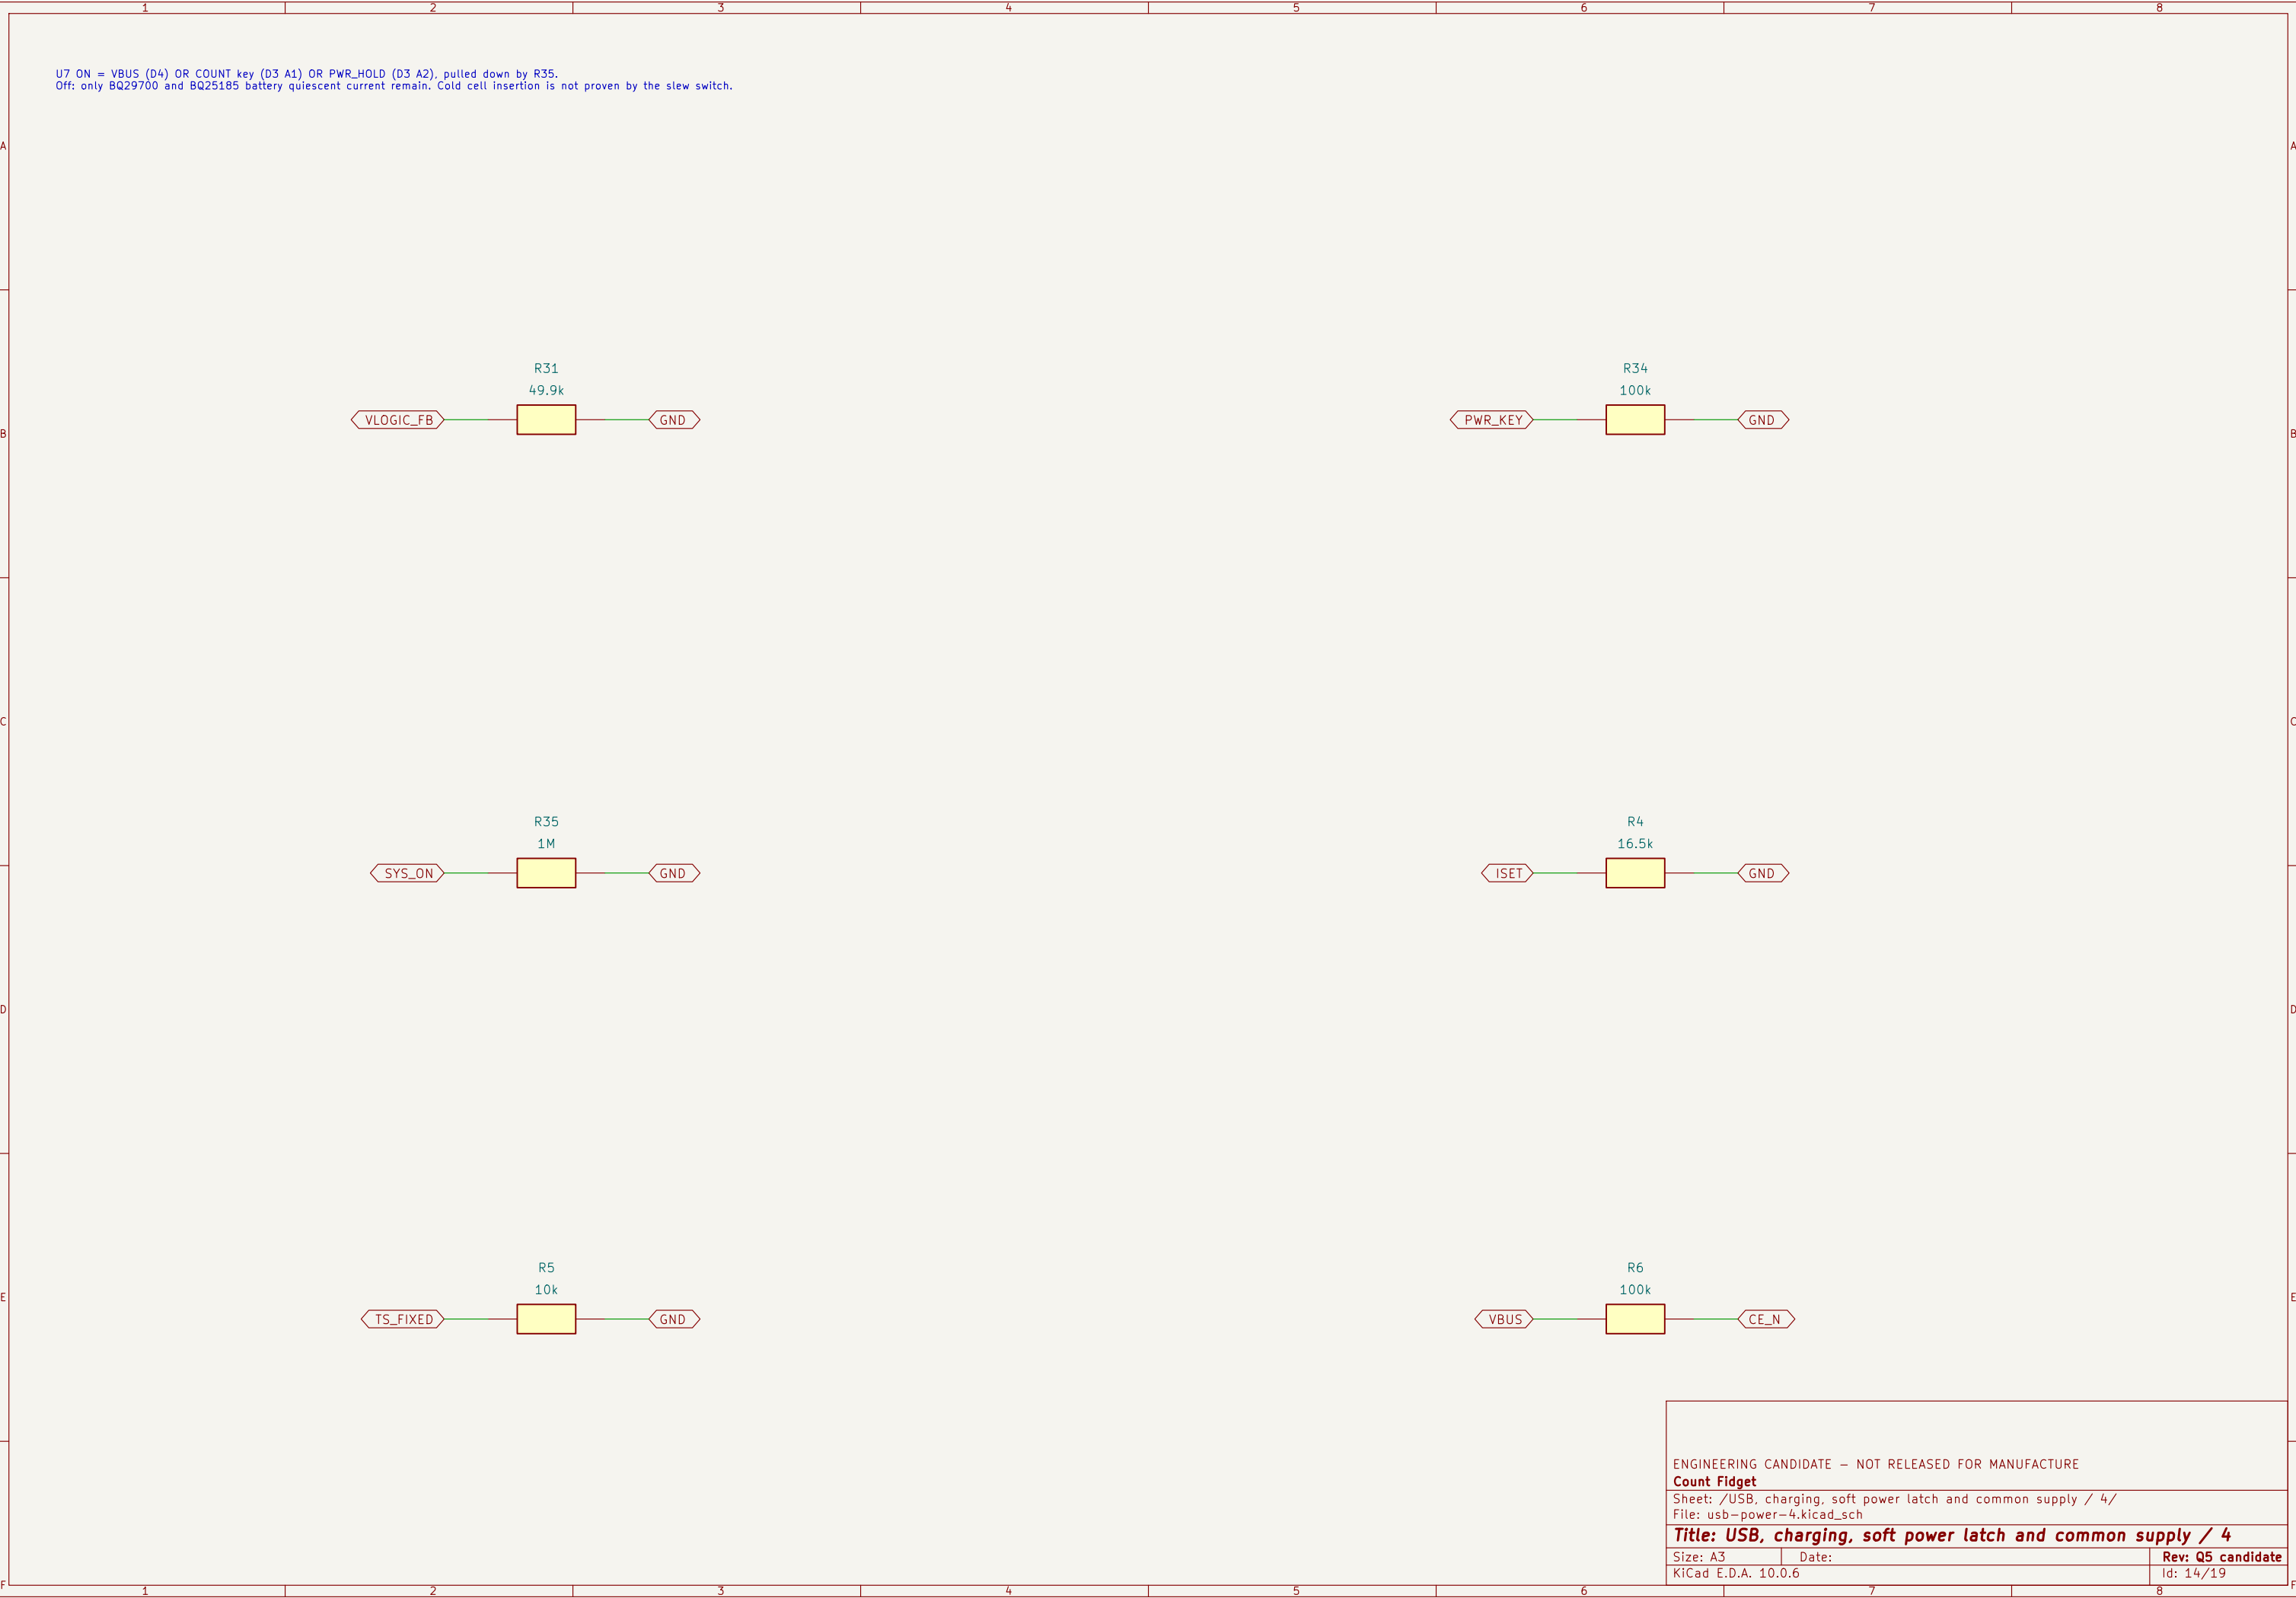

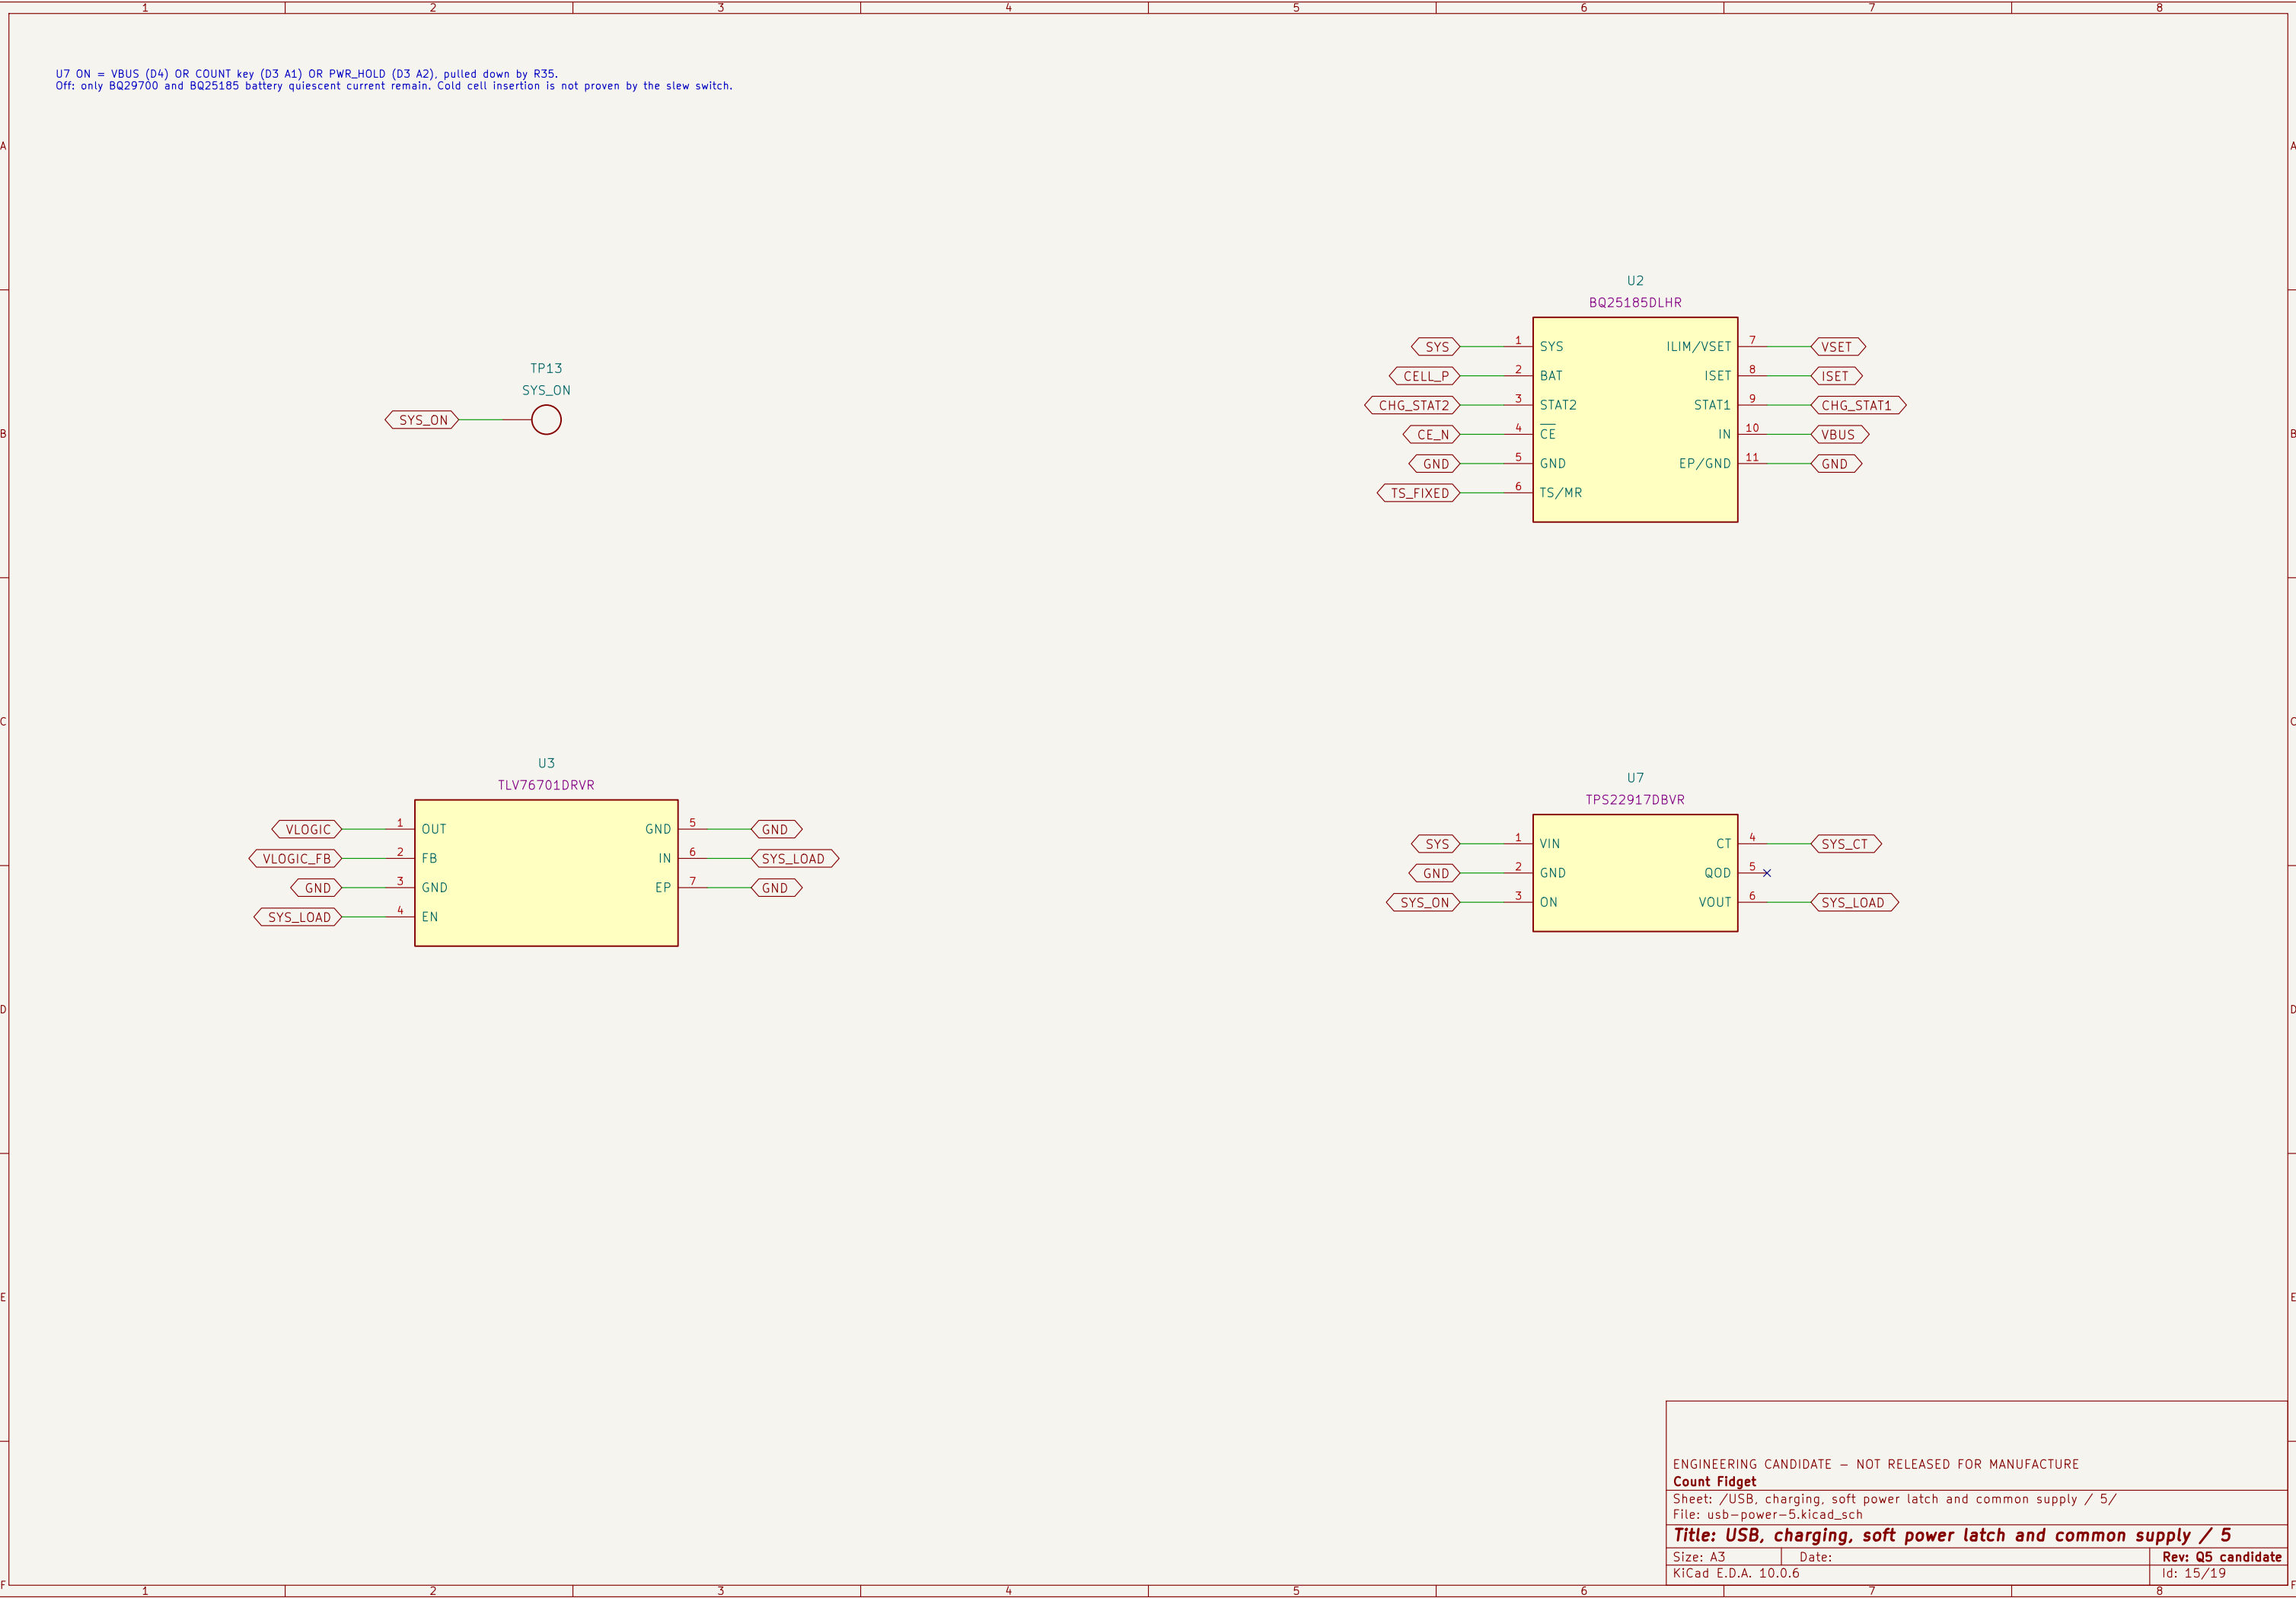

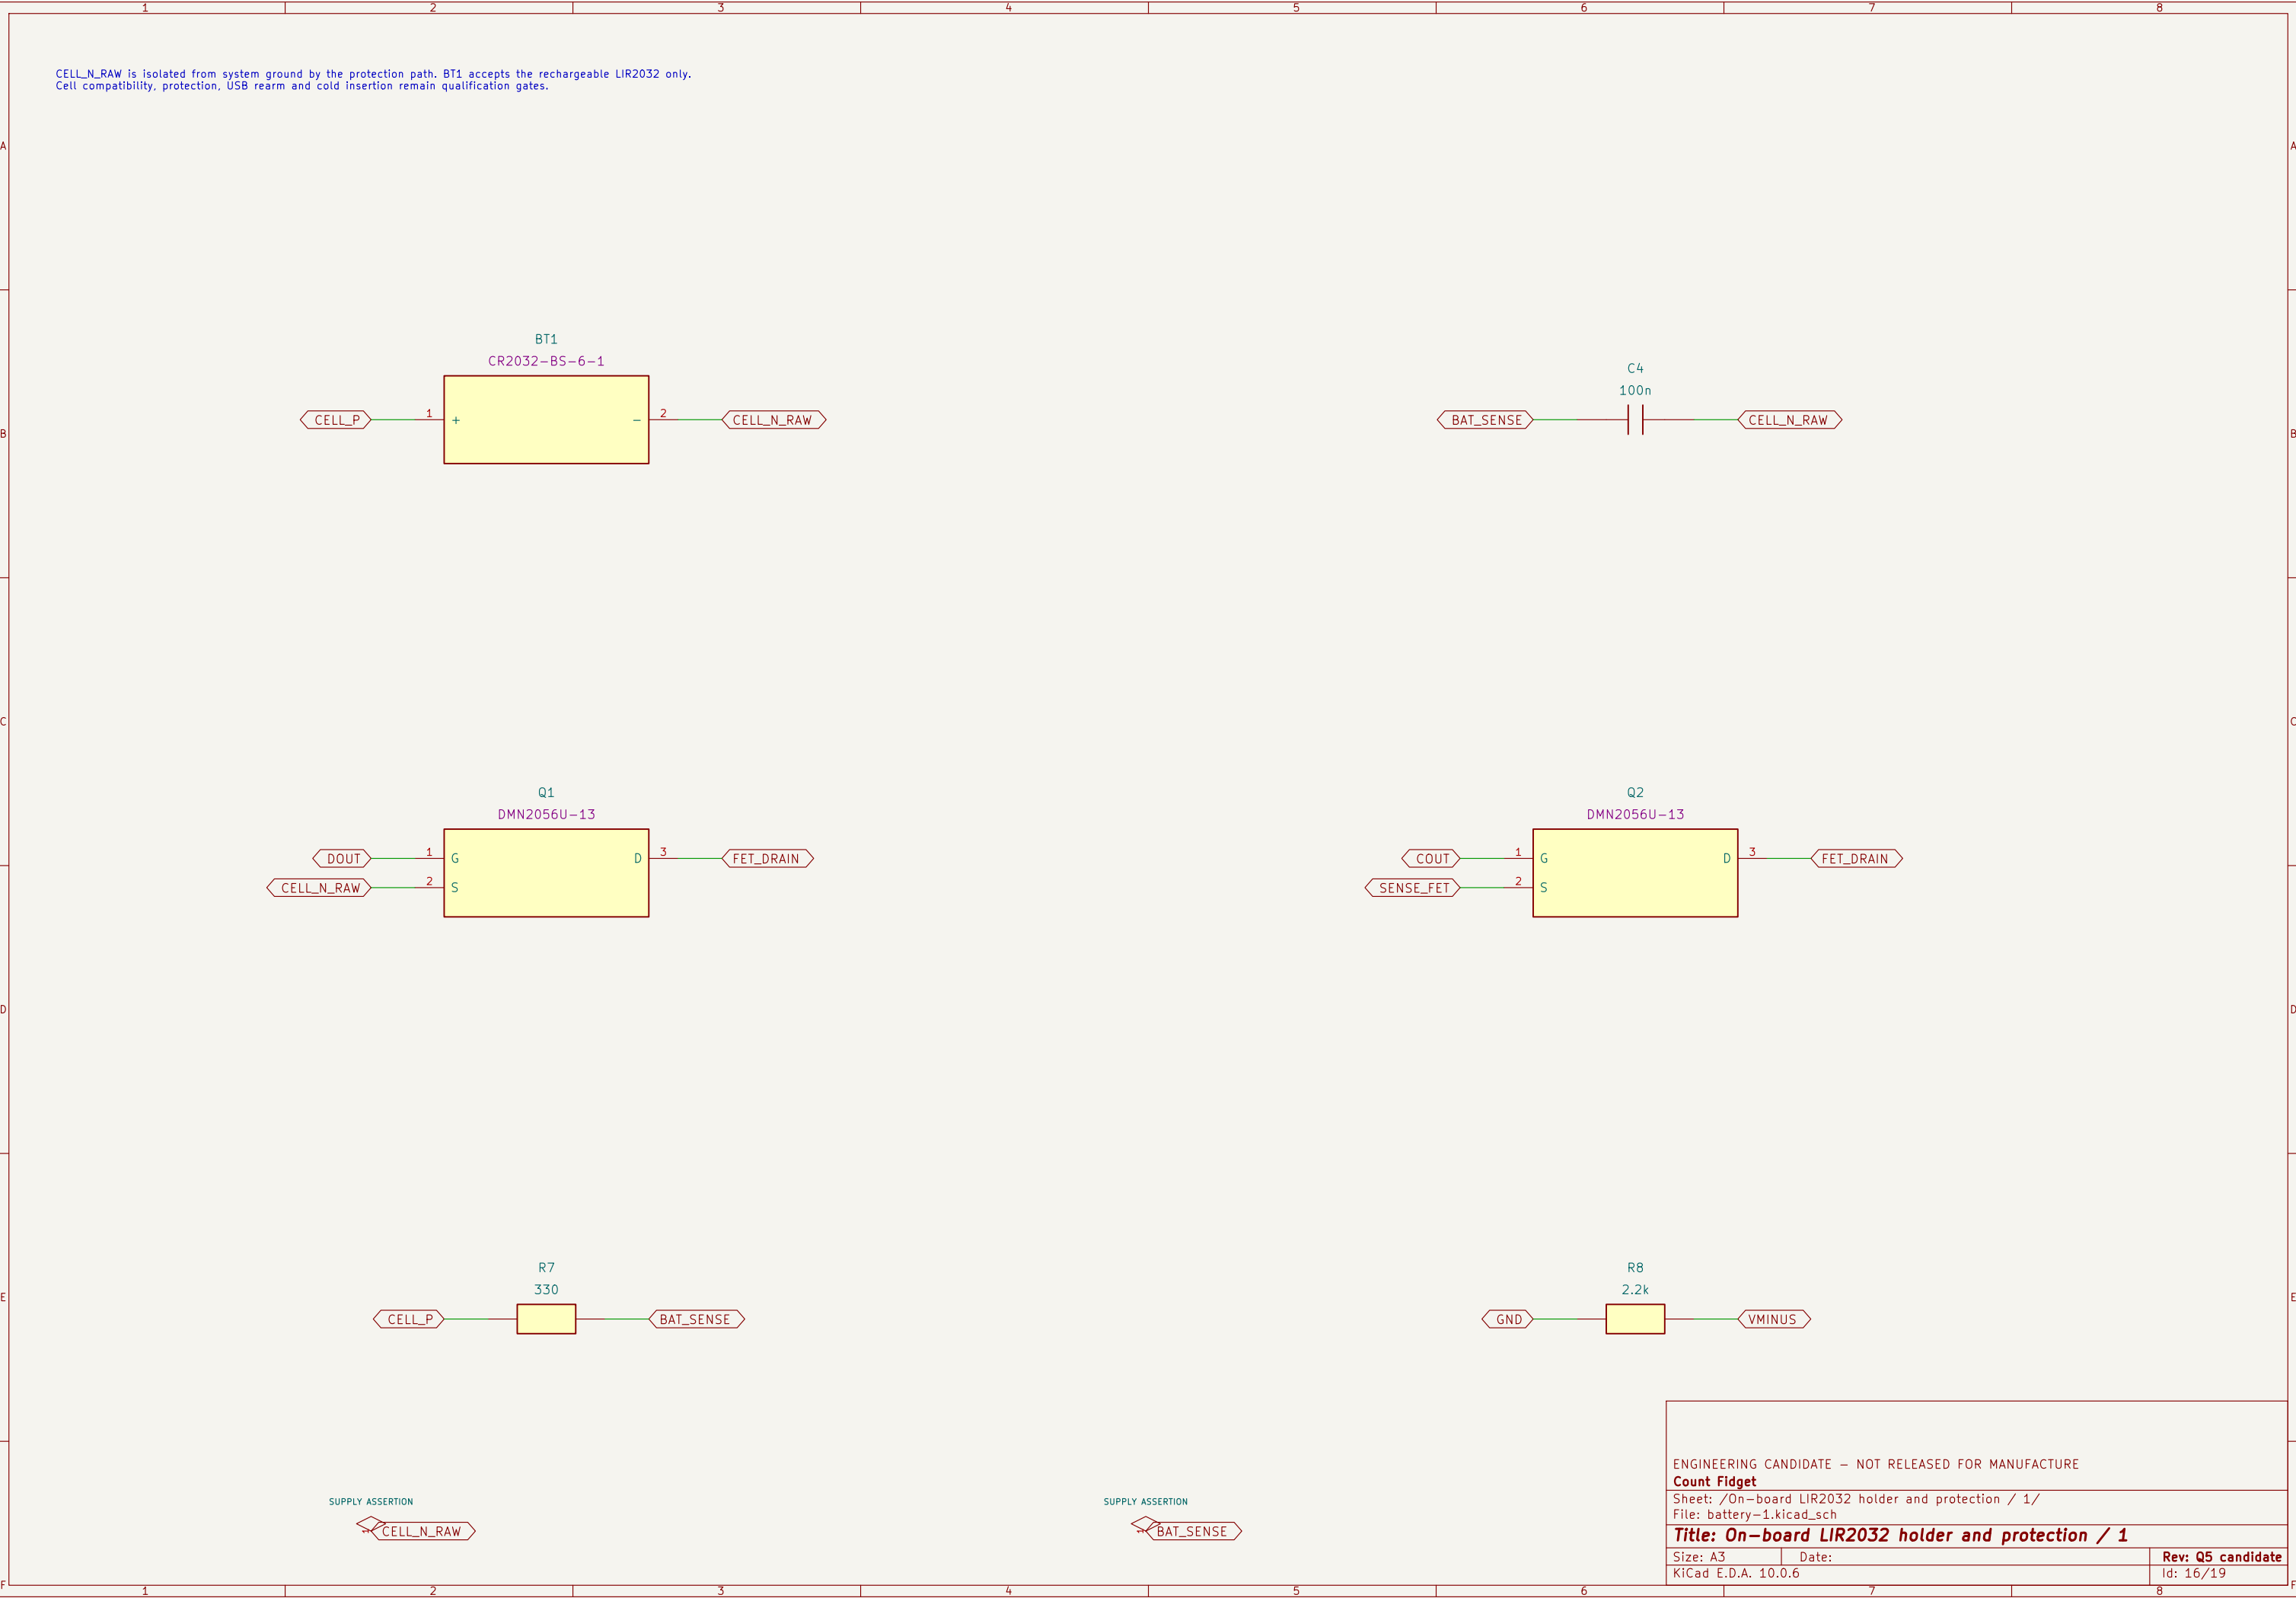

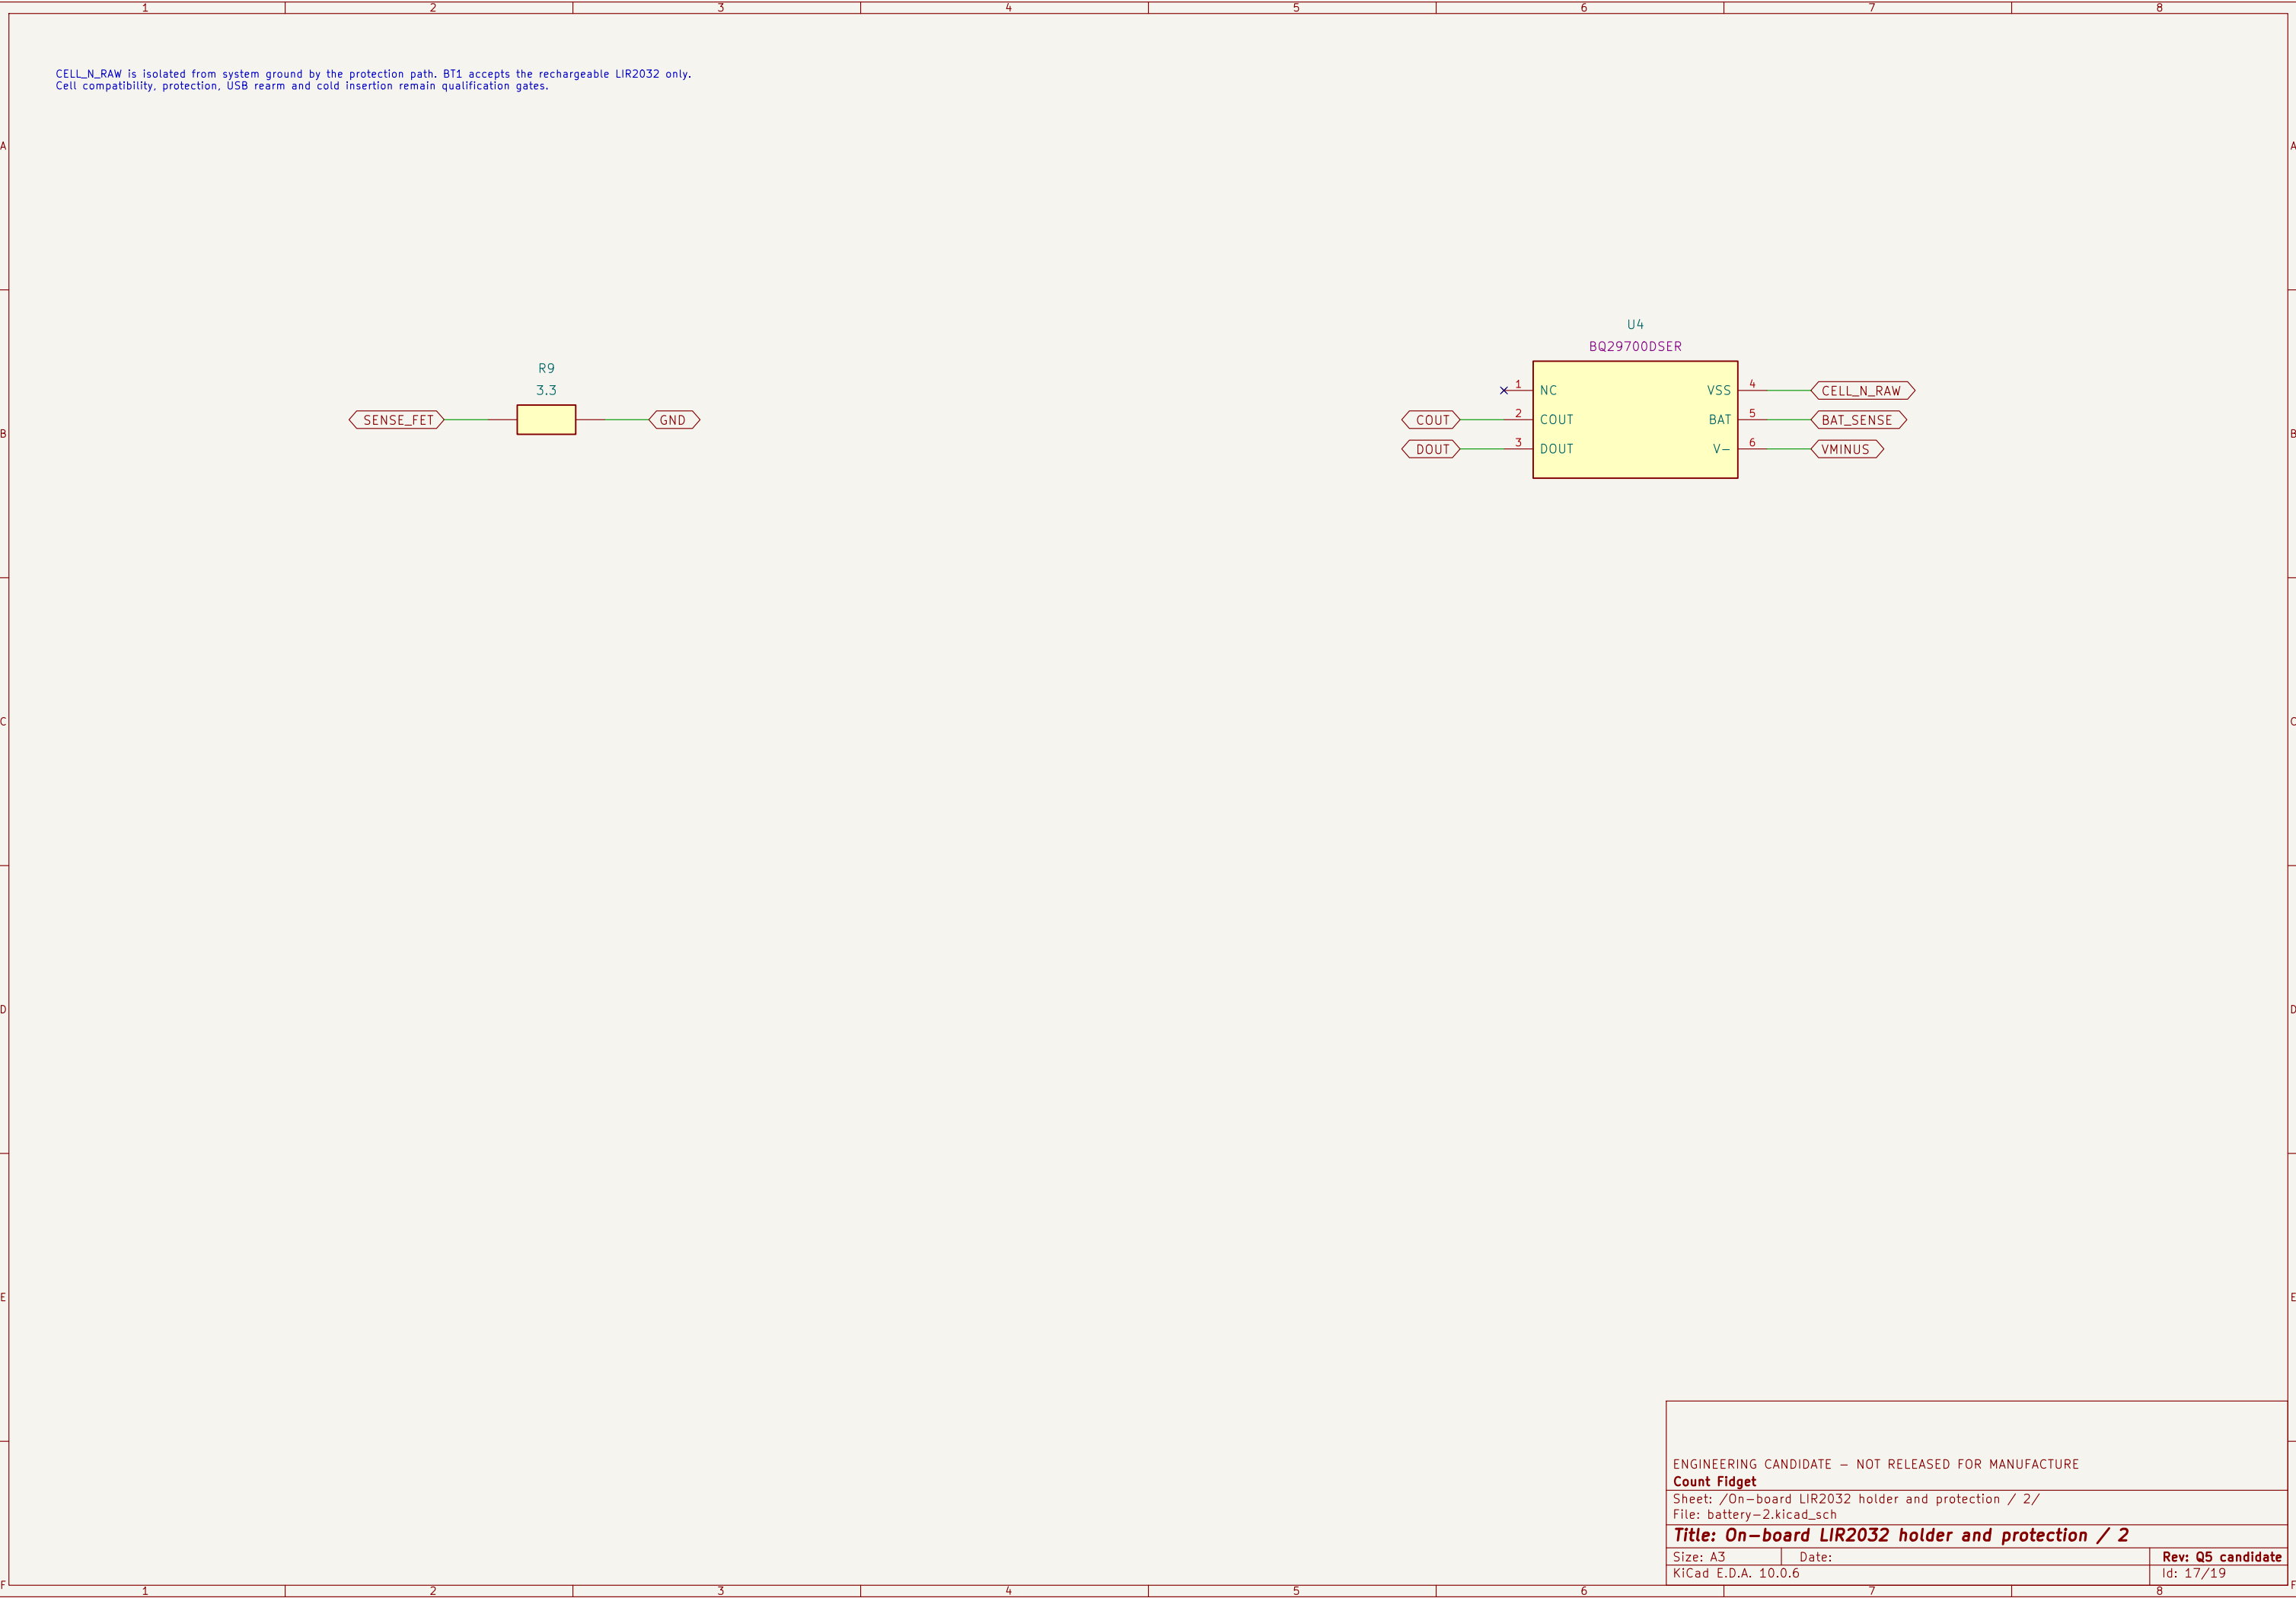

TH1 on the board beside BT1; both window outputs must enable their series FETs for charging.
Gate pulldowns disable charging when comparator power is absent; threshold and fault tests remain required.

