




	1	2	3	4	5	6	7	8	
A	Q5 schematic index – 81 fitted PCB parts plus non–fitted test lands and mounts. Global net labels connect the functional sheets. Crosses explicitly mark unused physical pins. Q1 submitted files remain frozen. This candidate still requires ERC, layout, first–article and safety qualification.								A
B	STM32, keys and USB boot controls		STM32, keys and USB boot controls / 2			STM32, keys and USB boot controls / 3			
	U1 / C31 / C32 / C33 / C34		C10 / C11 / C12 / C35 / C37 / C6			C7 / H1 / H2 / H3 / H4 / Q5			
	File: mcu–1.kicad_sch STM32, keys and USB boot controls / 4		File: mcu–2.kicad_sch STM32, keys and USB boot controls / 5			File: mcu–3.kicad_sch STM32, keys and USB boot controls / 6			
C	R16 / R17 / R18 / R36 / R37 / SW1		SW2 / SW3 / TP1 / TP11 / TP12 / TP2			TP3 / TP4 / TP5 / TP6 / TP9			
	File: mcu–4.kicad_sch SPI OLED module and power control / 1		File: mcu–5.kicad_sch SPI OLED module and power control / 2			File: mcu–6.kicad_sch Independent SPI retained–count memory / 1			
	C20 / C28 / D51 / R24 / R25 / R29		U6			C30 / C36 / R32 / R33 / U8			
D	File: display–1.kicad_sch USB, charging, soft power latch and common supply / 1		File: display–2.kicad_sch USB, charging, soft power latch and common supply / 2			File: memory–1.kicad_sch USB, charging, soft power latch and common supply / 3			
	C1 / C13 / C2 / C29 / C3 / C38		C39 / C40 / C5 / D1 / D2 / D3			D4 / J1 / R1 / R19 / R2 / R3			
	File: usb–power–1.kicad_sch USB, charging, soft power latch and common supply / 4		File: usb–power–2.kicad_sch USB, charging, soft power latch and common supply / 5			File: usb–power–3.kicad_sch On–board LIR2032 holder and protection / 1			
E	R30 / R31 / R34 / R35 / R38 / R4		R5 / R6 / TP13 / U2 / U3 / U7			BT1 / C4 / Q1 / Q2 / R7 / R8			
	File: usb–power–4.kicad_sch On–board LIR2032 holder and protection / 2		File: usb–power–5.kicad_sch Independent charge–temperature window / 1			File: battery–1.kicad_sch Independent charge–temperature window / 2			
	R9 / U4		C9 / Q3 / Q4 / R10 / R11 / R12			R13 / R14 / R15 / TH1 / U5			
F	File: battery–2.kicad_sch		File: thermal–1.kicad_sch			File: thermal–2.kicad_sch			
	ENGINEERING CANDIDATE – NOT RELEASED FOR MANUFACTURE								
	Count Fidget								
Sheet: /									
File: click–counter–Q5.kicad_sch									
Title: Count Fidget – Q5 engineering candidate									
Size: A3				Date:					
KiCad E.D.A. 10.0.6				Rev: Q5 candidate					
				Id: 1/19					
	1	2	3	4	5	6	7	8	


STM32L072CBT6. USB ROM DFU uses BOOT0 held high during NRST reset. PB2 holds the soft power latch; PA4 reads SYS_LOAD/2; PA5/PA6 read charger status. COUNT closes SYS to PWR_KEY; Q5 mirrors it onto COUNT_N.




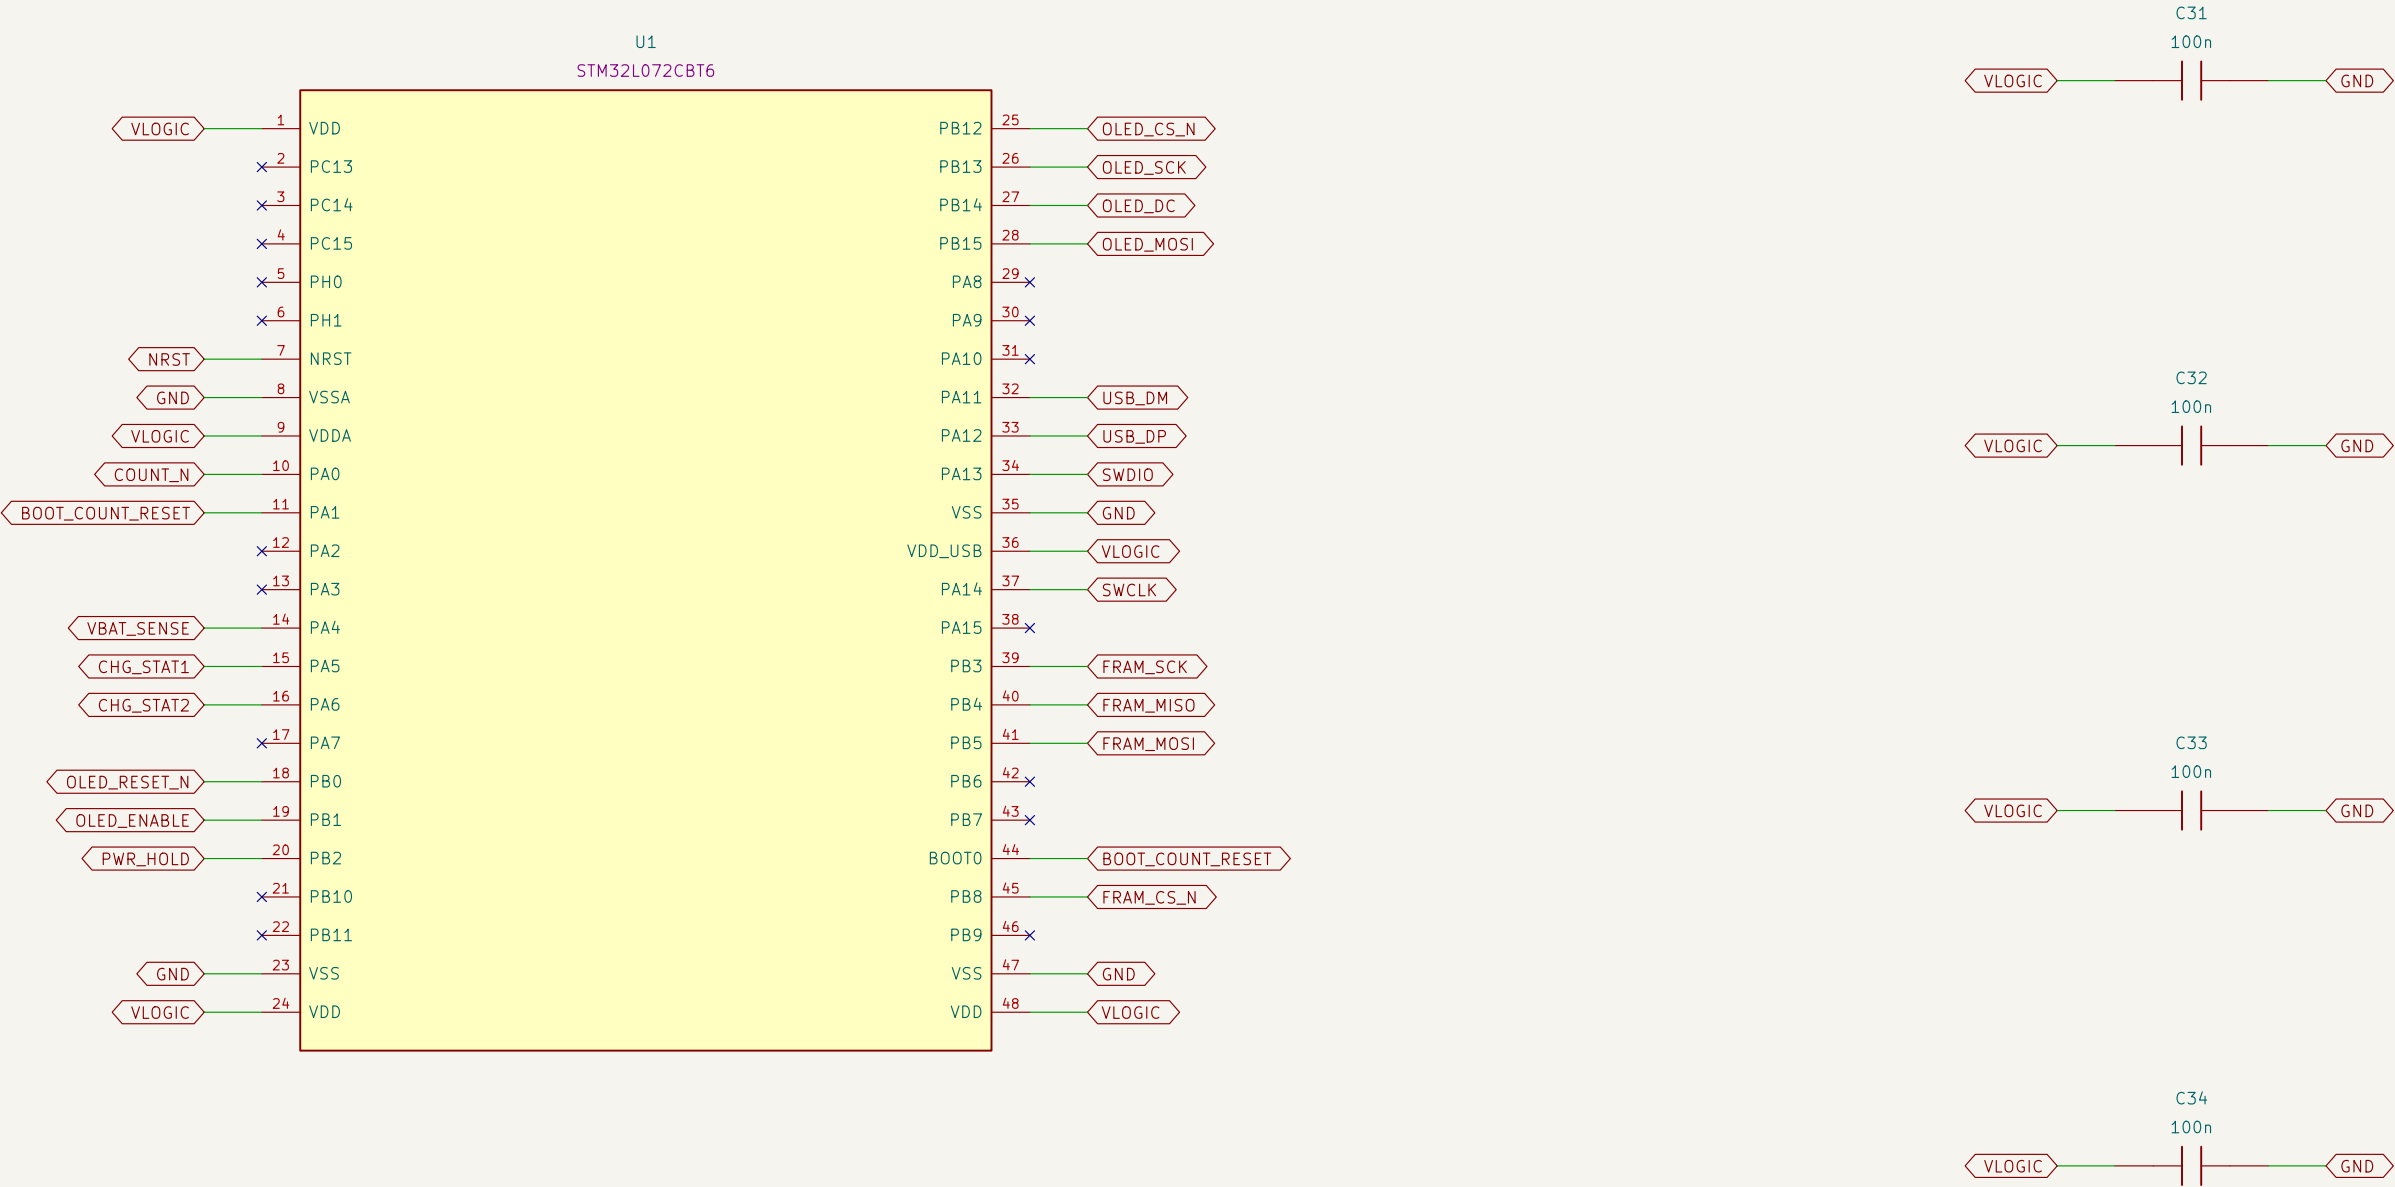


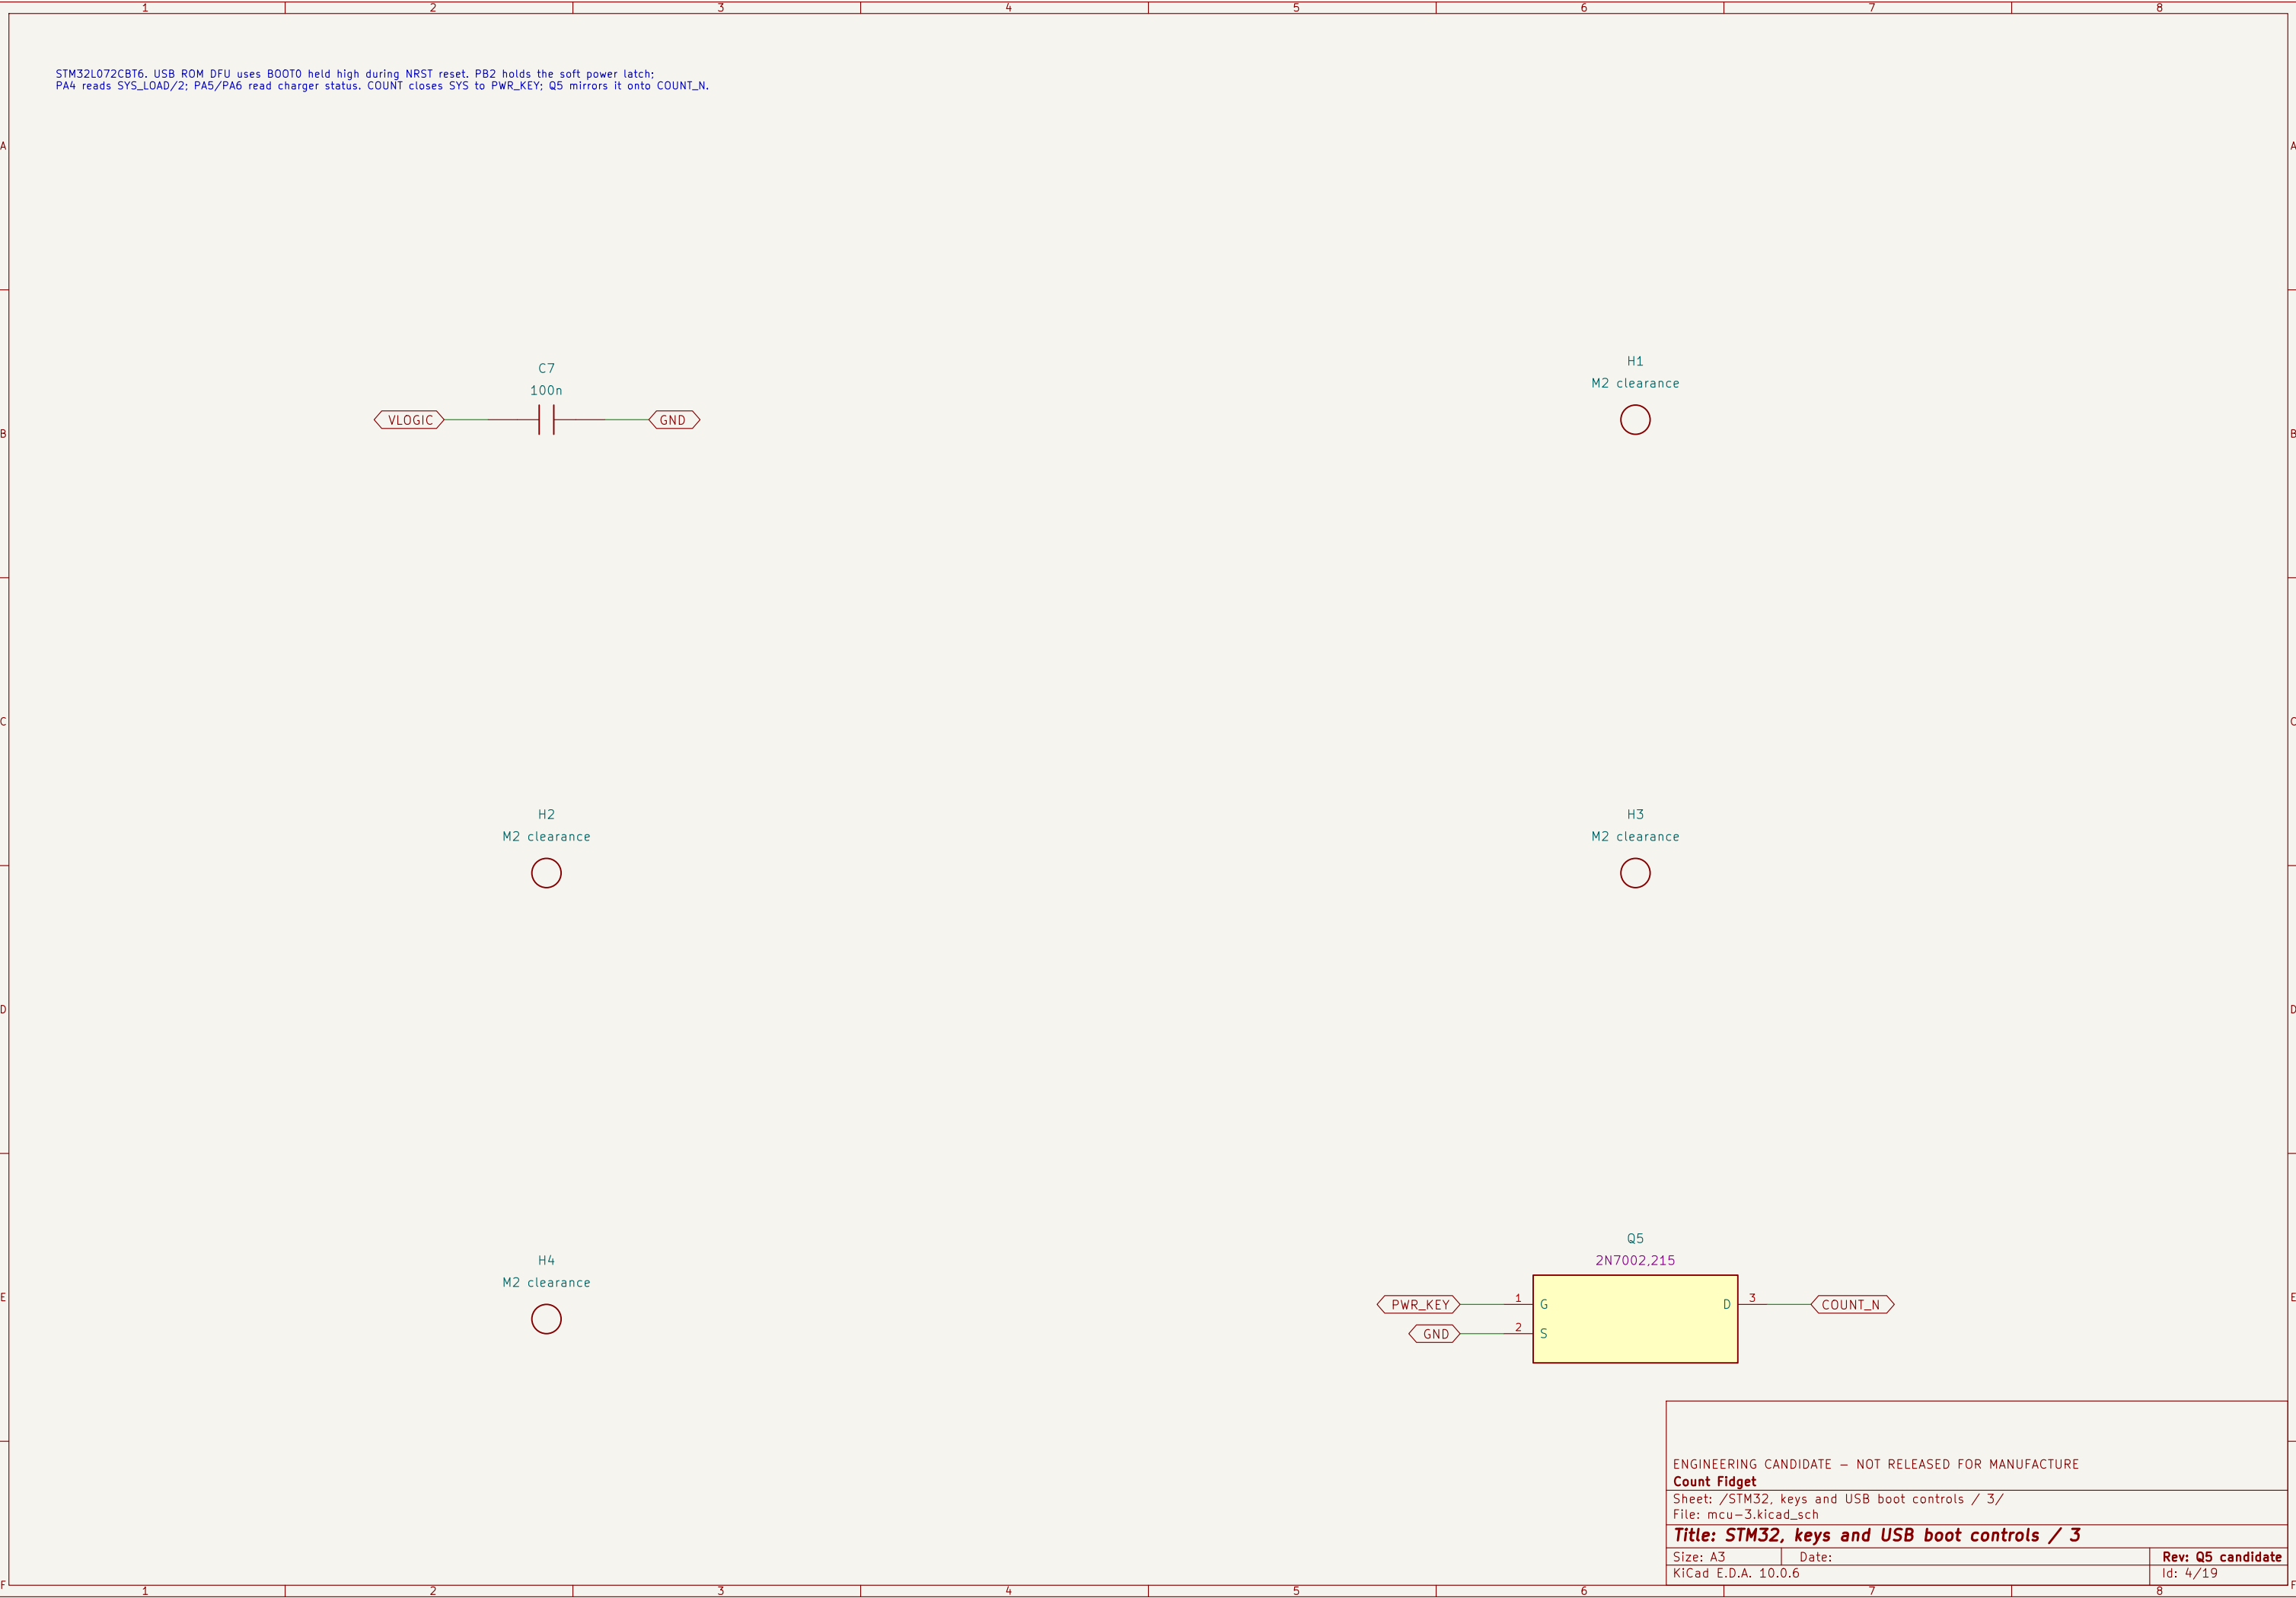


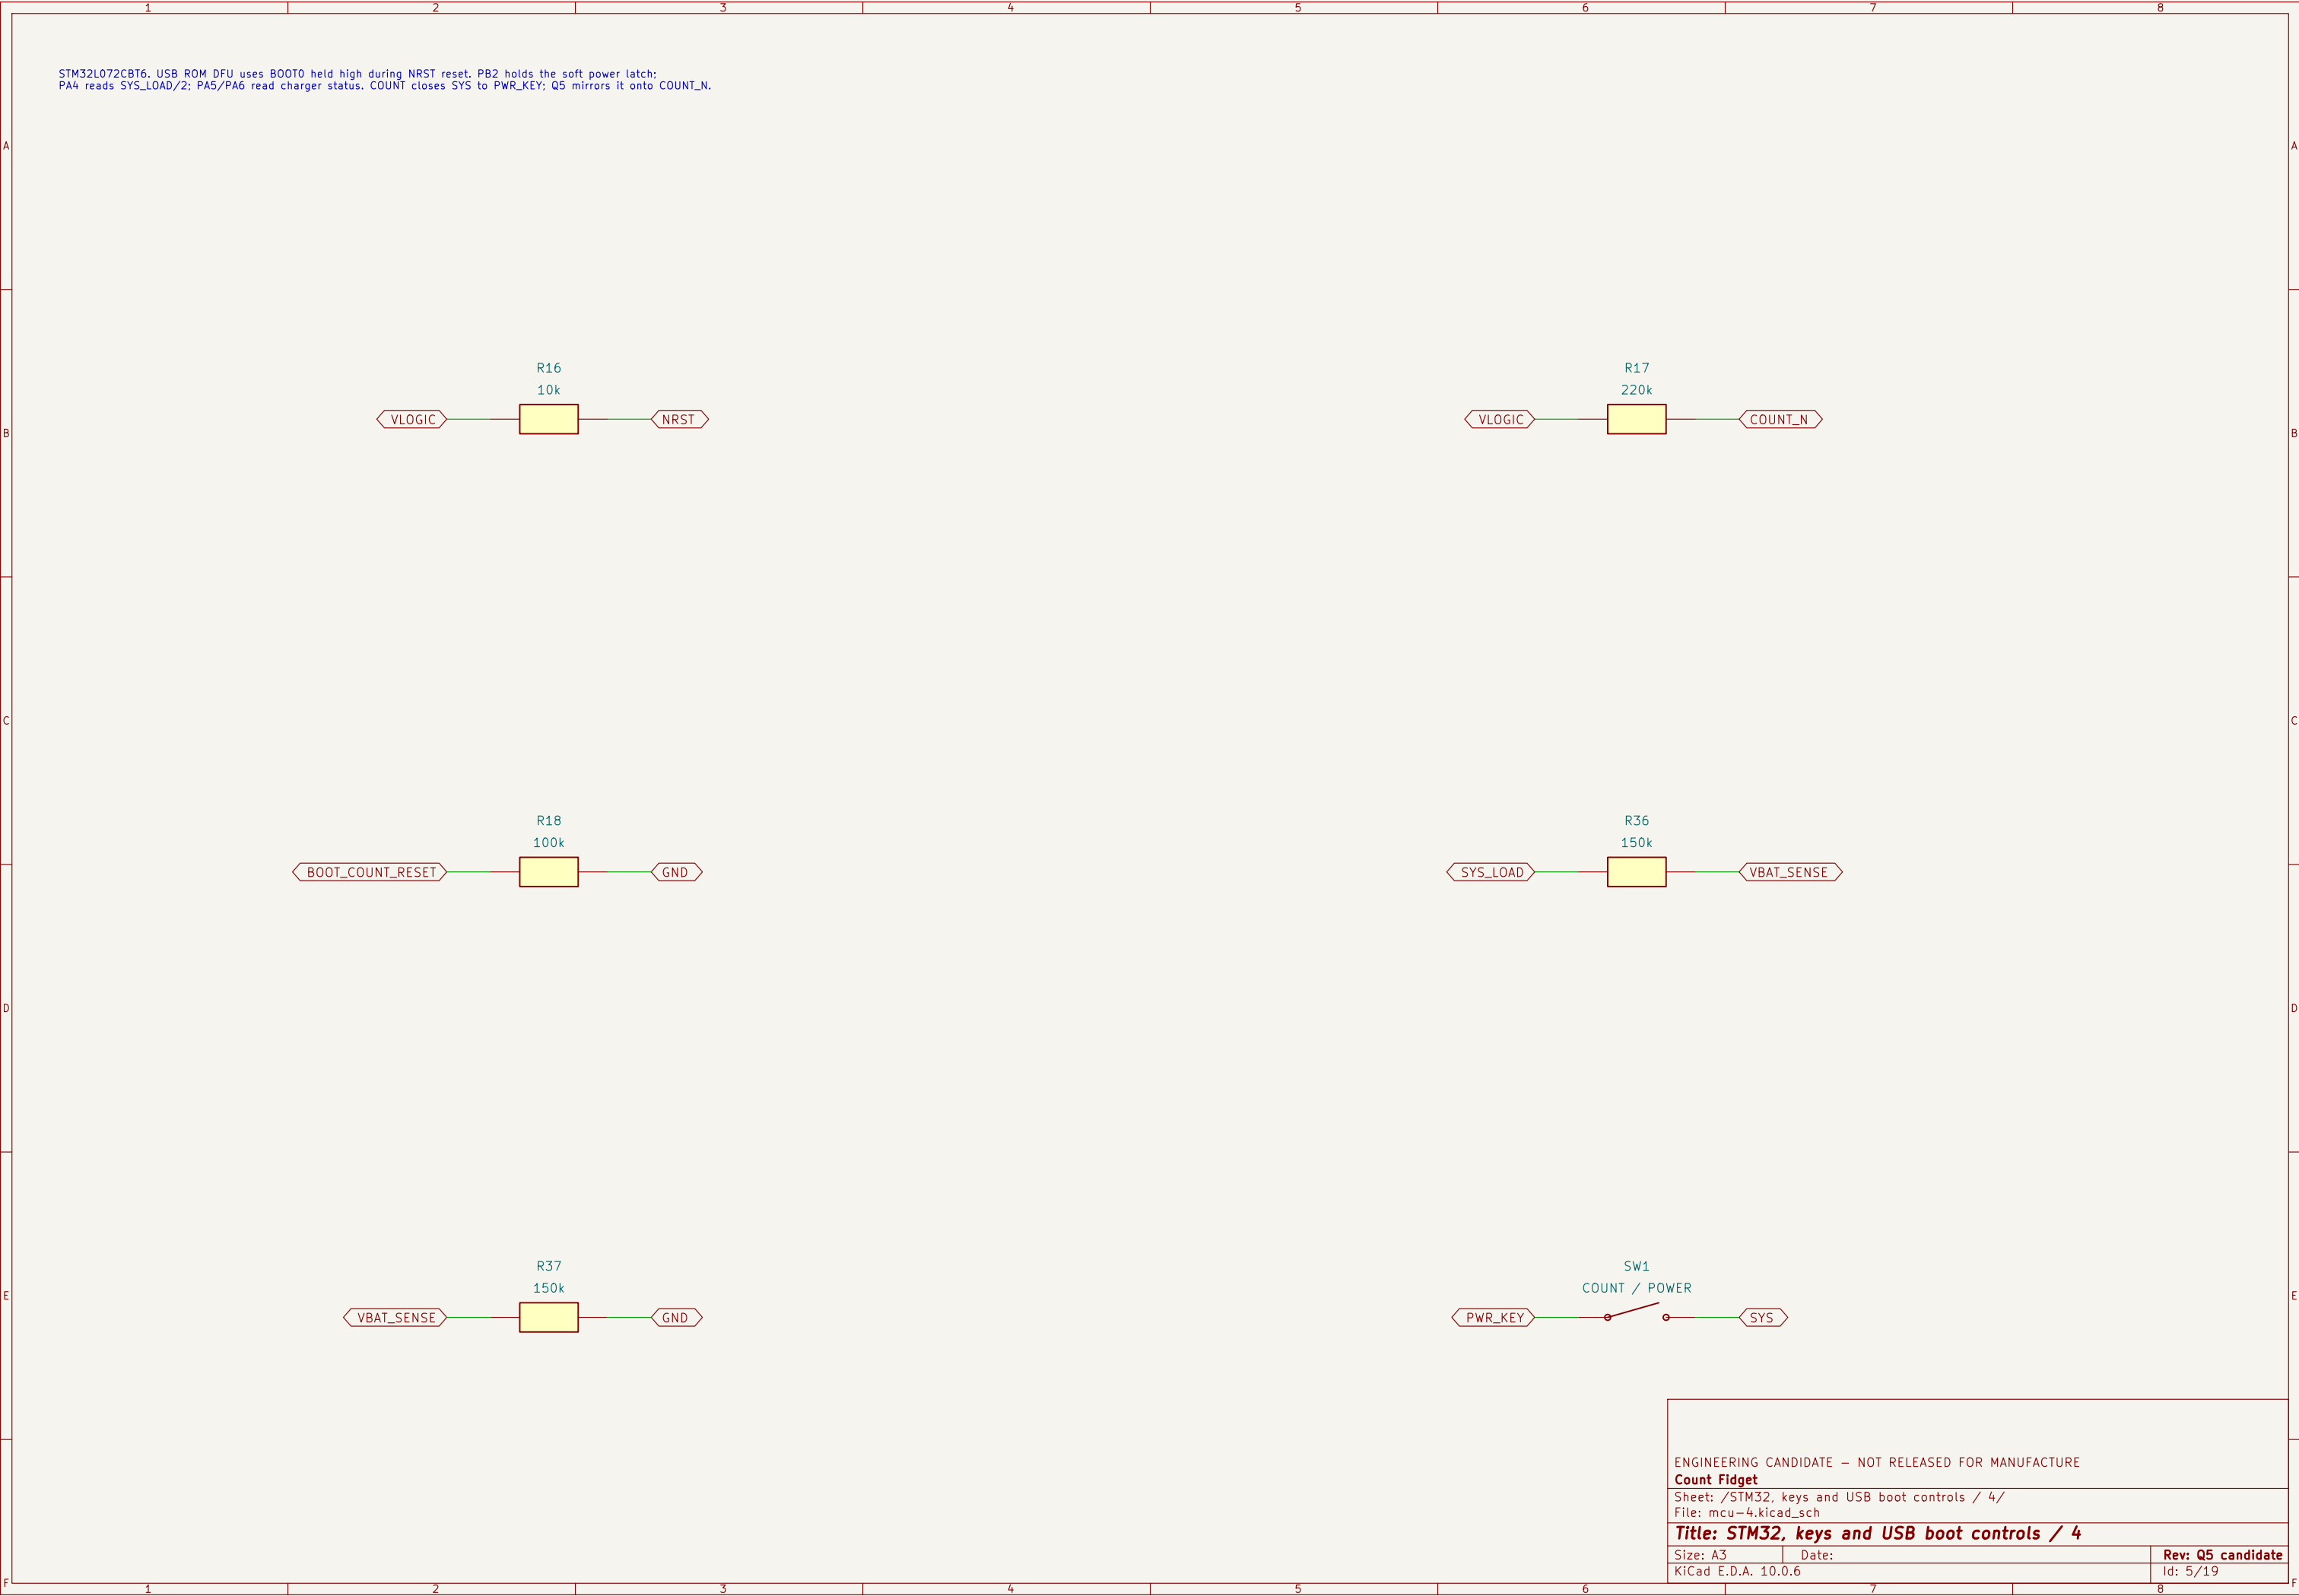


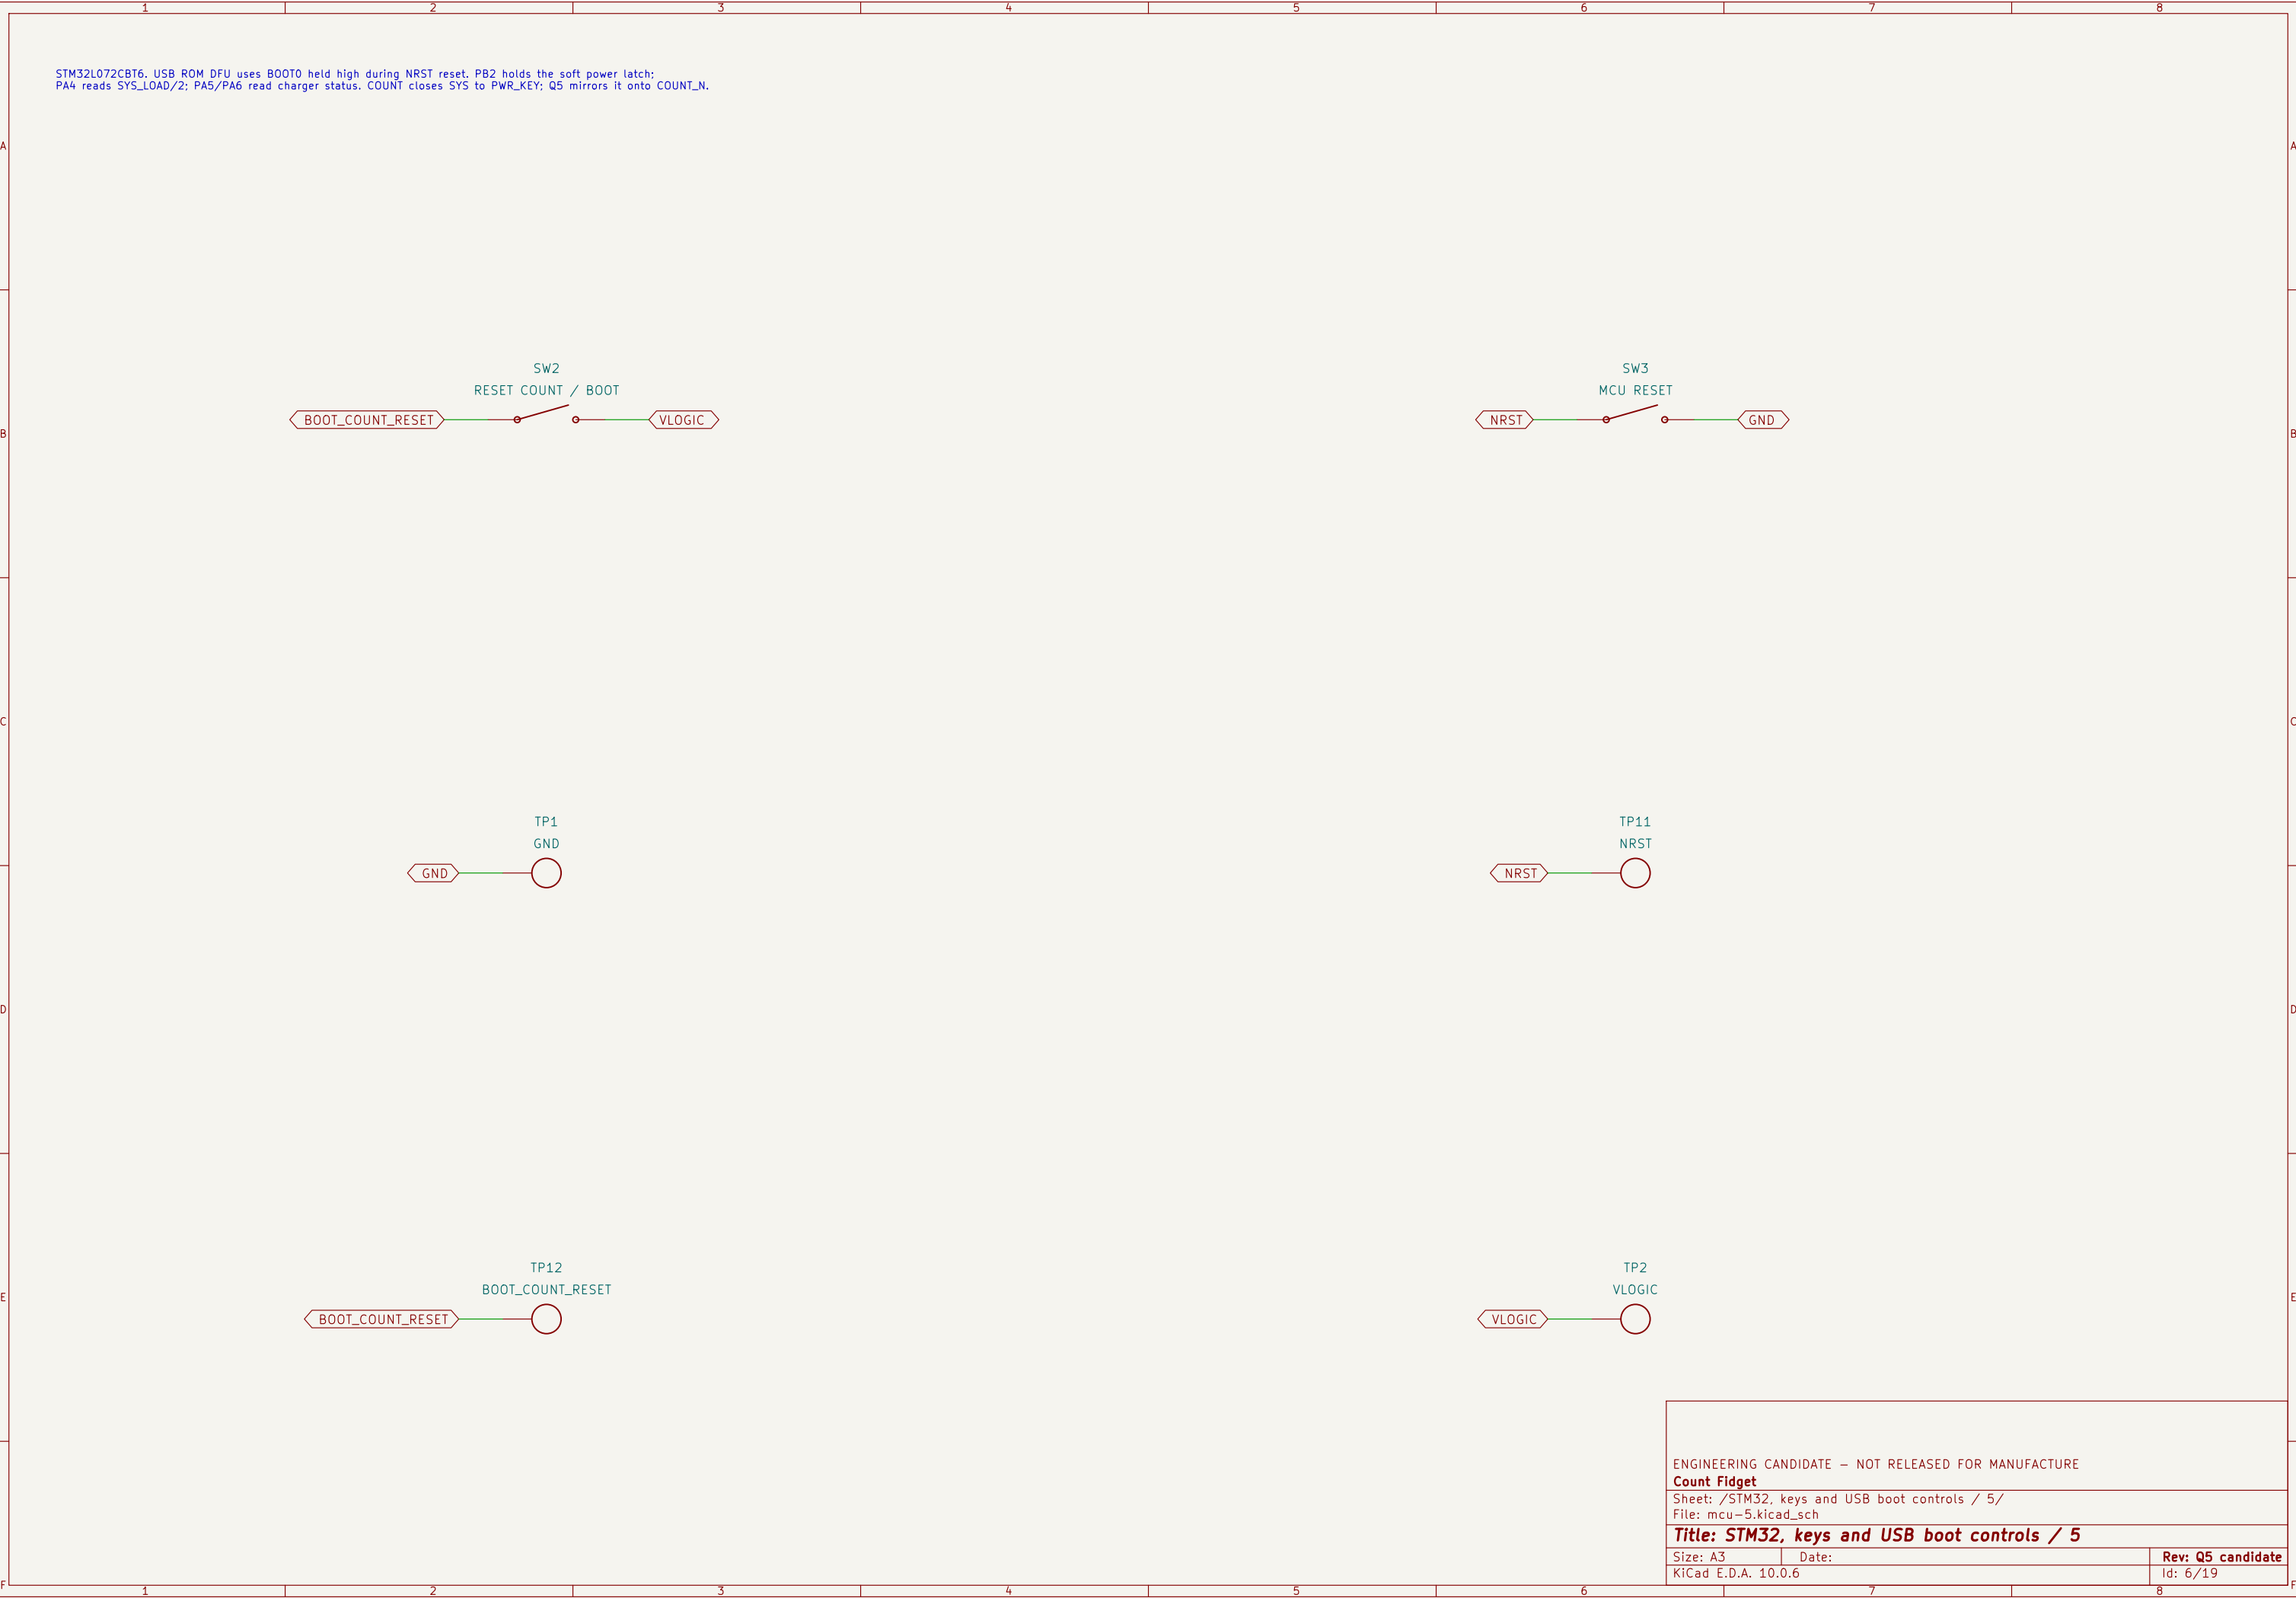

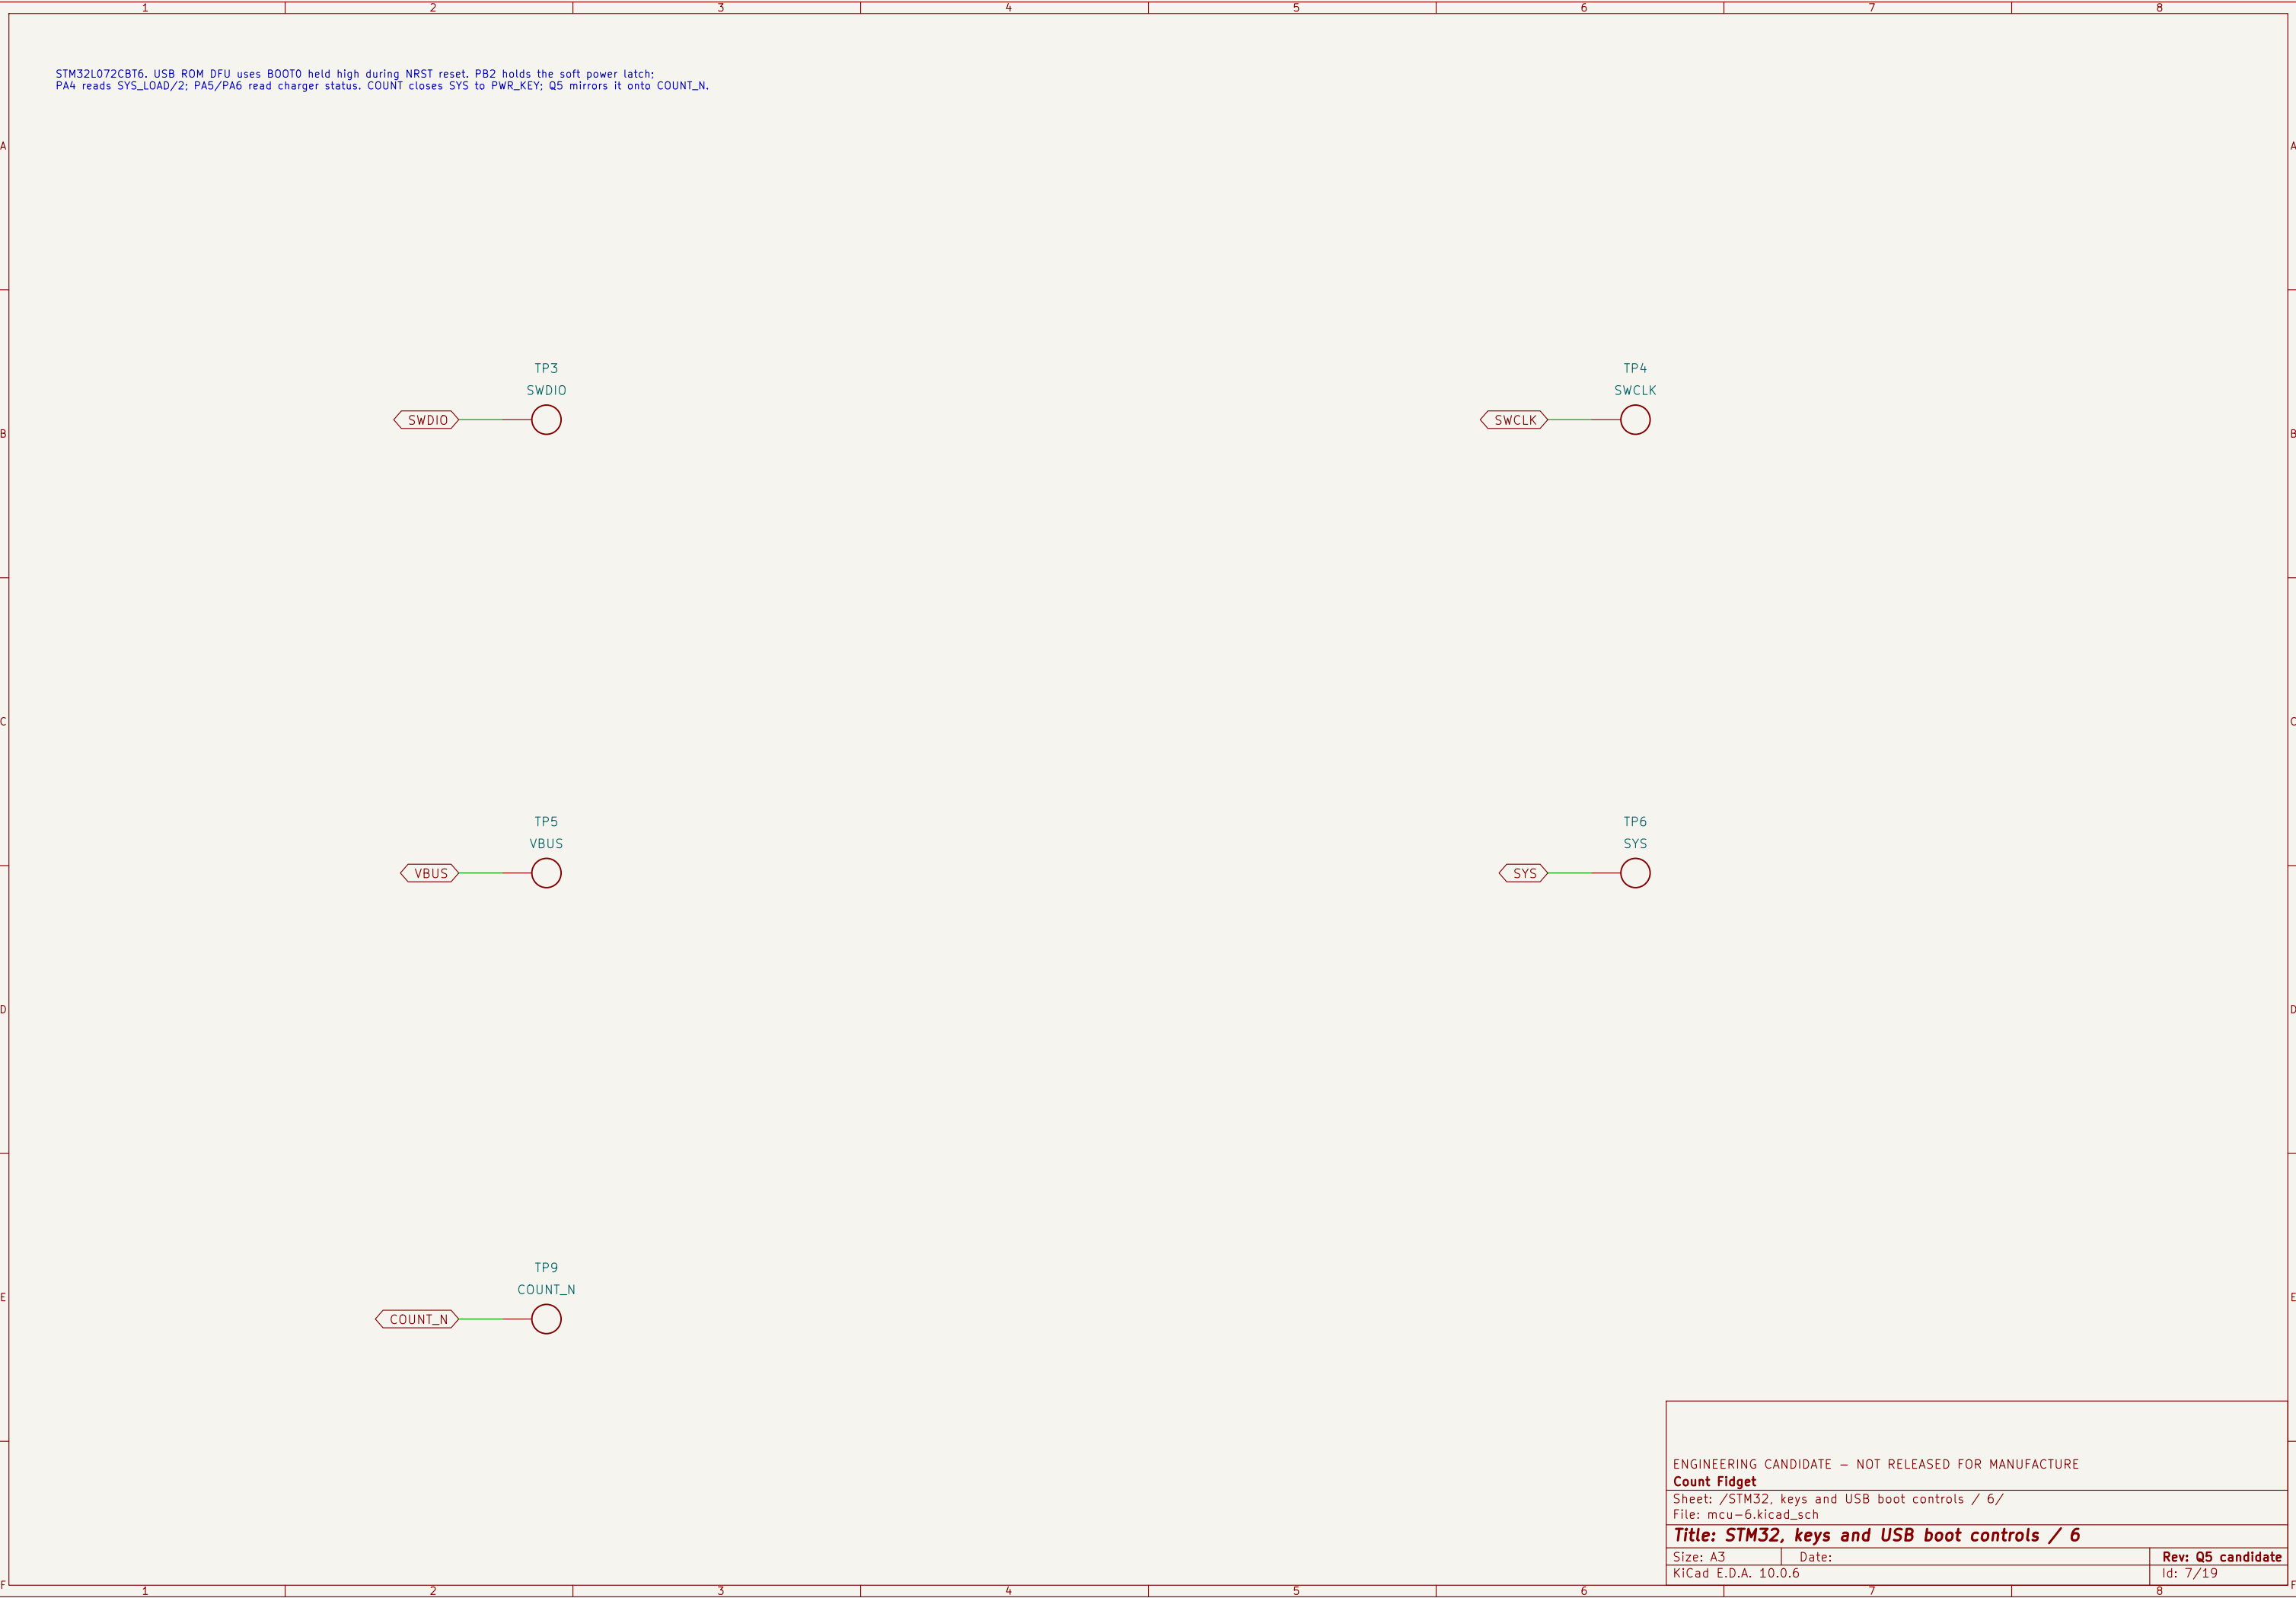

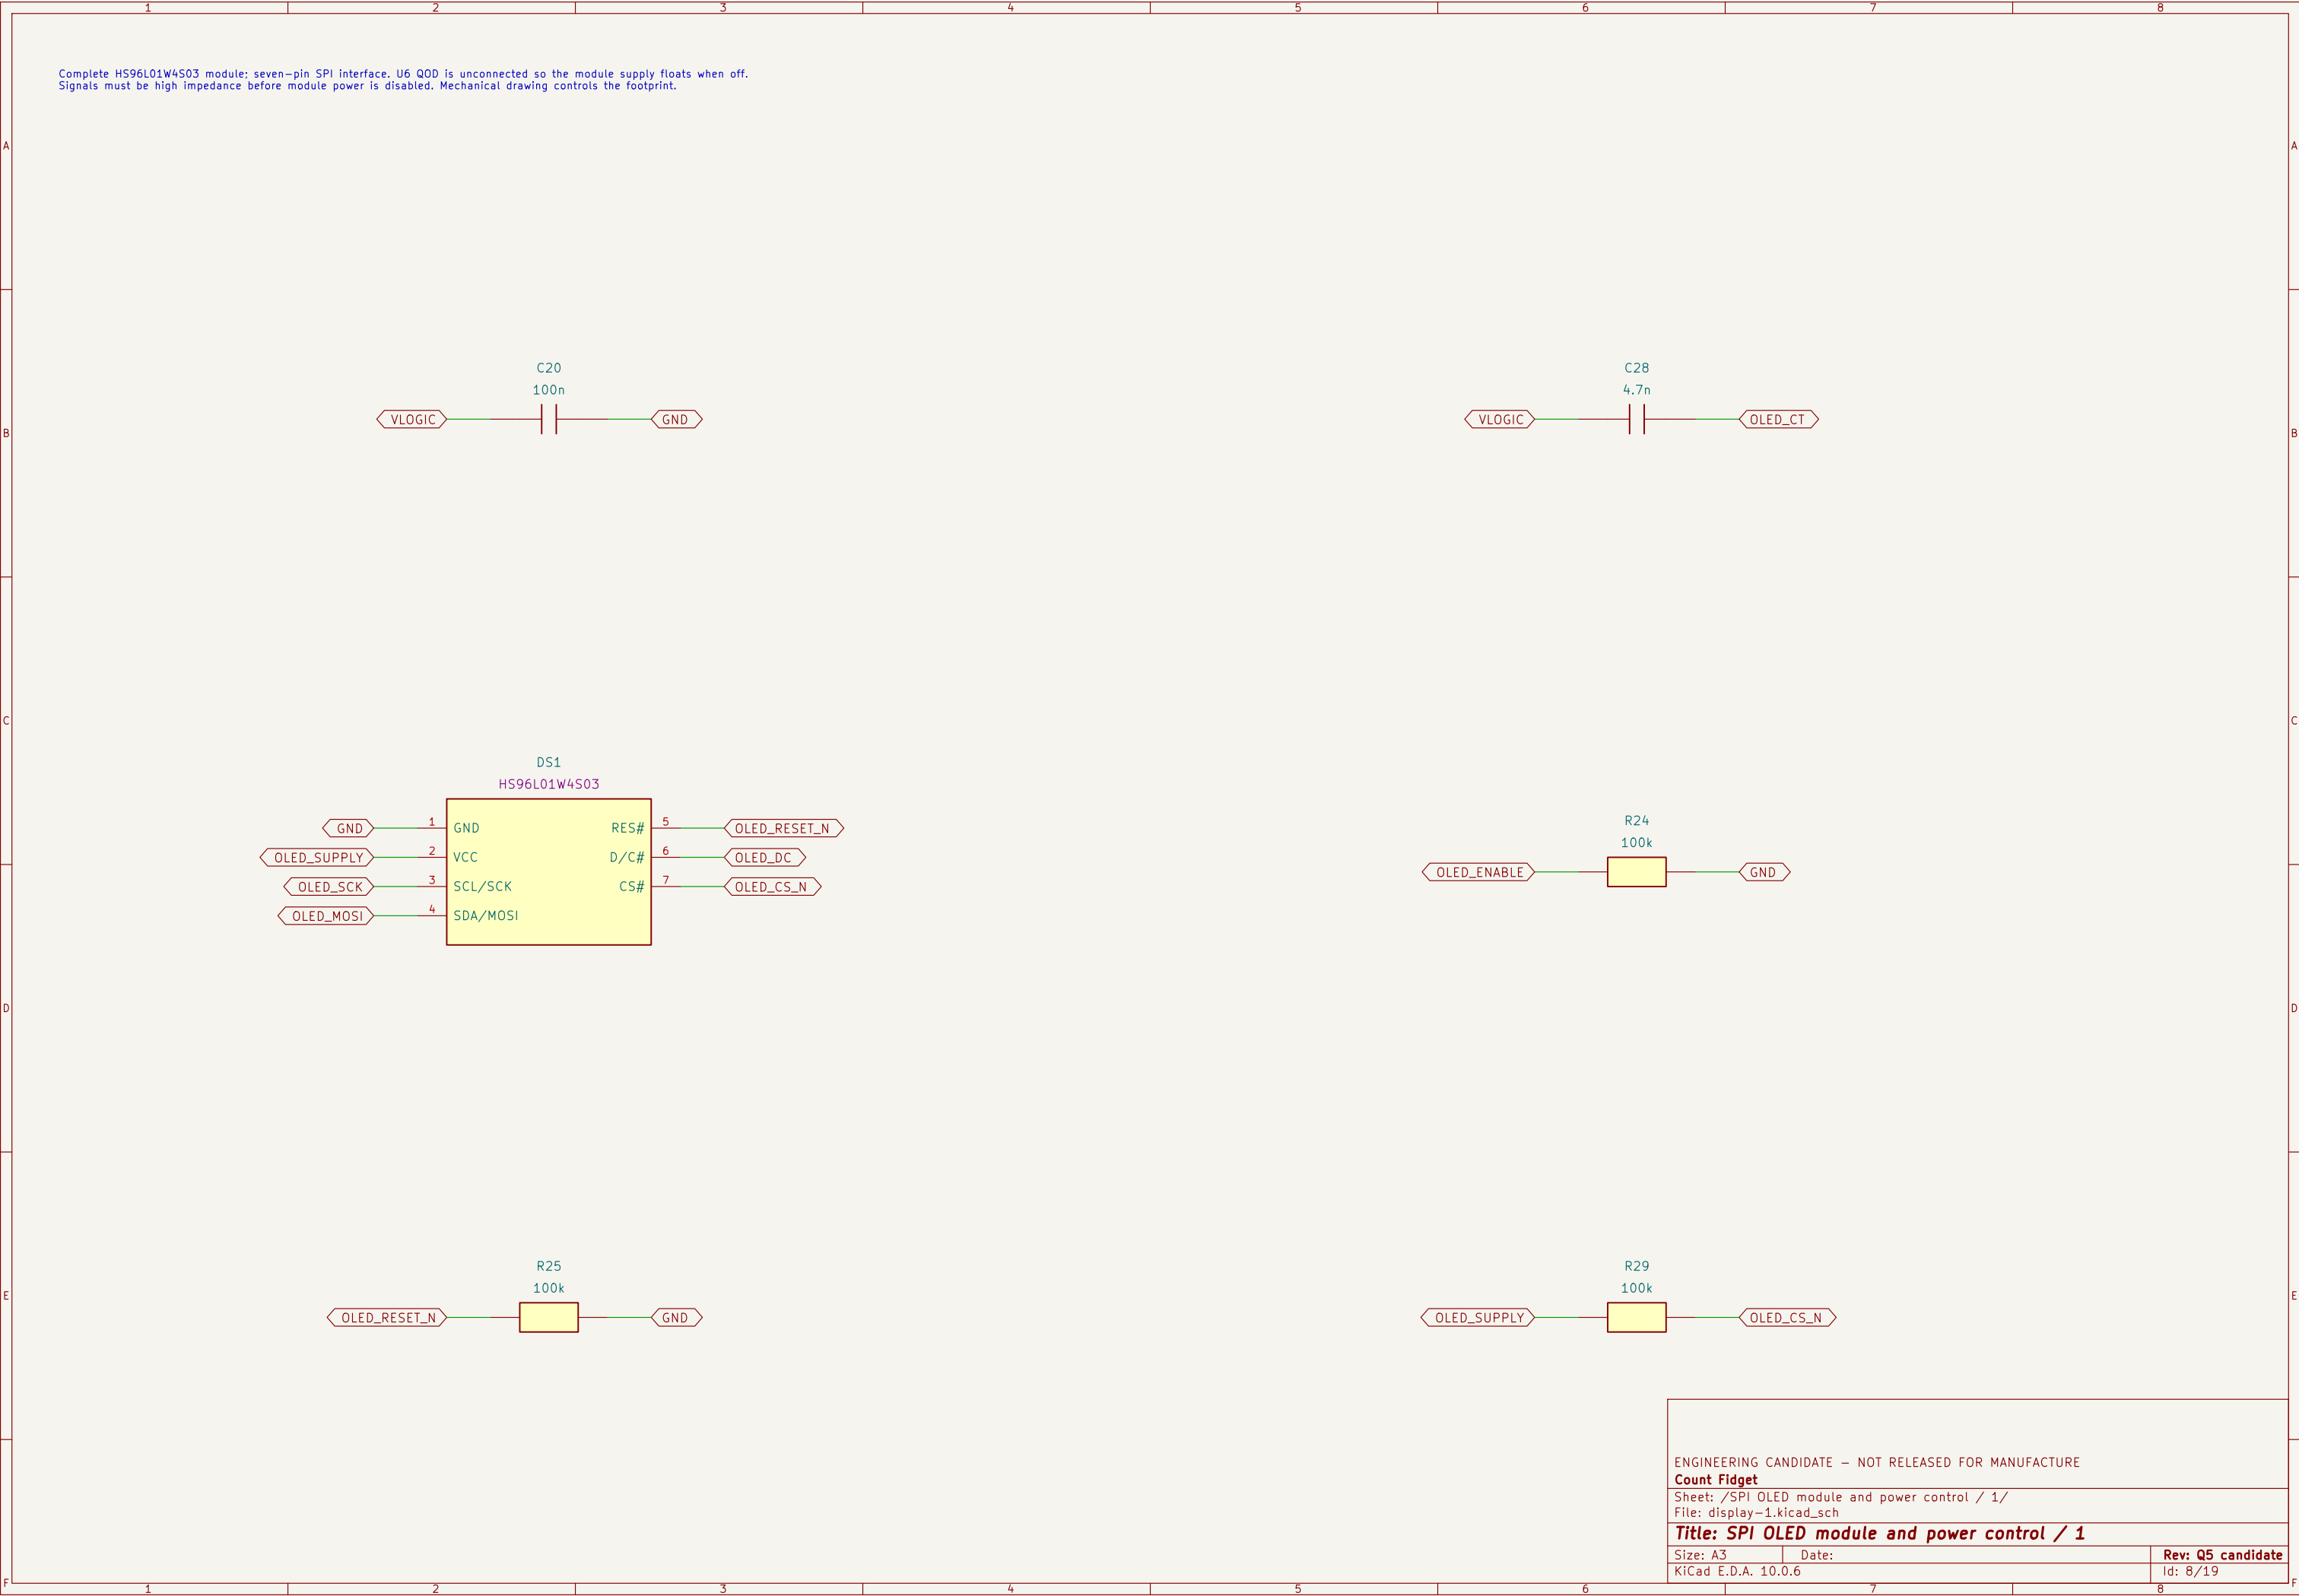

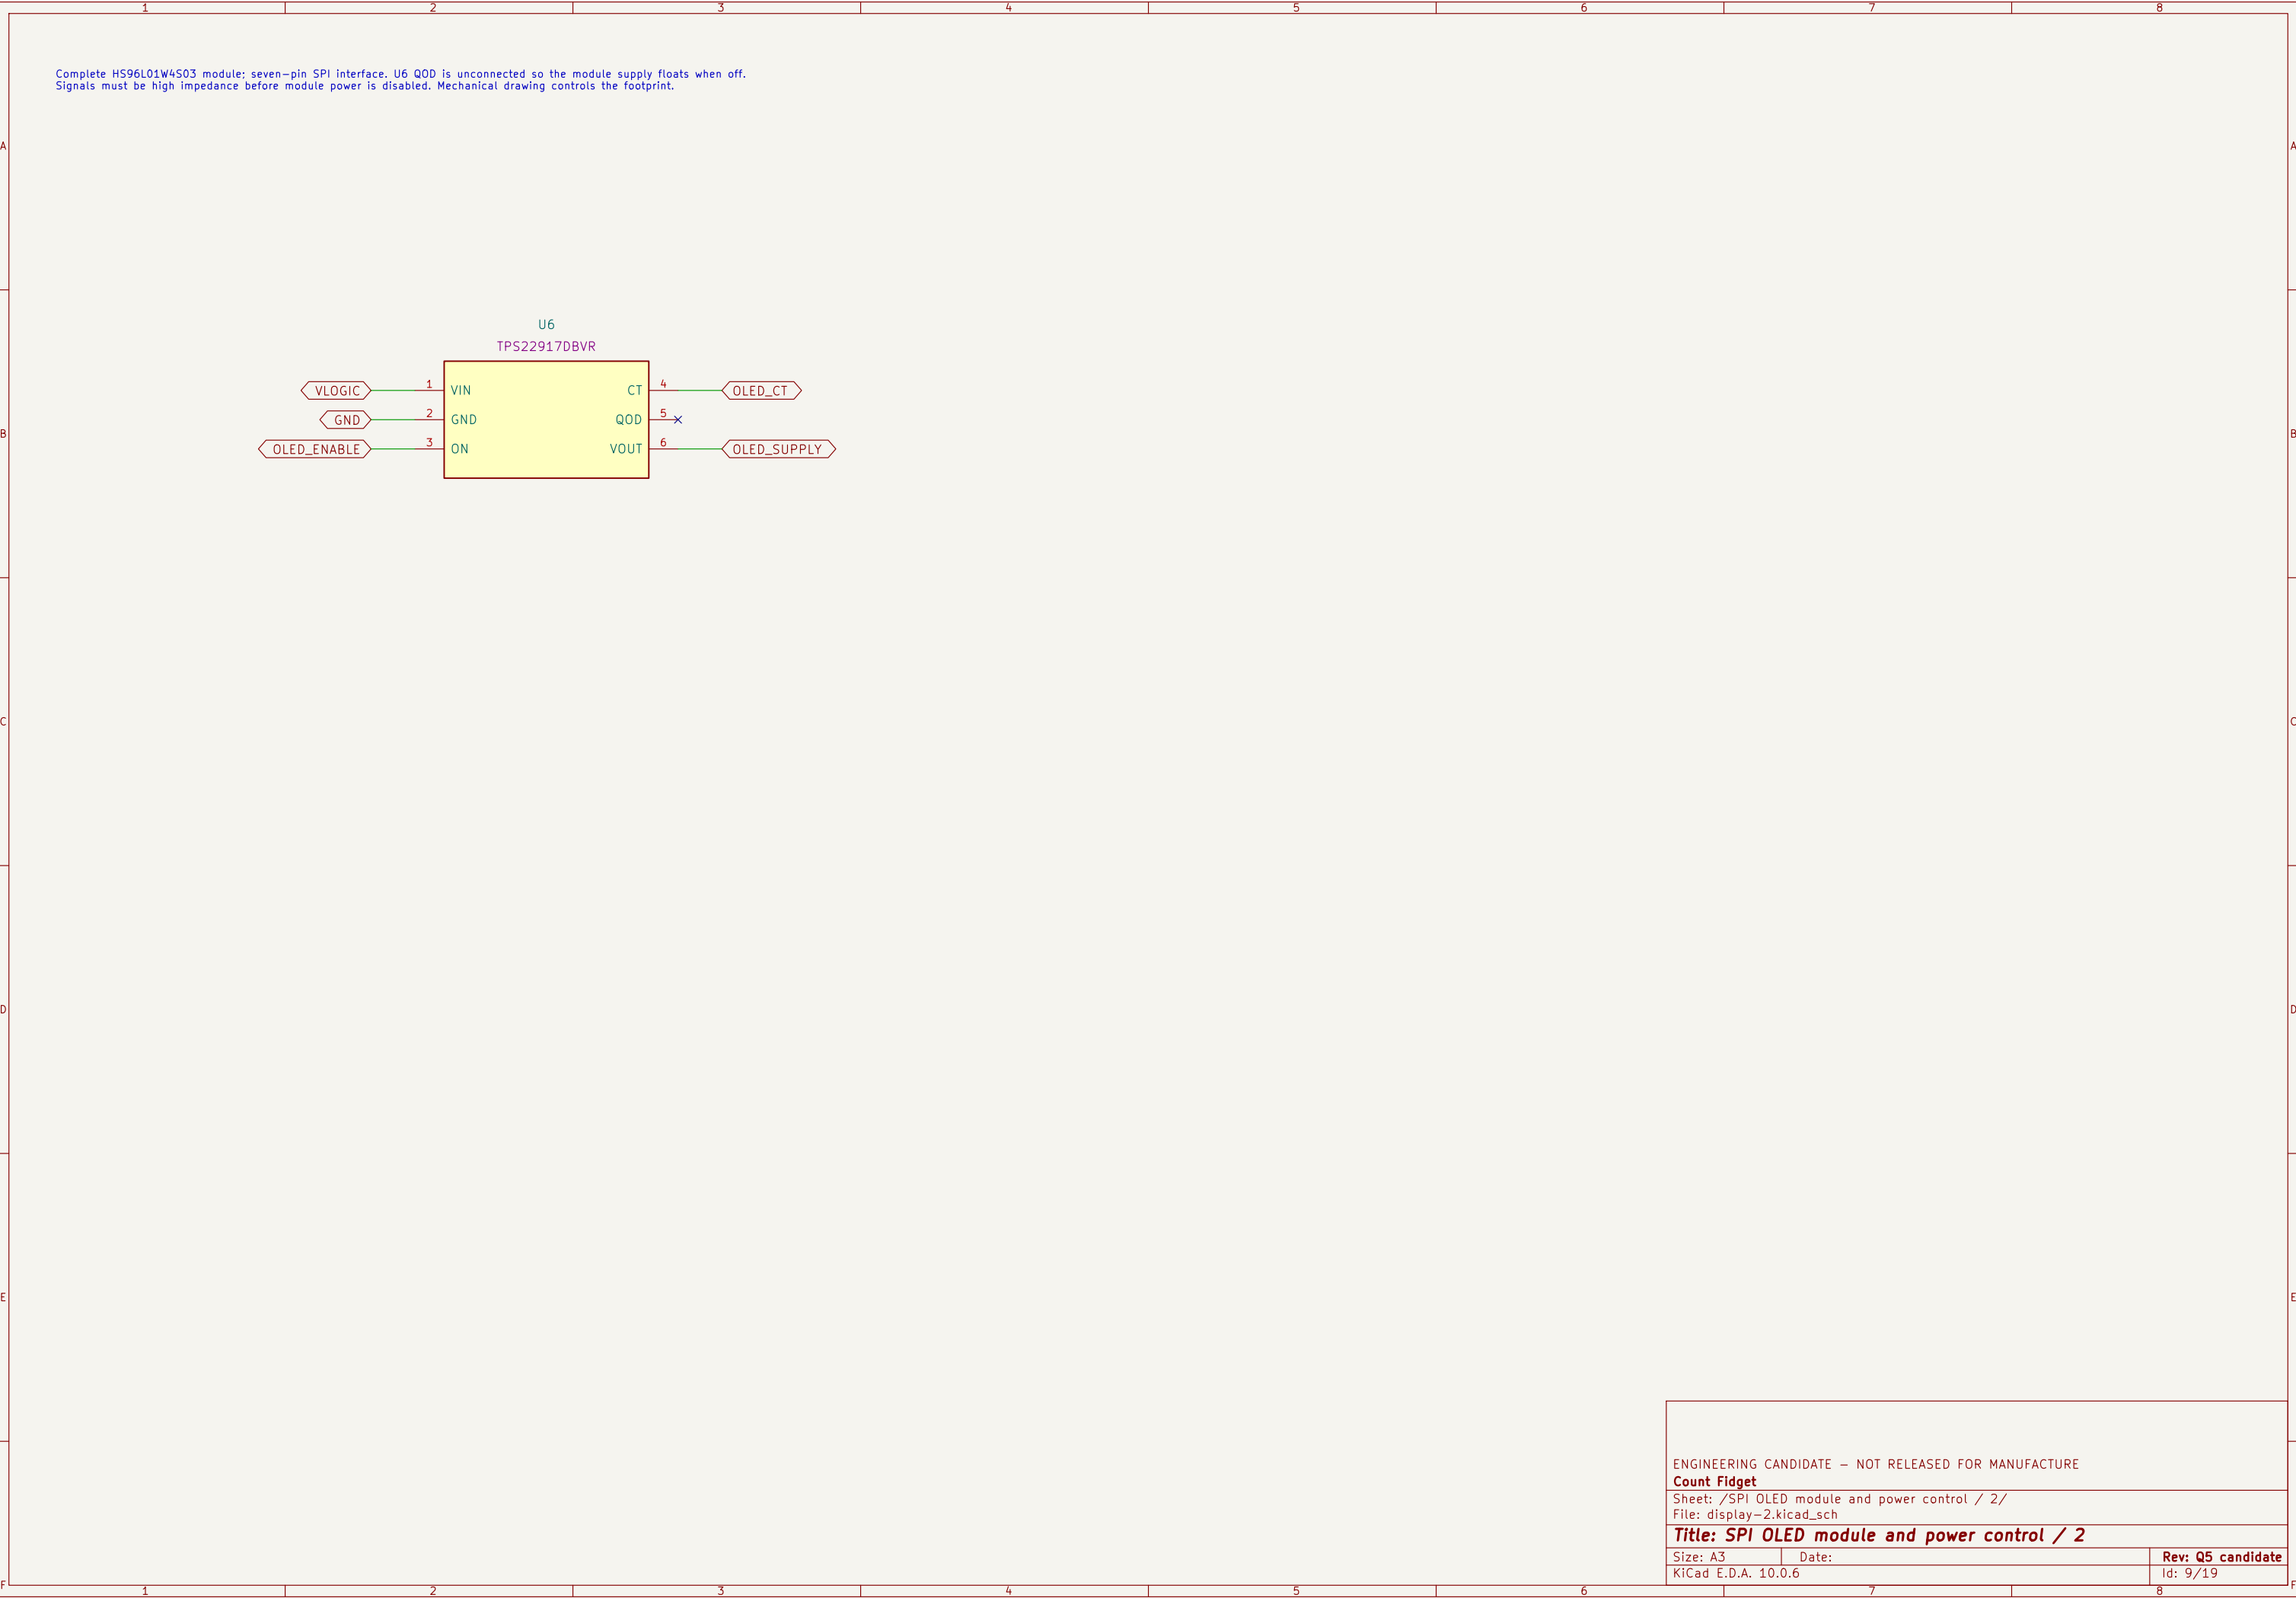

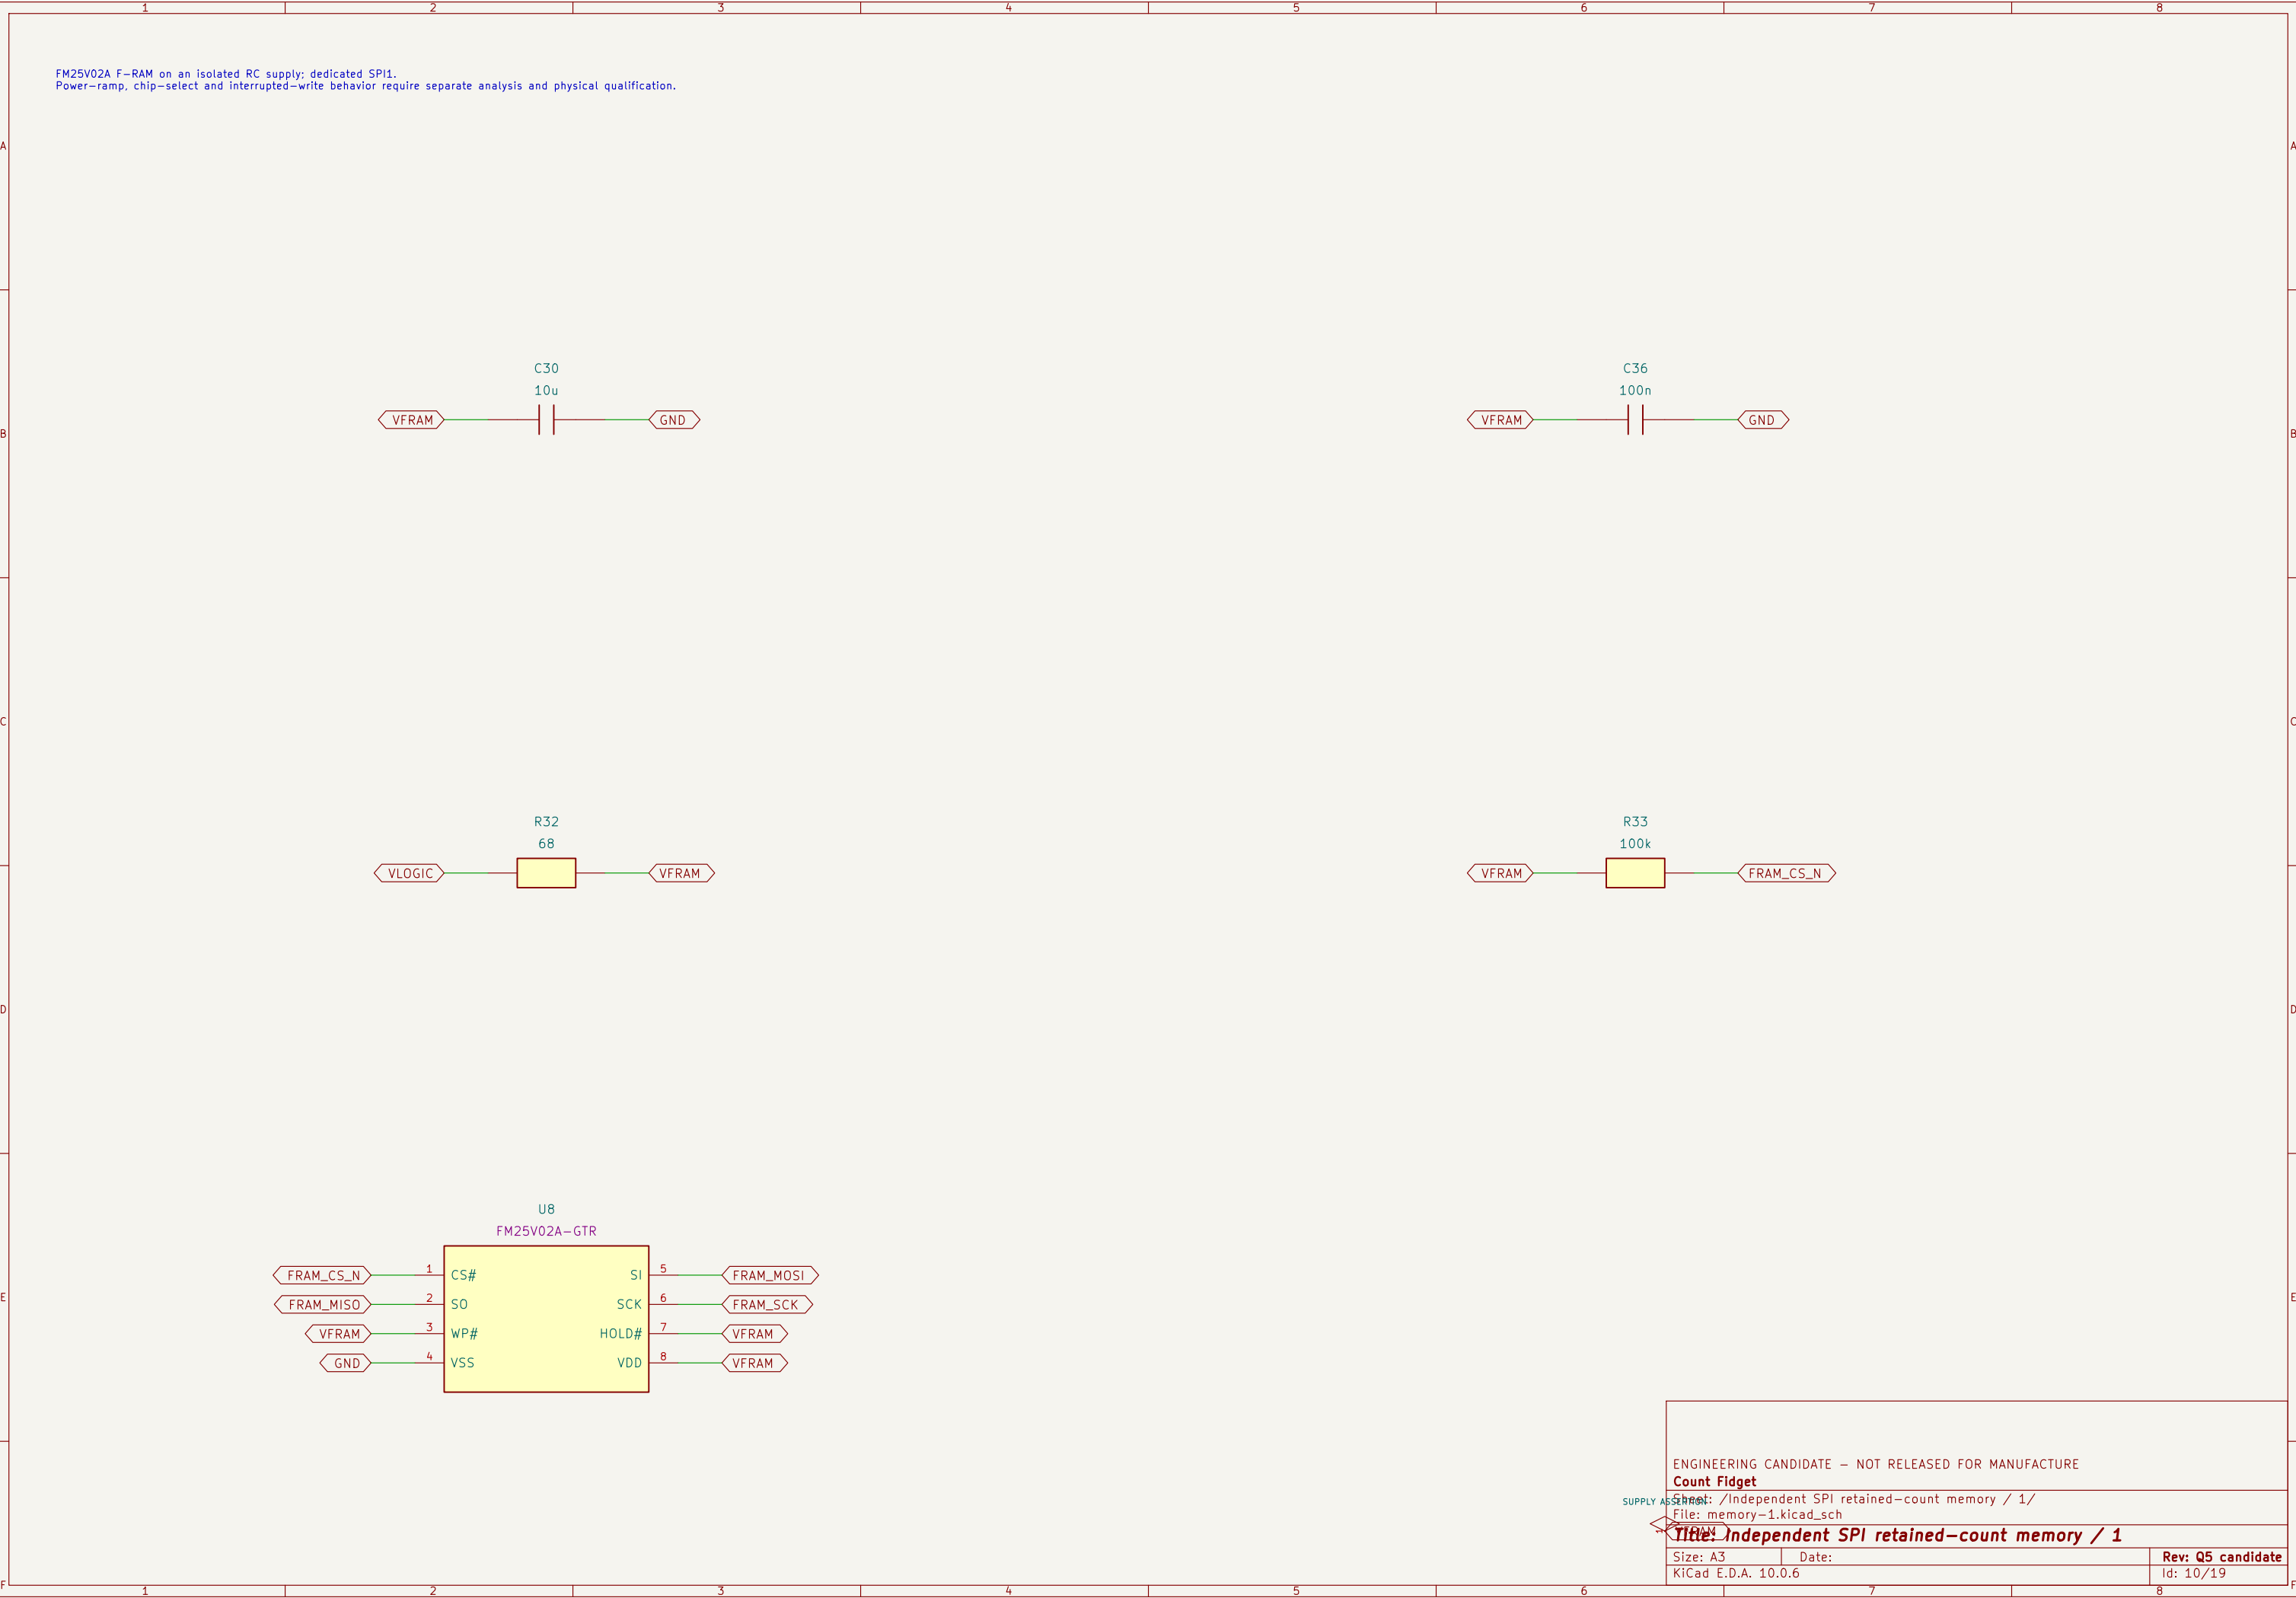

ENGINEERING CANDIDATE – NOT RELEASED FOR MANUFACTURE

Count Fidget

Sheet: /Independent SPI retained-count memory / 1/
File: memory-1.kicad_sch

10/19

Rev: Q5 candidate

Id: 10/19

SUPPLY ASSIGNMENT

10/19

1

2

3

4

5

6

7

8

U7 ON = VBUS (D4) OR COUNT key (D3 A1) OR PWR_HOLD (D3 A2), pulled down by R35.
Off: only BQ29700 and BQ25185 battery quiescent current remain. Cold cell insertion is not proven by the slew switch.

C1
2.2u

C13
4.7n

C2
10u

C29
4.7n

C3
2.2u

C38
100n

SUPPLY ASSERTION


SUPPLY ASSERTION

ENGINEERING CANDIDATE - NOT RELEASED FOR MANUFACTURE
Count Fidget
Sheet: /USB, charging, soft power latch and common supply / 1/
File: usb-power-1.kicad_sch
Title: USB, charging, soft power latch and common supply / 1
Size: A3 Date: Rev: Q5 candidate
KiCad E.D.A. 10.0.6 Id: 11/19







Count Fidget


Title: USB, charging, soft power latch and common supply / 1

Size: A3	Date:	Rev: Q5 candidate
KiCad E.D.A. 10.0.6		Id: 11/19





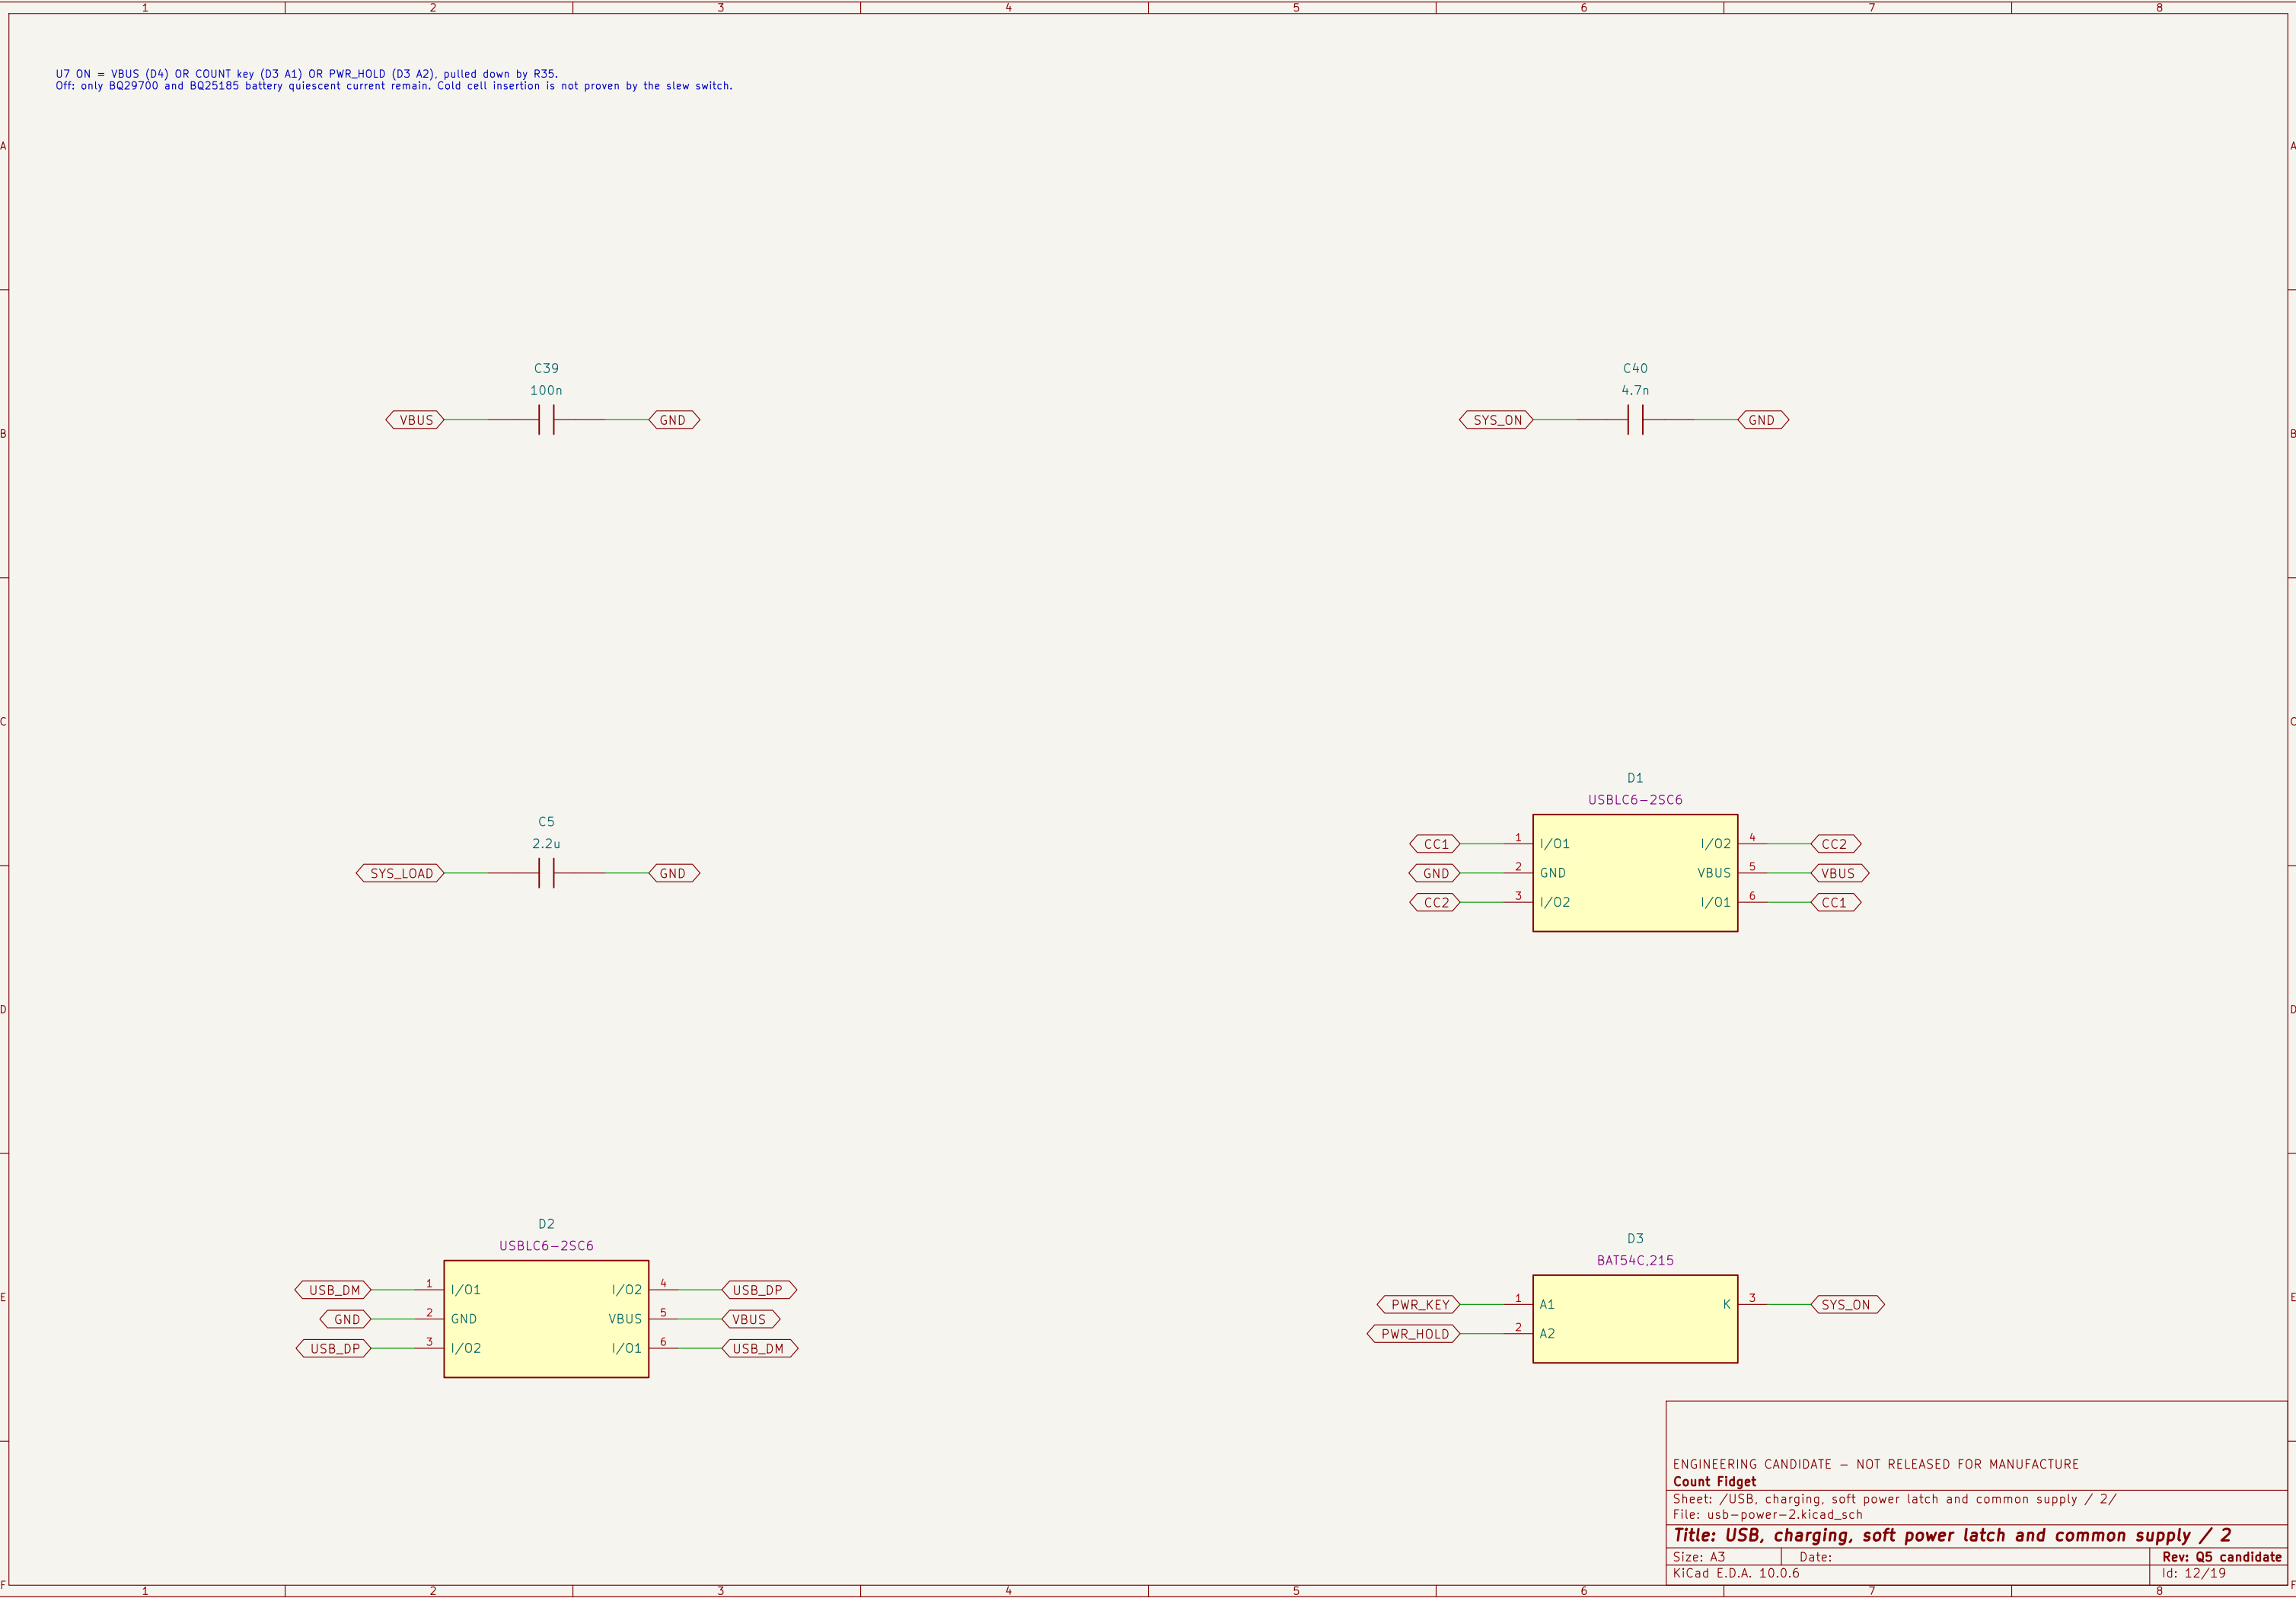



U7_ON = VBUS (D4) OR COUNT key (D3 A1) OR PWR_HOLD (D3 A2), pulled down by R35.
Off: only BQ29700 and BQ25185 battery quiescent current remain. Cold cell insertion is not proven by the slew switch.

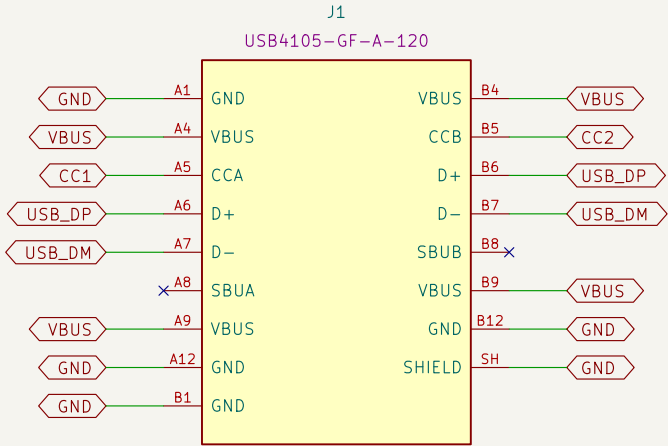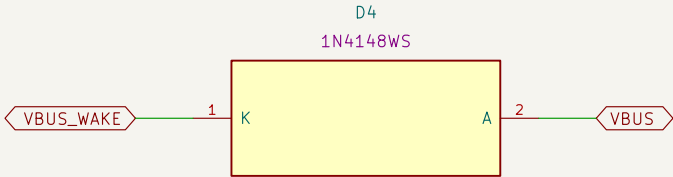


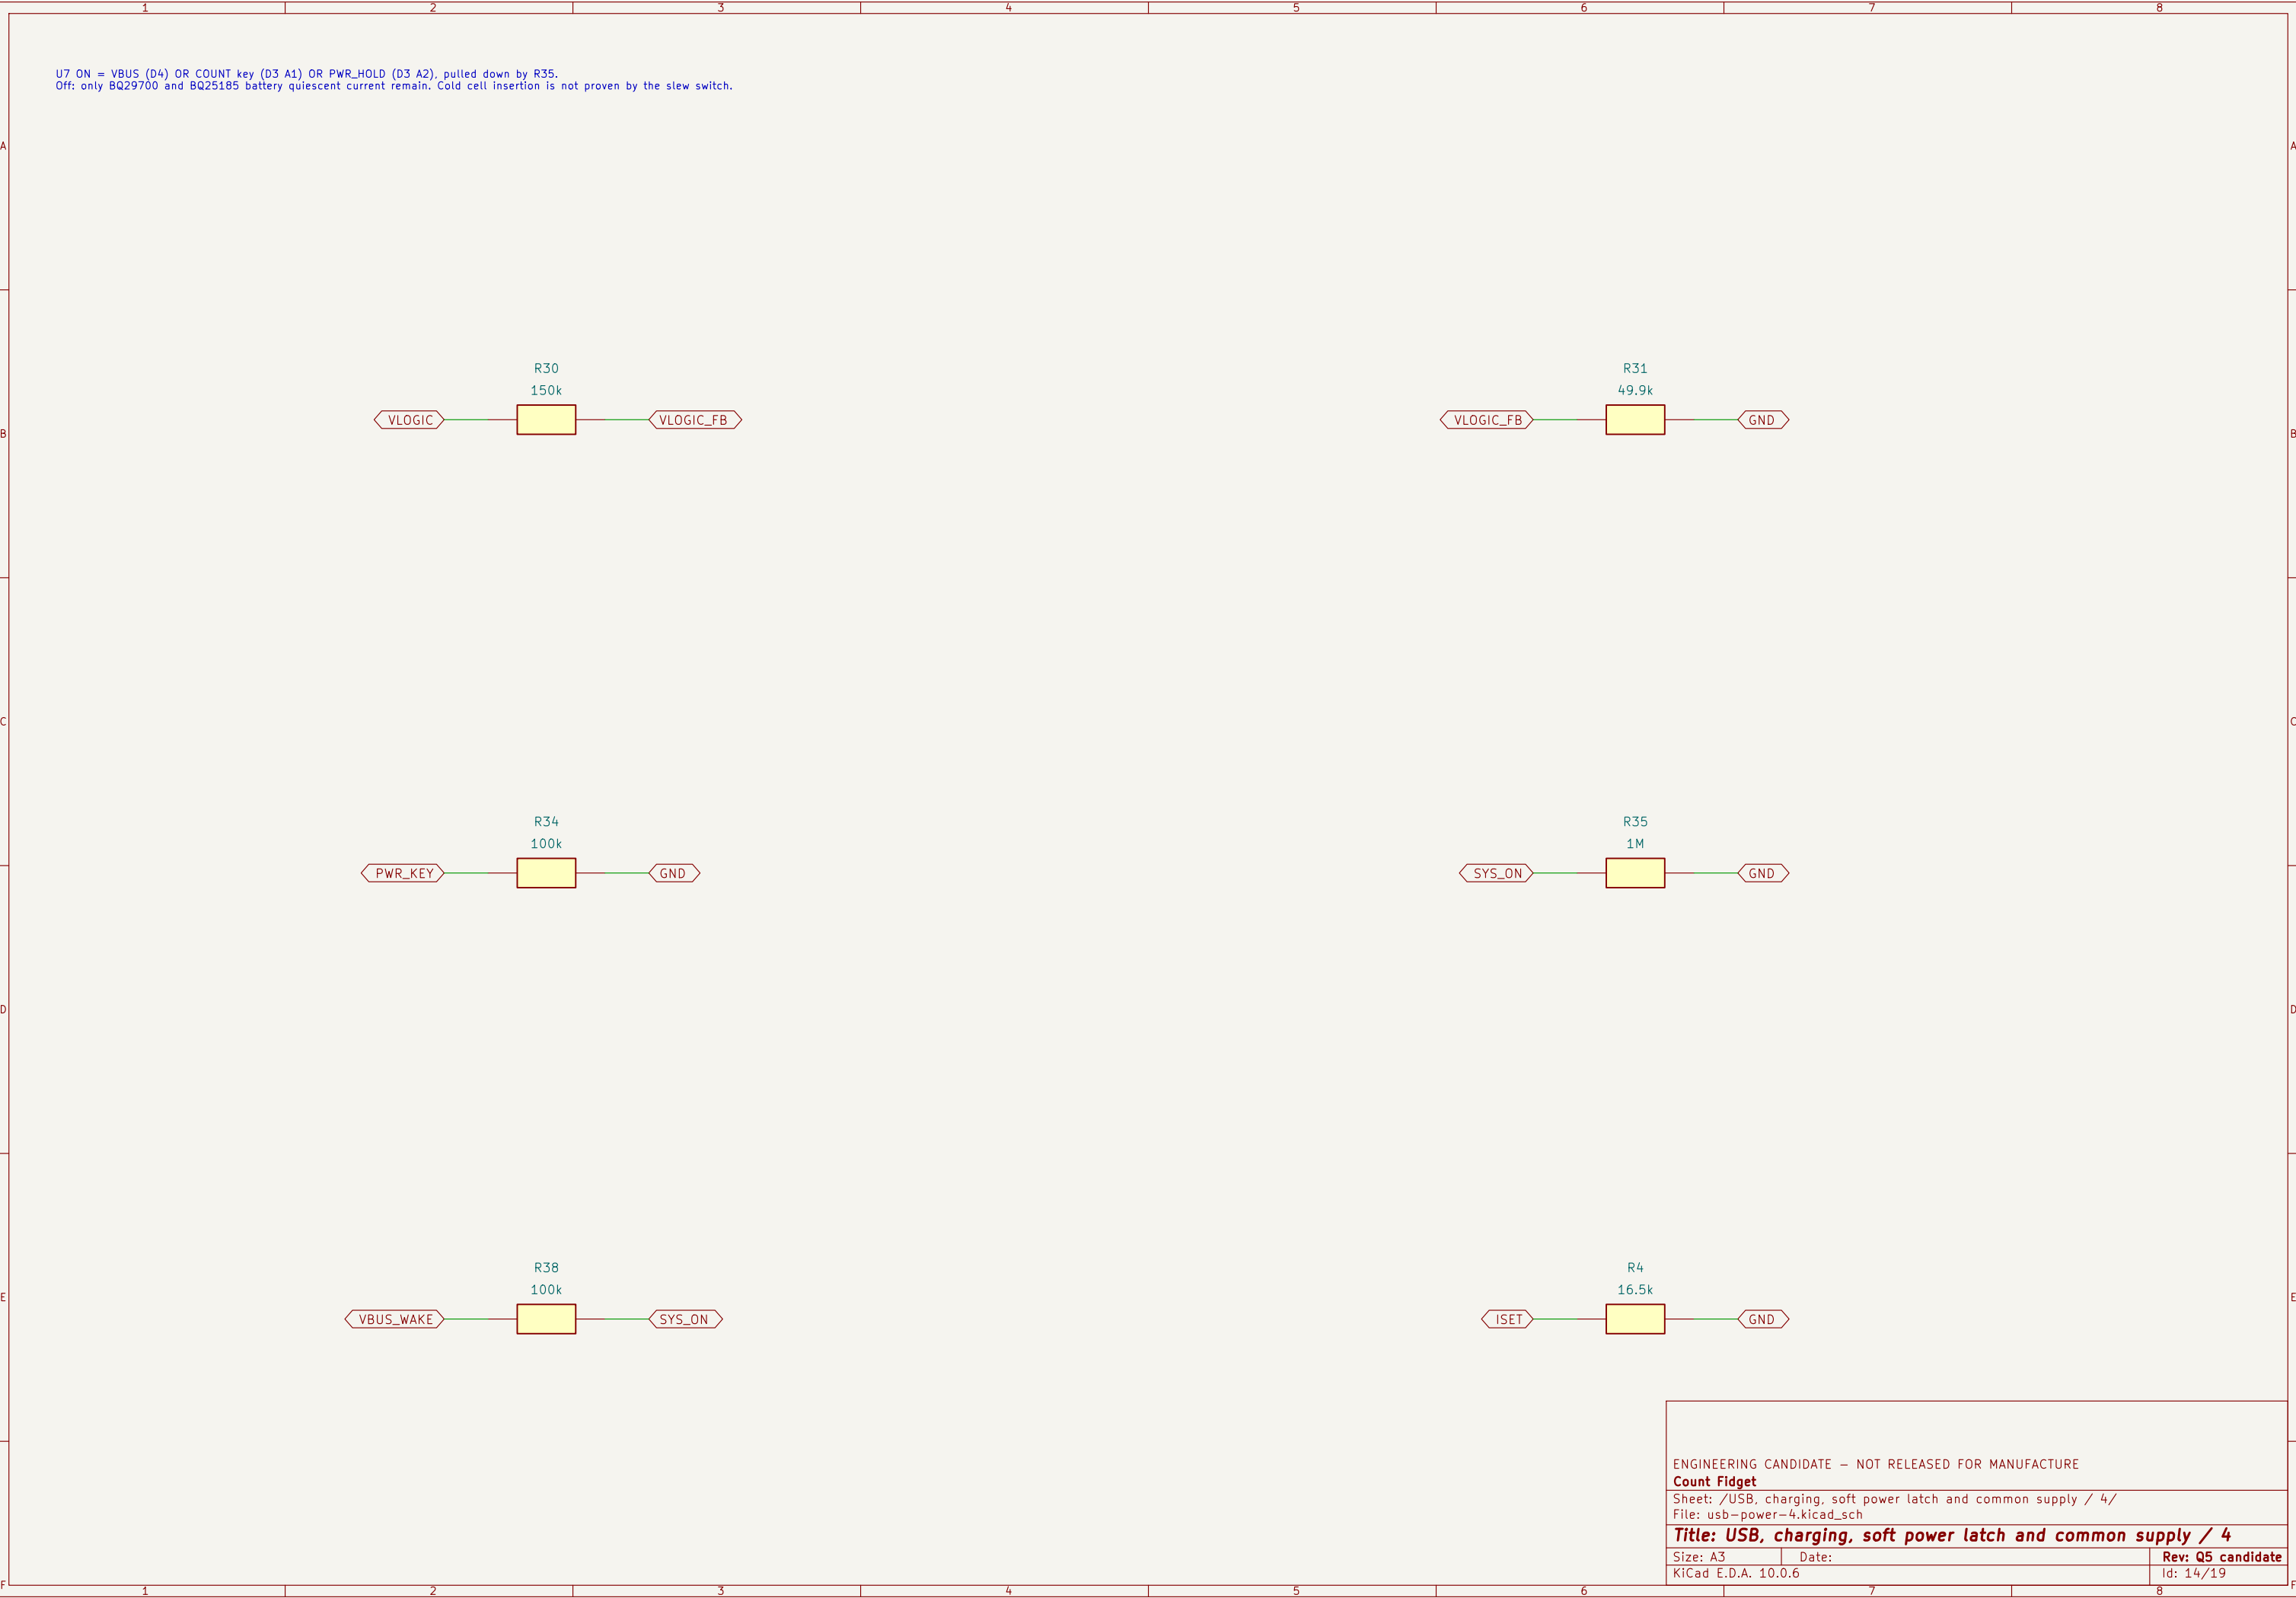

U7 ON = VBUS (D4) OR COUNT key (D3 A1) OR PWR_HOLD (D3 A2), pulled down by R35.
Off: only BQ29700 and BQ25185 battery quiescent current remain. Cold cell insertion is not proven by the slew switch.

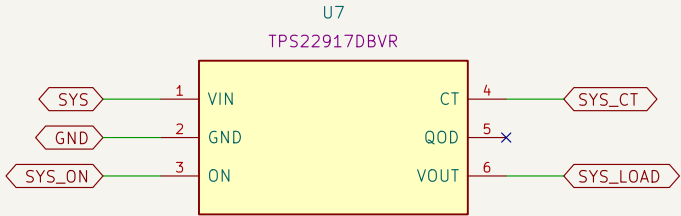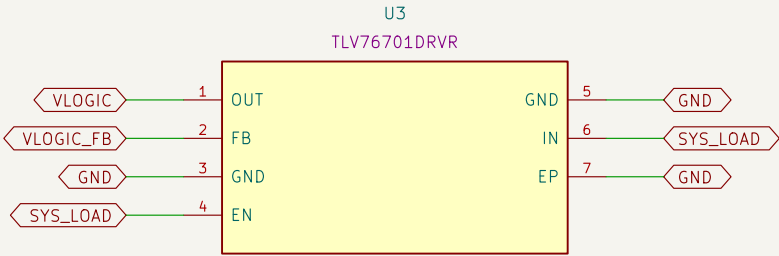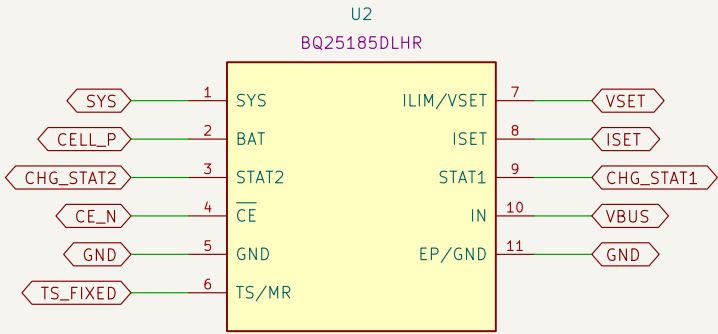

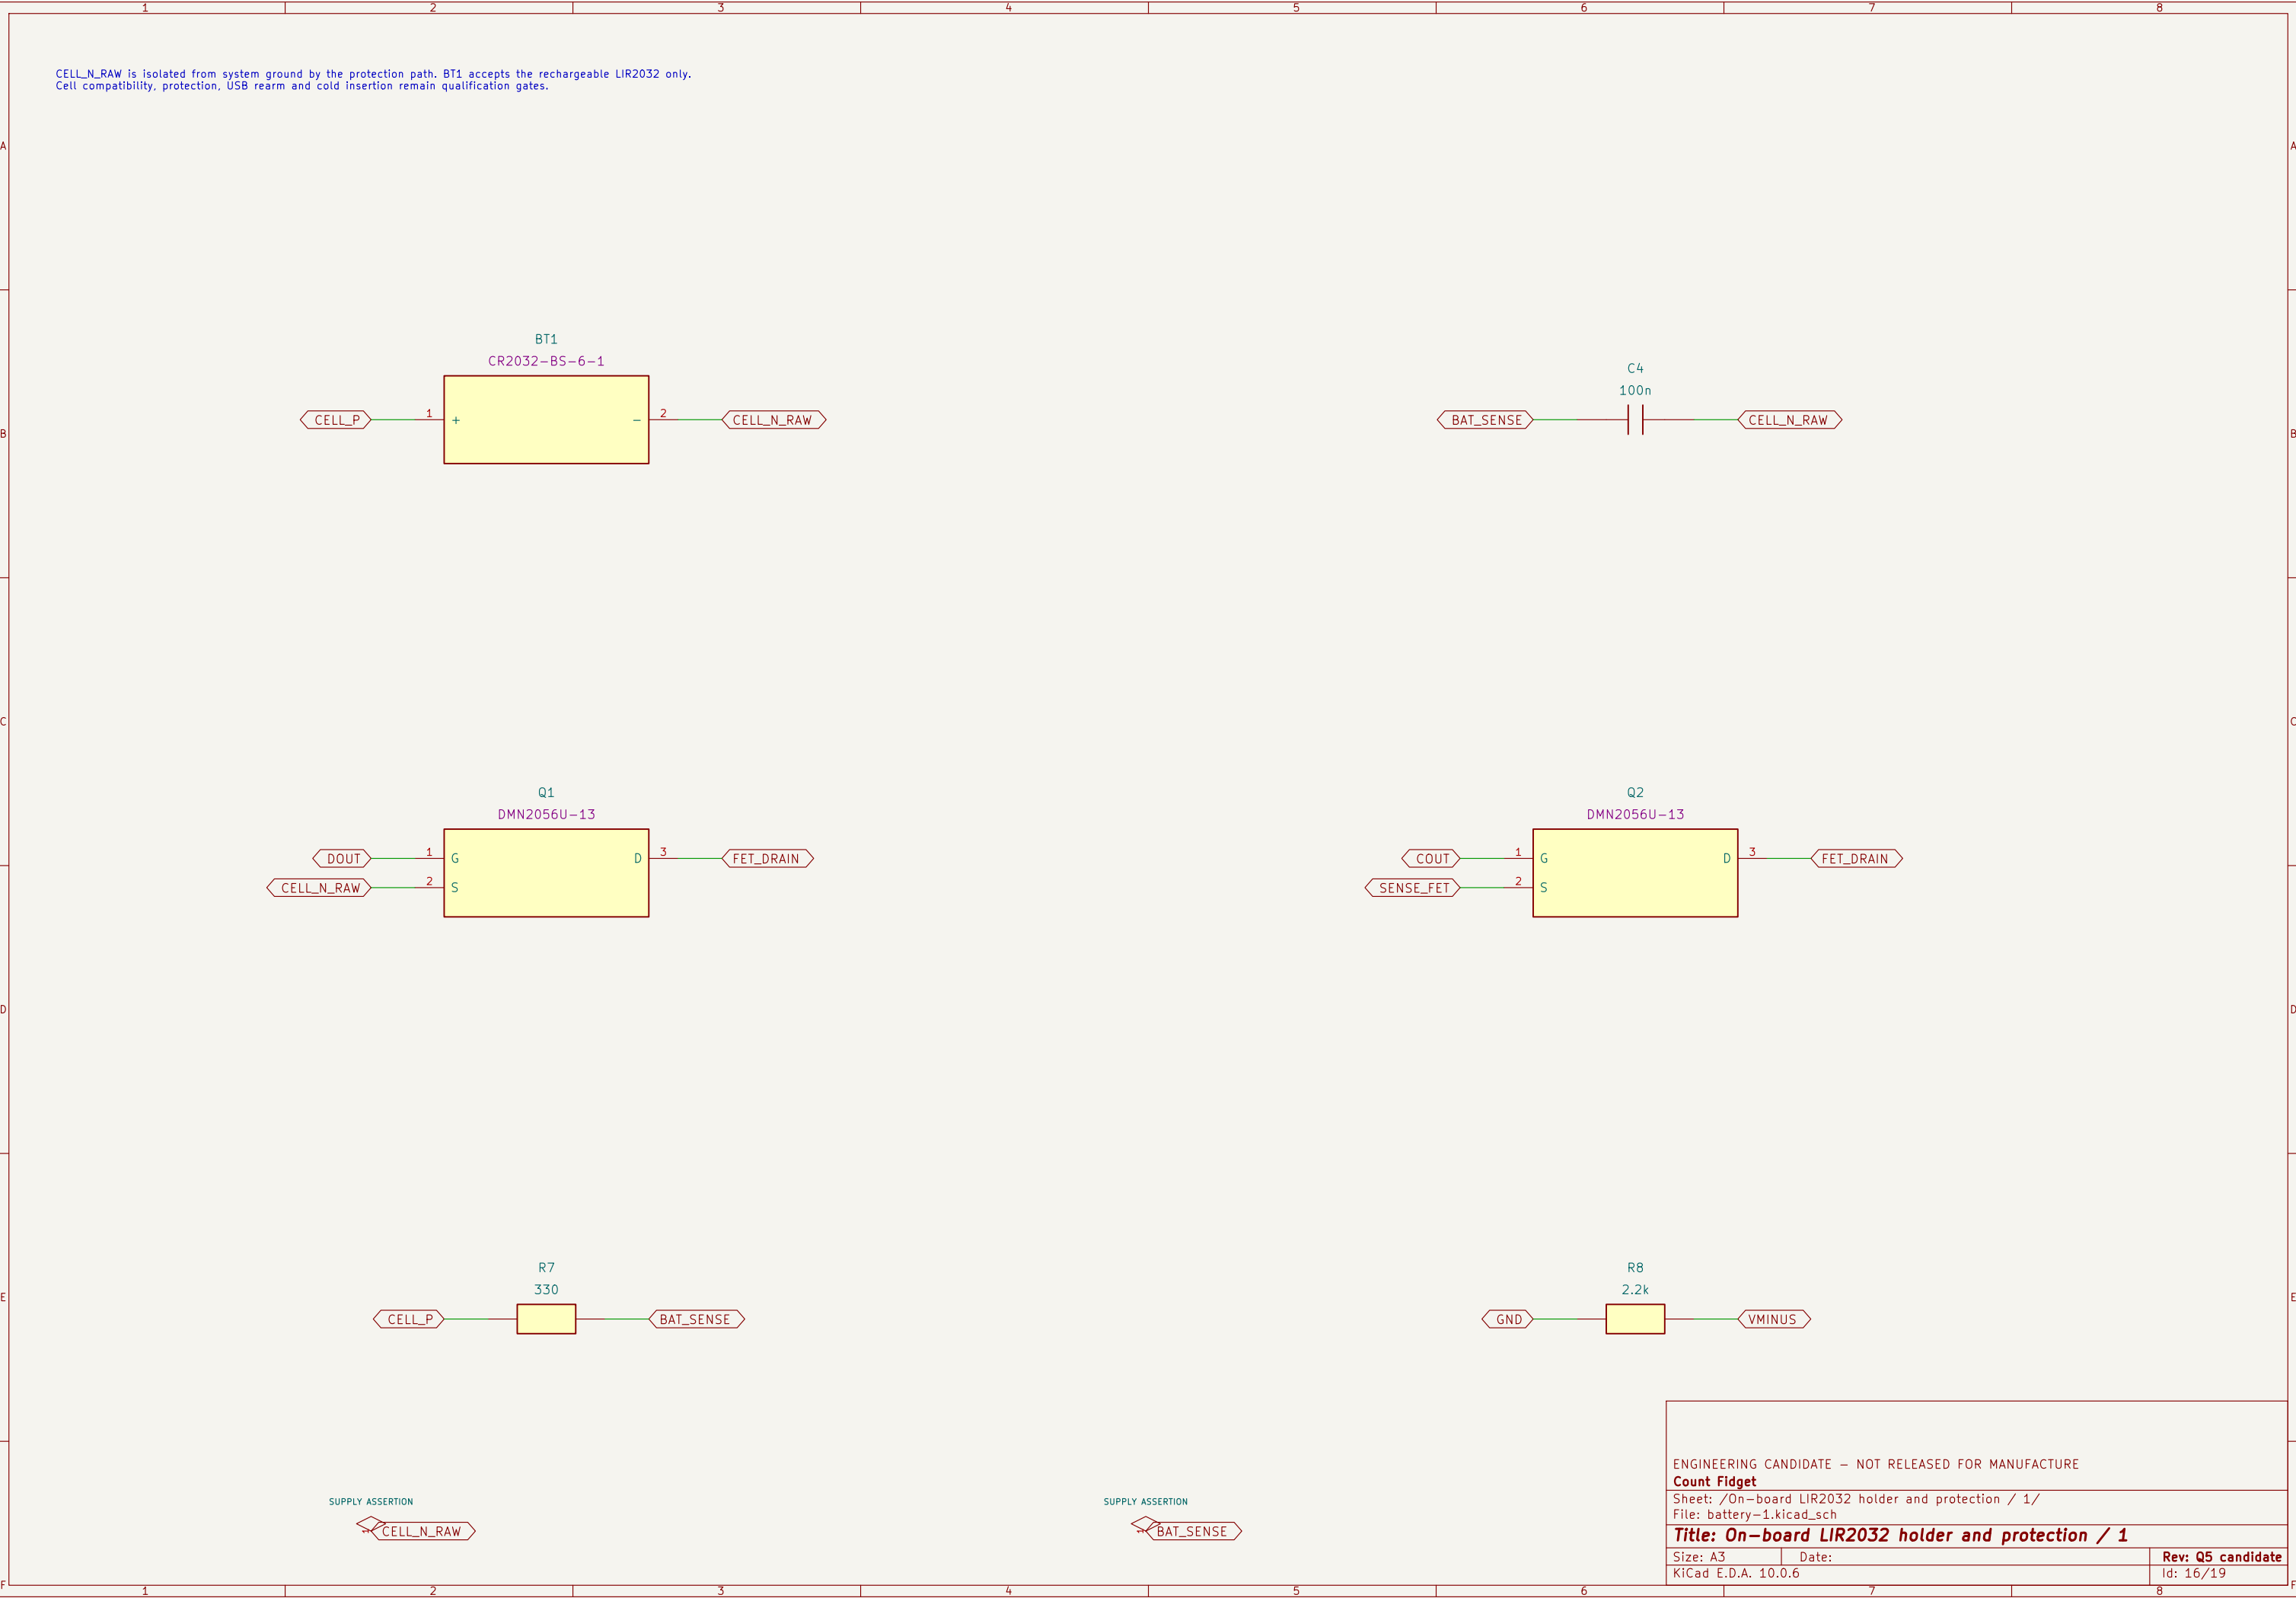

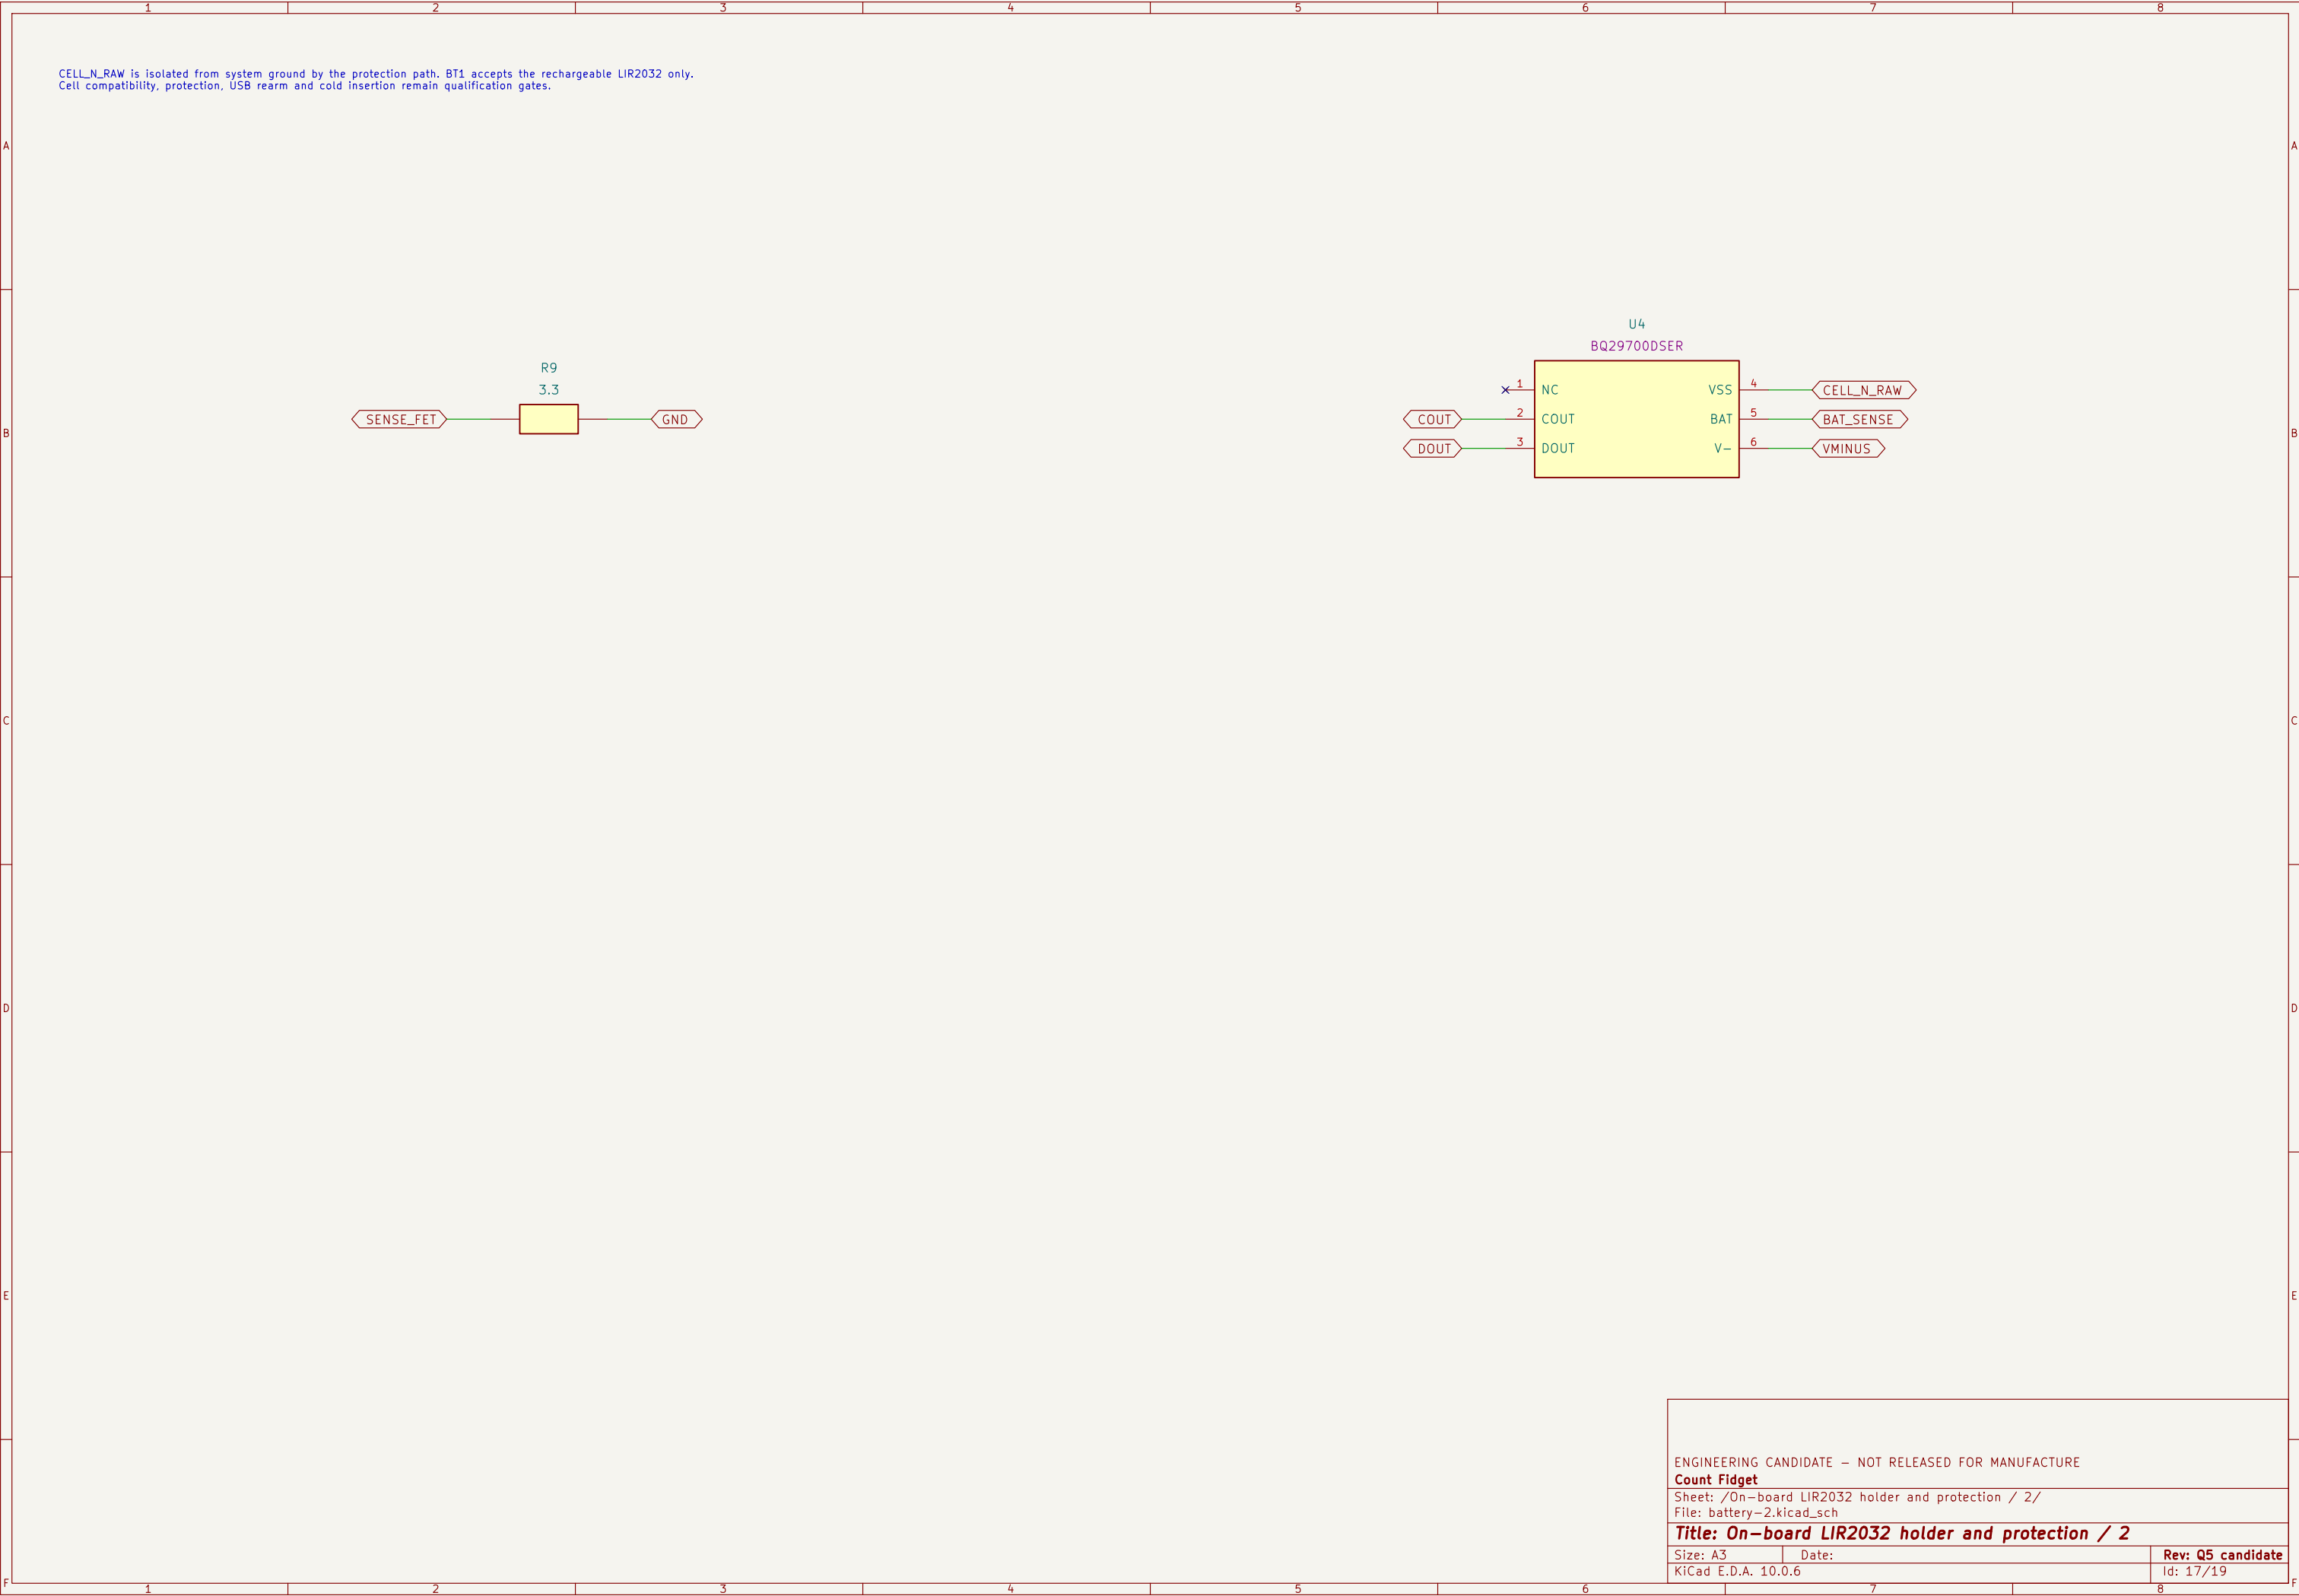

TH1 on the board beside BT1; both window outputs must enable their series FETs for charging.
Gate pulldowns disable charging when comparator power is absent; threshold and fault tests remain required.

