

	1	2	3	4	5	6	7	8	
A	Q2 schematic index – 50 fitted PCB parts plus 10 pogo lands and 2 mounts. Global net labels connect the functional sheets. Crosses explicitly mark unused physical pins. Q1 submitted files remain frozen. This candidate still requires ERC, layout, first–article and safety qualification.								A
B	MCU, LCD bias and programming U1 / DS1 / C8 / C14 / C15 / C16 / C7 / R16 / C10 / TP1 / TP2 / TP3 / TP4 File: mcu–lcd.kicad_sch				USB input, charging and 3 V supply J1 / D1 / U2 / U3 / R1 / R2 / C9 / C1 / R3 / R4 / R5 / R6 / R19 / C13 / C2 / C3 / C5 / C6 / TP5 / TP6 File: usb–power.kicad_sch				B
C	Battery connector and independent cell protection J2 / U4 / Q1 / Q2 / R7 / C4 / R8 / R9 / TP7 / TP8 / H1 / H2 File: battery–protection.kicad_sch				Independent temperature window and charge inhibit U5 / R10 / R11 / R12 / R13 / Q3 / Q4 / R14 / R15 File: thermal.kicad_sch				C
D	Count/reset keys, filtering and fixture access SW1 / SW2 / R17 / R18 / C11 / C12 / TP9 / TP10 File: buttons.kicad_sch								D
E									E
F	1	2	3	4	5	6	7	8	F

ENGINEERING CANDIDATE – NOT RELEASED FOR MANUFACTURE

Count Fidget

Sheet: /
File: click–counter–Q2.kicad_sch

Title: Count Fidget – Q2 engineering candidate

Size: A3

Date:

Rev: Q2 candidate


KiCad E.D.A. 10.0.6

Id: 1/6





ENGINEERING CANDIDATE – NOT RELEASED FOR MANUFACTURE		
Count Fidget		
Sheet: / File: click-counter-Q2.kicad_sch		
Title: Count Fidget – Q2 engineering candidate		
Size: A3	Date:	Rev: Q2 candidate
KiCad E.D.A. 10.0.6	Id: 1/6	

48-pin DGG device. All unused GPIO/crystal pins explicitly NC. Q2 firmware: 32 Hz nominal.
Mode 2 requires C8 pump plus C14/C15/C16 bias reservoirs. Hardware waveform/FRAM tests remain open.

U1
MSP430FR4133IG48R

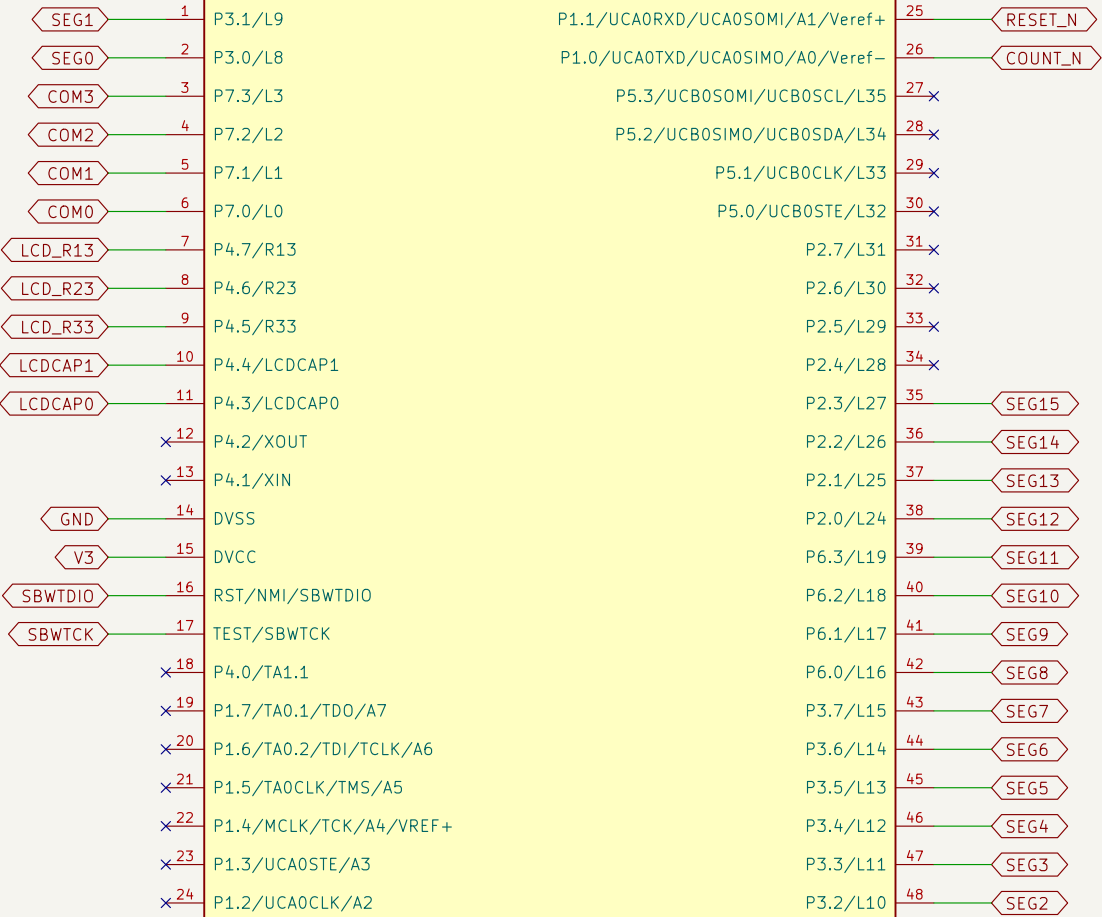

DS1
DE188-RU-30/7.5/V(3V)

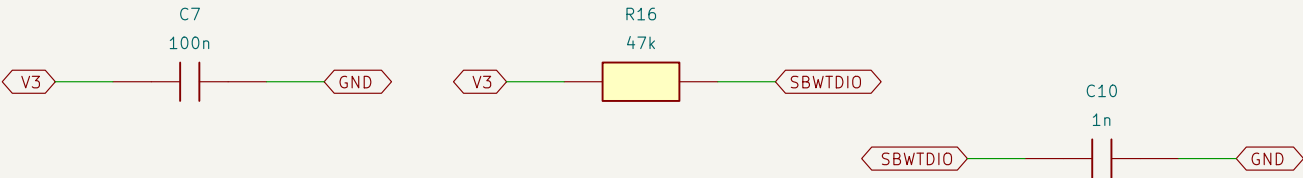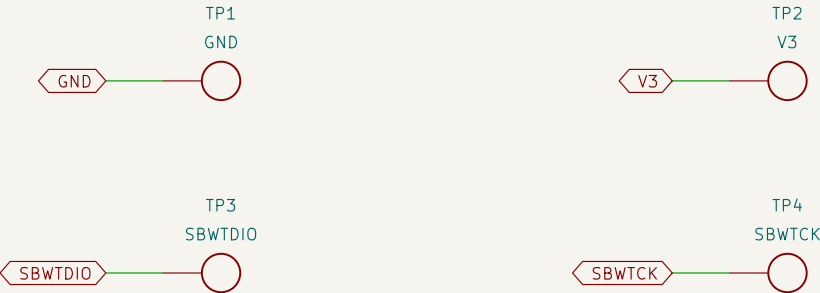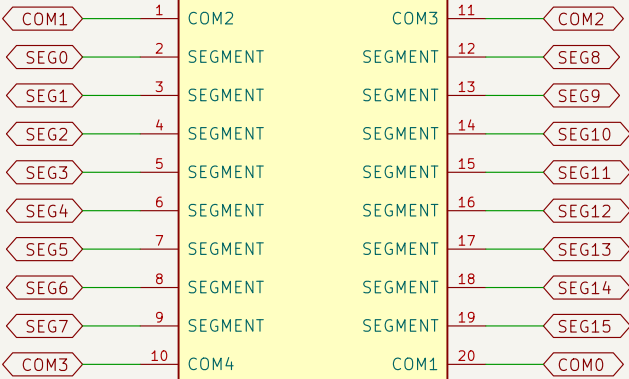

ENGINEERING CANDIDATE – NOT RELEASED FOR MANUFACTURE

Count Fidget

Sheet: /MCU, LCD bias and programming/
File: mcu-lcd.kicad_sch

Title: MCU, LCD bias and programming


Size: A3

Date:

Rev: Q2 candidate

KiCad E.D.A. 10.0.6

Id: 2/6

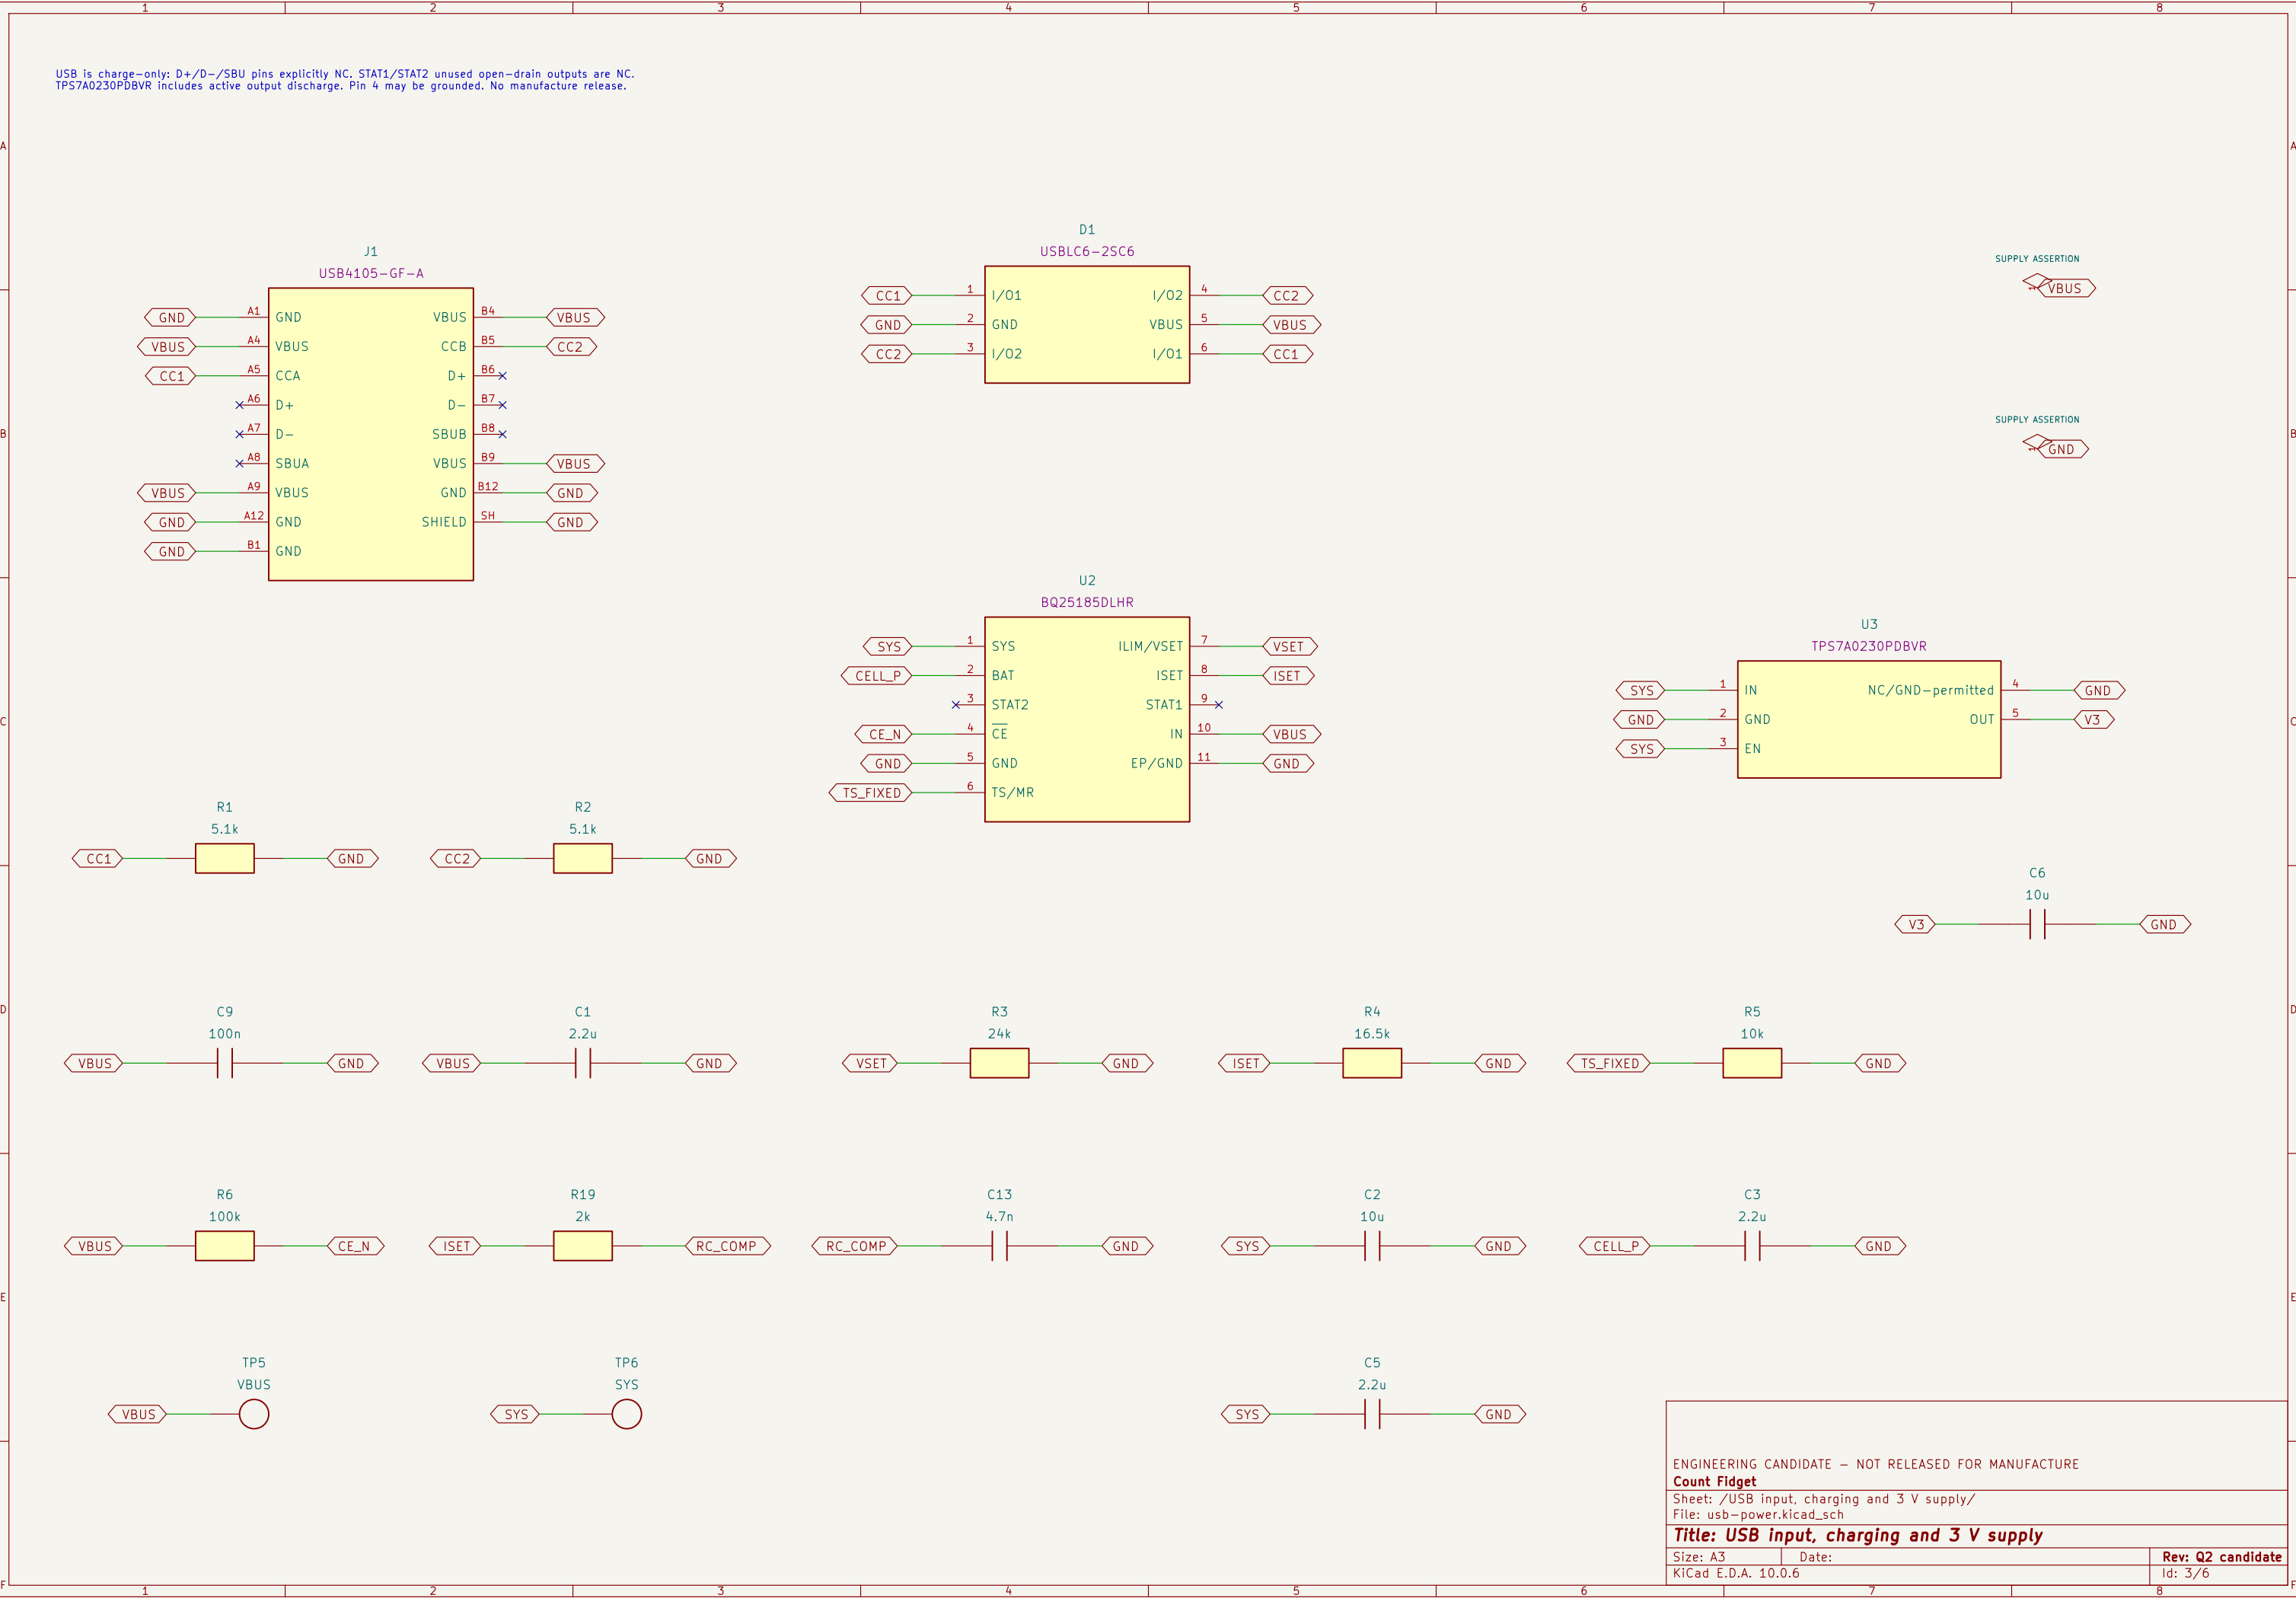

J2 mates the offboard CC-BAT-001 cell/NTC harness. CELL_N_RAW must remain isolated from system GND.
BQ29700 undervoltage tolerance, protection bypass/recovery and final pack remain release gates.

