


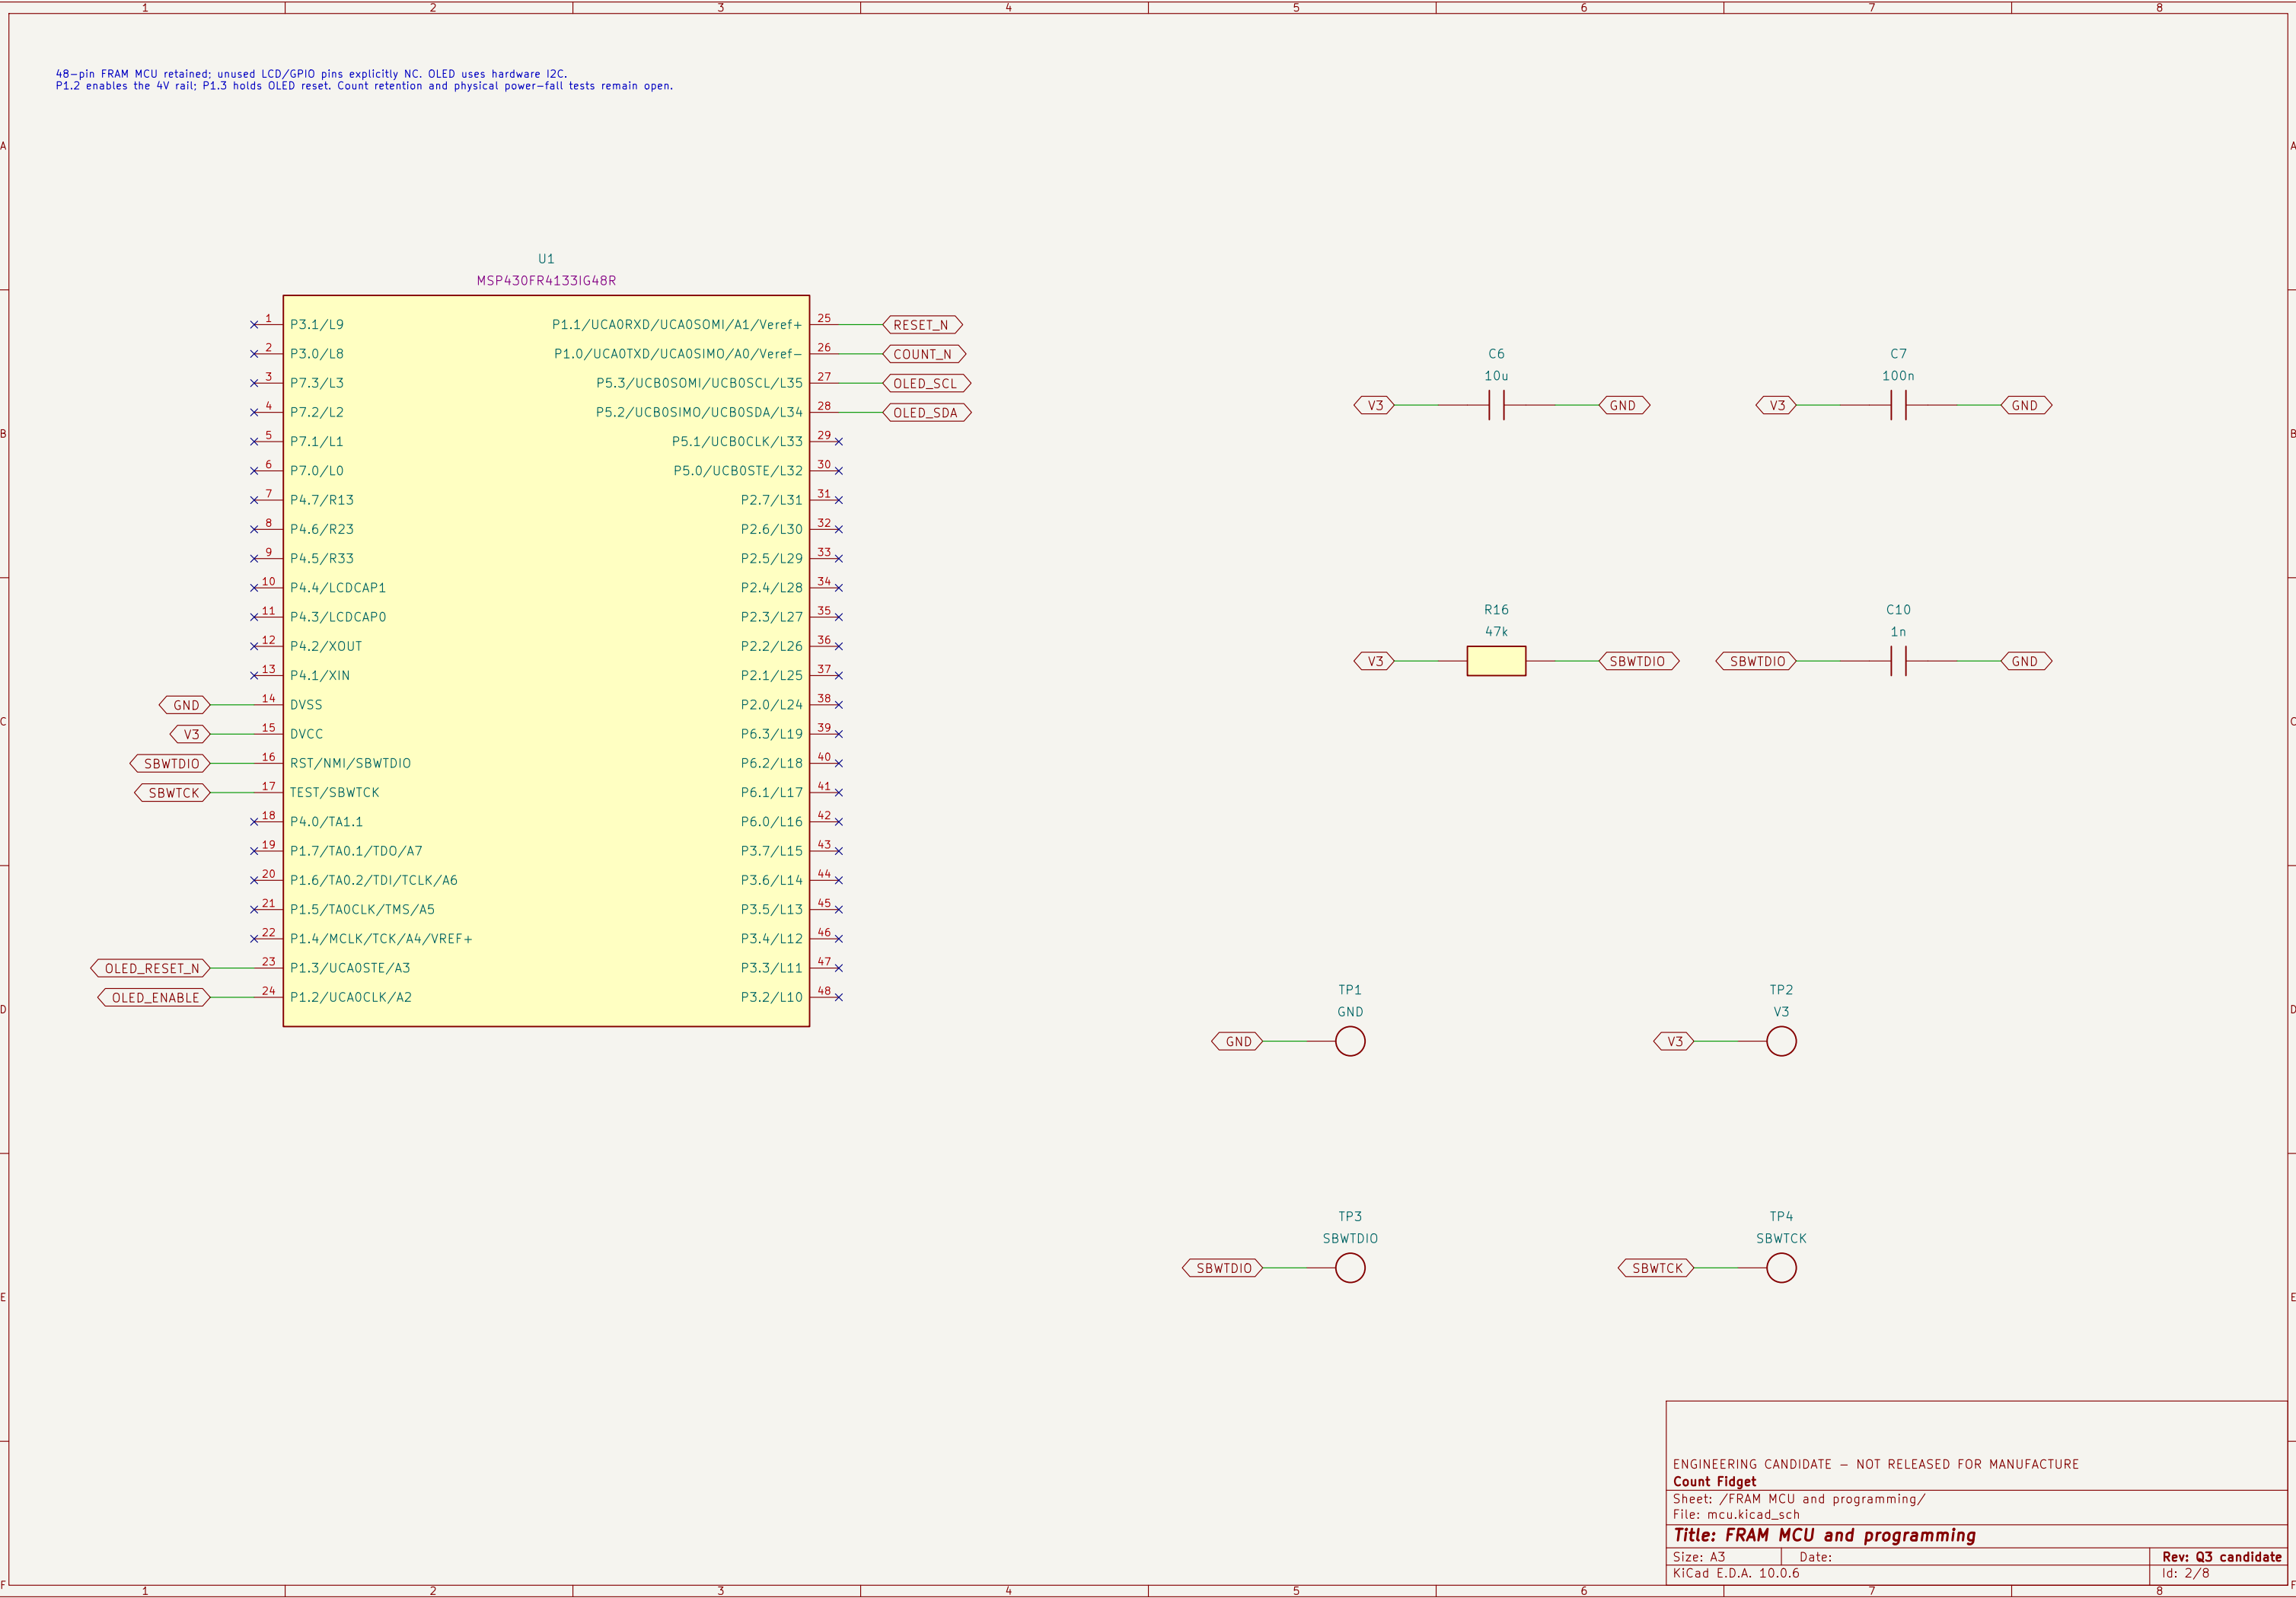
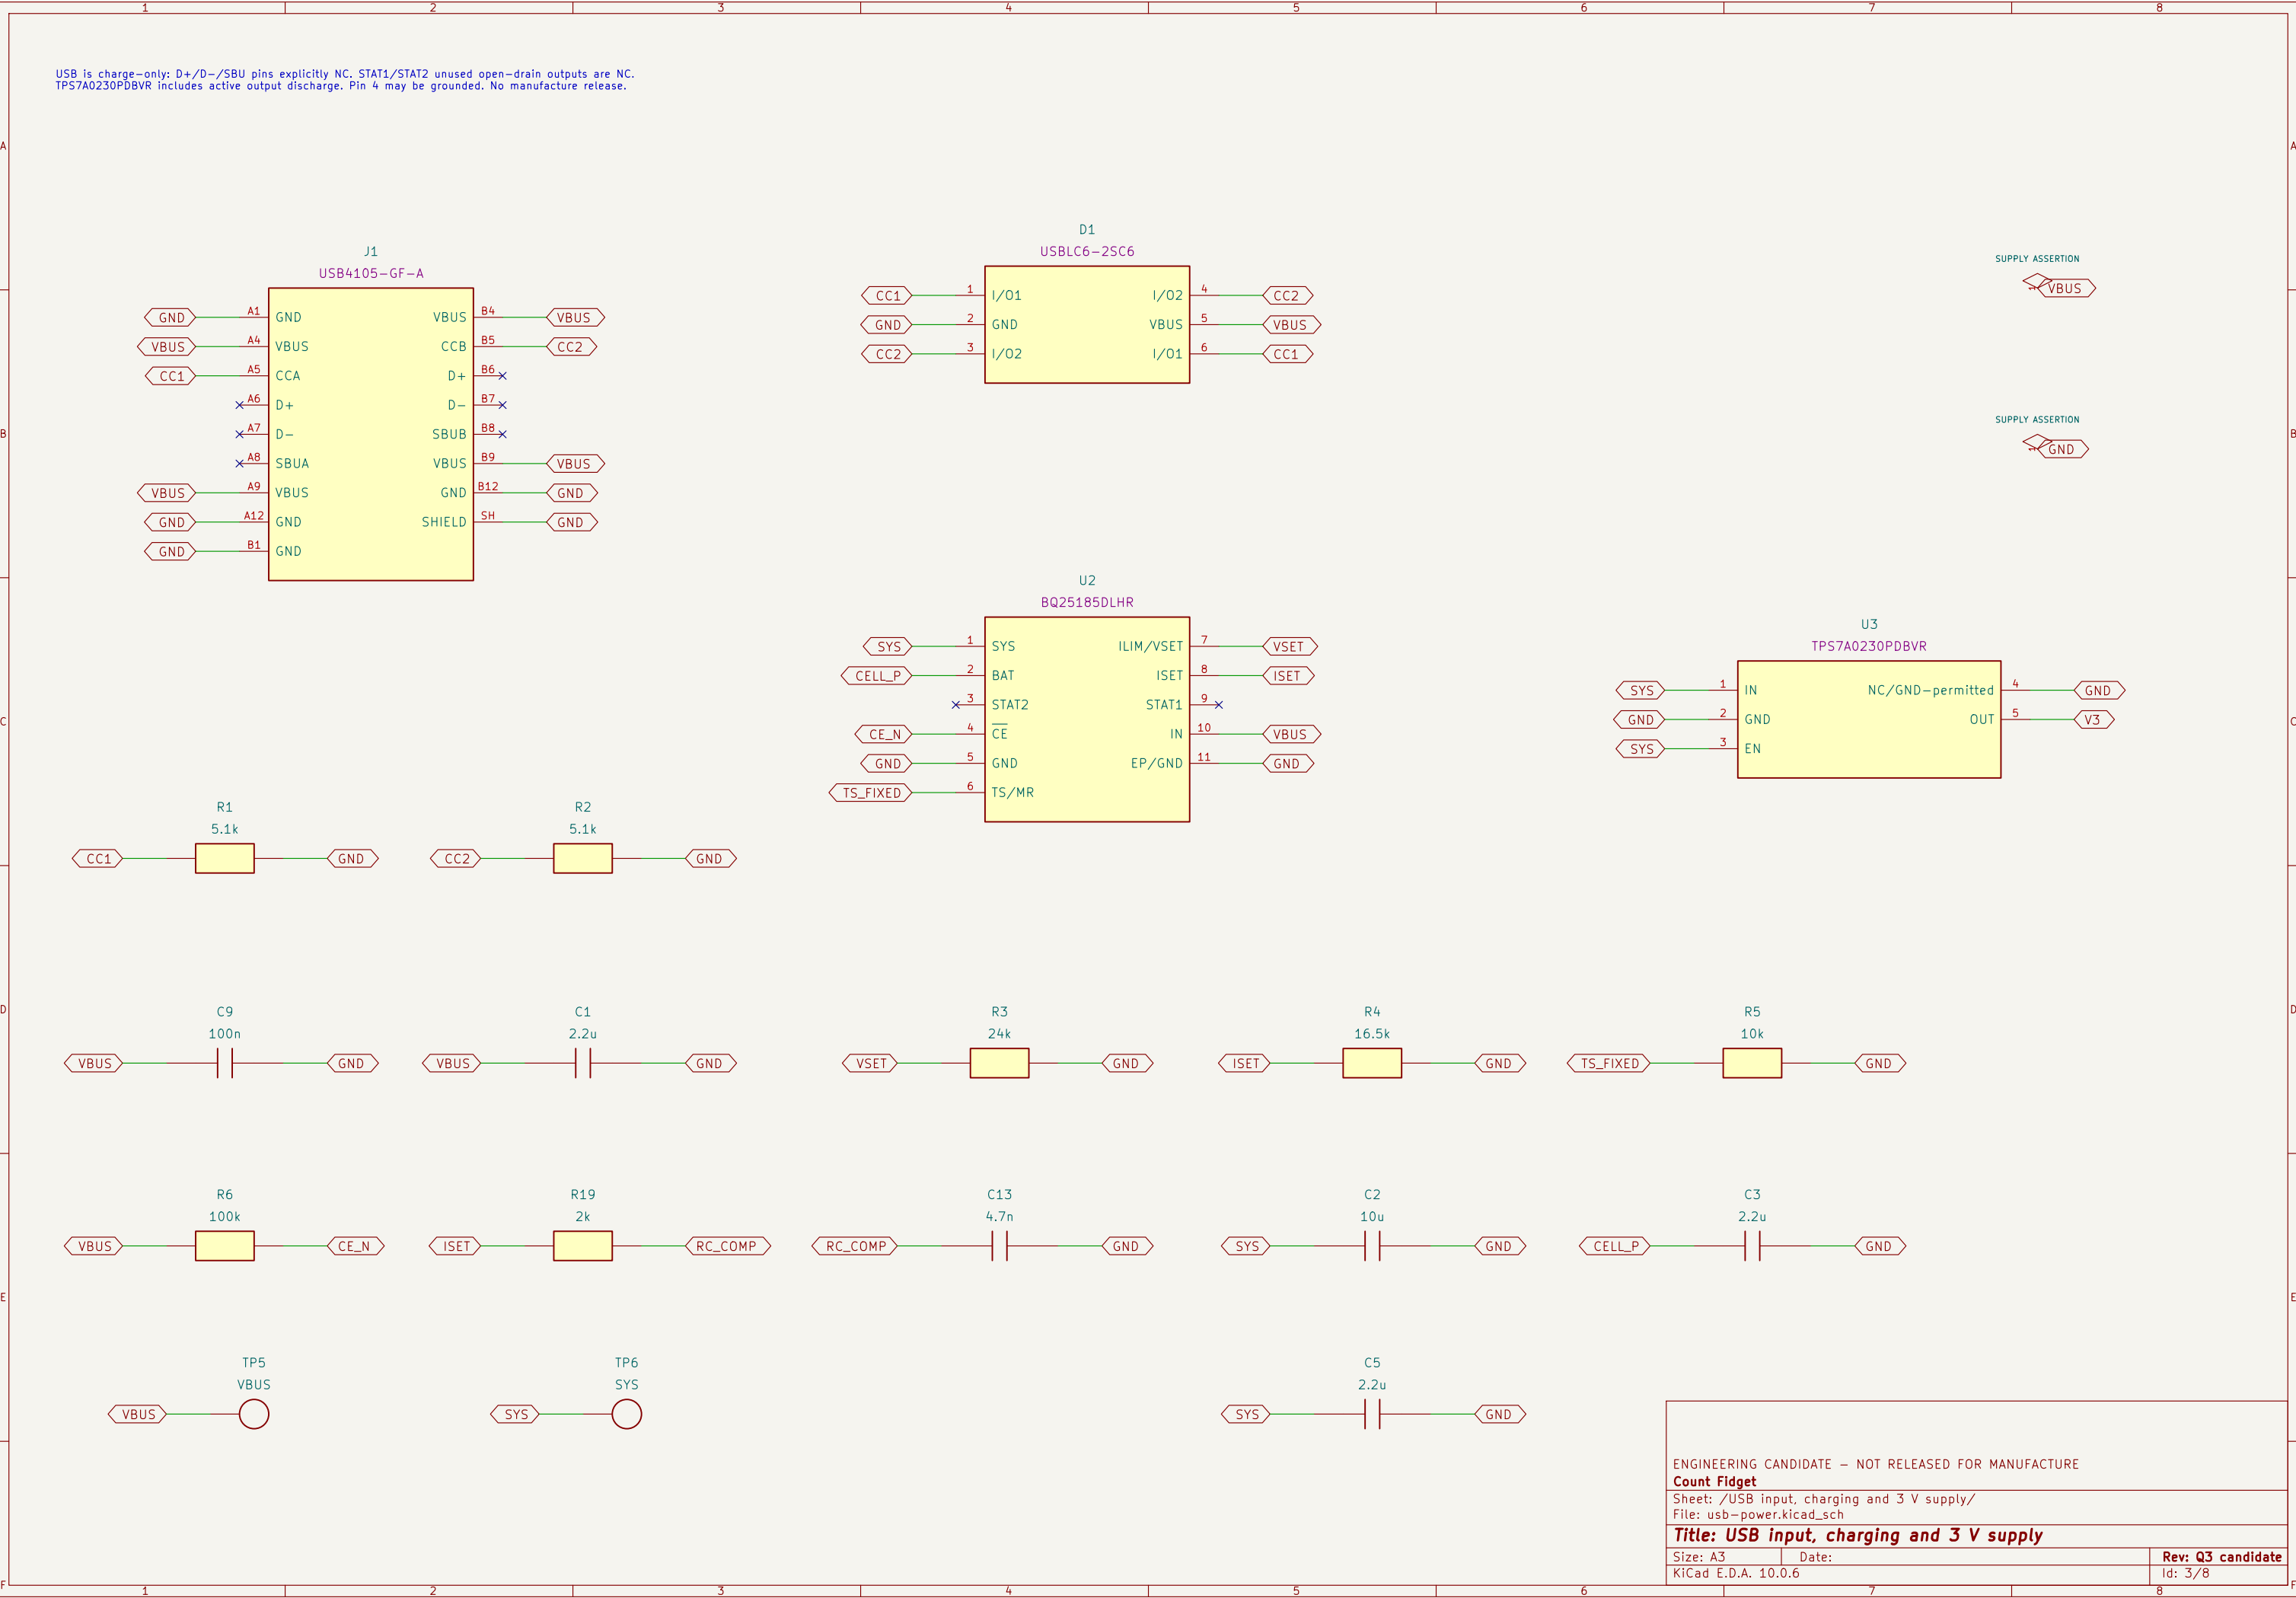






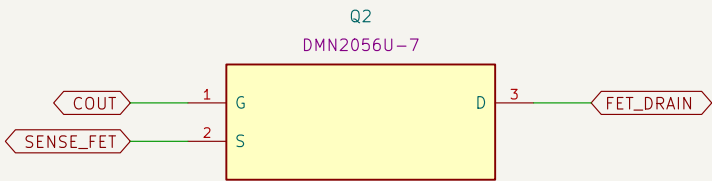
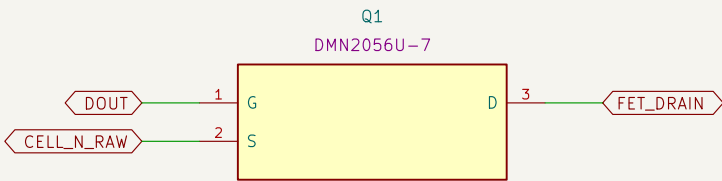


	1	2	3	4	5	6	7	8	
A	Q3 schematic index – 70 fitted PCB parts plus 10 pogo lands and 2 mounts. Global net labels connect the functional sheets. Crosses explicitly mark unused physical pins. Q1 submitted files remain frozen. This candidate still requires ERC, layout, first–article and safety qualification.								A
B	FRAM MCU and programming U1 / C6 / C7 / R16 / C10 / TP1 / TP2 / TP3 / TP4 File: mcu.kicad_sch				USB input, charging and 3 V supply J1 / D1 / U2 / U3 / R1 / R2 / C9 / C1 / R3 / R4 / R5 / R6 / R19 / C13 / C2 / C3 / C5 / TP5 / TP6 File: usb–power.kicad_sch				B
C	Battery connector and independent cell protection J2 / U4 / Q1 / Q2 / R7 / C4 / R8 / R9 / TP7 / TP8 / H1 / H2 File: battery–protection.kicad_sch				Independent temperature window and charge inhibit U5 / R10 / R11 / R12 / R13 / Q3 / Q4 / R14 / R15 File: thermal.kicad_sch				C
D	Count/reset keys, filtering and fixture access SW1 / SW2 / R17 / R18 / C11 / C12 / TP9 / TP10 File: buttons.kicad_sch				OLED 4 V buck–boost and pump isolation U6 / L1 / C17 / C18 / C19 / R20 / R21 / R22 / Q5 / Q6 / R23 / R24 File: oled–power.kicad_sch				D
E									E
F	SSD1312 OLED and support parts DS1 / C20 / C21 / C22 / C23 / C24 / C25 / C26 / C27 / R25 / R26 / R27 / R28				ENGINEERING CANDIDATE – NOT RELEASED FOR MANUFACTURE Count Fidget Sheet: / File: click–counter–Q3.kicad_sch Title: Count Fidget – Q3 engineering candidate Size: A3Date:KiCad E.D.A. 10.0.6 Rev: Q3 candidateId: 1/8				F
	1	2	3	4	5	6	7	8	

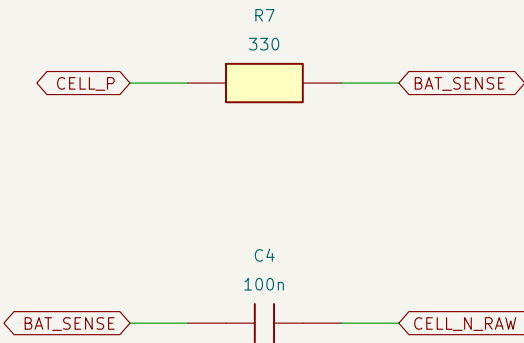


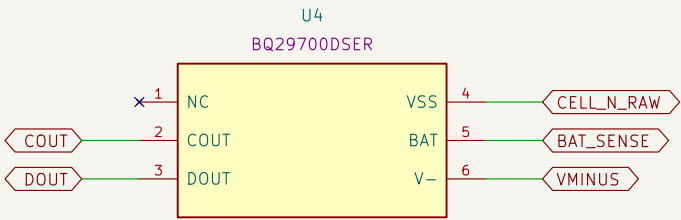

J2 mates the offboard CC-BAT-001 cell/NTC harness. CELL_N_RAW must remain isolated from system GND. BQ29700 undervoltage tolerance, protection bypass/recovery and final pack remain release gates.

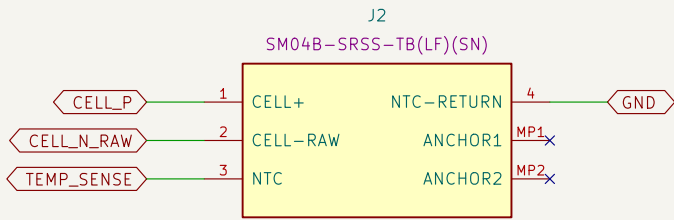

ENGINEERING CANDIDATE – NOT RELEASED FOR MANUFACTURE		
Count Fidget		
Sheet: /Battery connector and independent cell protection/ File: battery-protection.kicad_sch		
Title: Battery connector and independent cell protection		
Size: A3	Date:	Rev: Q3 candidate
KiCad E.D.A. 10.0.6		Id: 4/8

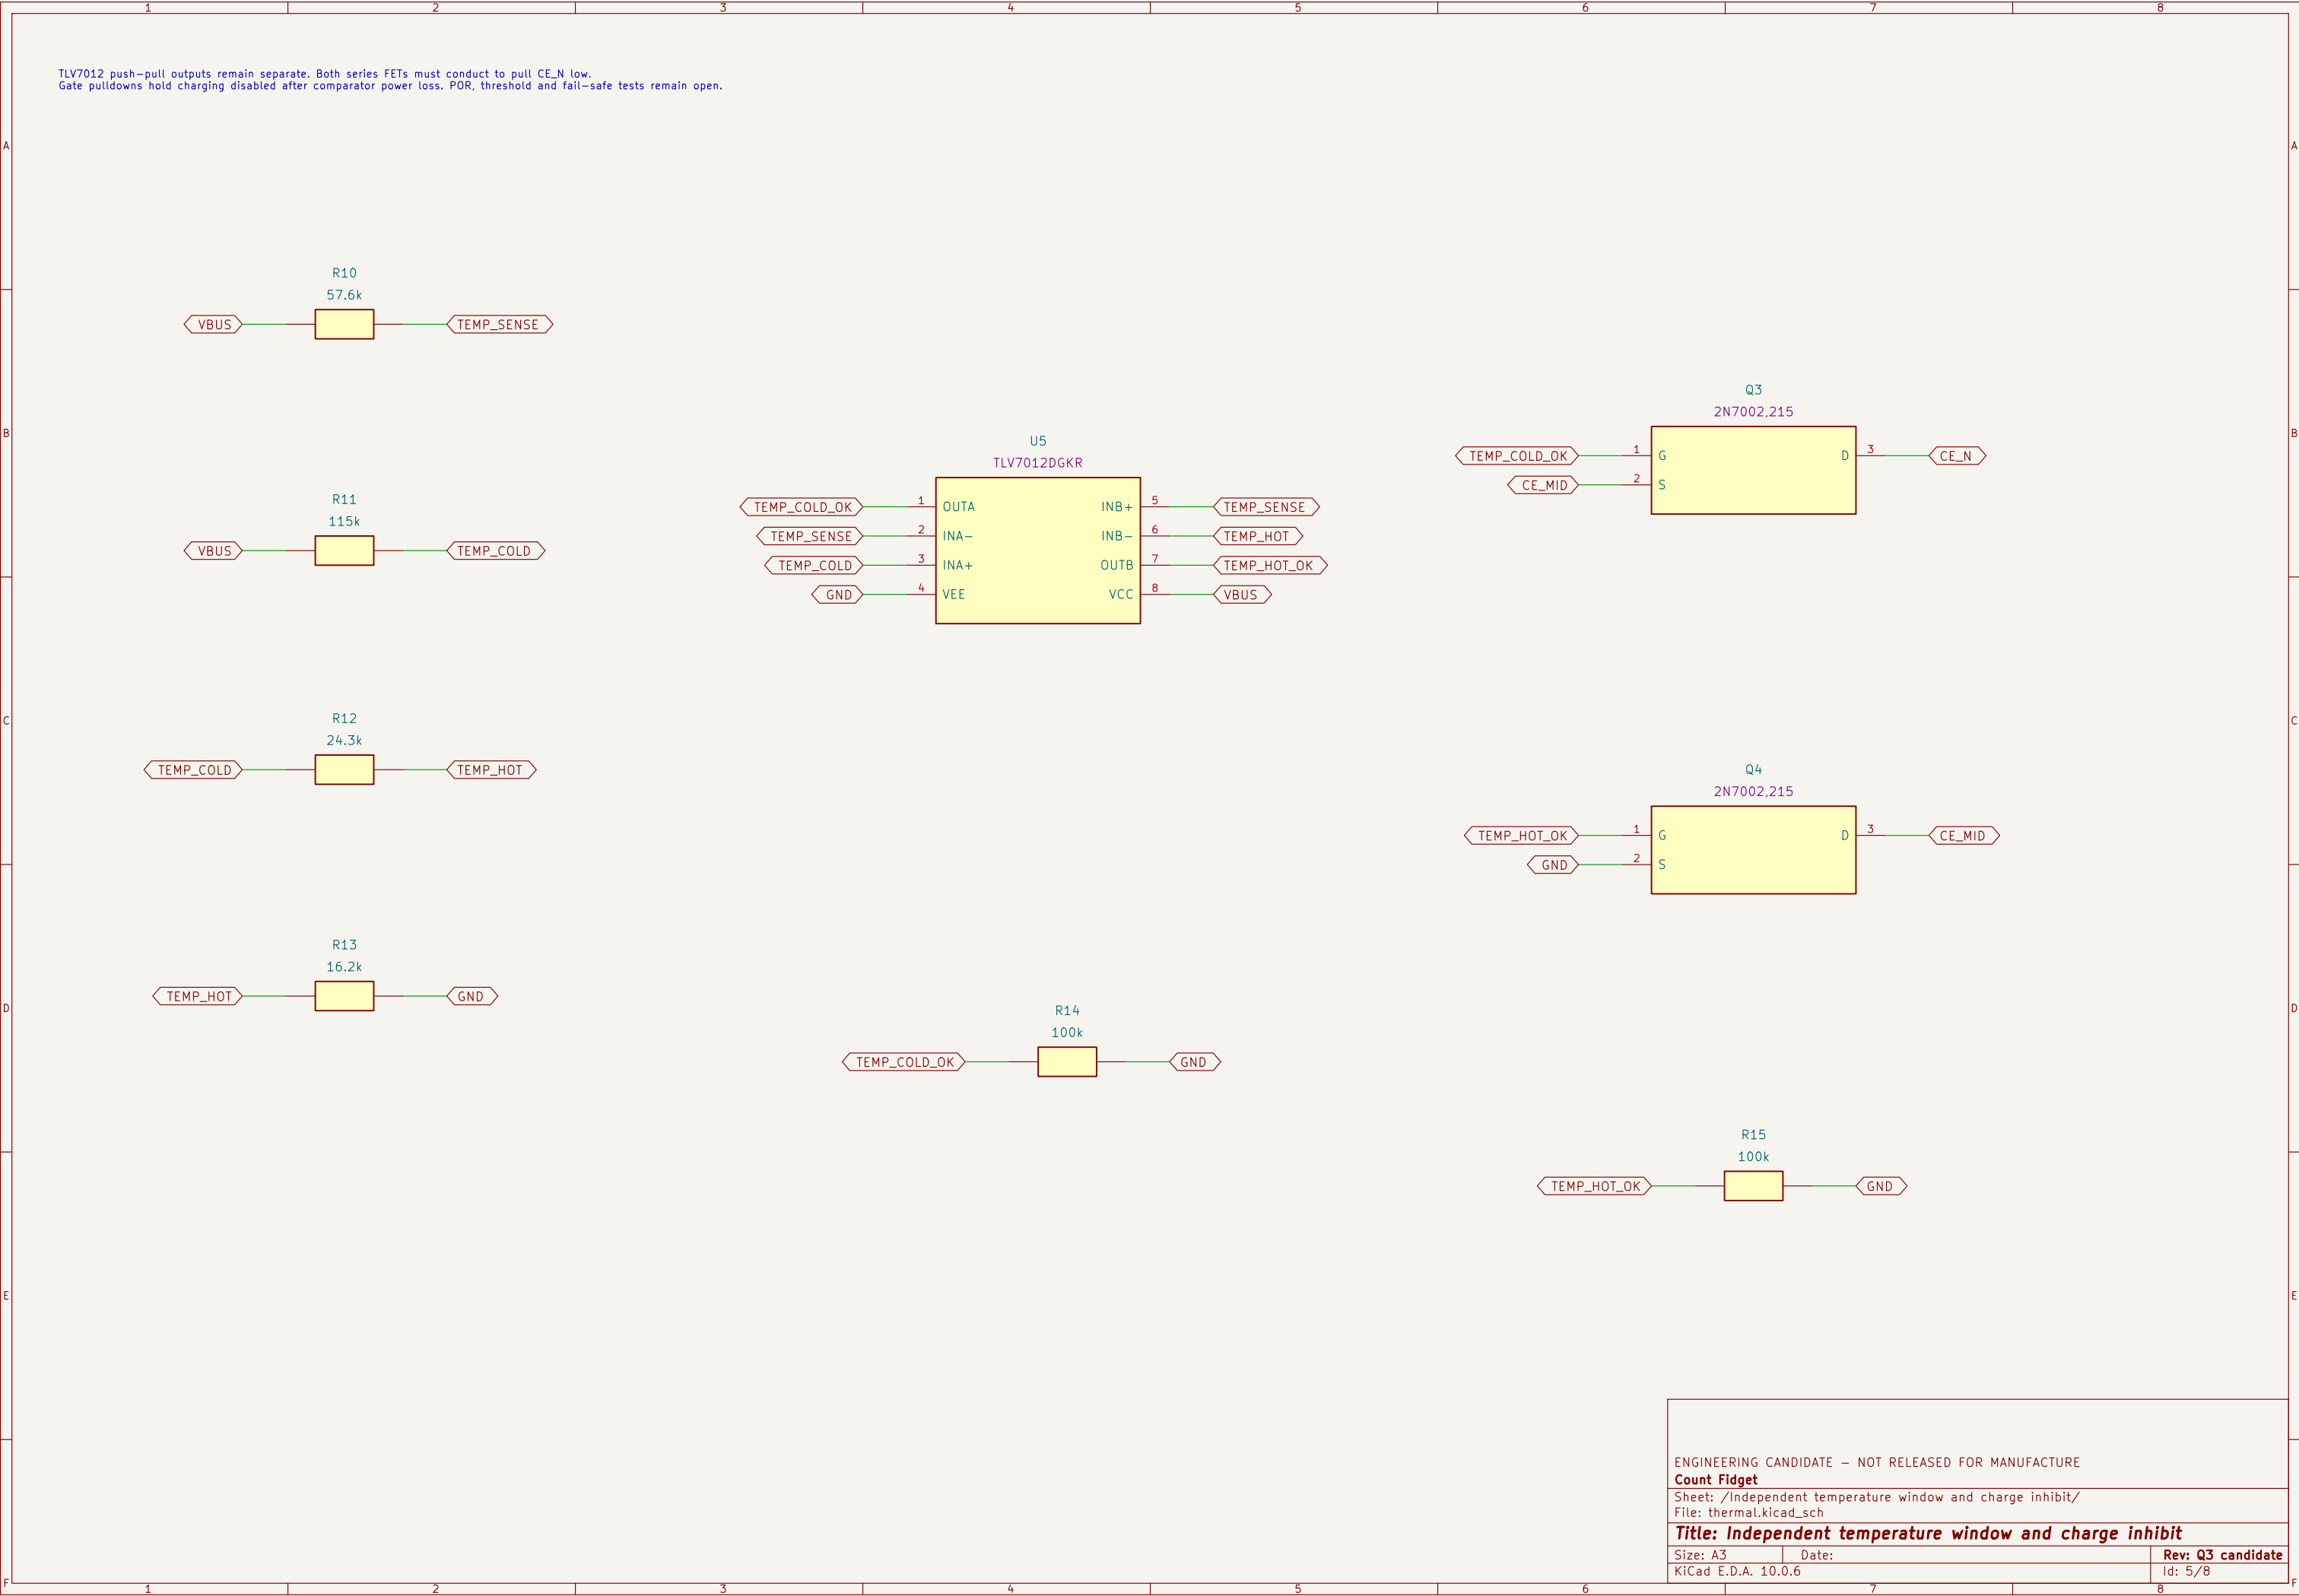

HanElectricity CPG151101D13, 19.05 mm stem spacing; active-low keys with 220k pull-ups.
Firmware captures one count per accepted press; physical switch/clip/plate support remains unqualified.

SW1
COUNT

COUNT_N GND

SW2
RESET

RESET_N GND

R17
220k

V3 COUNT_N

R18
220k

V3 RESET_N

C11
1n

COUNT_N GND

C12
1n

RESET_N GND


TP9
COUNT_N

COUNT_N










TP10
RESET_N

RESET_N

ENGINEERING CANDIDATE – NOT RELEASED FOR MANUFACTURE		
Count Fidget		
Sheet: /Count/reset keys, filtering and fixture access/		
File: buttons.kicad_sch		
Title: Count/reset keys, filtering and fixture access		
Size: A3	Date:	Rev: Q3 candidate
KiCad E.D.A. 10.0.6		Id: 6/8

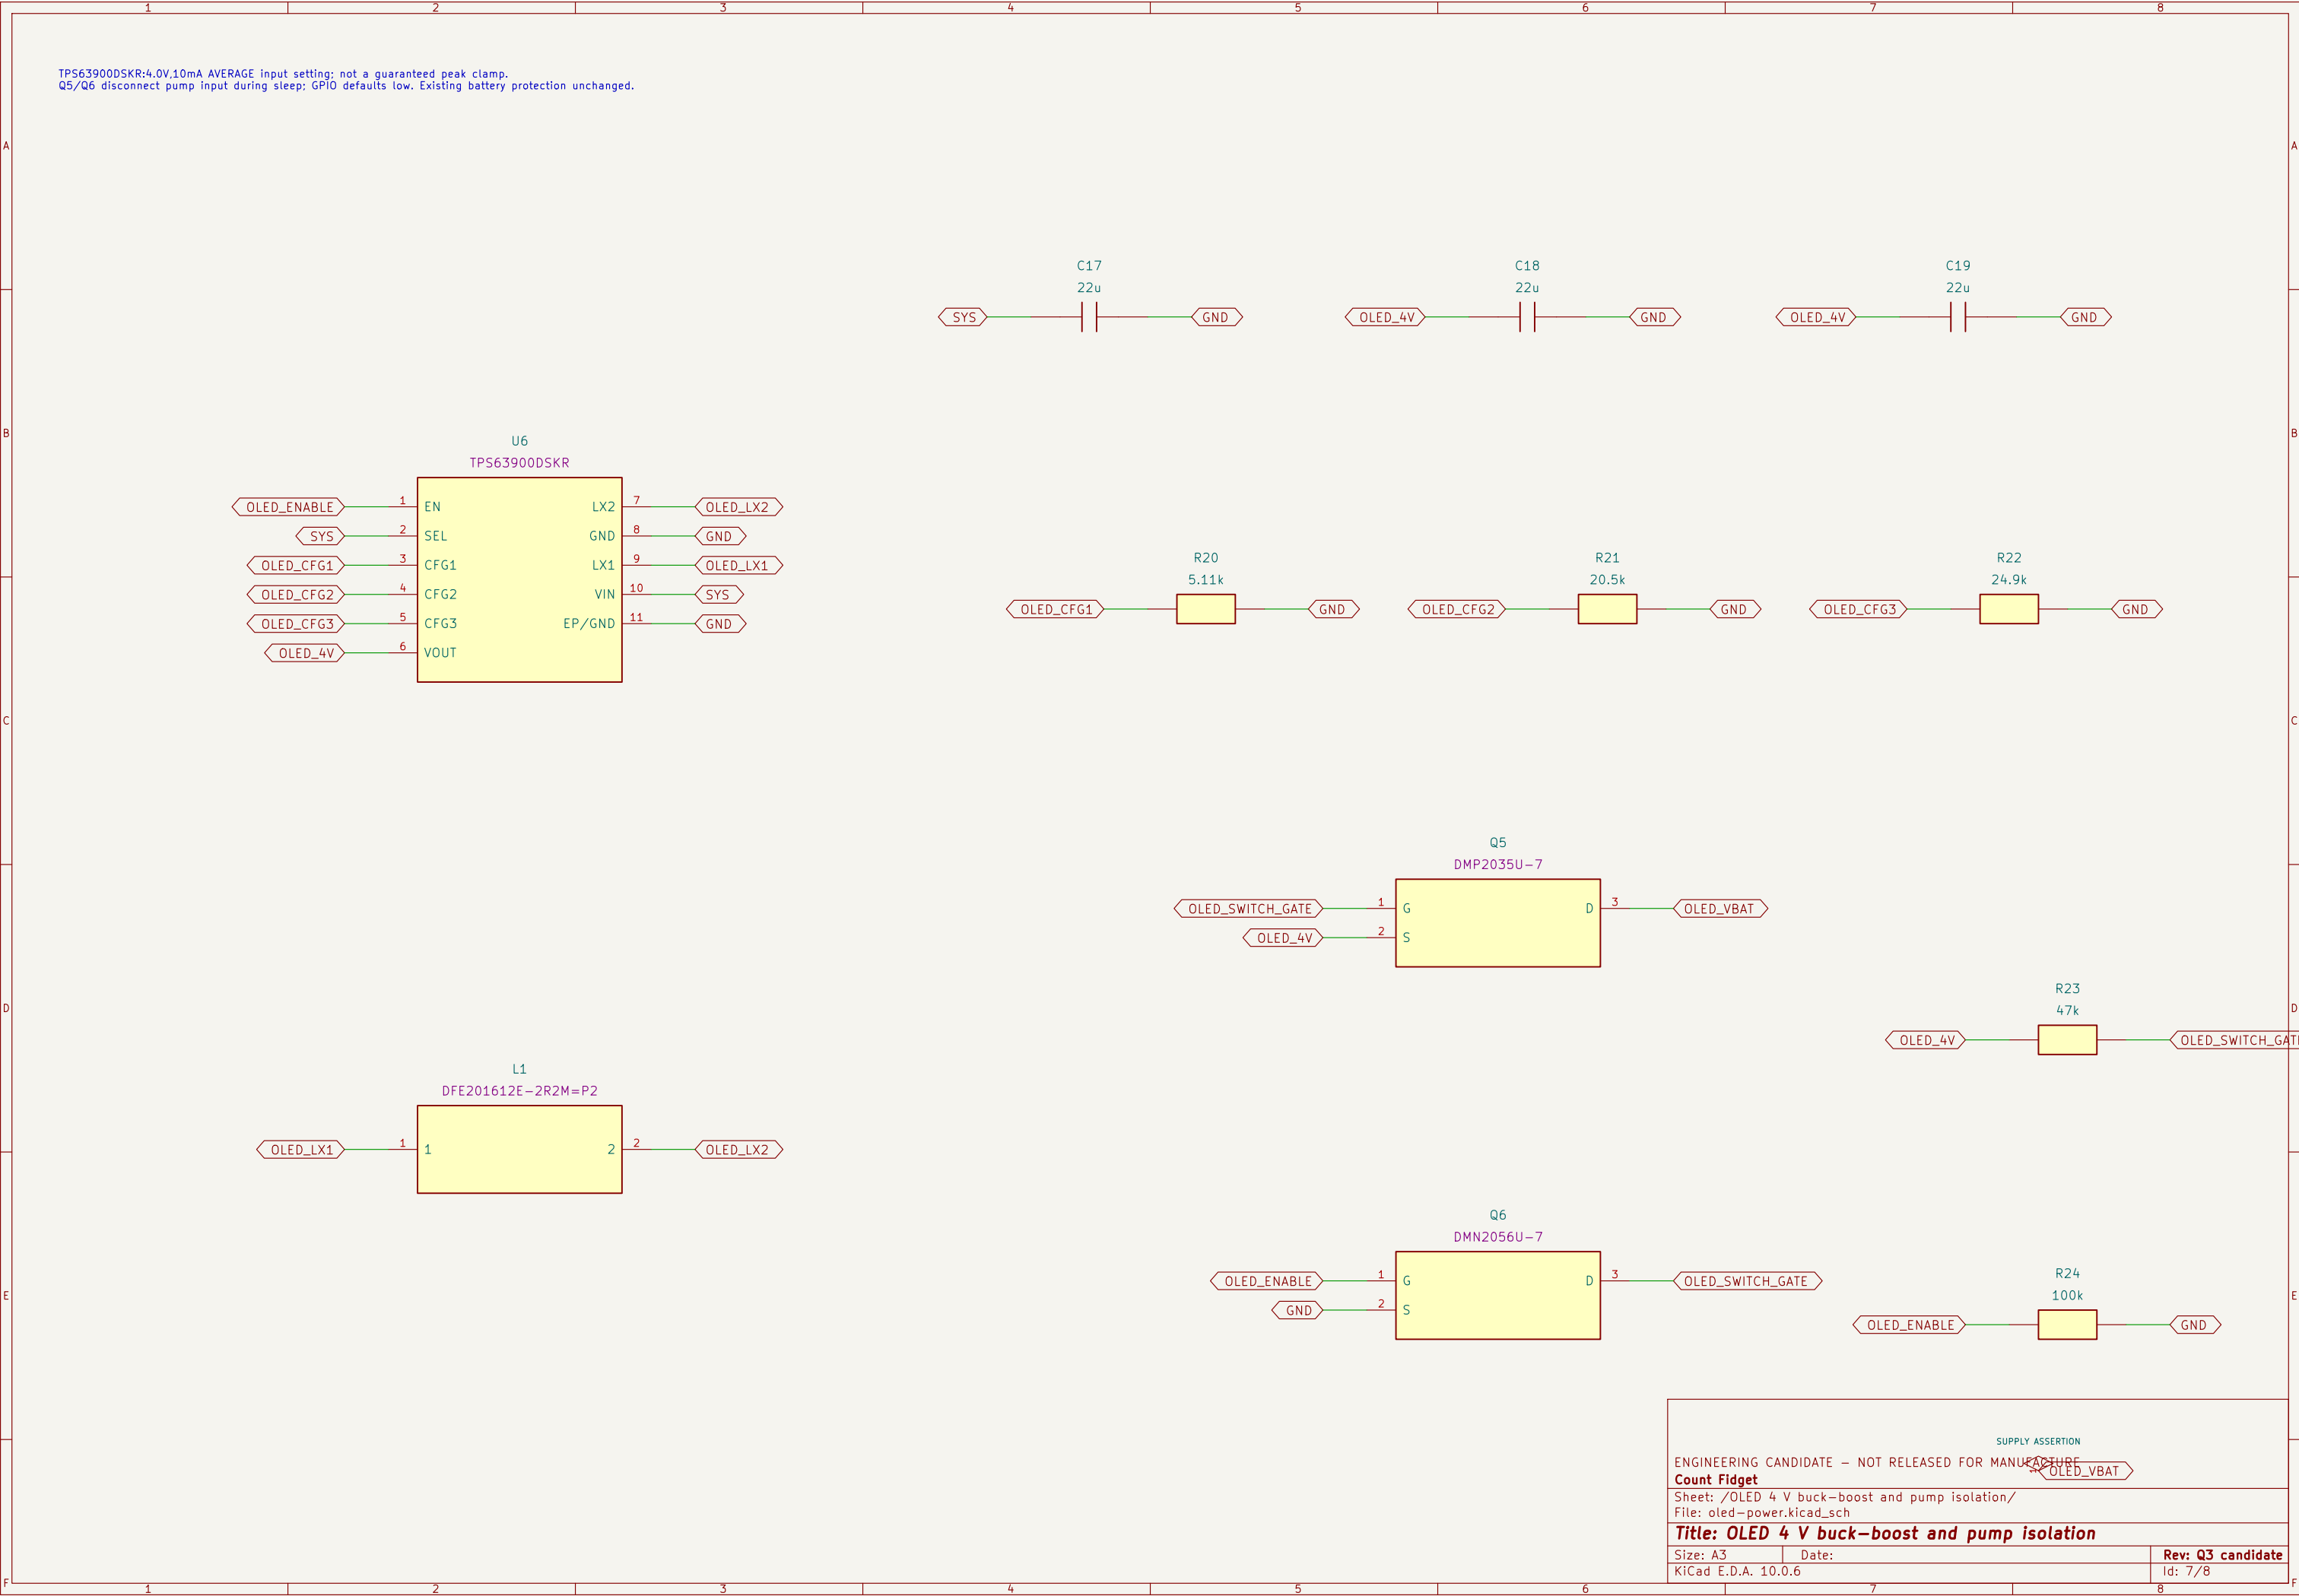

Exact X087-2832TSWIG02-H14:1C2P,2C2N,3C1P,4C1N,5VBAT,6NC,7GND,8VDD.
External750k IREF;9V internal pump. FPC process, sequencing, current and readability require qualification.

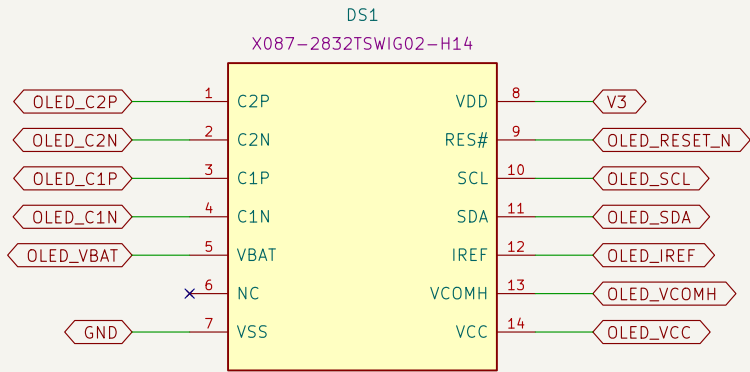

ENGINEERING CANDIDATE – NOT RELEASED FOR MANUFACTURE

Count Fidget

Sheet: /SSD1312 OLED and support parts/

File: oled-panel.kicad_sch

Title: SSD1312 OLED and support parts

Size: A3

Date:

Rev: Q3 candidate

KiCad E.D.A. 10.0.6

Id: 8/8