





	1	2	3	4	5	6	7	8	
A	Q5 schematic index – 82 fitted PCB parts plus non-fitted test lands and mounts. Global net labels connect the functional sheets. Crosses explicitly mark unused physical pins. Q1 submitted files remain frozen. This candidate still requires ERC, layout, first-article and safety qualification.								A
	STM32, keys and USB boot controls		STM32, keys and USB boot controls / 2			STM32, keys and USB boot controls / 3			
	U1 / C31 / C32 / C33 / C34		C10 / C11 / C12 / C35 / C37 / C6			C7 / H1 / H2 / H3 / H4 / Q5			
B	File: mcu-1.kicad_sch STM32, keys and USB boot controls / 4		File: mcu-2.kicad_sch STM32, keys and USB boot controls / 5			File: mcu-3.kicad_sch STM32, keys and USB boot controls / 6			B
	R16 / R17 / R18 / R36 / R37 / SW1		SW2 / SW3 / TP1 / TP11 / TP12 / TP2			TP3 / TP4 / TP5 / TP6 / TP9			
	File: mcu-4.kicad_sch SPI OLED module and power control / 1		File: mcu-5.kicad_sch SPI OLED module and power control / 2			File: mcu-6.kicad_sch Independent SPI retained-count memory / 1			
C	C20 / C28 / D51 / R24 / R25 / R29		U6			C30 / C36 / R32 / R33 / U8			C
	File: display-1.kicad_sch USB, charging, soft power latch and common supply / 1		File: display-2.kicad_sch USB, charging, soft power latch and common supply / 2			File: memory-1.kicad_sch USB, charging, soft power latch and common supply / 3			
	C1 / C13 / C2 / C29 / C3 / C38		C39 / C40 / C5 / D1 / D2 / D3			D4 / J1 / R1 / R19 / R2 / R3			
D	File: usb-power-1.kicad_sch USB, charging, soft power latch and common supply / 4		File: usb-power-2.kicad_sch USB, charging, soft power latch and common supply / 5			File: usb-power-3.kicad_sch On-board LIR2032 holder and protection / 1			D
	R30 / R31 / R34 / R35 / R38 / R4		R5 / R6 / TP13 / U2 / U3 / U7			BT1 / C4 / Q1 / Q2 / R7 / R8			
	File: usb-power-4.kicad_sch On-board LIR2032 holder and protection / 2		File: usb-power-5.kicad_sch Independent charge-temperature window / 1			File: battery-1.kicad_sch Independent charge-temperature window / 2			
E	R9 / U4		C9 / Q3 / Q4 / R10 / R11 / R12			R13 / R14 / R15 / R39 / TH1 / U5			E
	File: battery-2.kicad_sch		File: thermal-1.kicad_sch			File: thermal-2.kicad_sch			
F	1	2	3	4	5	6	ENGINEERING CANDIDATE – NOT RELEASED FOR MANUFACTURE Count Fidget Sheet: / File: click-counter-Q5.kicad_sch Title: Count Fidget – Q5 engineering candidate Size: A3Date:KiCad E.D.A. 10.0.6 Rev: Q5 candidateId: 1/19	8	F


STM32L072CBT6. USB ROM DFU uses BOOT0 held high during NRST reset. PB2 holds the soft power latch; PA4 reads SYS_LOAD/2; PA5/PA6 read charger status. COUNT closes SYS to PWR_KEY; Q5 mirrors it onto COUNT_N.

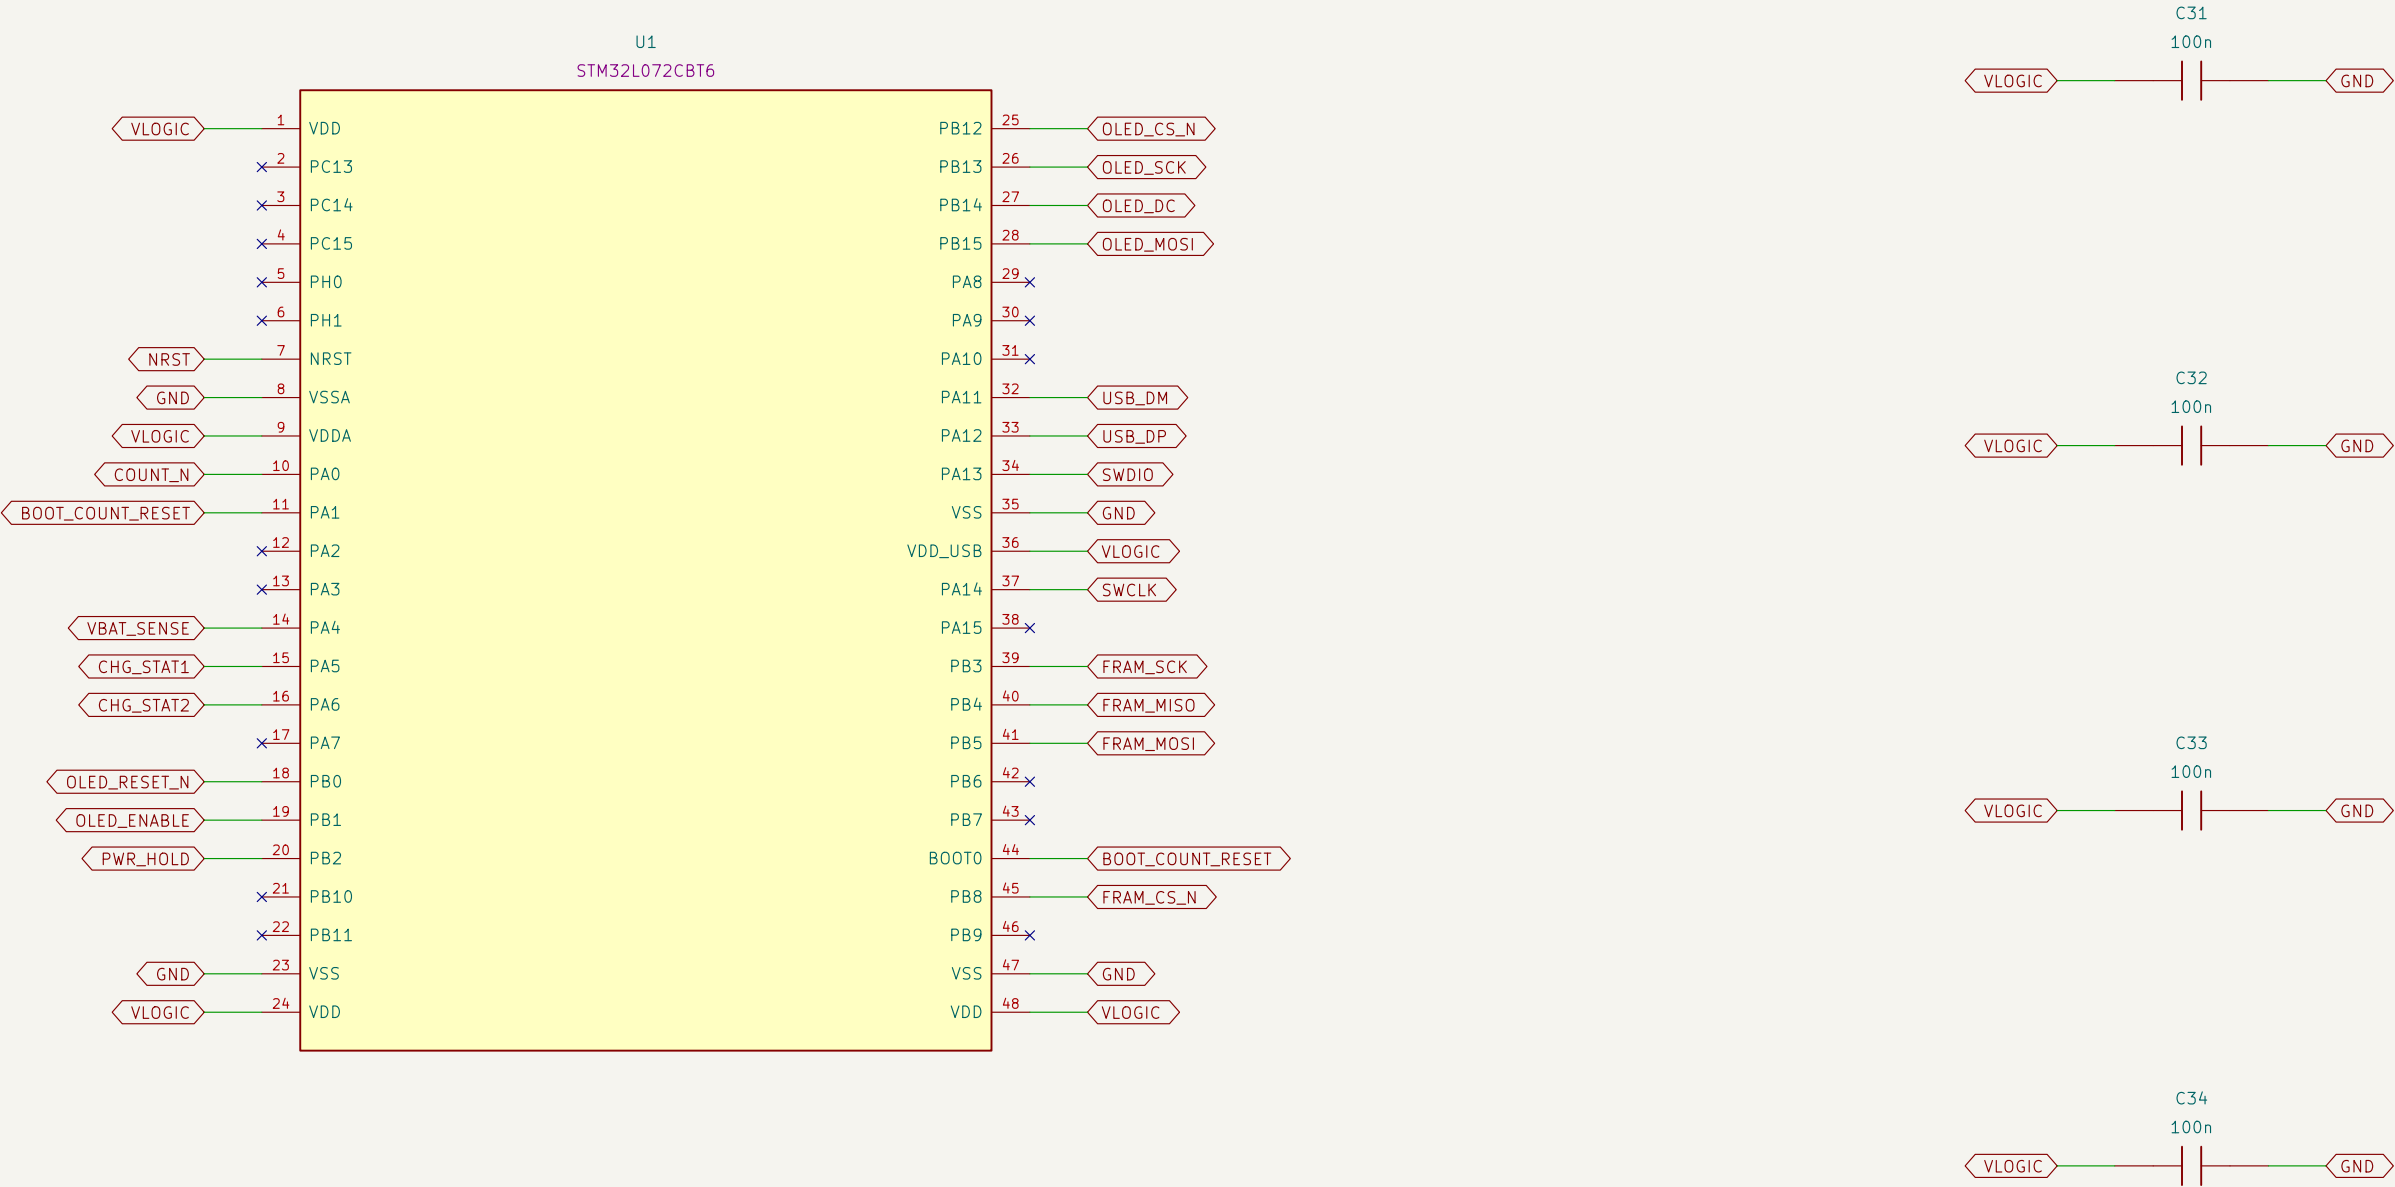


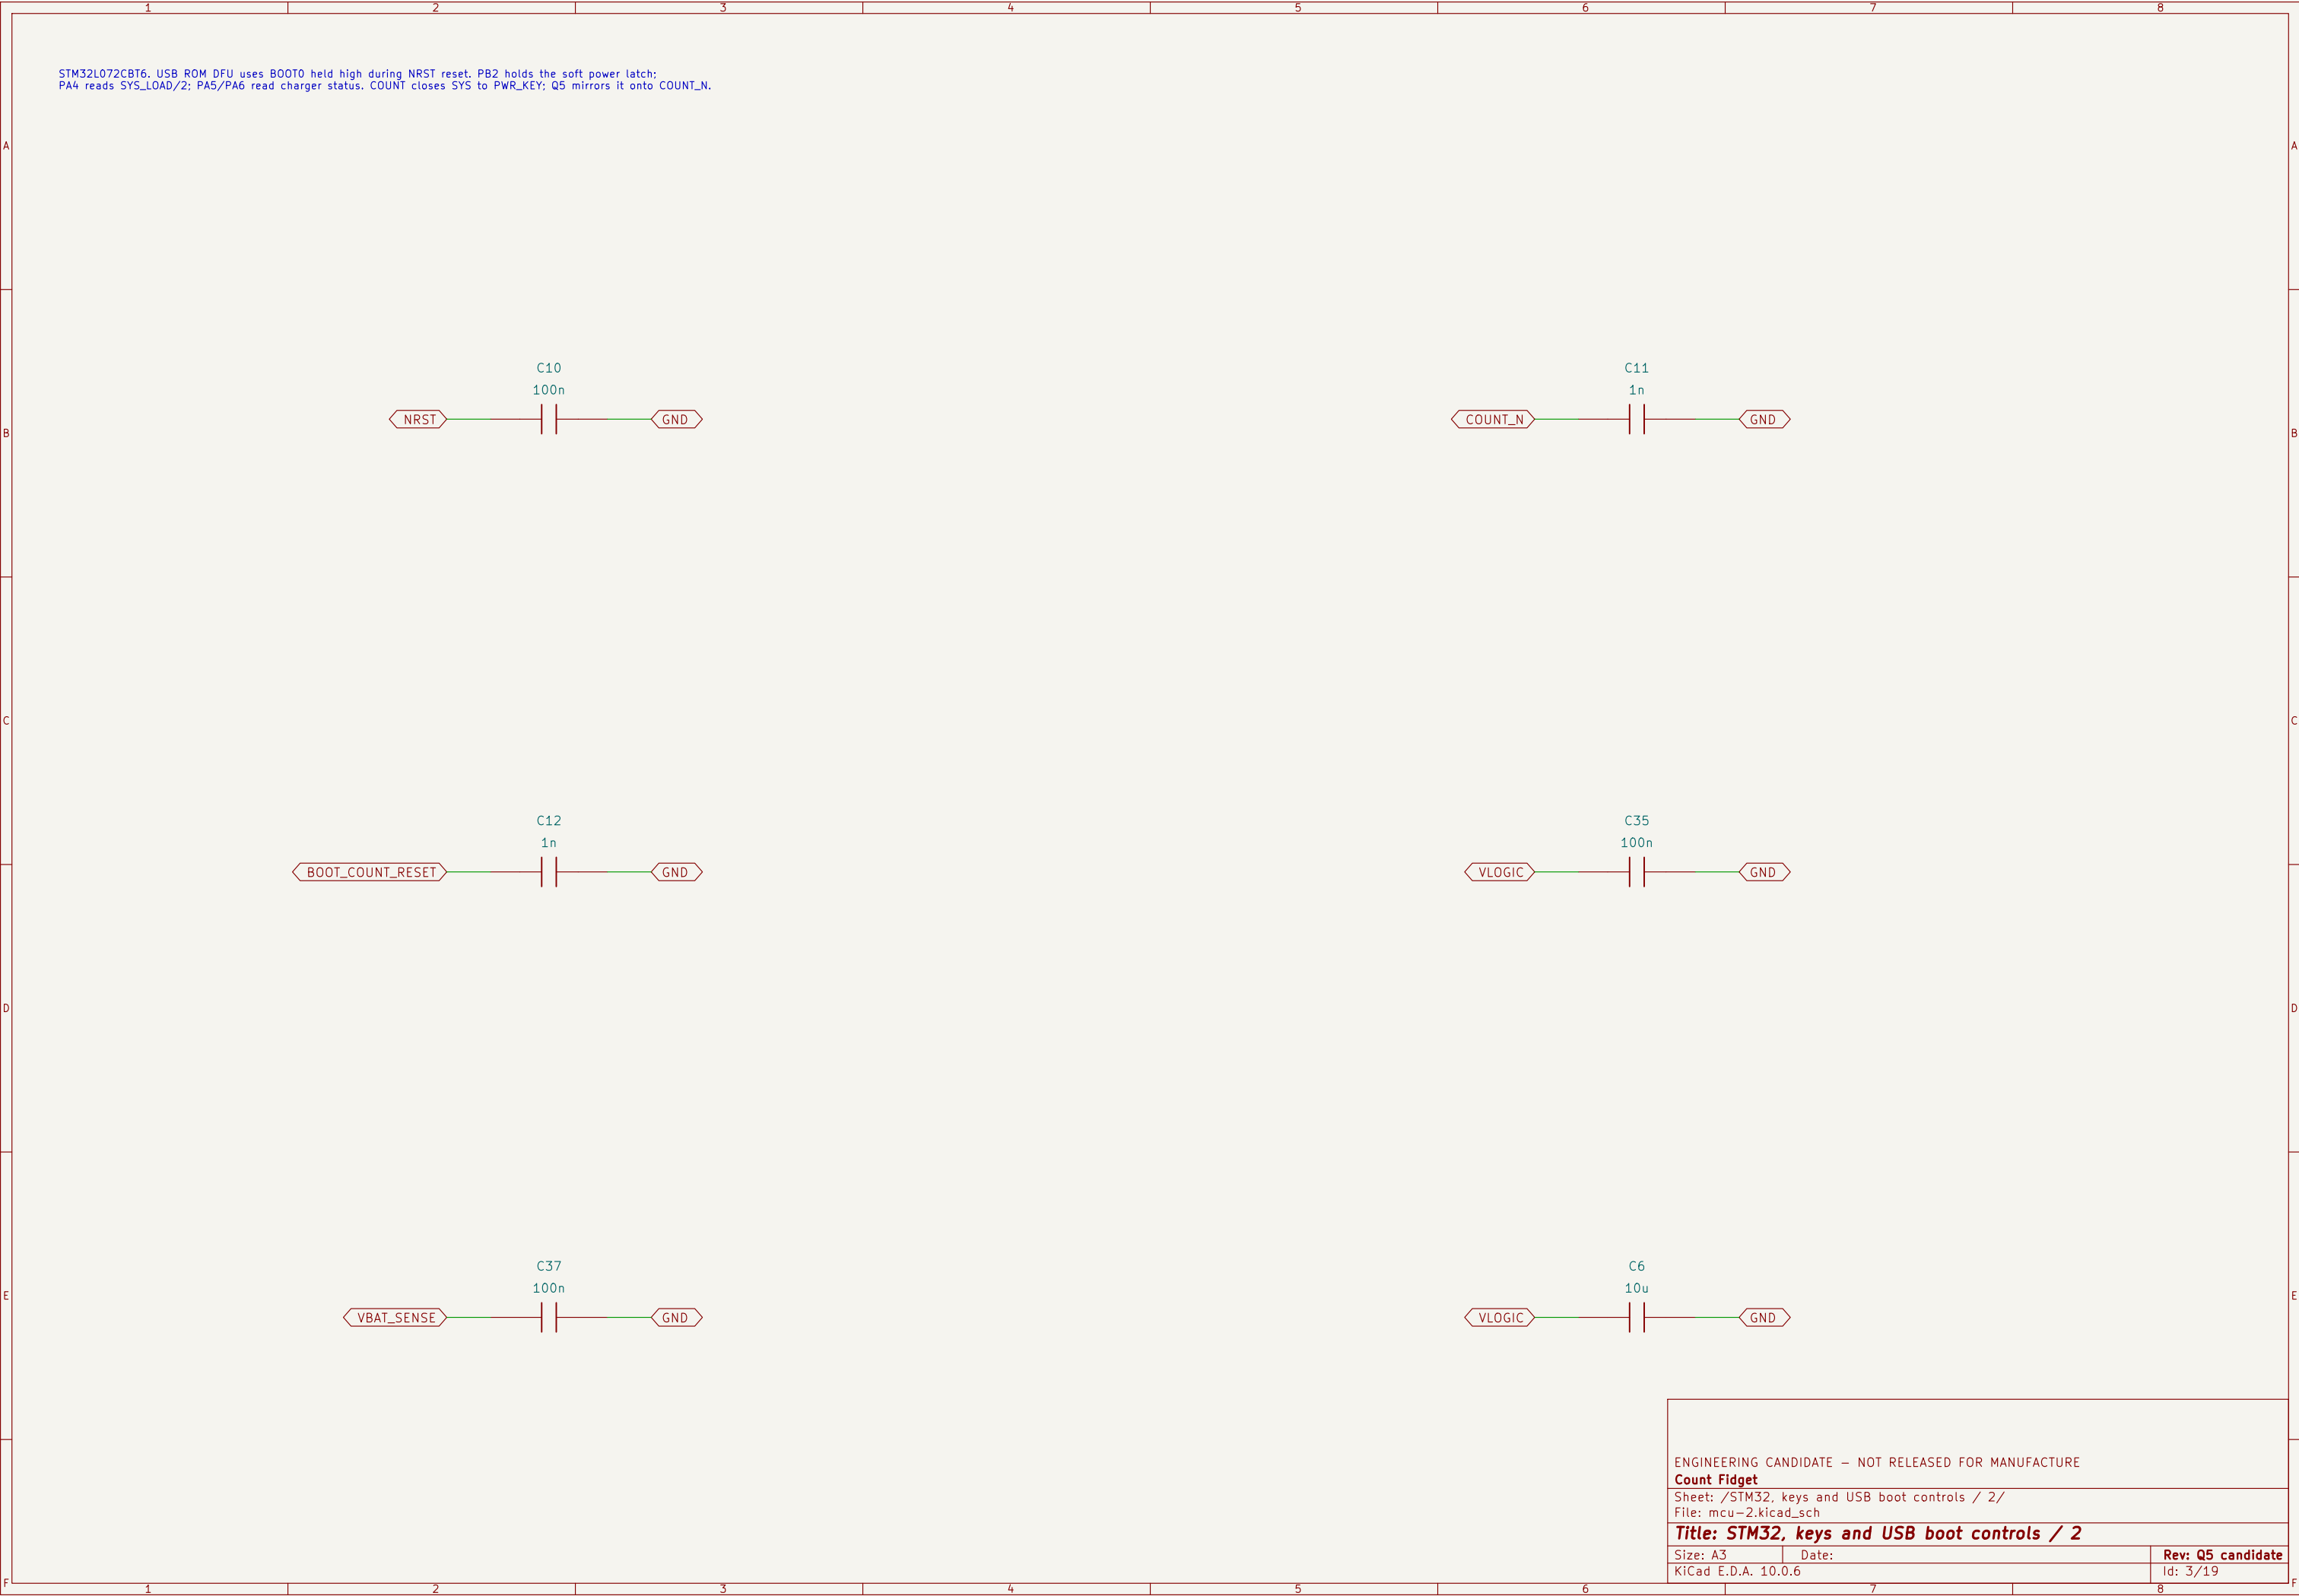


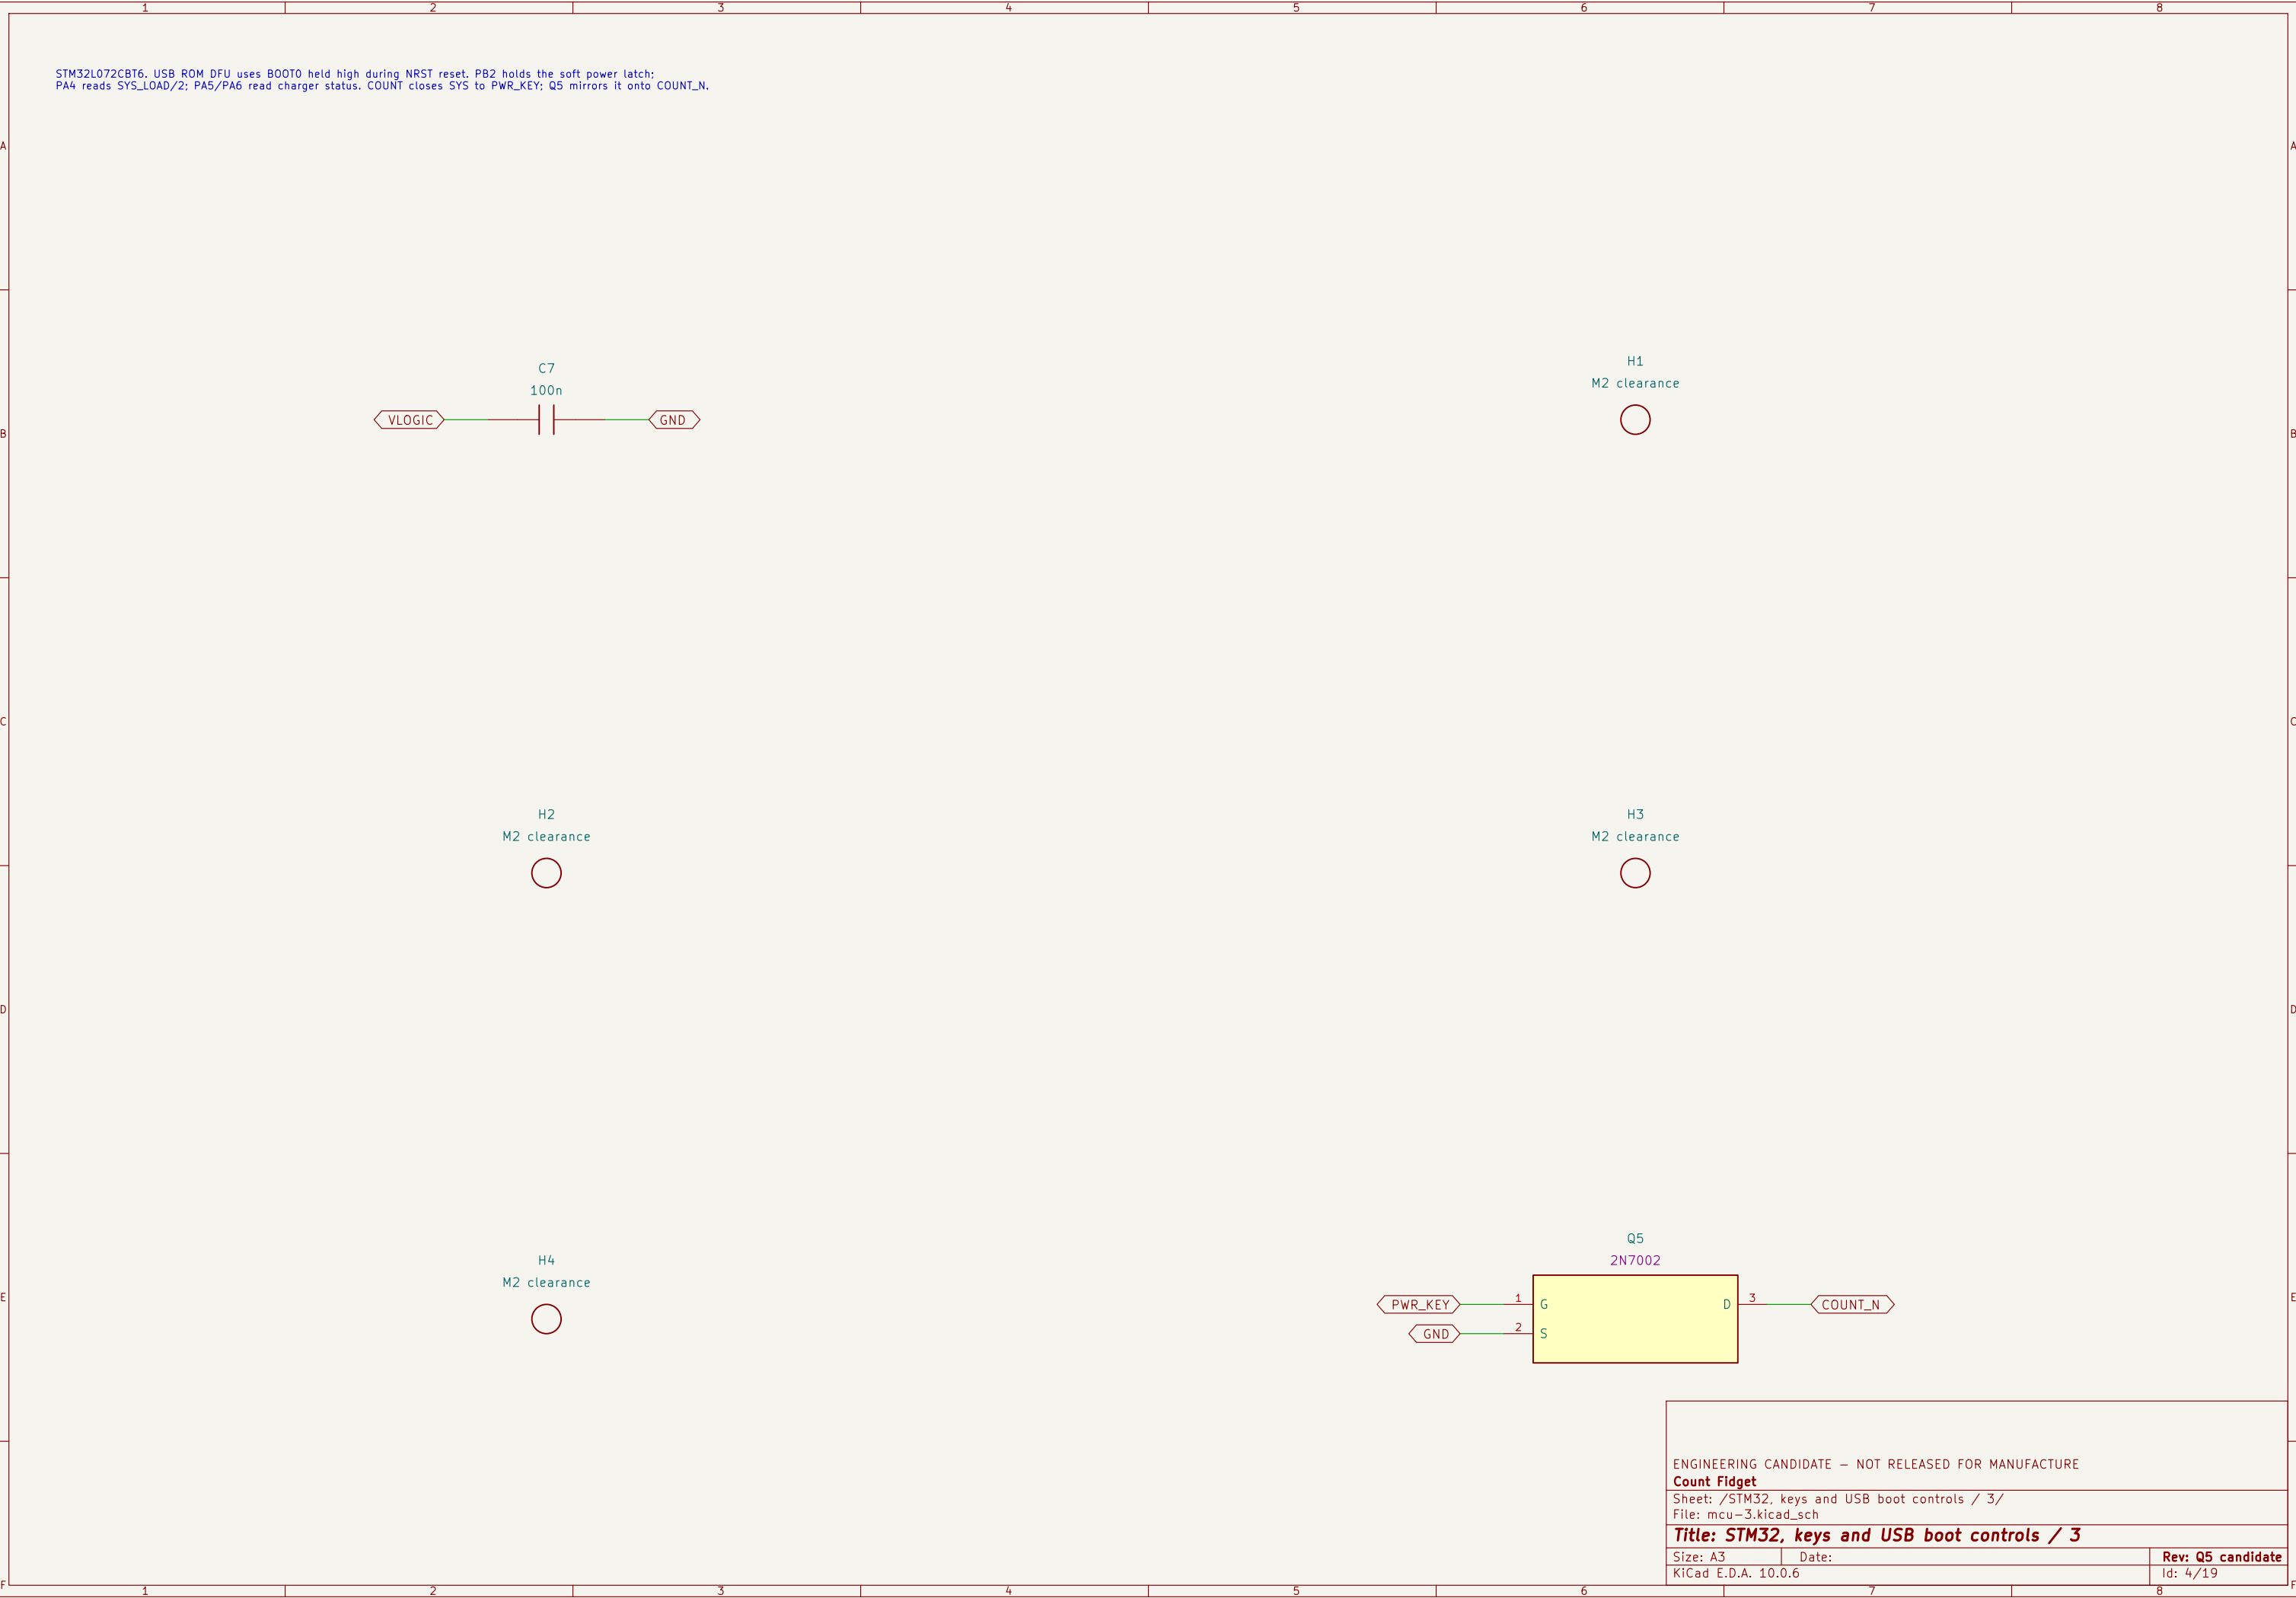

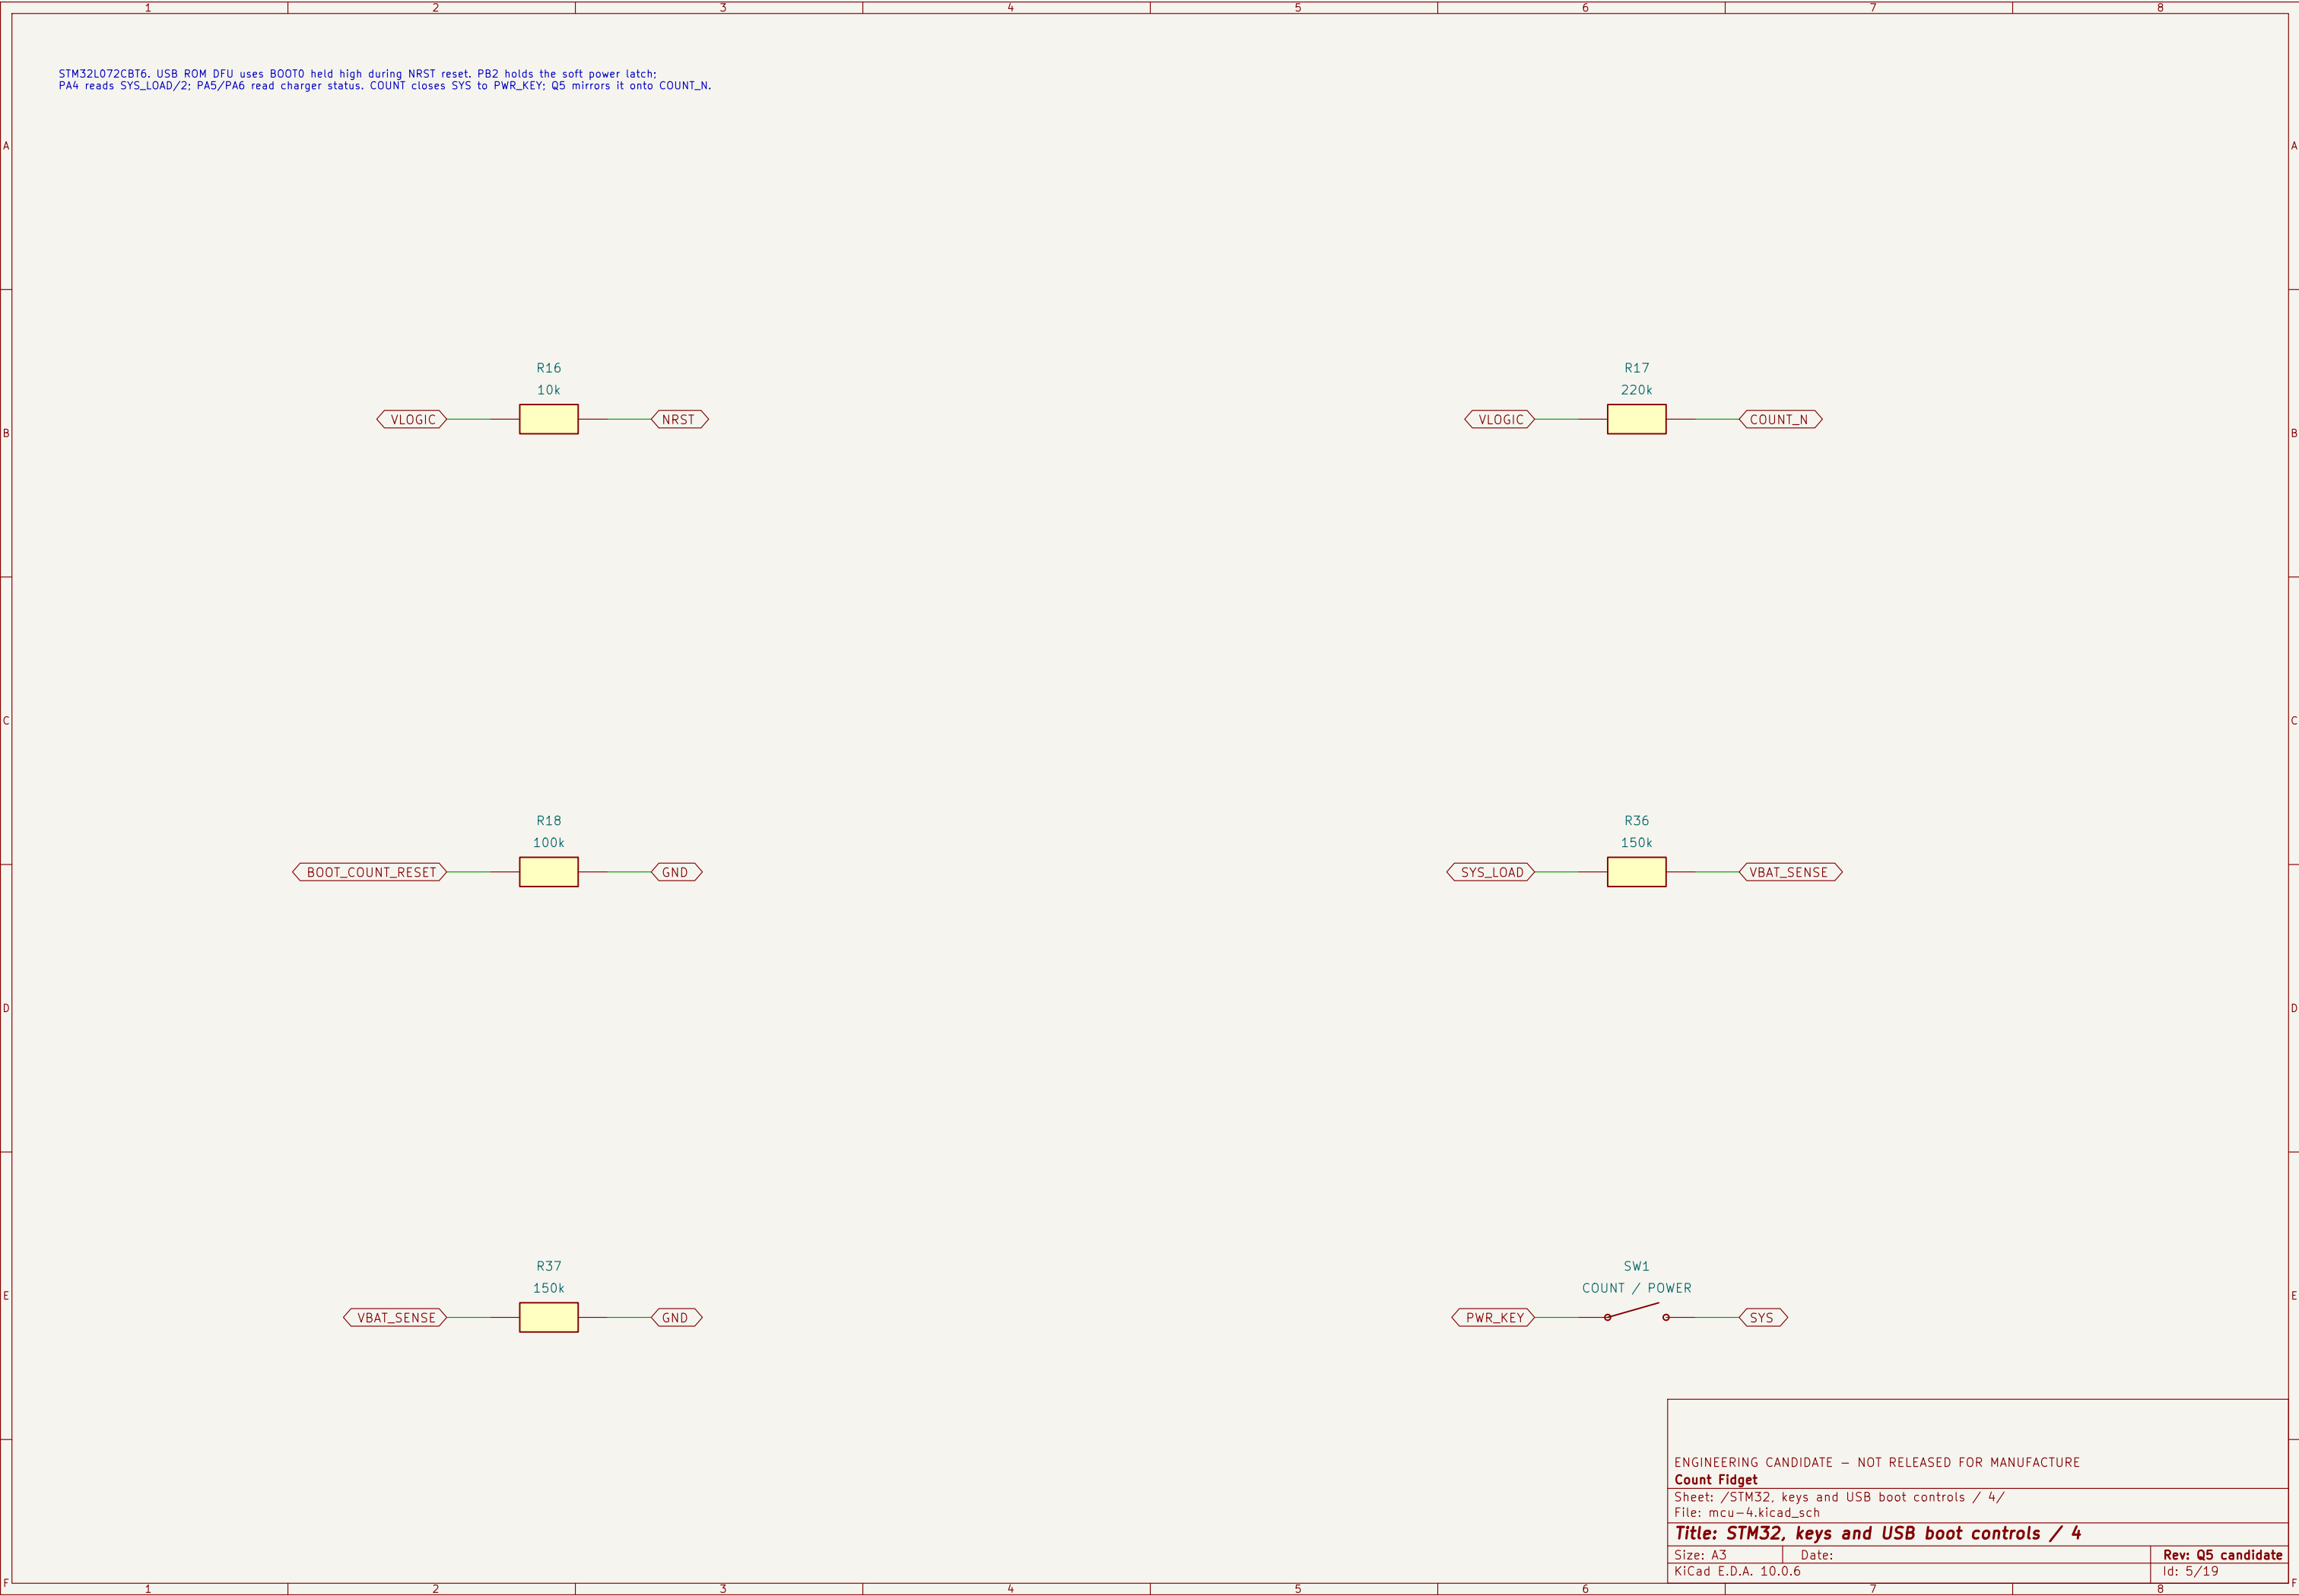

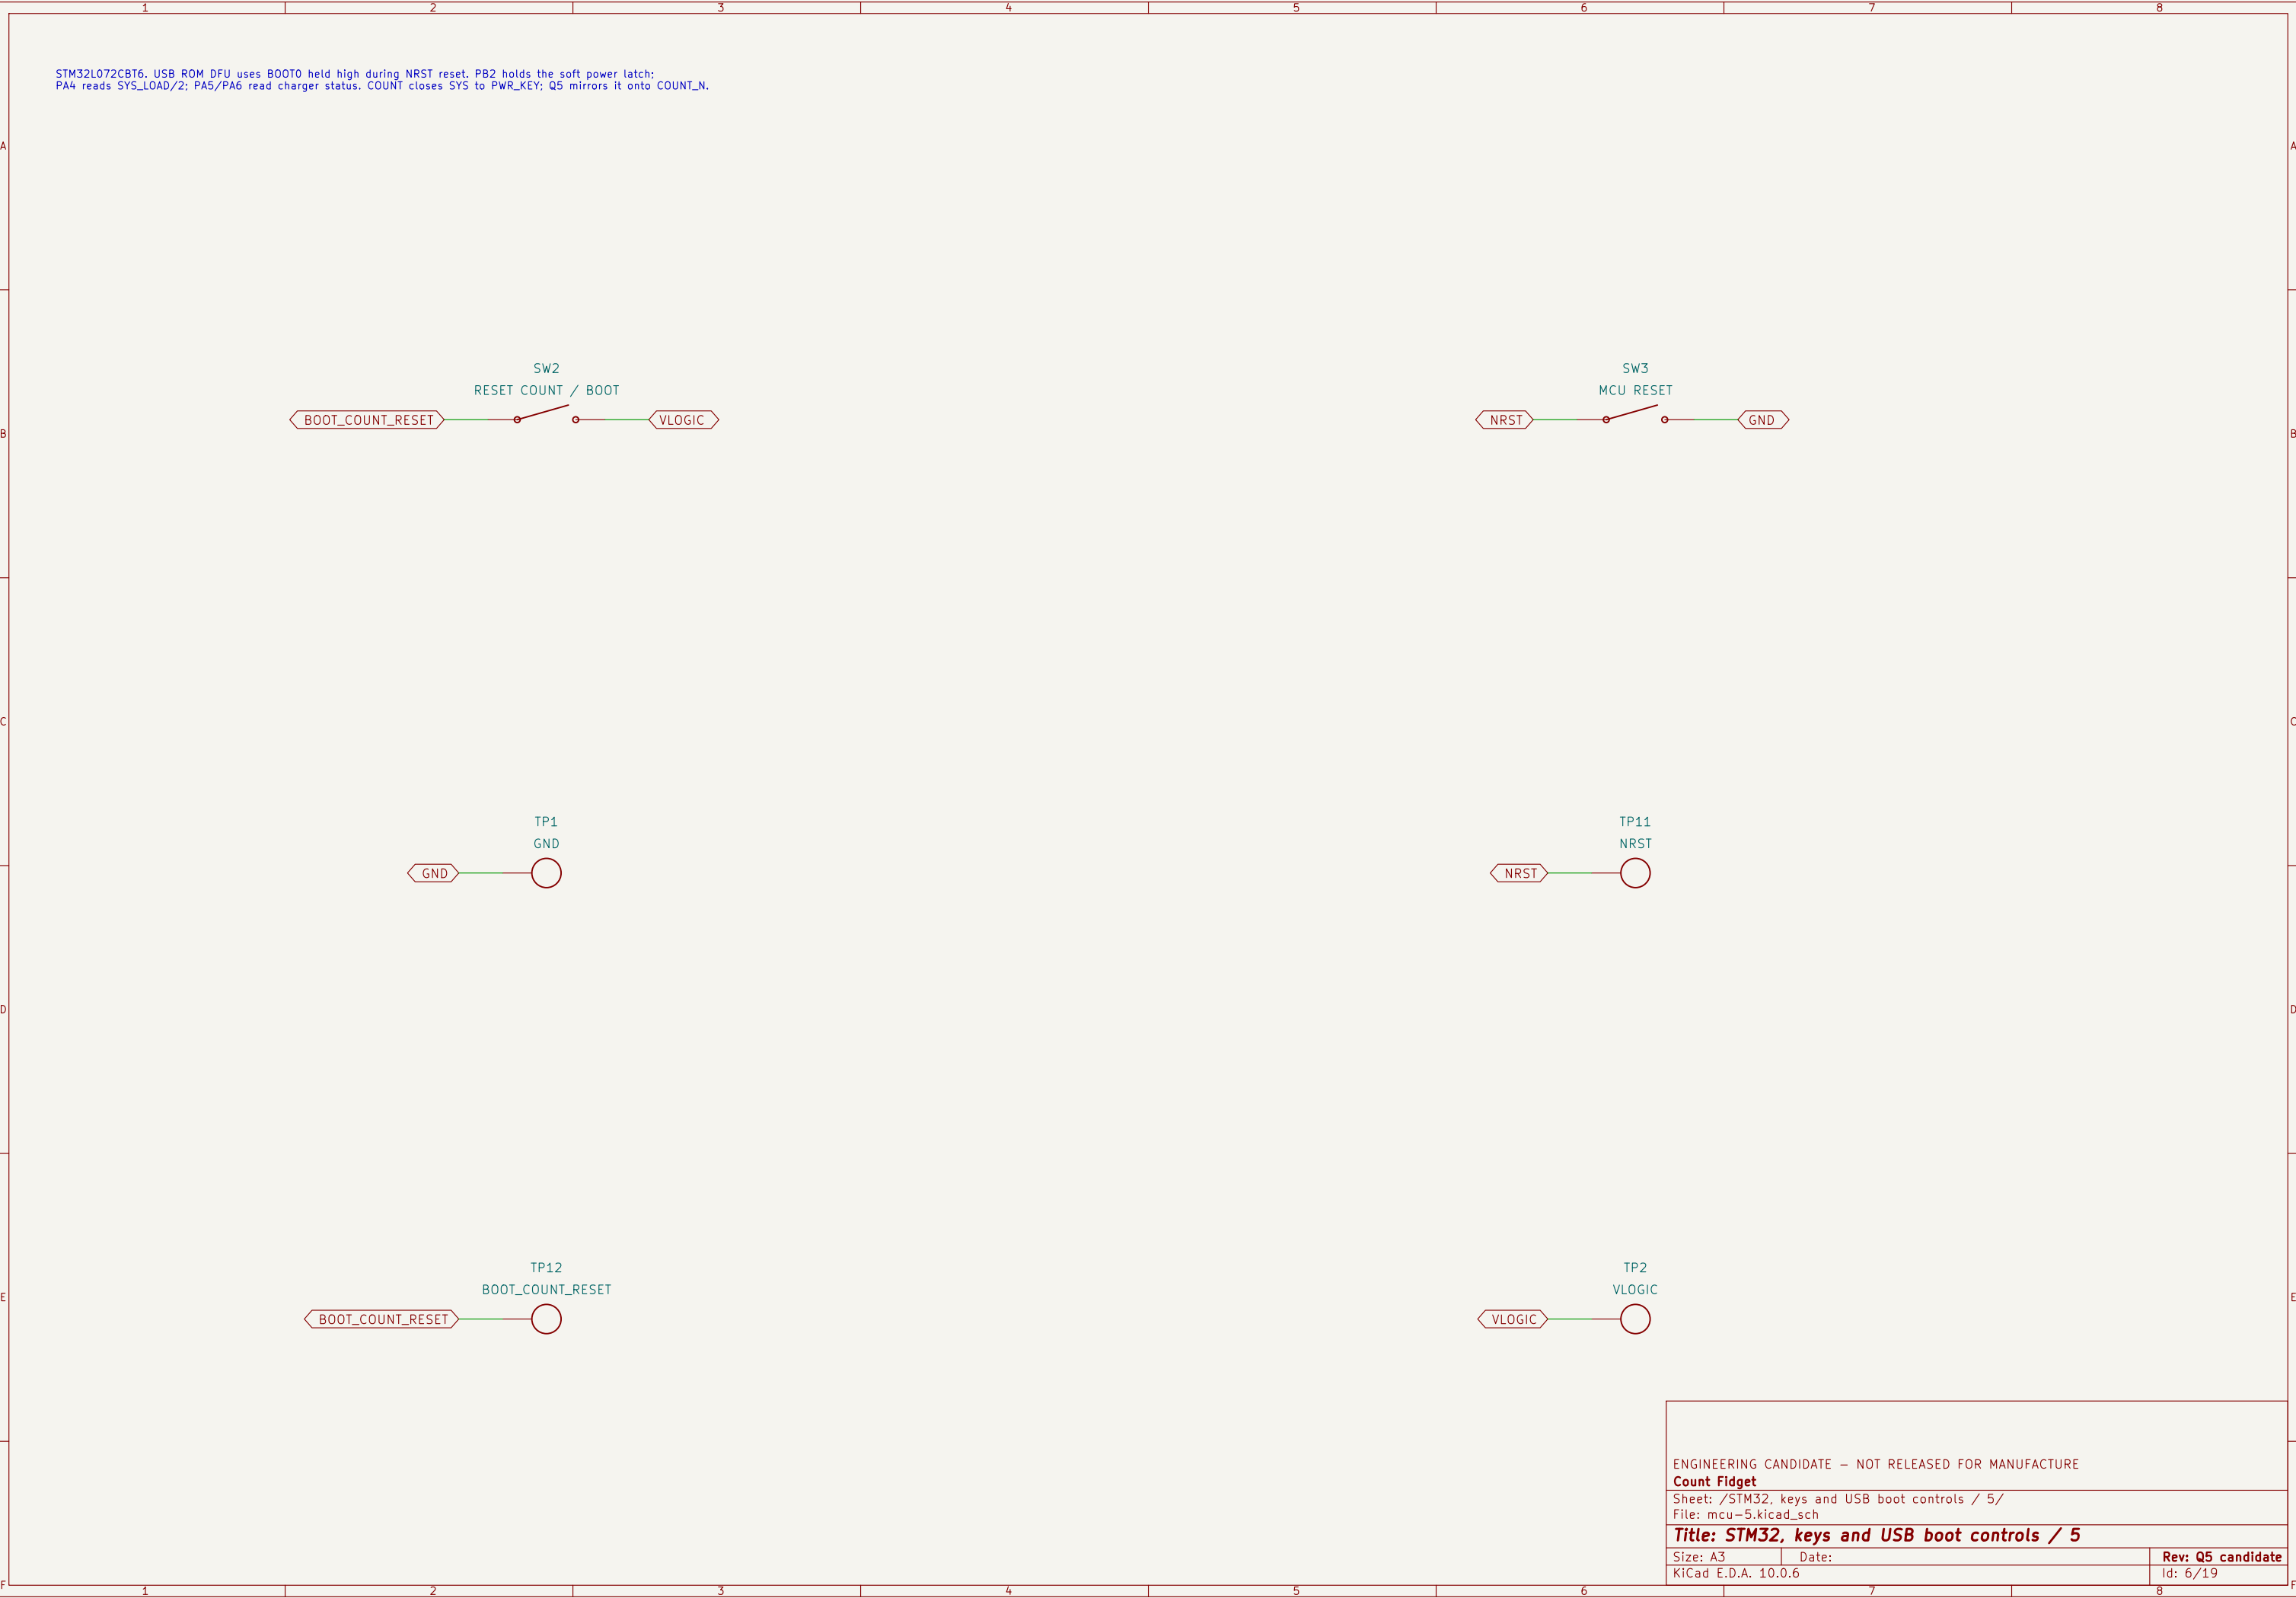

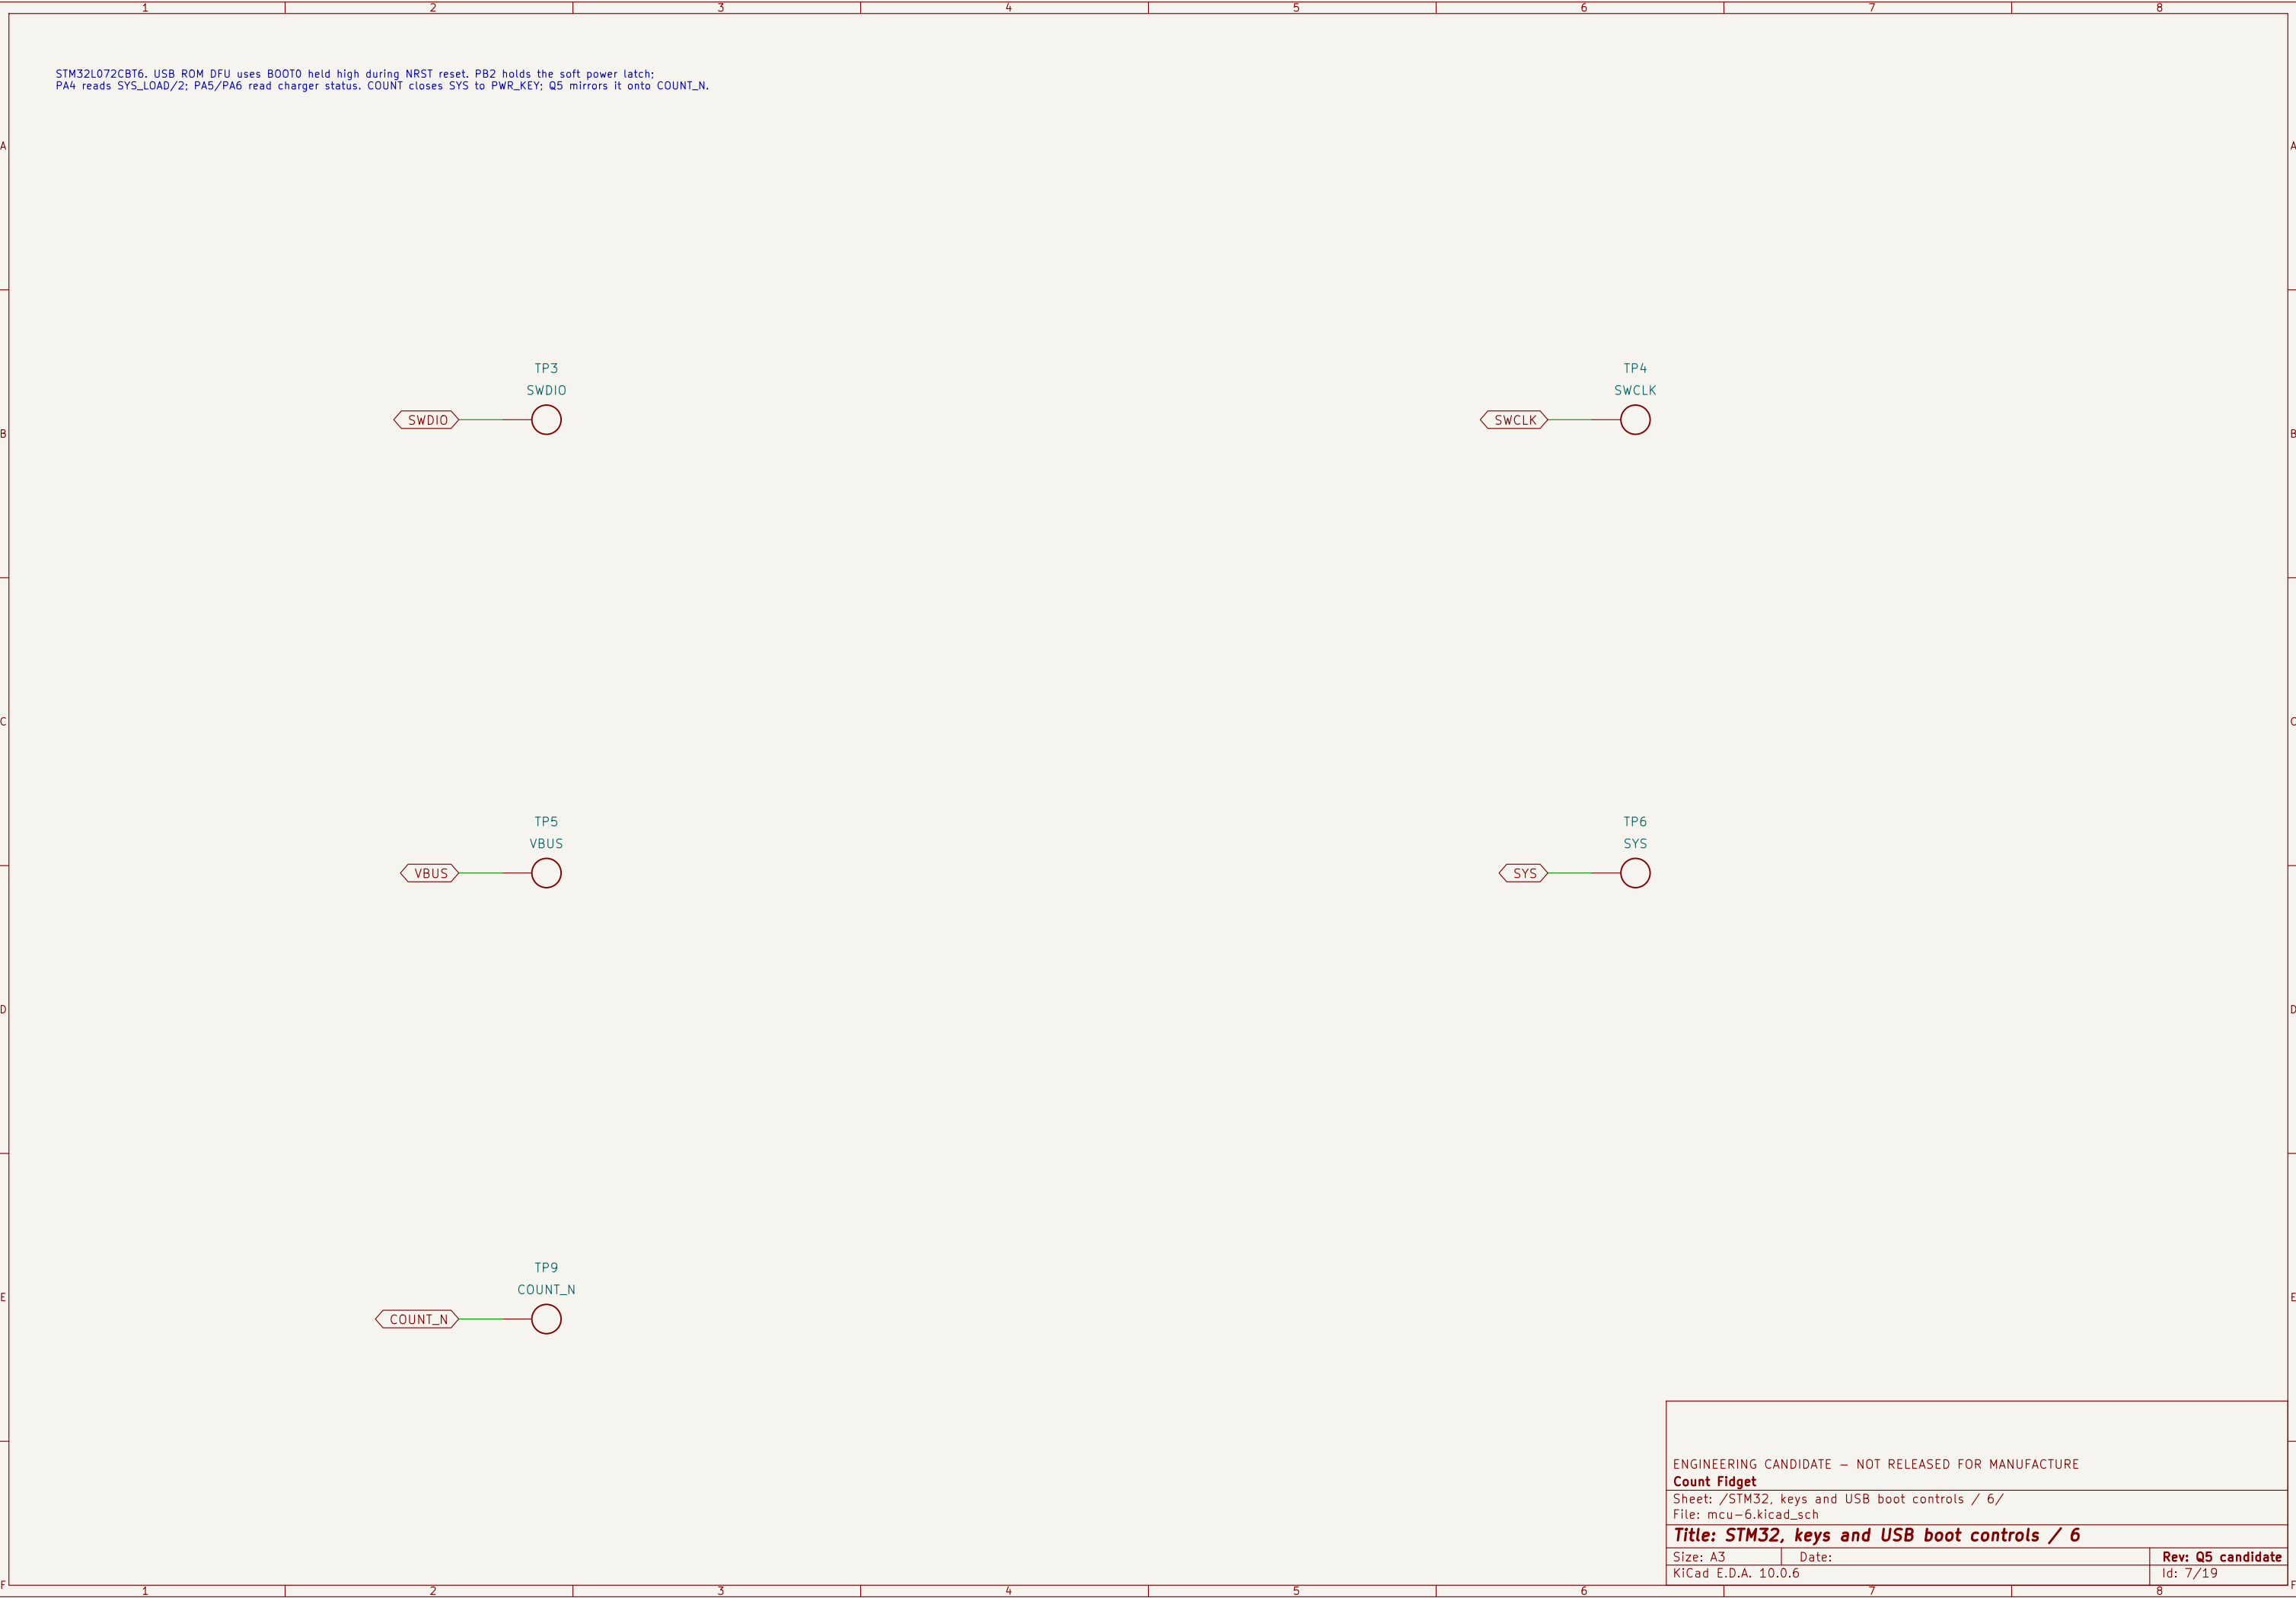

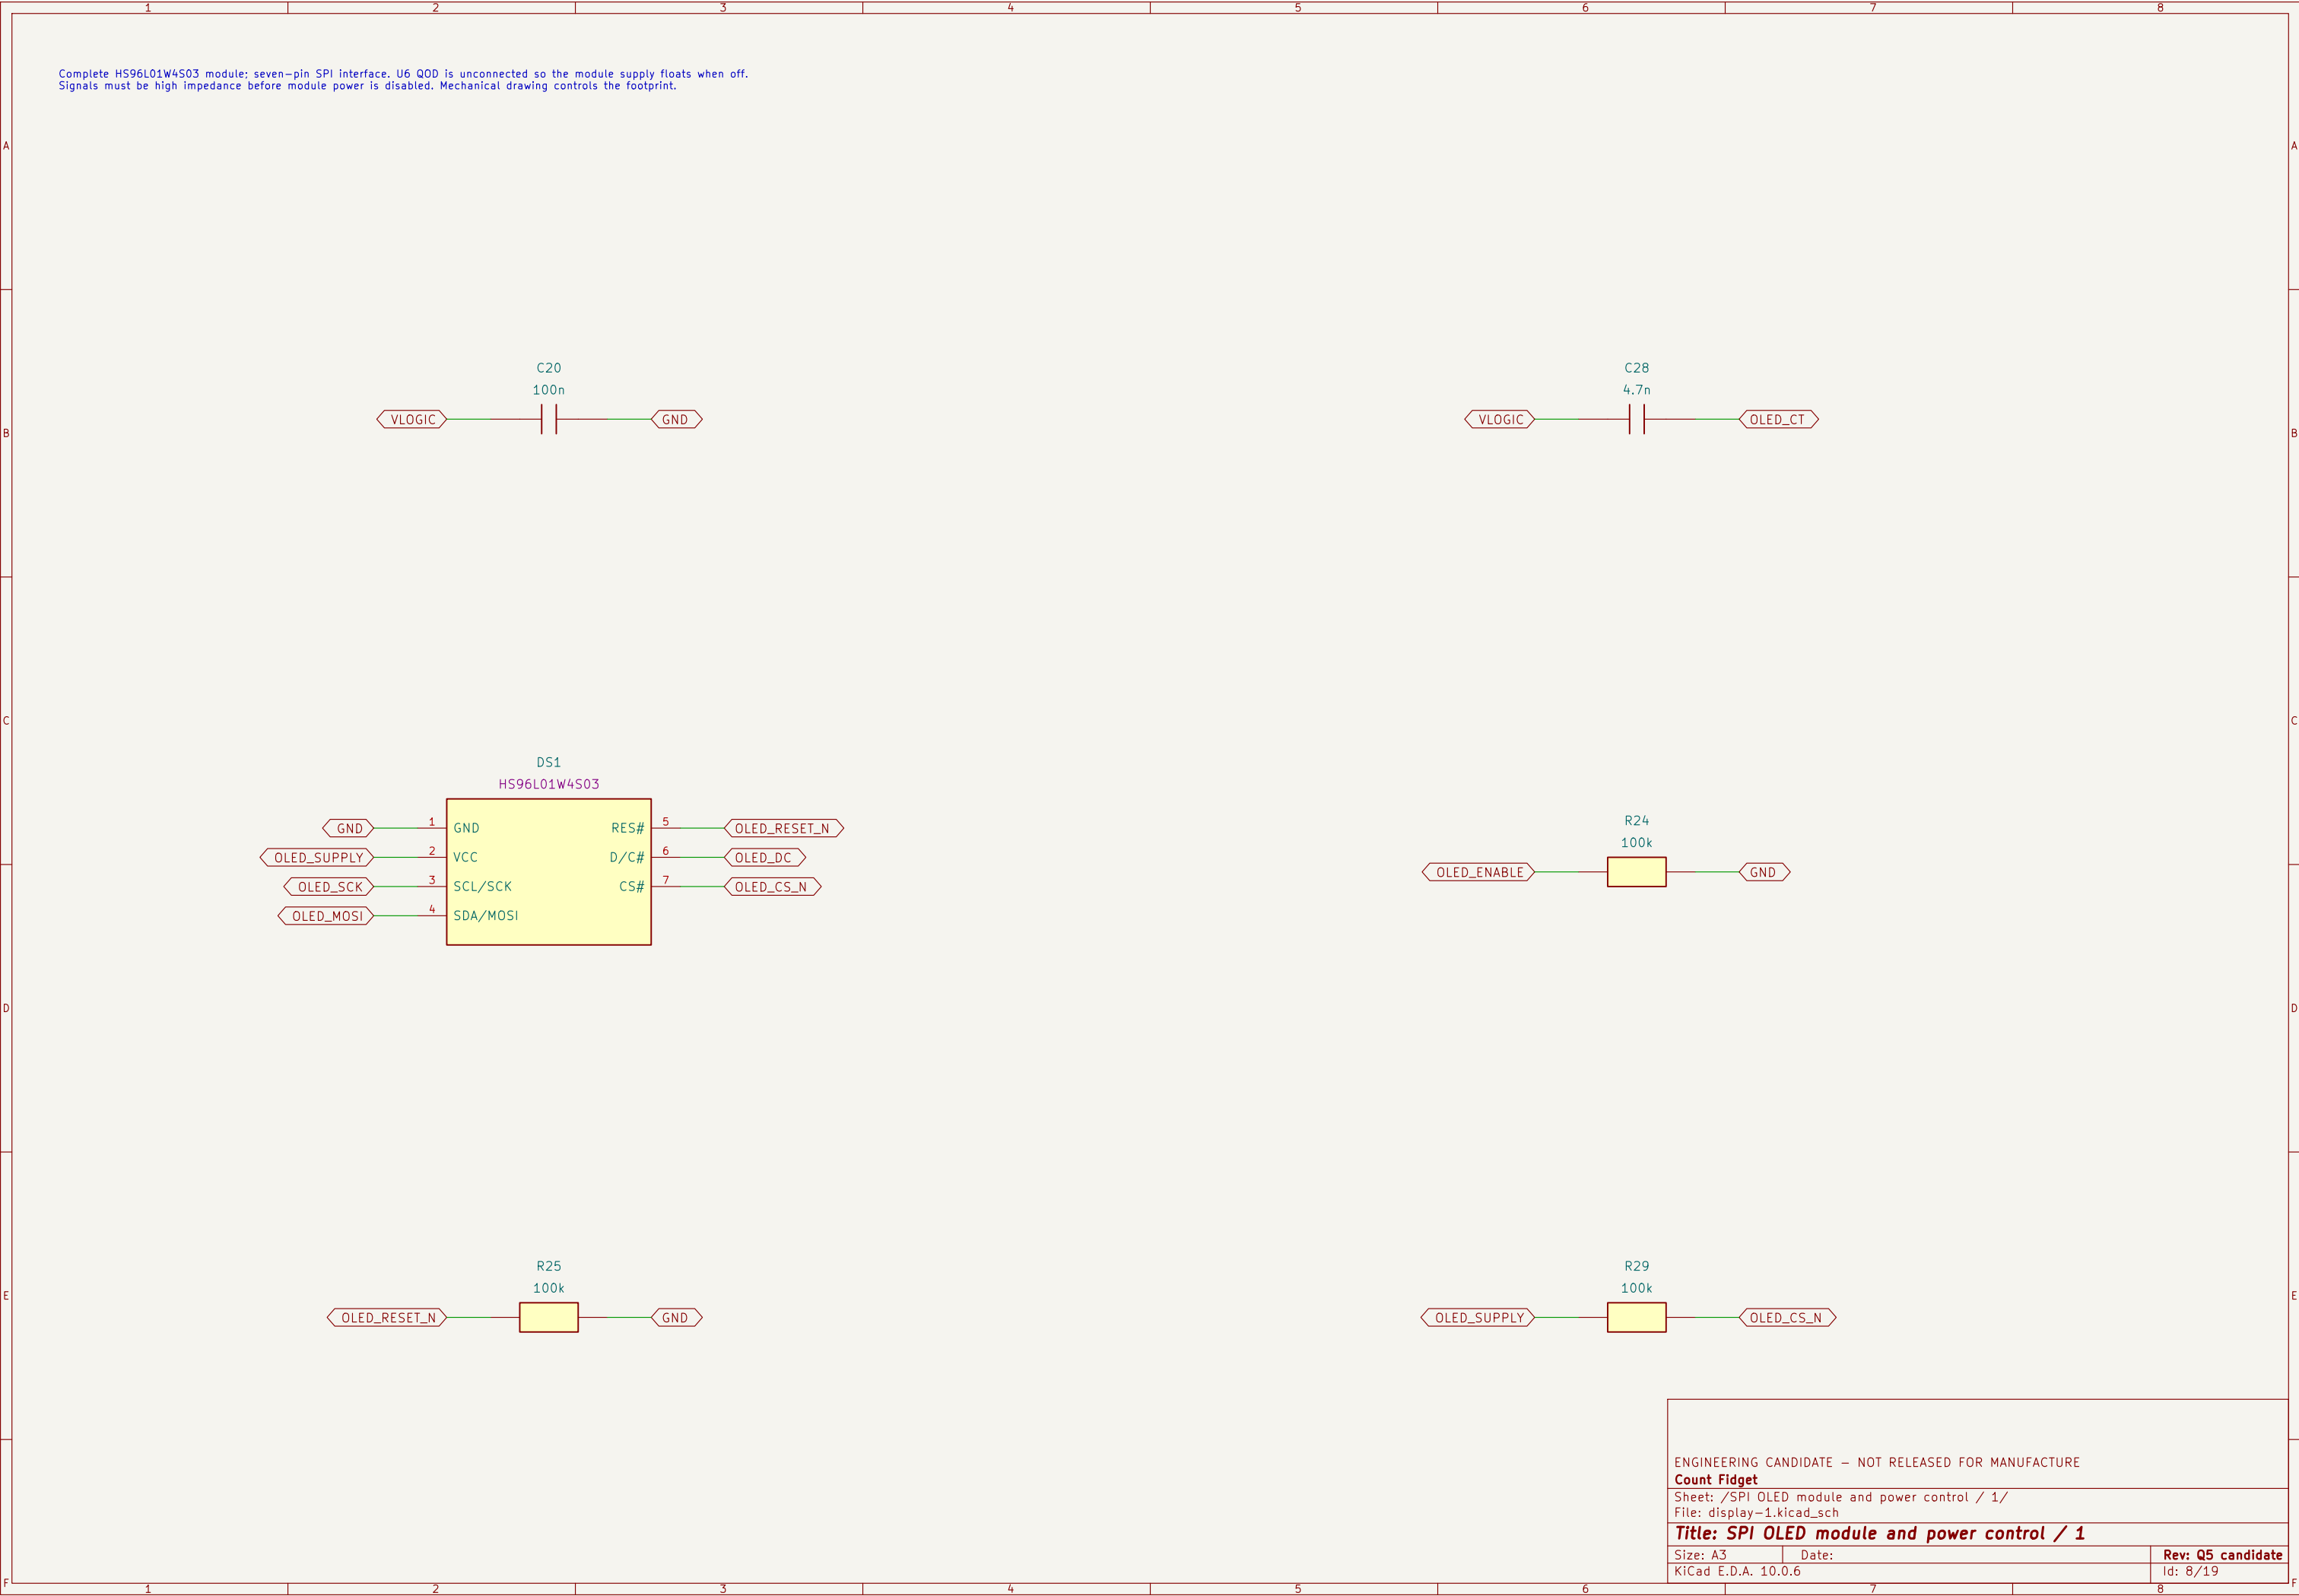

Complete HS96L01W4S03 module; seven-pin SPI interface. U6 QOD is unconnected so the module supply floats when off. Signals must be high impedance before module power is disabled. Mechanical drawing controls the footprint.

The schematic diagram shows a central component U6, labeled TPS22917DBVR, represented by a yellow rectangle. It has six pins: VIN, GND, ON, CT, QOD, and VOUT. The connections are as follows:

- VIN (pin 1) is connected to VLOGIC (pin 1).
- GND (pin 2) is connected to GND (pin 2).
- ON (pin 3) is connected to OLED_ENABLE (pin 3).
- CT (pin 4) is connected to OLED_CT (pin 4).
- QOD (pin 5) is unconnected, indicated by a blue 'X'.
- VOUT (pin 6) is connected to OLED_SUPPLY (pin 6).

ENGINEERING CANDIDATE – NOT RELEASED FOR MANUFACTURE		
Count Fidget		
Sheet: /SPI OLED module and power control / 2/ File: display-2.kicad_sch		
Title: SPI OLED module and power control / 2		
Size: A3	Date:	Rev: Q5 candidate
KiCad E.D.A. 10.0.6		Id: 9/19


Count Fidget


File: display-2.kicad_sch


Size: A3	Date:	Rev: Q5 candidate
----------	-------	-------------------

Rev: Q5 candidate







Id: 9/19

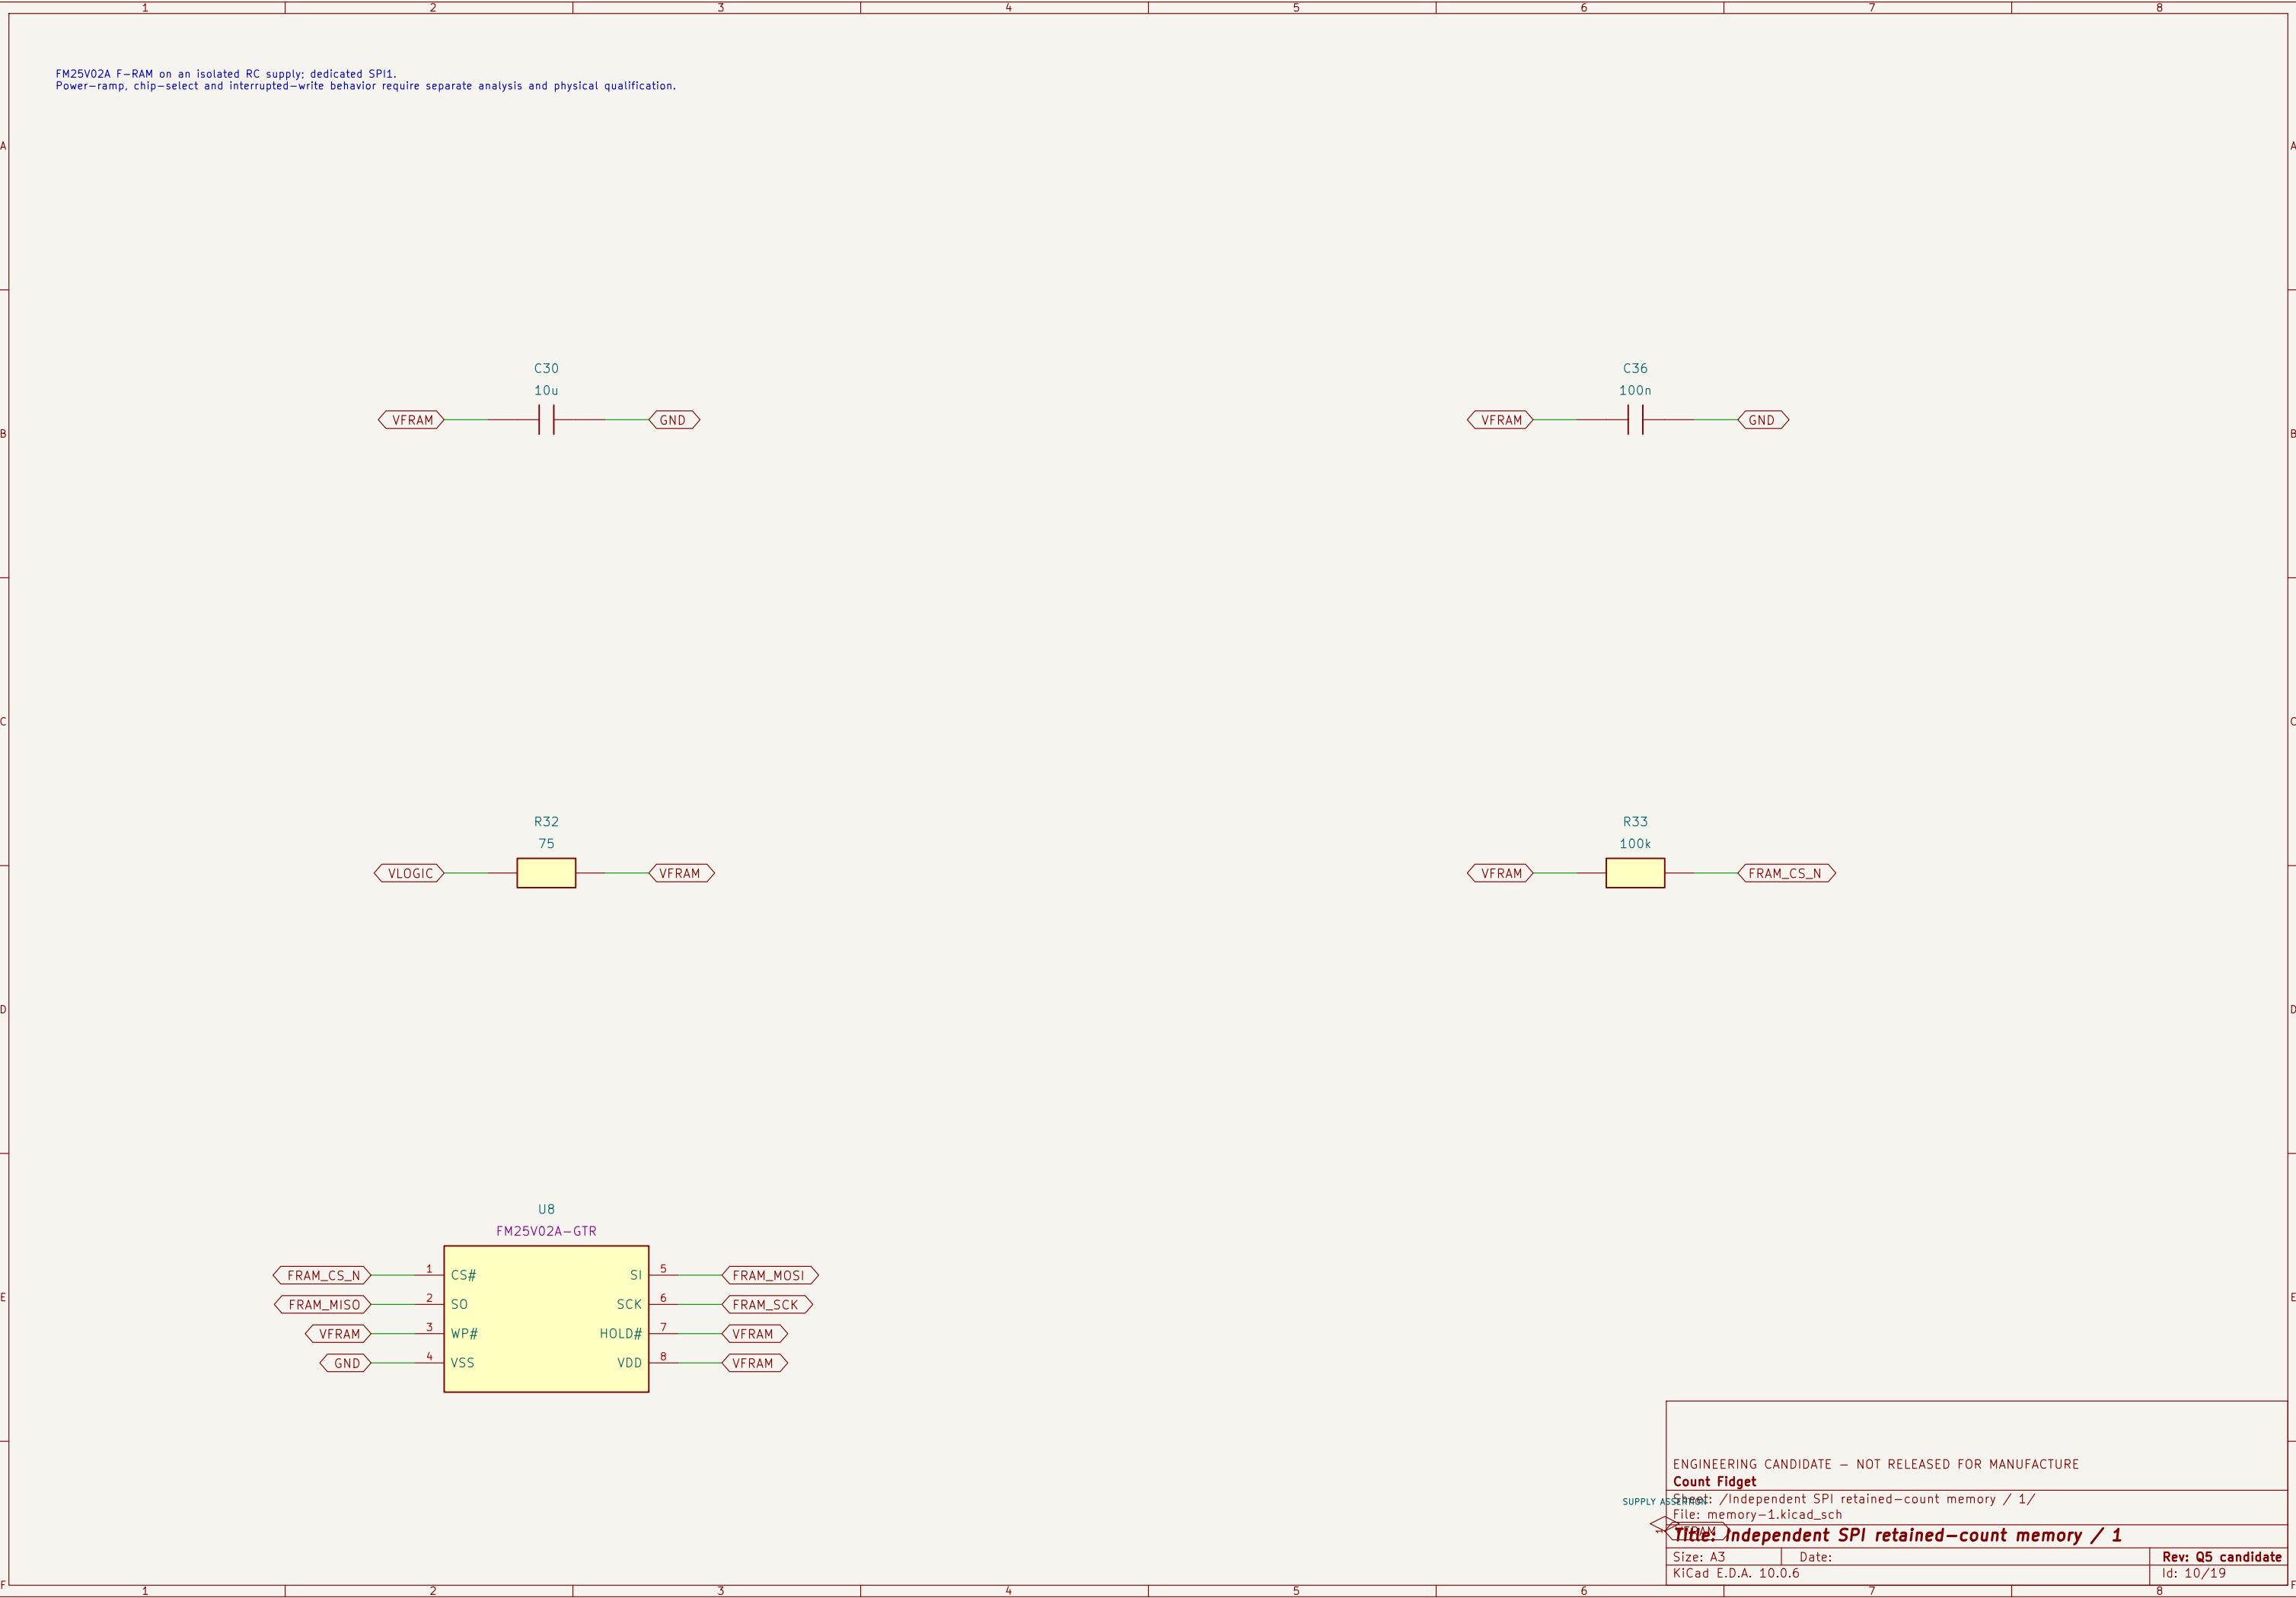


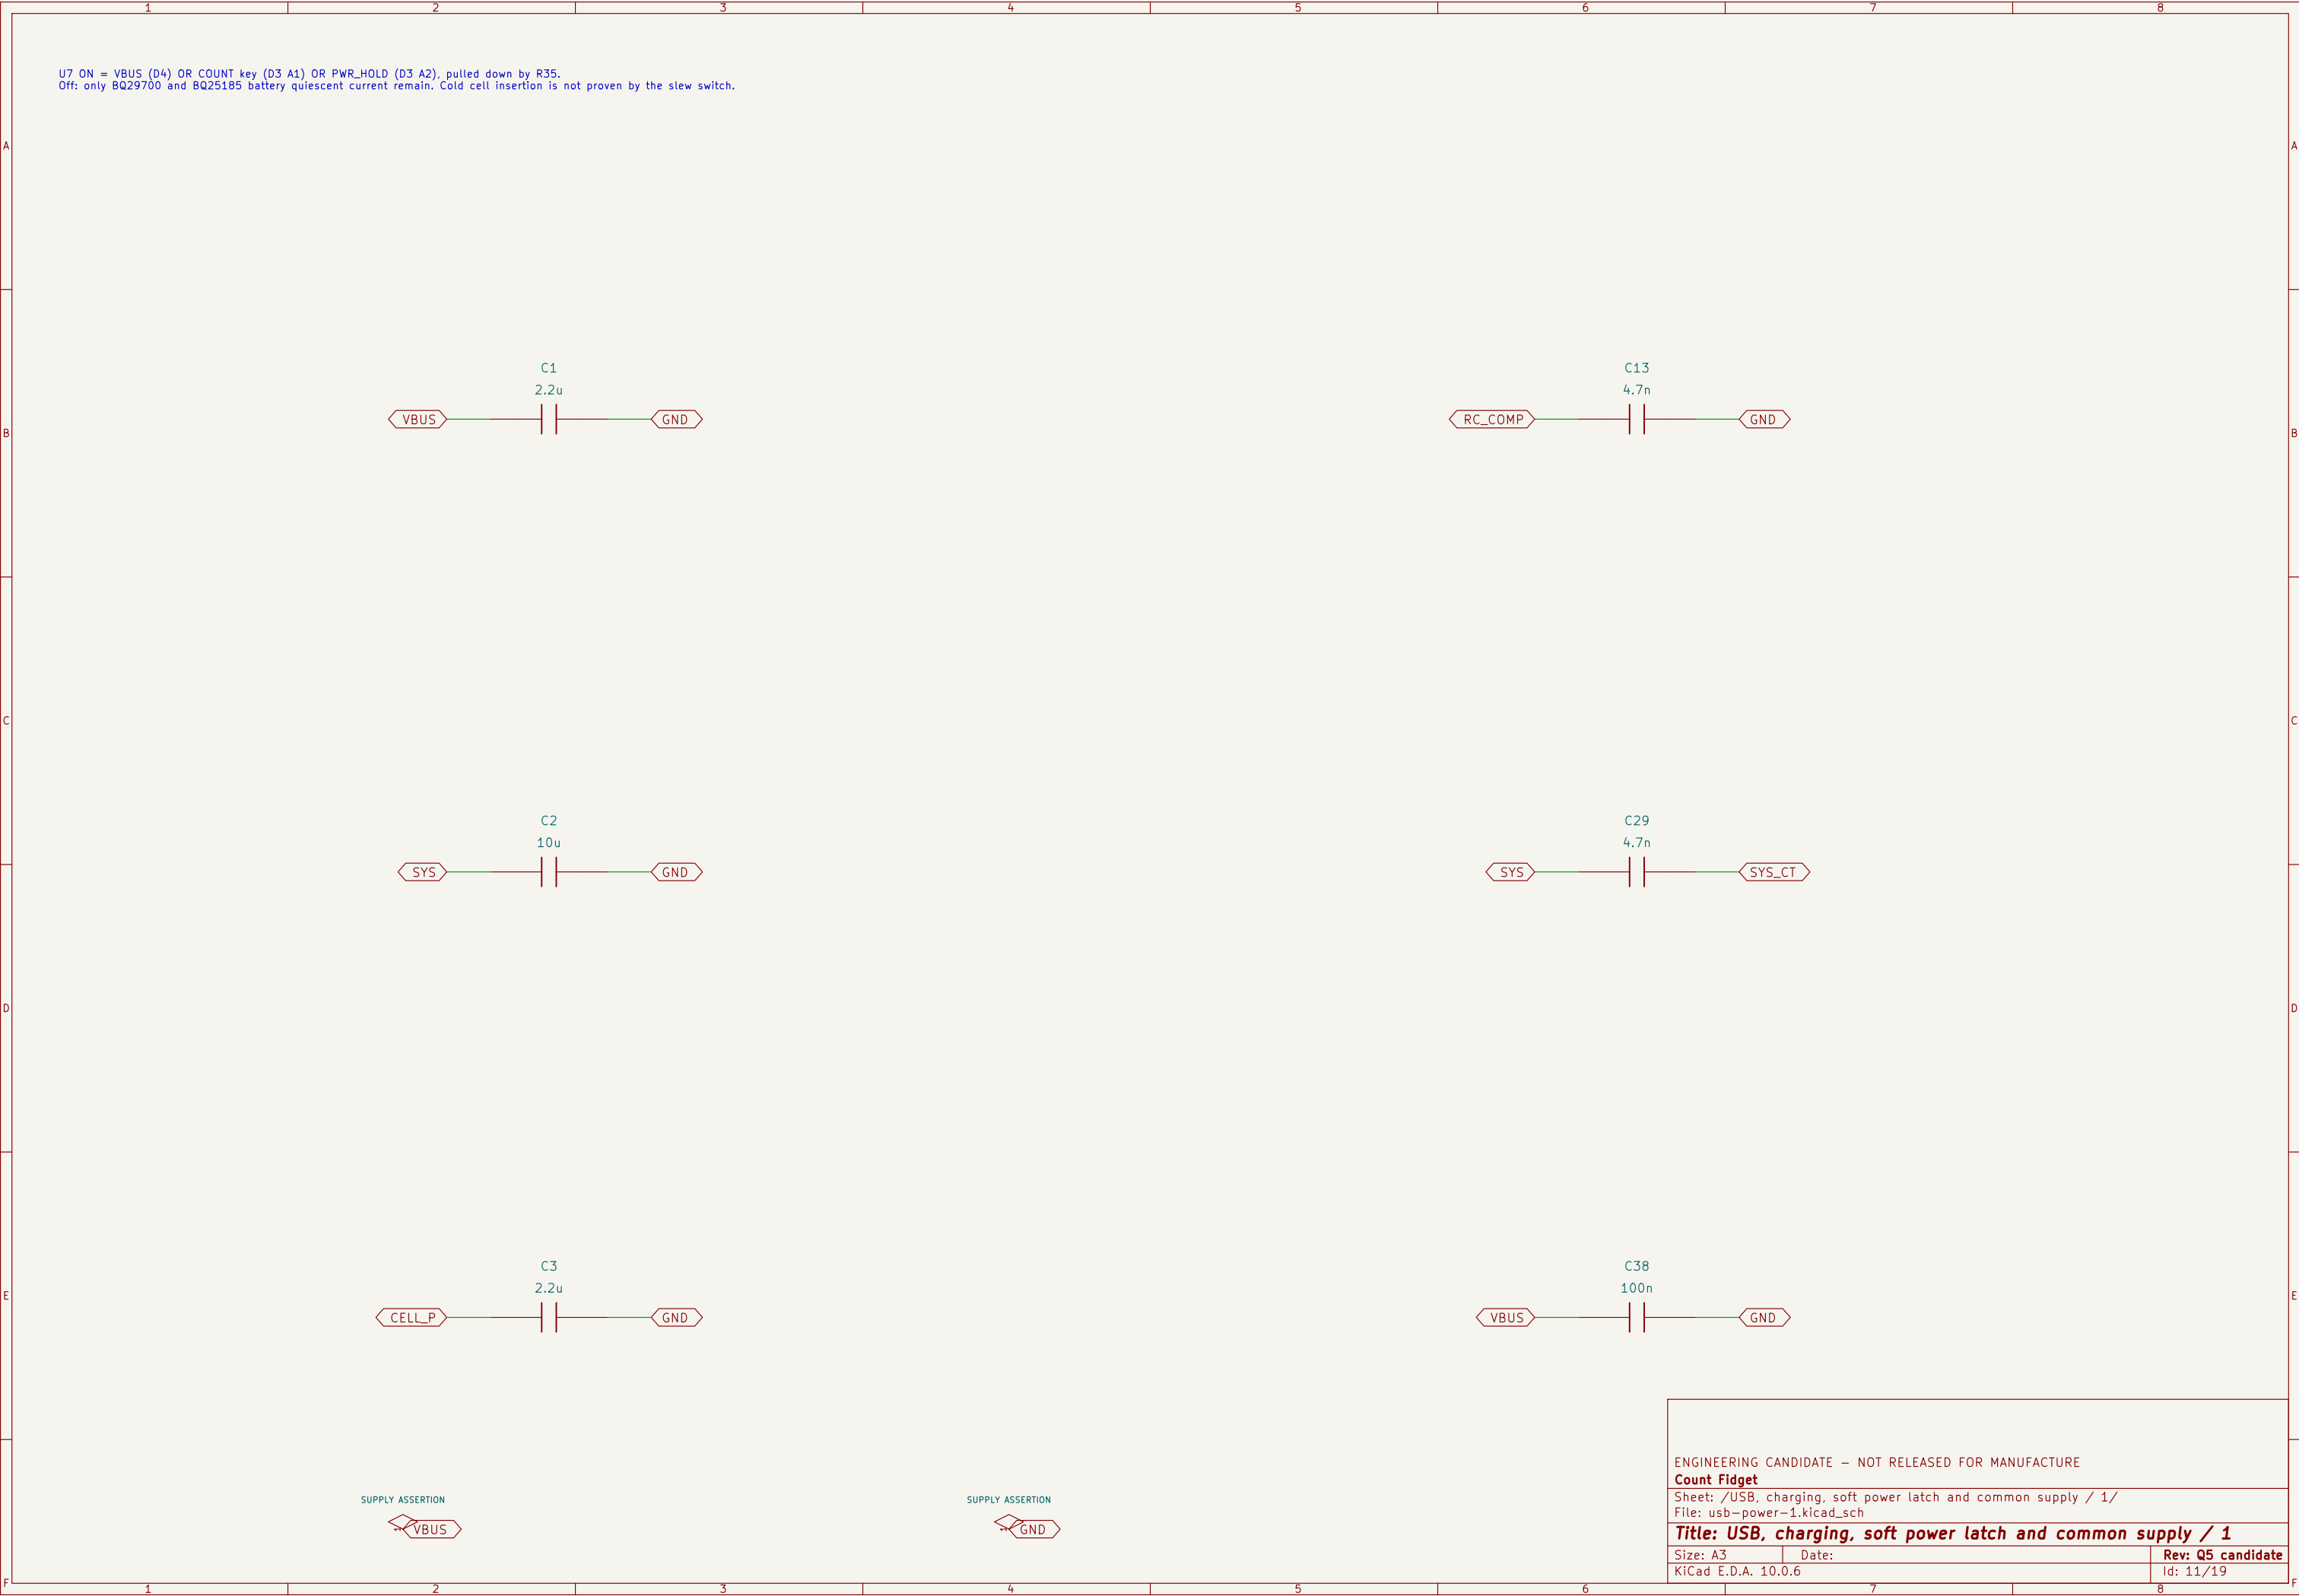

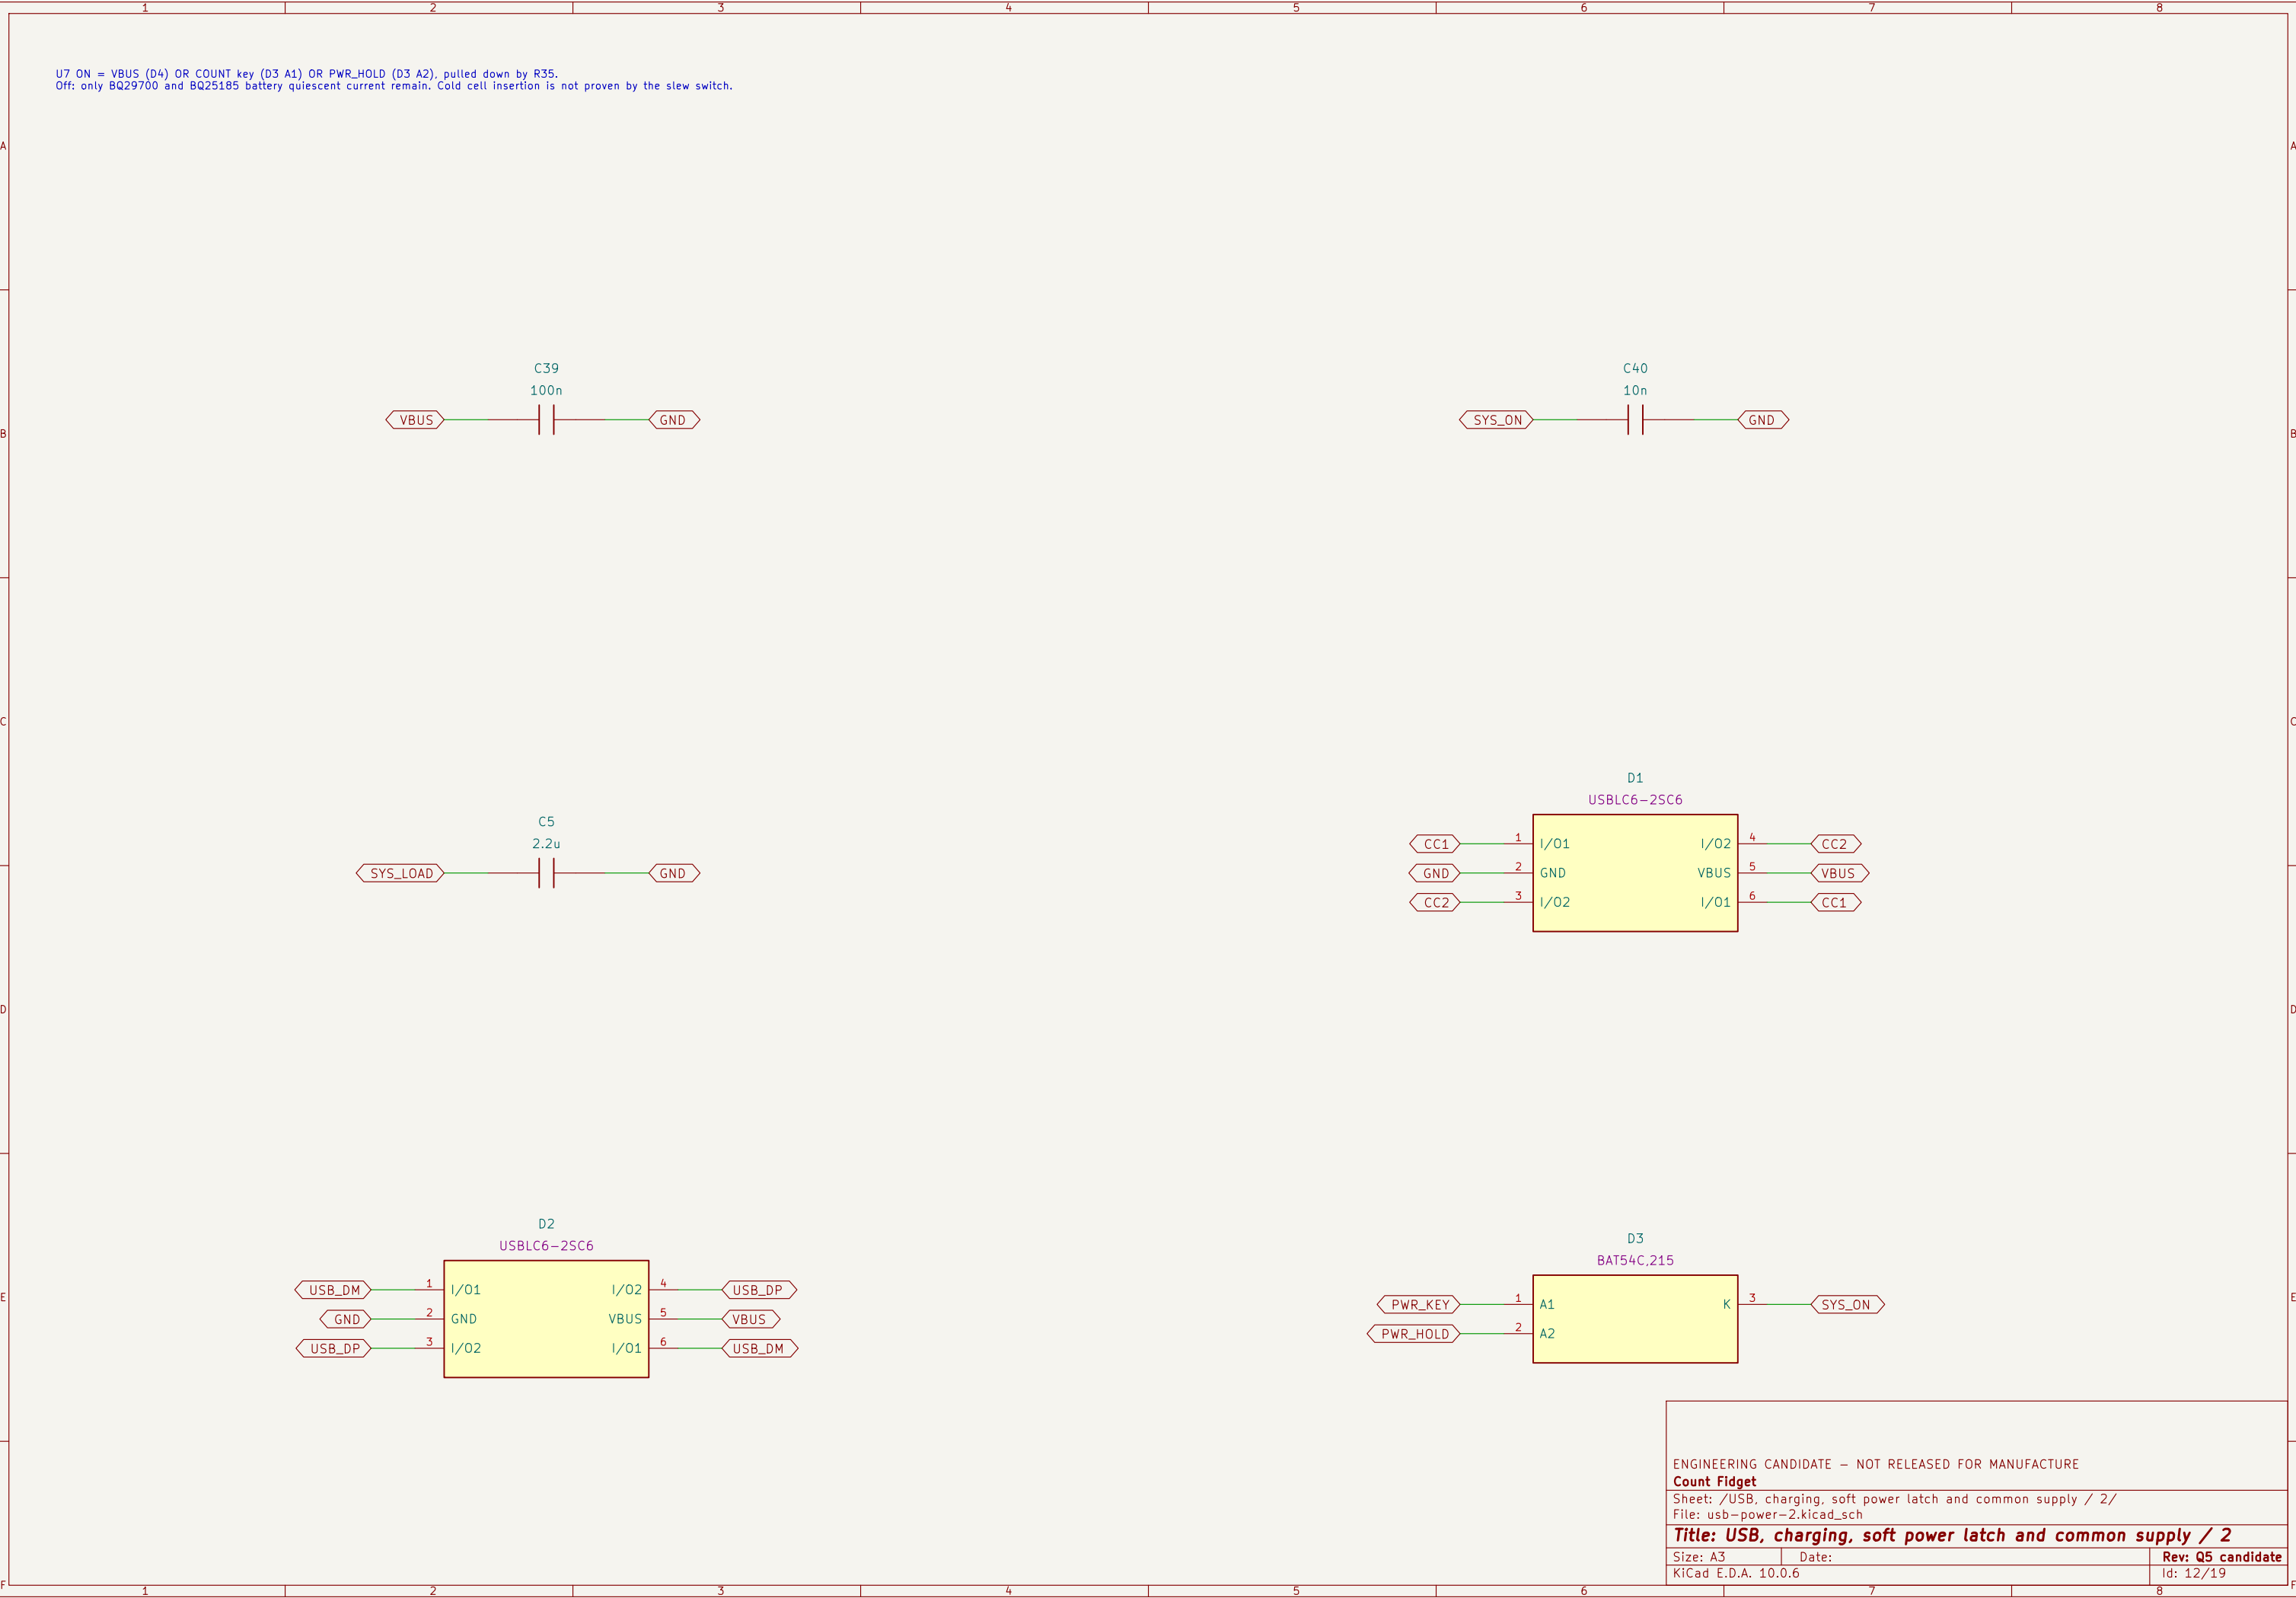

U7_ON = VBUS (D4) OR COUNT key (D3 A1) OR PWR_HOLD (D3 A2), pulled down by R35.
Off: only BQ29700 and BQ25185 battery quiescent current remain. Cold cell insertion is not proven by the slew switch.

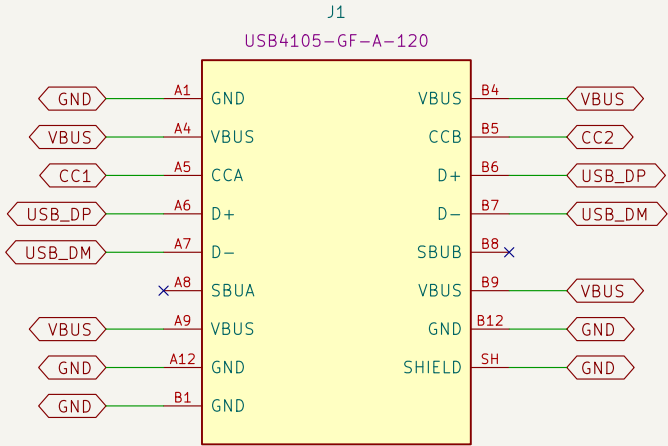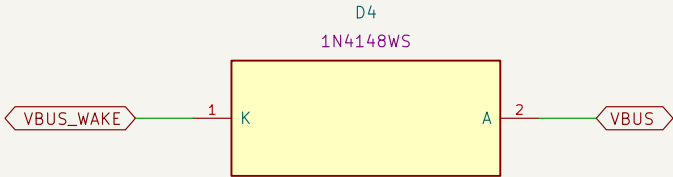

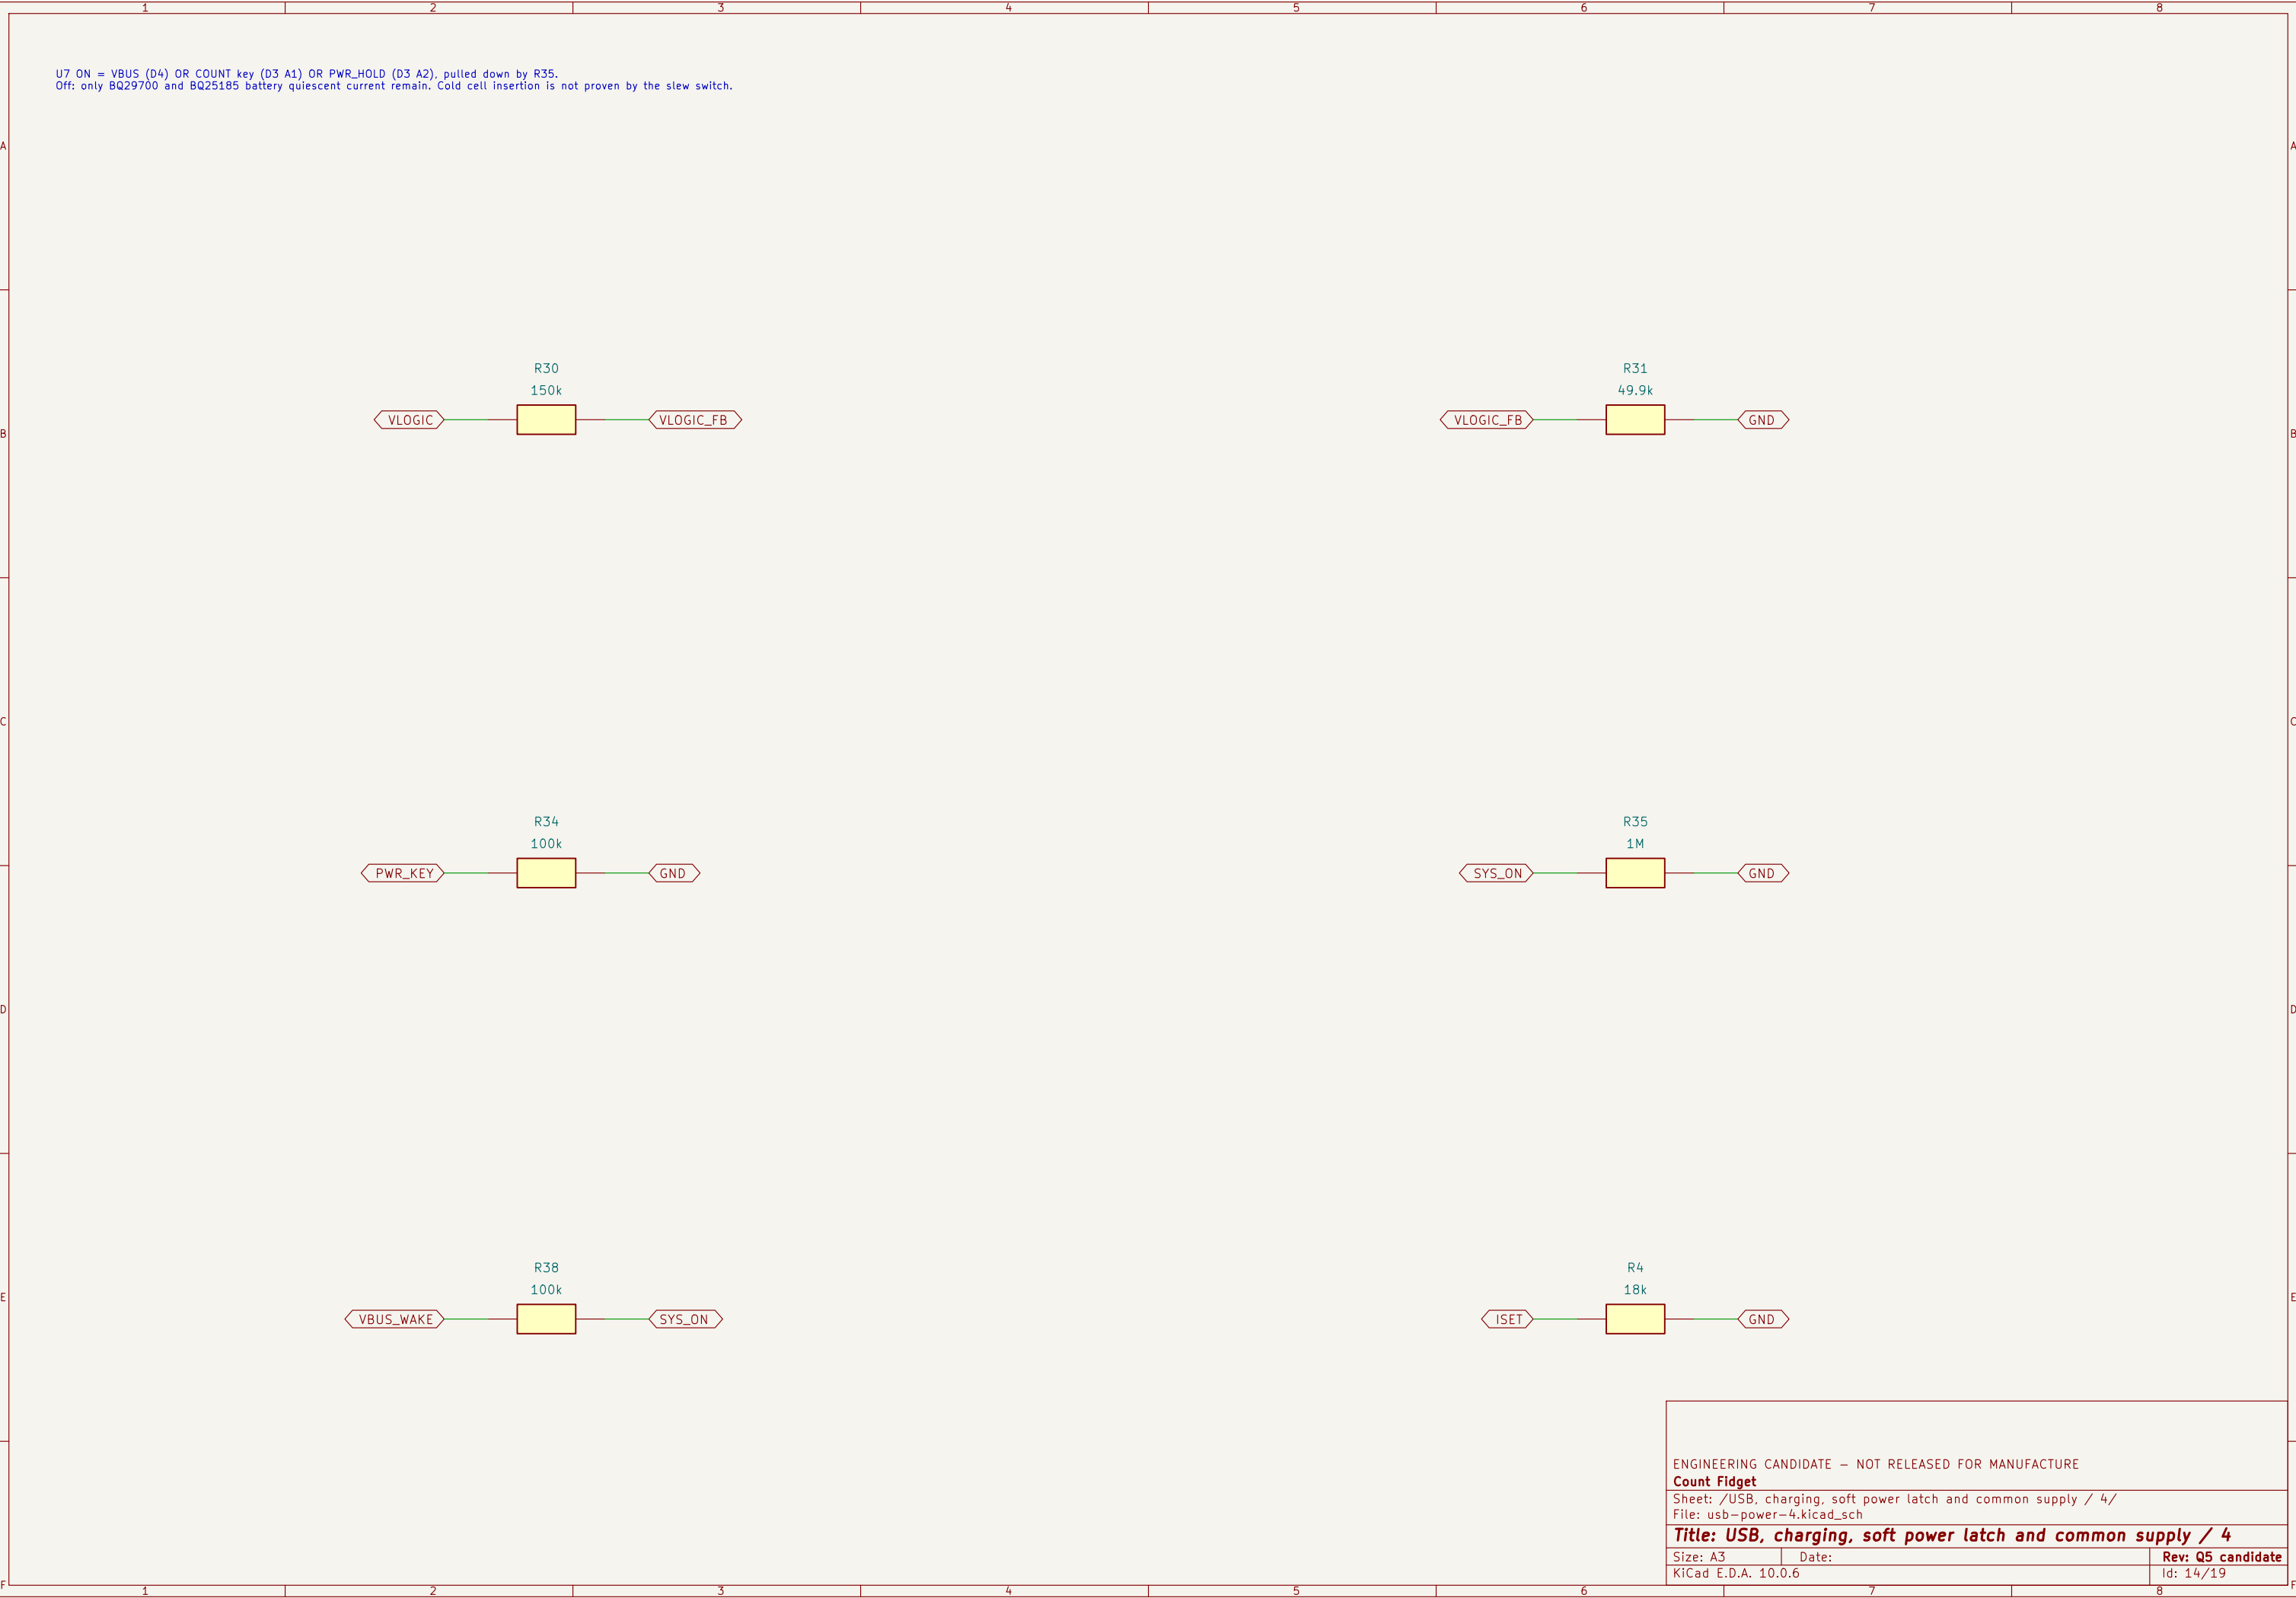

U7 ON = VBUS (D4) OR COUNT key (D3 A1) OR PWR_HOLD (D3 A2), pulled down by R35.
Off: only BQ29700 and BQ25185 battery quiescent current remain. Cold cell insertion is not proven by the slew switch.

