DOOR AND WINDOW HARDWARE SOLUTIONS

WIEK

Where Function Meets Innovation

2026

COMPANY PROFILE

BELGIUM DESIGN

Who We Are

WIEK SYSTEM is a Belgium-based company specializing in the design, research, development, and sales of high-quality, innovative door and window hardware systems. Our core technologies, enabling flexible positioning and smooth operation, are widely trusted across mainland Europe and the British Isles.

7+ Years

Export of hardware for building doors and windows for 7 years

Our Commitment

10 Years

Quality assurance commitment

We continuously innovate in global mainstream hardware systems, integrating advanced engineering, modern design, and customer-focused service to create lasting value.

All WIEK products are:

- Researched and developed by our qualified engineers in Belgium.
- Designed in accordance with ISO standards.
- Tested in a state-of-the-art laboratory under the most stringent international requirements.

Our Values

Excellence & Innovation

Superior quality and unique solutions are the foundation of WIEK.

Human-Centered Design

Beyond functionality, we design with people in mind.

Win–Win Partnerships

We believe in mutual growth with employees, suppliers, customers, and industry partners.

Our Vision

As a Belgium-based design company, WIEK combines European expertise with innovative thinking to deliver durable, functional, and forward-looking hardware systems that meet the evolving needs of modern architecture.

1	ICON INDEX	04 - 05
2	HIDDEN HINGE TILT & TURN WINDOW HARDWARE SYSTEM – CONFIGURATION CHART	08 - 09
3	HINGED TILT & TURN WINDOW HARDWARE SYSTEM – CONFIGURATION CHART	10 - 11
4	FREE-ANGLE LOCKING AND OUTWARD OPENING HARDWARE SYSTEM	12 - 15
5	WINDOW HANDLE PRODUCT SERIES	16 - 25
6	TRANSMISSION GEARBOX SERIES	26 - 29
7	DOOR HARDWARE SYSTEM	30 - 31
8	SWING DOOR HARDWARE SYSTEM - CONFIGURATION CHART	32 - 33
9	B-FOLDING DOOR HARDWARE SYSTEM	34- 35
10	DOOR HANDLE PRODUCT SERIES	36- 39
11	SWING DOOR LOCK BODY SERIES	40
12	HINGE SERIES	41 - 45
13	CURTAIN WALL OPERABLE SYSTEM HARDWARE	46 - 51
14	LOCKING POINT & STRIKE SERIES	52 - 53
15	LIFT AND SLIDE HARDWARE SYSTEM	54 - 55
16	LIFT & SLIDE SYSTEM LS150 TECHNICAL CHART	56 - 57
17	LIFT & SLIDE SYSTEM LS200 TECHNICAL CHART	58 - 59
18	LIFT & SLIDE SYSTEM LS300 TECHNICAL CHART	60 - 61
19	LIFT & SLIDE HANDLE PRODUCT SERIES	62 - 65
20	LIFT & SLIDE ESPAGNOLETTE SERIES	66 - 73
21	LIFT & SLIDE BOGIE SERIES AND COMPLEMENTARY PARTS	74 - 86
22	OFFICE PARTITION HANDLE AND HIDDEN HINGE	87

PAGE ARCHITECTURE

PRODUCT TYPE	A	PRODUCT DESCRIPTION	E
PRODUCT CODE	B	OVERALL DIMENSIONS	F
QUANTITY PER CASE	C	CUT-OUT DIMENSIONS	G
TECHNICAL SPECIFICATIONS	D	COMPATIBLE WINDOW TYPES	H

WINDOW HANDLE

TECHNICAL CHARACTERISTICS:

Defying conventional handle base structures through 6063-T5 aerospace-grade aluminum monolithic forming, achieving 0 mm redundant protrusion.

CNC precision milling enables seamless integration with window profiles, featuring 12 RAL color options via anodized finish, and reducing visual thickness by 63% compared to traditional handles.

NO BASE STRAIGHT HANDLE

W01011

25

NO BASE STRAIGHT HANDLE

W01011

25



PROFILE HOLE SIZE

Convert 180 degrees to 90 degrees

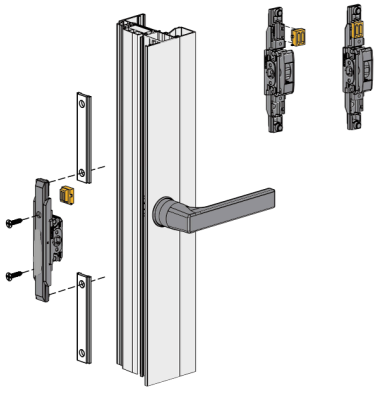

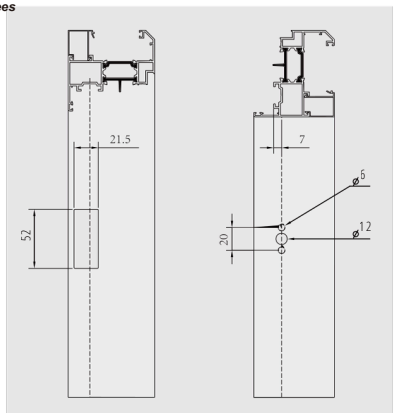

25

PRODUCT REFERENCE

BREAKDOWN OF THE REFERENCE

A	B	C
W100101	R	**
	L	

DETAILED DESCRIPTION

W100101	PRODUCT REFERENCE ROOT	A
R	PRODUCT SUITABLE FOR RIGHT-HAND OPENING	B
L	PRODUCT SUITABLE FOR LEFT-HAND OPENING	

**	AVAILABLE IN DIFFERENT FINISHES	C

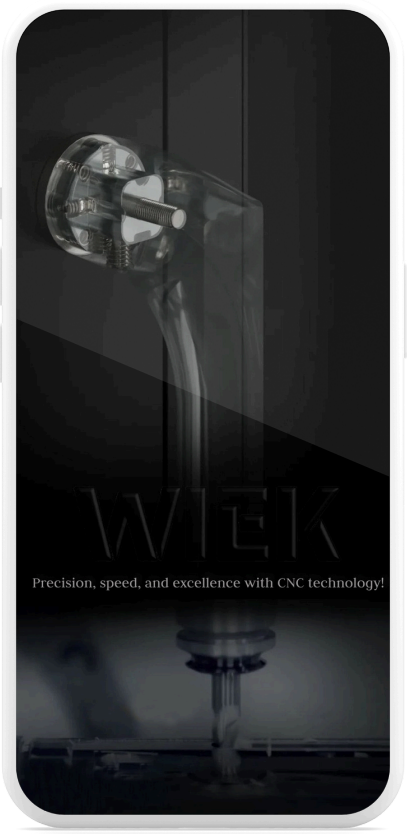

AVAILABLE FINISHES

REGULAR STOCK COLORS

	005	OXIDIZED BLACK
	006	OXIDIZED SILVER

PRODUCT MATERIAL

MATERIAL CLASSIFICATION

AL	ALUMINUM	ZA	ZINC ALLOY
HSS	HIGH-STRENGTH STEEL	SS	STAINLESS STEEL
CSS	CARBON STRUCTURAL STEEL	POM	POLYACETAL
		PA6	POLYAMIDE 6

TWO FUNCTIONS

ONE ELEGANT SOLUTION

RENS90 CONCEALED HINGE TILT & TURN HARDWARE SYSTEM

W00001	R / L	**

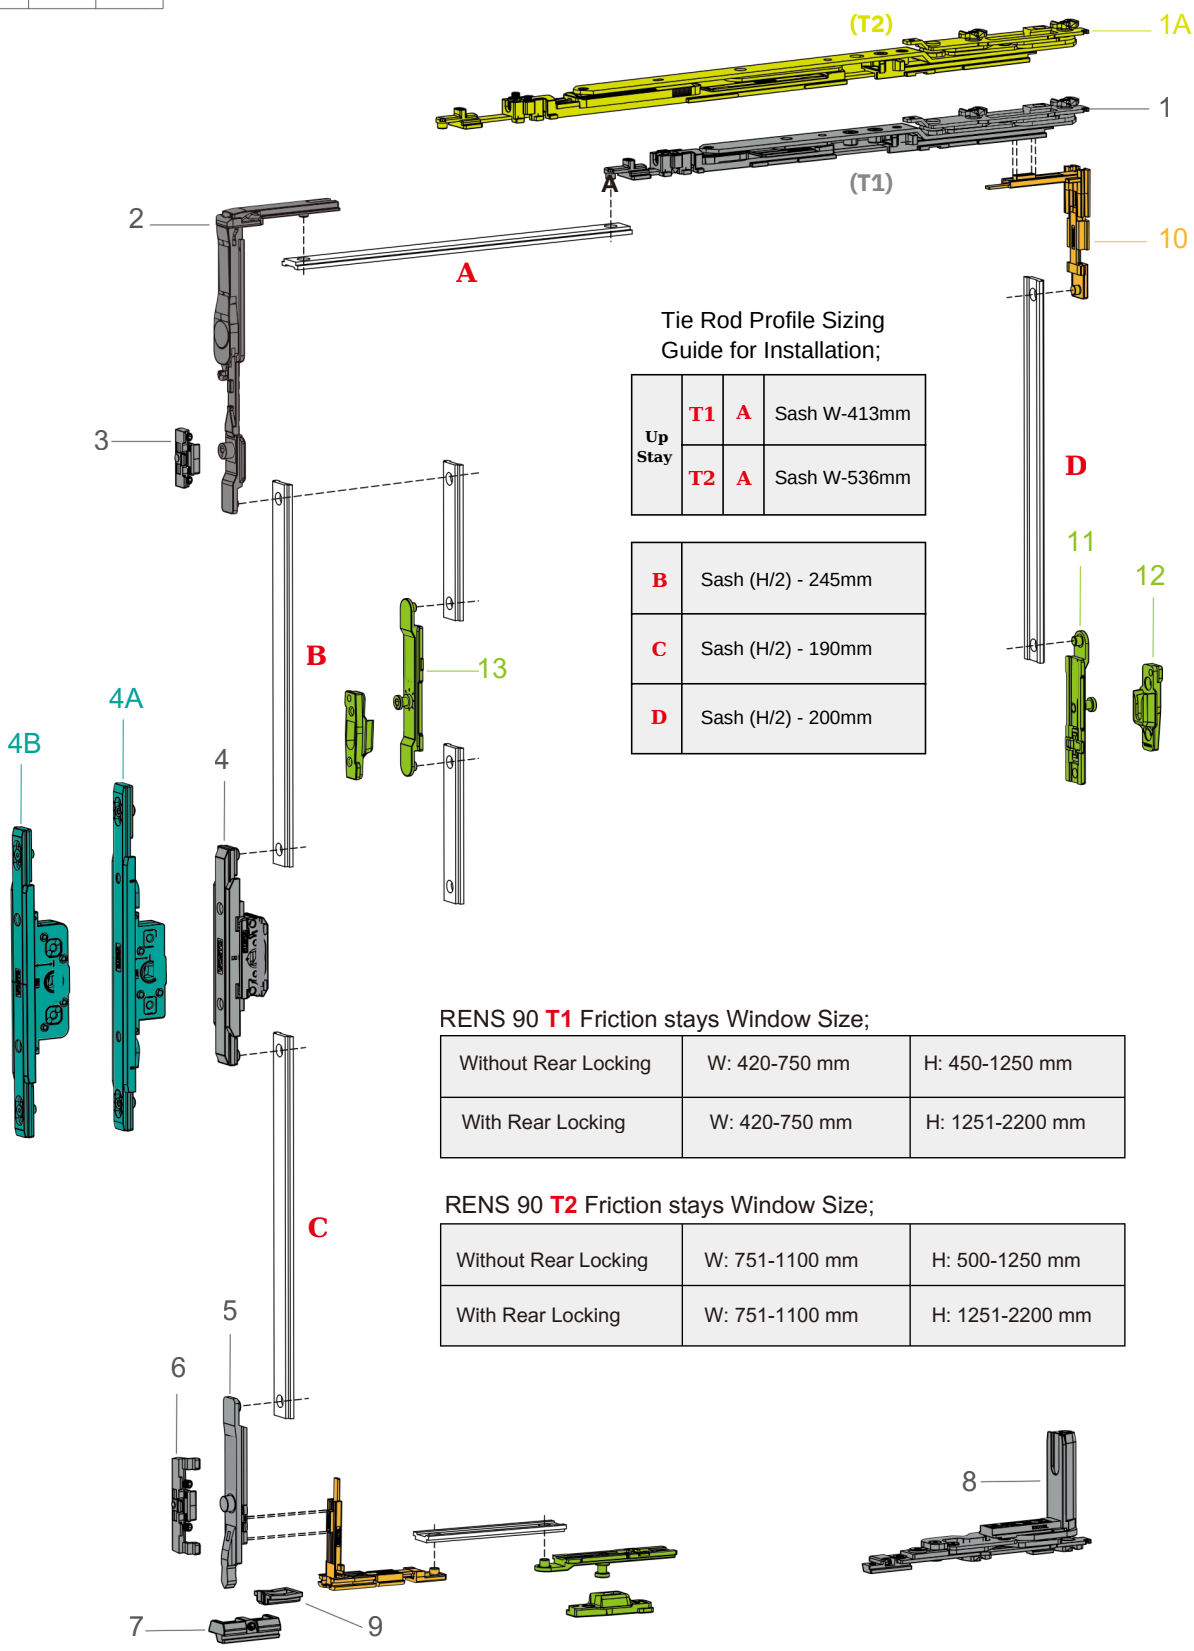

Tie Rod Profile Sizing Guide for Installation;

Up Stay	T1	A	Sash W-413mm
	T2	A	Sash W-536mm

B	Sash (H/2) - 245mm
C	Sash (H/2) - 190mm
D	Sash (H/2) - 200mm

RENS 90 **T1** Friction stays Window Size;

Without Rear Locking	W: 420-750 mm	H: 450-1250 mm
With Rear Locking	W: 420-750 mm	H: 1251-2200 mm

RENS 90 **T2** Friction stays Window Size;

Without Rear Locking	W: 751-1100 mm	H: 500-1250 mm
With Rear Locking	W: 751-1100 mm	H: 1251-2200 mm

TECHNICAL CHARACTERISTICS:

I. The kit is suppled with hinges that can be adjusted horizontally and vertically and adjustable locking points.
II. Possibility offittingmultiplelockingpoints.
III. All of the sliding elements are incorporated with a clip to eliminate looseness.
IV. Screws and metallic parts are stainless steel.
V. Zamak treated parts that guarantee res stance to corrosion exposed to more than 500 hours in a saline mist chamber.
VI. Friction stays not included. Maximum load per sash: 120 kg .

S/N	Product Name	Code	Finish Black	Notes
1	Up Stay (L) (T1)	W02021	Zinc Zn-Ni Black	Select according to the opening method of the window sash
	Up Stay (R) (T1)	W02022	Zinc Zn-Ni Black	
1A	Up Stay (L) (T2)	W02023	Zinc Zn-Ni Black	Select according to the opening method of the window sash
	Up Stay (R) (T2)	W02024	Zinc Zn-Ni Black	
2	Corner Drive	W02001	Zinc Zn-Ni Black	
3	Lock Seat	W02002	Zinc Zn-Ni Black	
4	Transmission Gearbox 7	W22971	Black Zinc Zn-Ni	Select according to the window sash profile
4A	Transmission Gearbox 12	W23022	Black Zinc Zn-Ni	
4B	Transmission Gearbox 15	W23023	Black Zinc Zn-Ni	
5	Latch	W02006	Black Zinc Zn-Ni	Must choose
6	Lock Seat	W02007	Black Zinc Zn-Ni	Must choose
7	Latch Lock Seat	W02008	Black Zinc Zn-Ni	Must choose
8	Lower Hinge(L)	W02009	Black Zinc Zn-Ni	Select according to the opening method of the window sash
	Lower Hinge(R)	W02010	Black Zinc Zn-Ni	
9	Lifting Block I	W02011	Grey Black	Must choose
10	Smal Corner Drive	W02012	Zinc／Zn-Ni	Optional accessories
11	Lock Point	W02013	Black Zinc／Zn-Ni	Optional accessories
12	Lock Seat	W02014	Black Zinc／Zn-Ni	
13	Double Lock Point	W02015	Black Zinc／Zn-Ni	

LENA90 HINGE TILT & TURN HARDWARE SYSTEM

W00002	R L	**

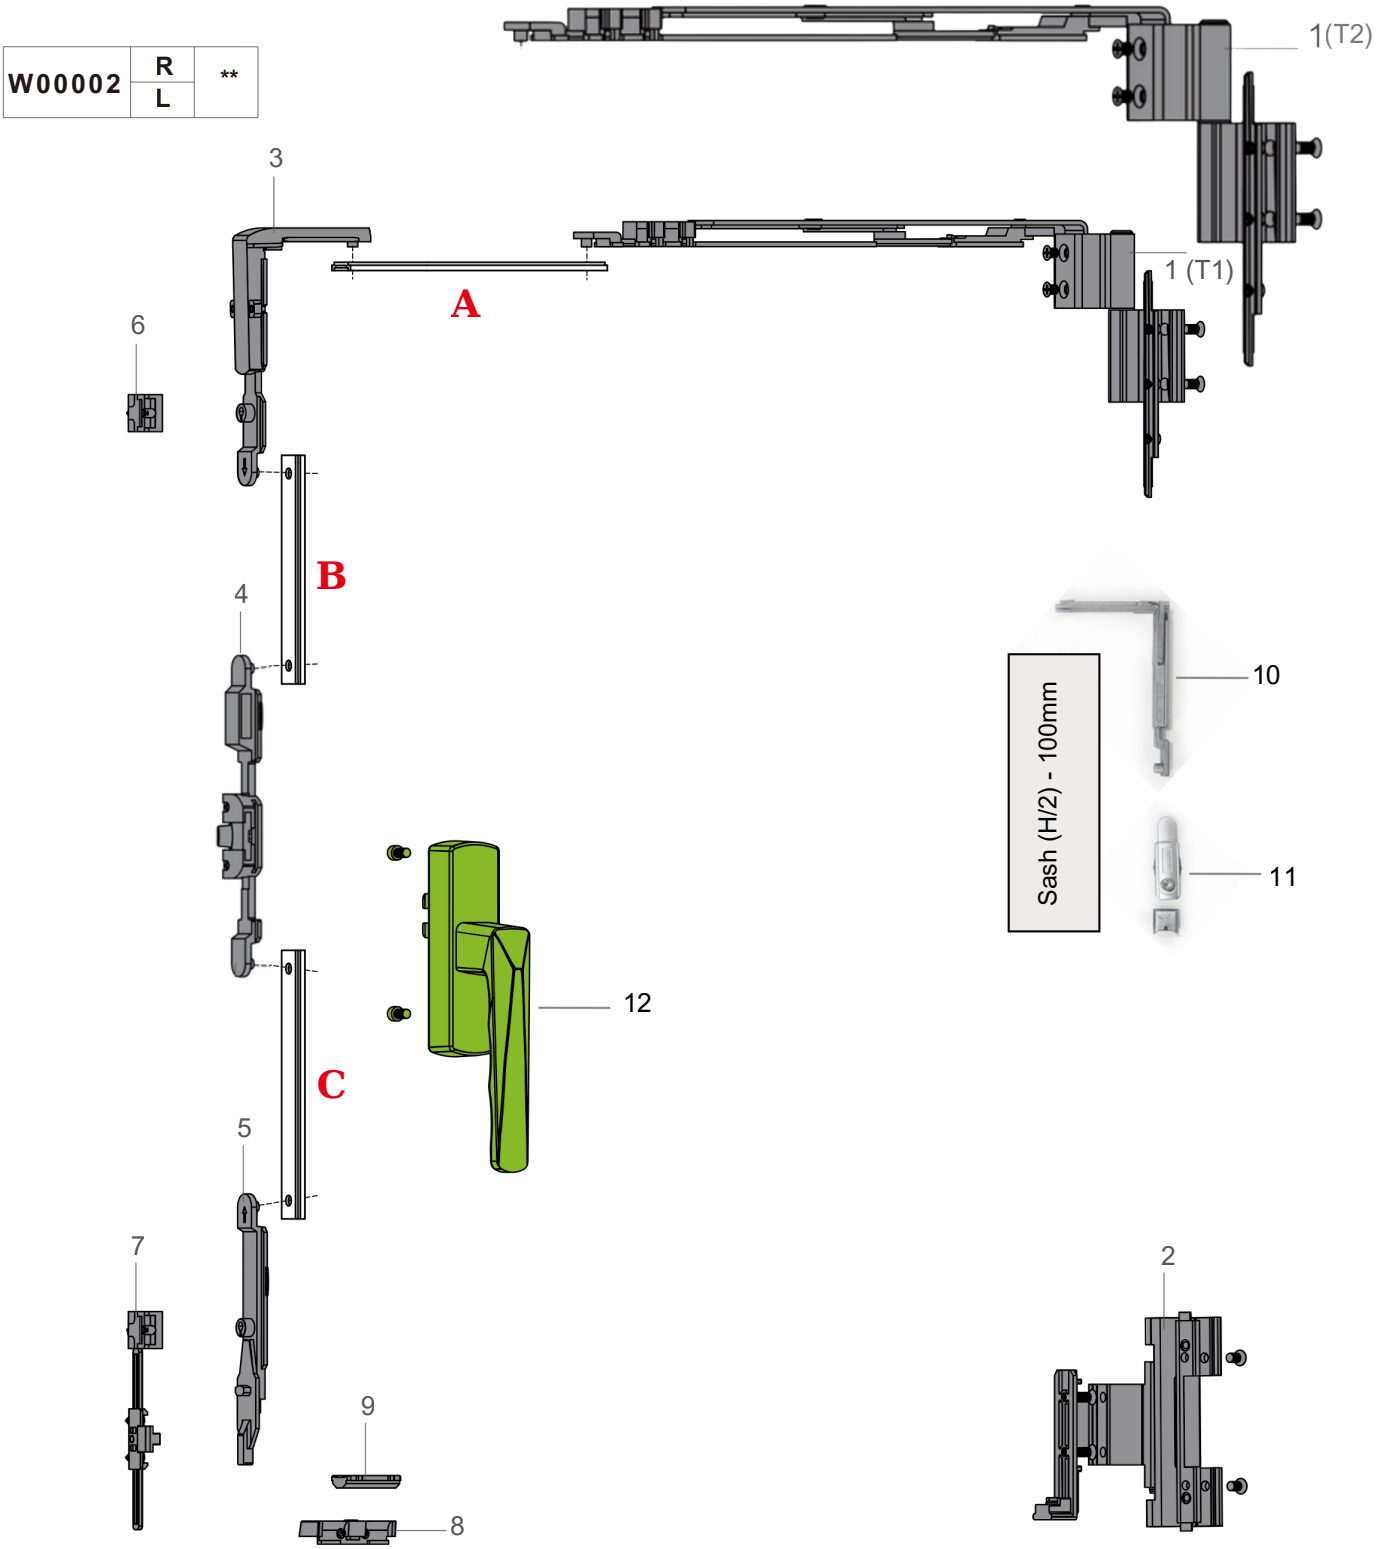

Tie Rod Profile Sizing Guide for Installation;

Up Stay	T1	A	Sash W-341 mm
	T2	A	Sash W-494 mm

B	Sash (H/2) - 149 mm
C	Sash (H/2) - 284,5 mm

TECHNICAL CHARACTERISTICS:

I. The kit is equipped with adjustable hinges (horizontal and vertical) and modular locking points. It also allows
II. for the installation of multiple locking points.
III. Each sliding component features an integrated clip to prevent looseness and ensure a secure fit.
IV. Screws and metallic parts are manufactured from stainless steel for maximum corrosion resistance.
V. Zamak-treated components providing corrosion resistance exceeding 200 hours in a salt spray chamber (according to ASTM B117)..
VI. Friction stays not included. Maximum load per sash: 120 kg .

S/N	Product Name	Code	Finish	Notes
1	Up Stay **T1**	W03021	Black / Silver	Selection should be made based on the window sash's operation type and dimensions
	Up Stay **T2**	W03022	Black / Silver	
2	Lower Hinge (L)	W03009	Black / Silver	Select according to the opening method of the window sash
	Lower Hinge (R)	W03010	Black / Silver	
3	Corner Drive	W03001	Black / Silver	
4	Lock Box	W03003	Black / Silver	Select according to the window sash profile
5	Latch	W03006	Black / Silver	Must choose
6	Lock Seat	W03002	Black / Silver	
7	Lock Seat	W03007	Black / Silver	Must choose
8	Latch Lock Seat	W03008	Black / Silver	Must choose
9	Lifting Block	W03011	Black / Silver	Must choose
10	Rear Locking Corner	W03012	Black / Silver	
11	Rear Locking Lock Seat	W03013	Black / Silver	
12	Multi-Position Window Handle	W03014	(e.g., white, silver, black)	Different Options Available

LENA90 **T1** Friction stays Window Size;

Without Rear Locking	W: 420-750 mm	H: 450-1250 mm
With Rear Locking	W: 420-750 mm	H: 1251-2350 mm

LENA90 **T2** Friction stays Window Size;

Without Rear Locking	W: 751-1200 mm	H: 500-1250 mm
With Rear Locking	W: 751-1200 mm	H: 1251-2350 mm

FREE-ANGLE LOCKING HARDWARE SYSTEM

W00003	R / L	**

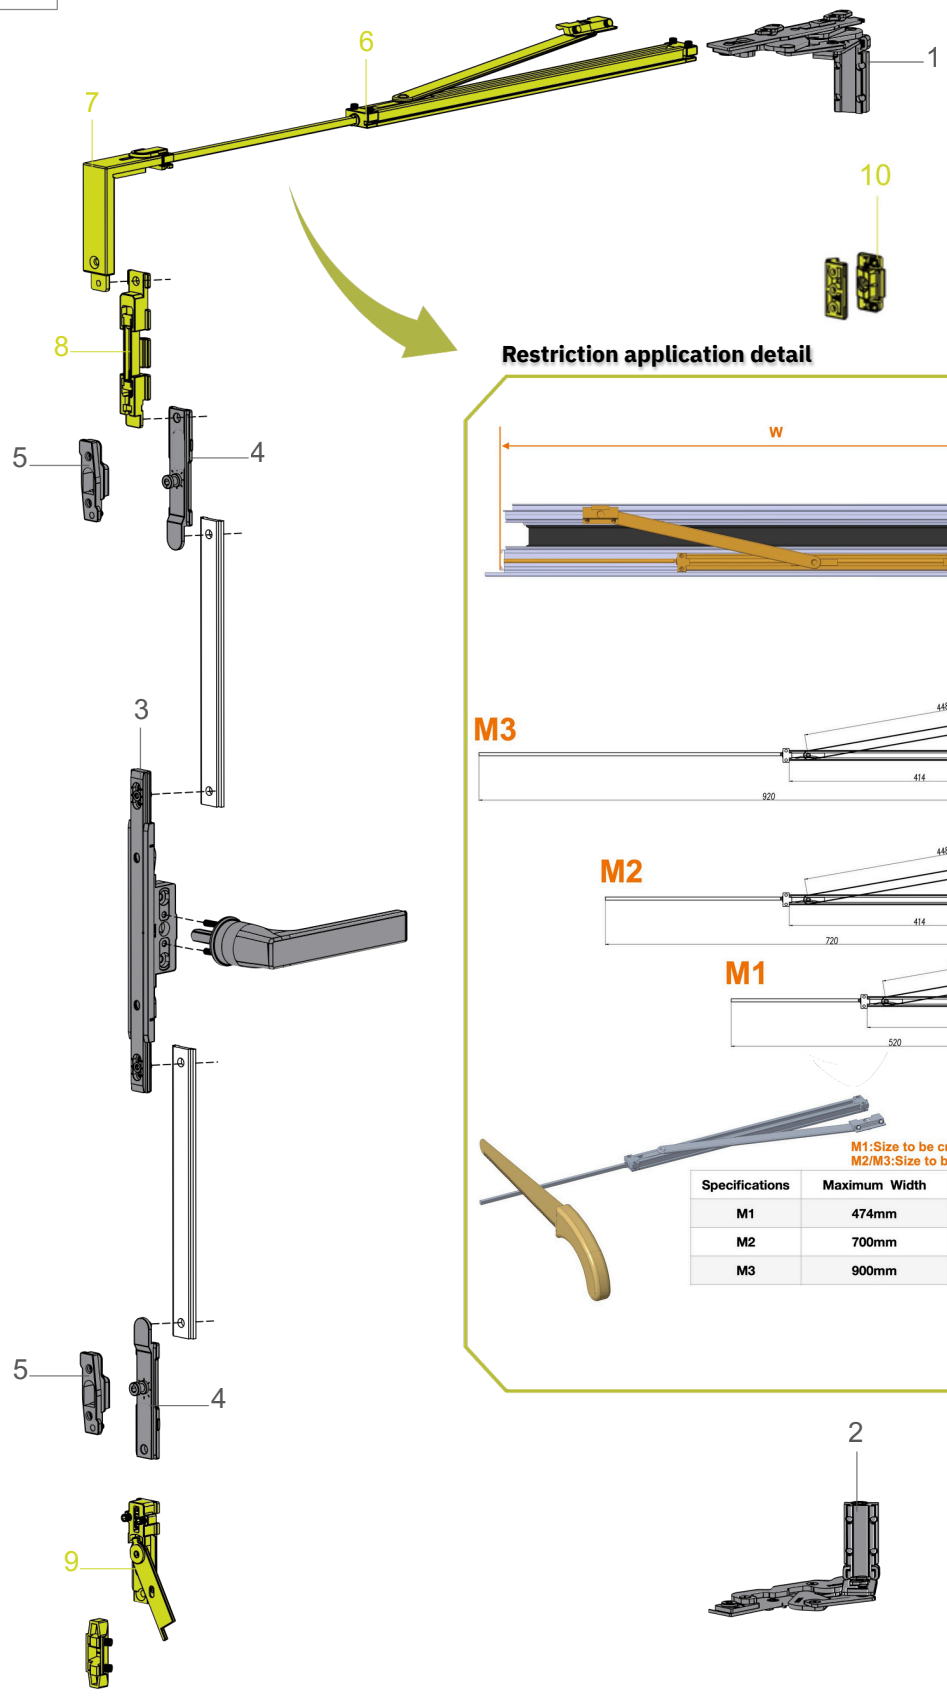

Restriction application detail

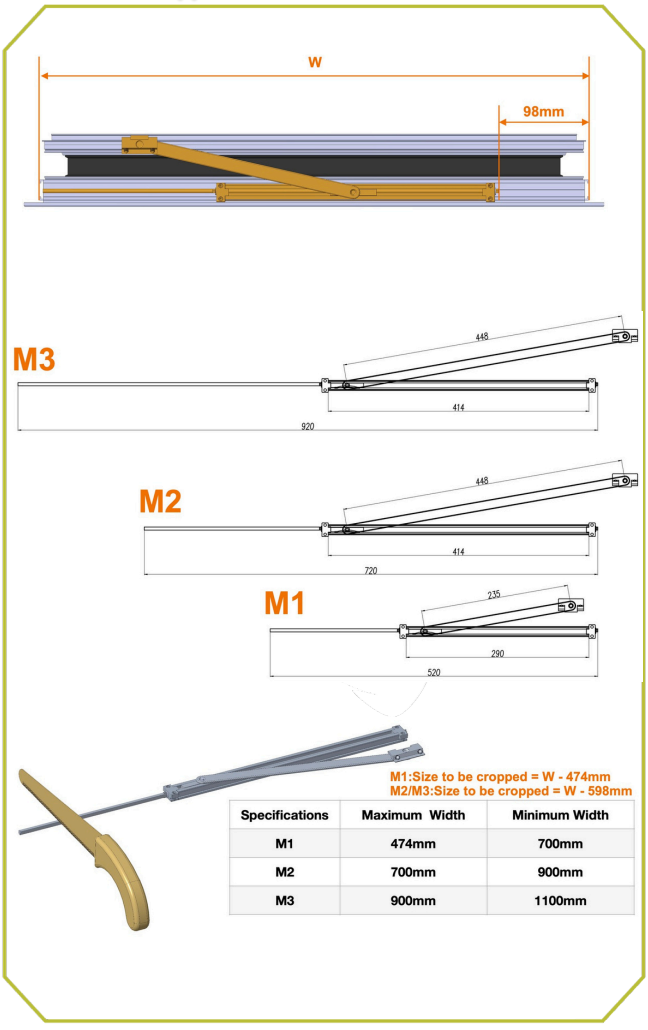

M1:Size to be cropped = W - 474mm
M2/M3:Size to be cropped = W - 598mm

Specifications	Maximum Width	Minimum Width
M1	474mm	700mm
M2	700mm	900mm
M3	900mm	1100mm

TECHNICAL CHARACTERISTICS:

I. Conventional casement windows rely on friction stays to hold the sash at specific angles, often resulting in operational complexity. Our innovative solution integrates components No.6, 7, and 8 directly with the handle mechanism, allowing smooth, any-angle sash positioning through simple handle control. This eliminates the need for external accessories while ensuring user-friendly, efficient operation.

II. In addition, component No.9 provides upward support when the window is closed, significantly reducing lateral stress on the top hinges. As a result, hinge service life is extended by over 40% compared to standard systems (validated through EN 1935 cyclic testing).

S/N	Product Name	Code	Finish	Notes
1	Hinge (L)	W02009	Zn-Ni Zn-Ni	
2	Hinge (R)	W02010	Zn-Ni Zn-Ni	
3	Transmission Gearbox F10	W22987 M01	304 stainless steel & aluminum alloy	Select according to the window sash profile
	Transmission Gearbox F12	W22987 M02	304 stainless steel & aluminum alloy	
	Transmission Gearbox F20	W22987 M03	304 stainless steel & aluminum alloy	
	Transmission Gearbox F25	W22987 M04	304 stainless steel & aluminum alloy	
	Transmission Gearbox F30	W22987 M07	304 stainless steel & aluminum alloy	
	Transmission Gearbox F35	W22987 M08	304 stainless steel & aluminum alloy	
	Transmission Gearbox 7	W22971	Black Zinc/Zn-Ni	
	Transmission Gearbox 12	W23022	Black Zinc/Zn-Ni	
	Transmission Gearbox15	W23023	Black Zinc/Zn-Ni	
4	Lock point	W04101	Black Zinc/Zn-Ni	
5	Lock seat	W04102	Black Zinc/Zn-Ni	
6	Stopper	W04020M01	Zn-Ni	Select according to the width of the fan
		W04021M02	Zn-Ni	
		W04022M03	Zn-Ni	
7	Positioning corner device	W04001	Black Zinc/Zn-Ni	
8	Position adjuster Position	W04002	Black Zinc/Zn-Ni	
	Adjuster Cap	W04003	Black	
9	Lifting device (L)	W04004	Black Zinc/Zn-Ni	Optional accessories
	Lifting device (R)	W04005	Black Zinc/Zn-Ni	Optional accessories
10	Side buckle lock	W02016	Black Zinc/Zn-Ni	

HIDDEN HINGE OUTWARD OPENING HARDWARE SYSTEM

W00004	R L	**

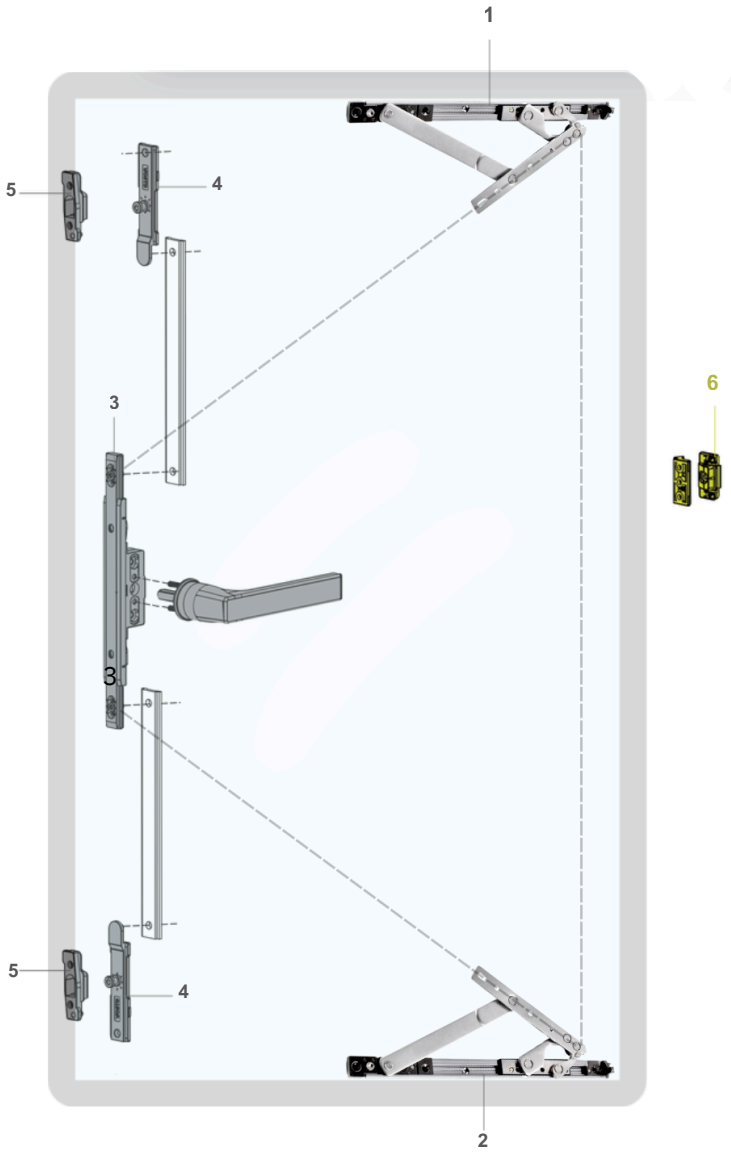

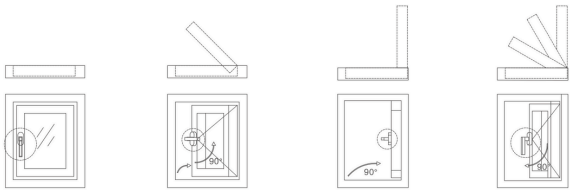

S/N	Product Name	Code	Finish	Notes
1	Hinge (L)	W05021	304 SS & Aluminum alloy	
2	Hinge (R)	W05022	304 SS & Aluminum alloy	
3	Transmission Gearbox F10	W04010M01	304 SS & Aluminum alloy	Select according to the window sash profile
	Transmission Gearbox F12	W04012M02	304 SS & Aluminum alloy	
	Transmission Gearbox F20	W04020M03	304 SS & Aluminum alloy	
	Transmission Gearbox F25	W04025M04	304 SS & Aluminum alloy	
	Transmission Gearbox F30	W04030M07	304 SS & Aluminum alloy	
	Transmission Gearbox F35	W04035M08	304 SS & Aluminum alloy	
	Transmission Gearbox 7	W02003	Black Zinc/Zn-Ni	
	Transmission Gearbox 12	W02004	Black Zinc/Zn-Ni	
	Transmission Gearbox 15	W02005	Black Zinc/Zn-Ni	
4	Lock point	W02013	Black Zinc/Zn-Ni	
5	Lock seat	W02014	Black Zinc/Zn-Ni	
6	Side buckle lock	W02016	Black Zinc/Zn-Ni	

Product Information Guide

Permissible Sash Dimensions:
- Recommended (Optimal) Width: 400mm - 750mm
- Recommended (Optimal) Height: 500mm - 1600mm

TECHNICAL CHARACTERISTICS:

Advantages of the New Friction Hinge Structure

Innovative snap-on design for faster installation.
All top screws are pre-installed at the factory, reducing assembly tin
Guide rail fits into the side notch, ensuring safer installation.
High load capacity of 60–70 kg.
Horizontal adjustment: ±1.5 mm; Height adjustment: ±3 mm.
Made of 304 stainless steel and aluminum alloy, providing excellent corrosion resistance, ideal for coastal environments.
Opening Angle: 90°

Features

High load-bearing capacity
NSST Salt Spray Resistance Test
Durability and Performance Test
Opening and Closing Life Cycle Test

FRICTION HINGE – TECHNICAL FEATURES

Load-Bearing Capacity
Corrosion Resistance NSST Salt Spray Test (304 stainless steel & aluminum alloy, coastal use)
Durability Test Opening & closing life cycle test
Adjustment Options Horizontal: ±1.5 mm / Vertical: ±3 mm
Installation System Snap-on design, with all top screws pre-installed at the factory

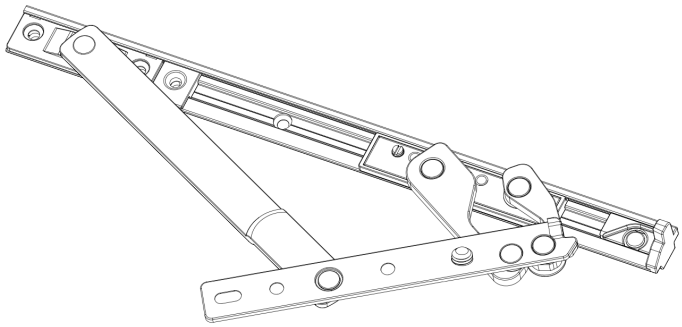

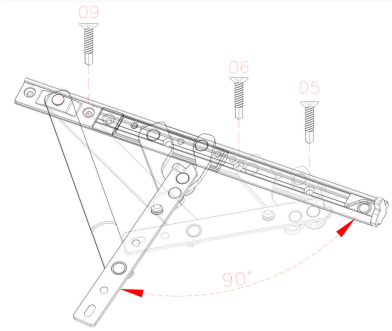

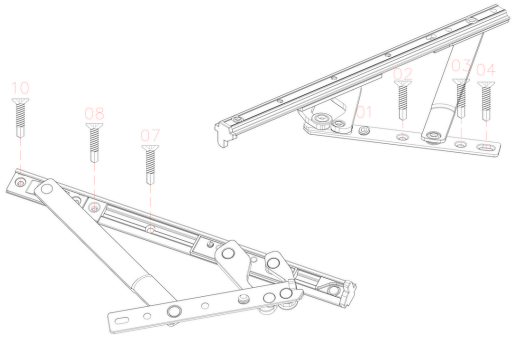

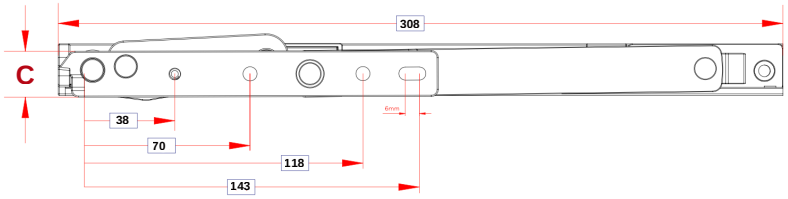

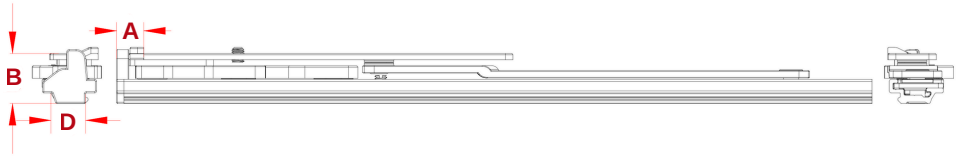

A Stacking Height Requirements: 1.5 mm
B Sliding Stay Space: 21 mm
C ProductDimensions: 19.5 mm
D Product Dimensions: 19.5 mm
E Window Joint Requirements: 4.5 ± 0.5 mm

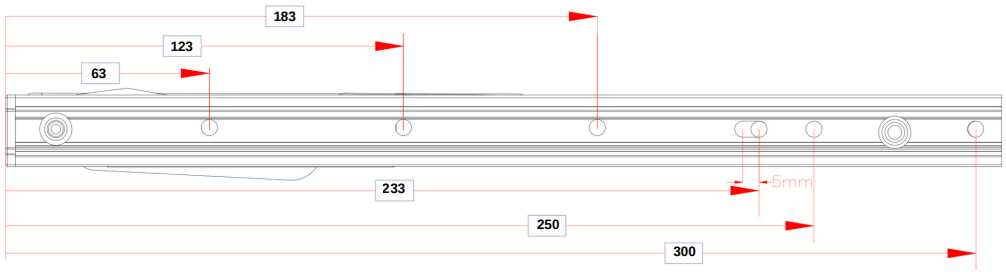

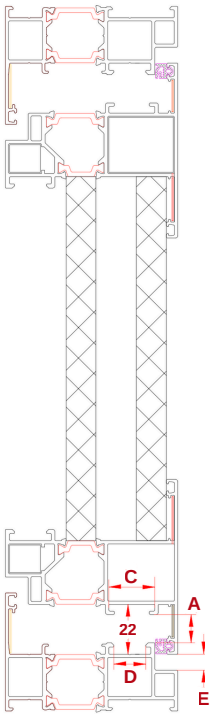

The first choice for use in coastal areas and high-frequency usage areas.

HUMAN BODY MECHANICAL DESIGN PATIO

COMFORTABLE AND FIRM

GIVE USERS TO ULTIMATE FEELING OF USE

TECHNICAL CHARACTERISTICS:

Defying conventional handle base structures through 6063-T5 aerospace-grade aluminum monolithic forming, achieving 0 mm redundant protrusion. CNC precision milling enables seamless integration with window profiles, offering 12 RAL color options via anodized finish, and reducing visual thickness by 63% compared to traditional handles.

NO BASE STRAIGHT HANDLE

W23026

AL ZA
SS Css
7mm

30

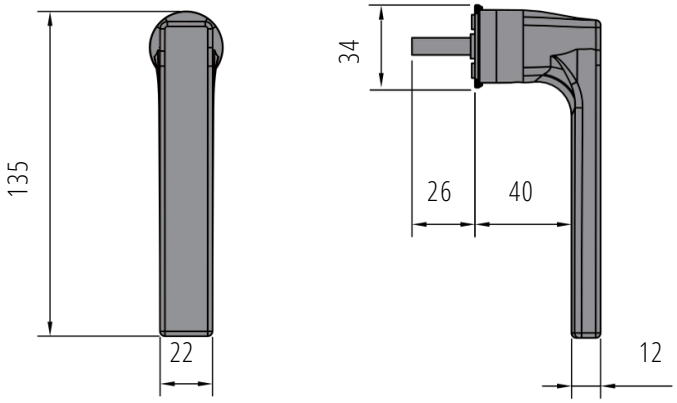

NO BASE STRAIGHT HANDLE

W23026

AL ZA
SS Css
7mm

30

Convert 180 degrees to 90 degrees

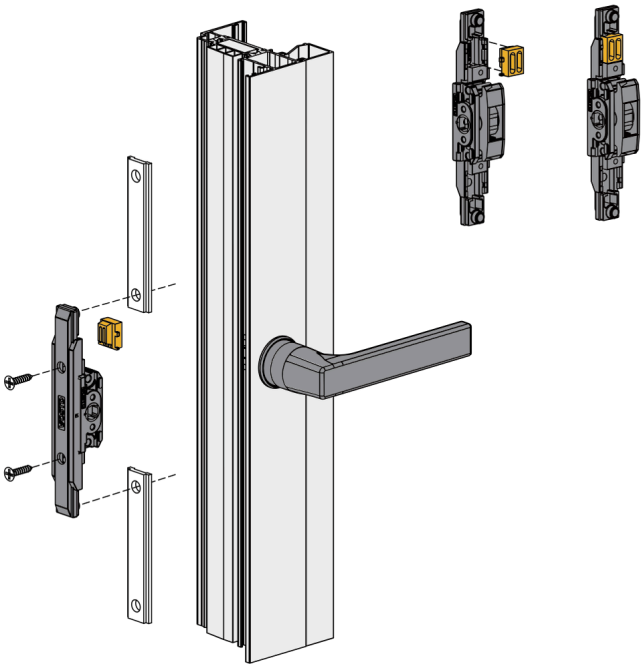

PROFILE HOLE SIZE

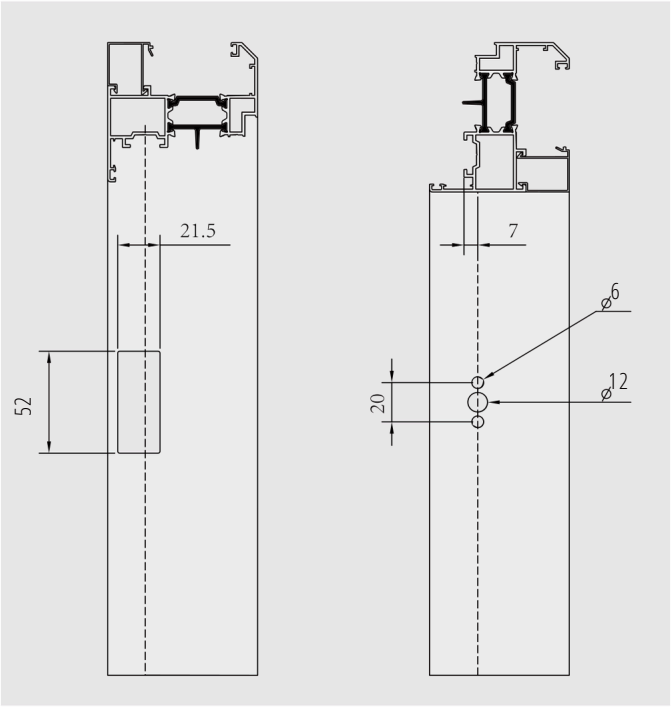

NO BASE CROOKED HANDLE

W23026R

30

AL ZA
SS Css
7mm

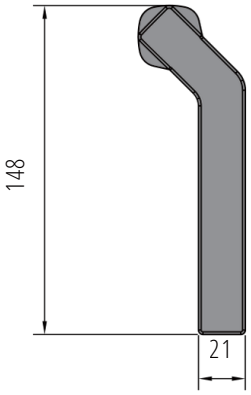

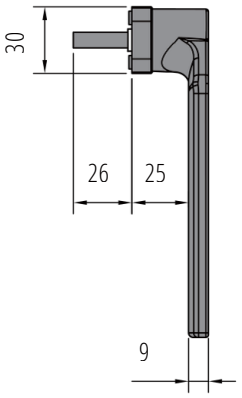

NO BASE CROOKED HANDLE

W23026L

30

AL ZA
SS Css
7mm

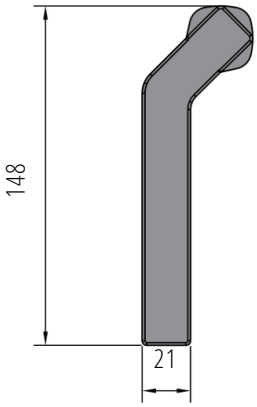

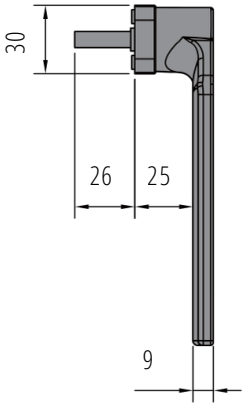

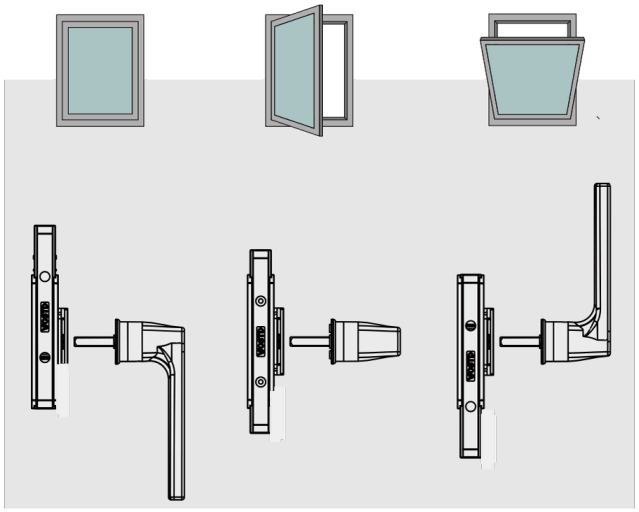

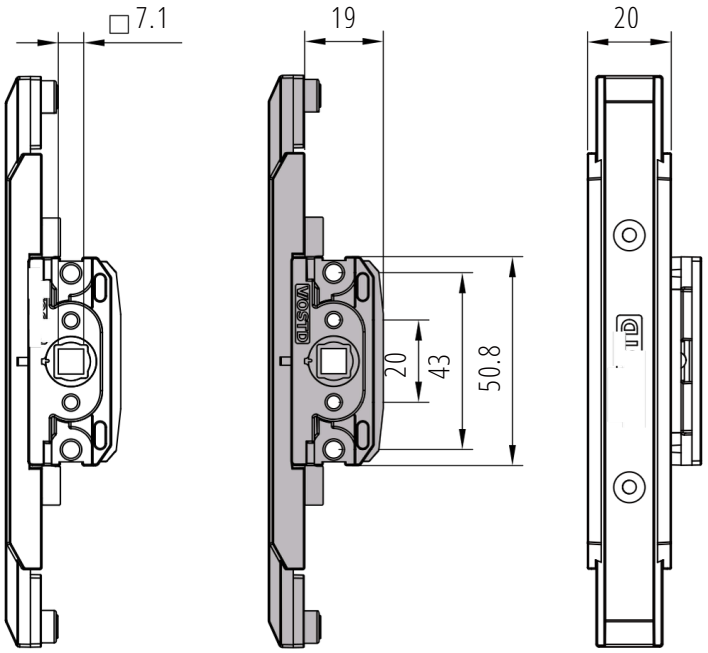

TECHNICAL CHARACTERISTICS:

Inspired by the tension aesthetics of instrument strings, this design captures refined lines and graceful curves. The name evokes the fluid motion of plucking a string, blending auditory and tactile imagery to imbue the hardware with poetic elegance. Simply angle and rotate the handle to the locked position, and the window can be securely fixed in place.

CHORD GRIP STRAIGHT HANDLE

W23163A

AL ZA Css 7mm

100

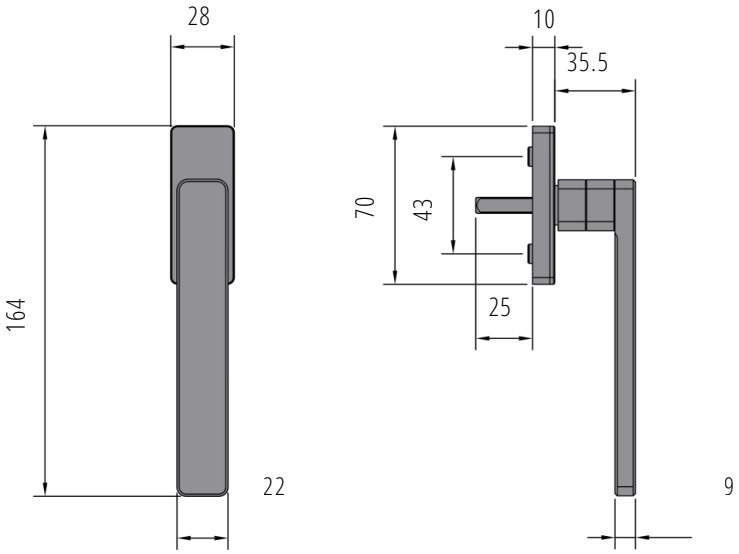

CHORD GRIP STRAIGHT HANDLE

W23163B

AL ZA Css 7mm

100

PROFILE HOLE SIZE

Convert 180 degrees to 90 degrees

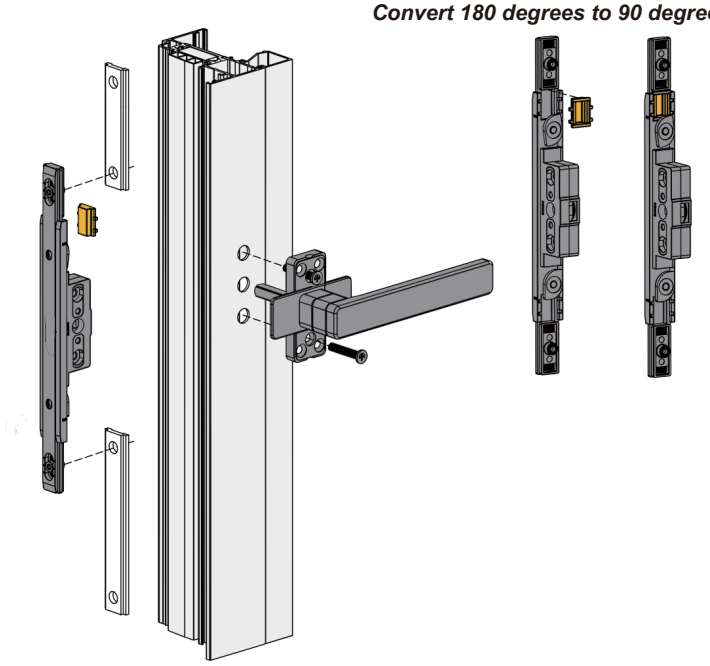

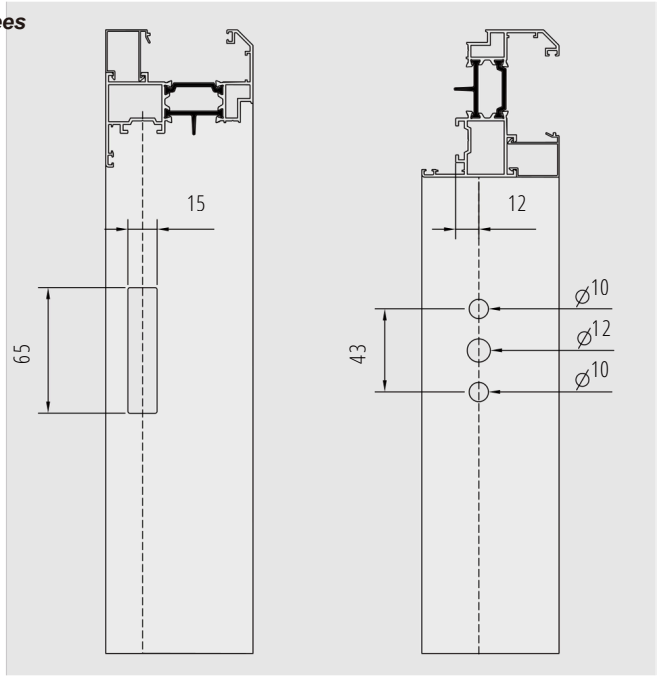

CHORD GRIP CROOKED HANDLE

W23163R

100

AL ZA Css

7mm

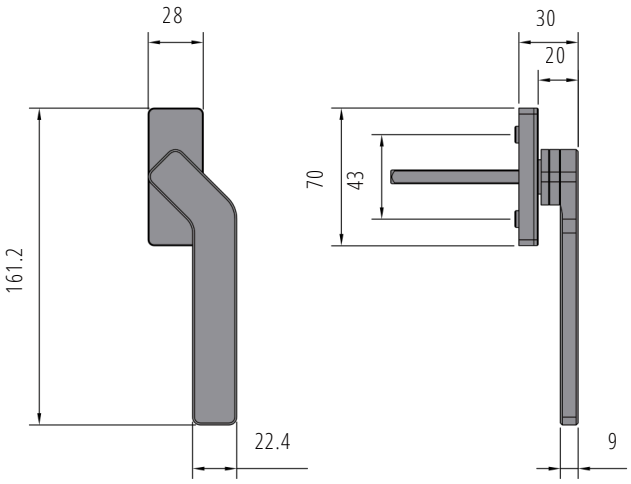

CHORD GRIP CROOKED HANDLE

W23163L

100

AL ZA Css

7mm

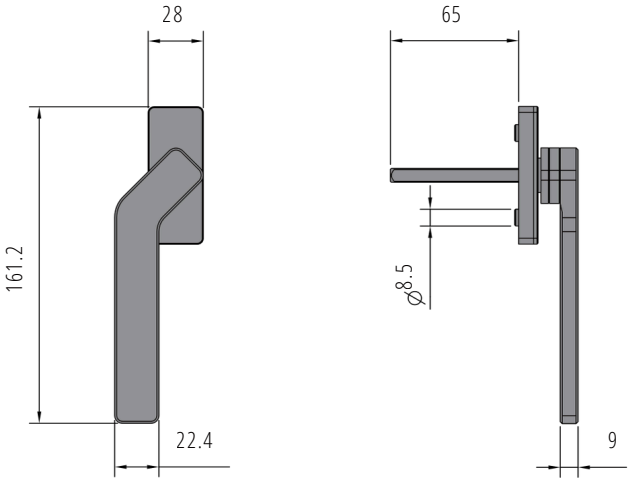

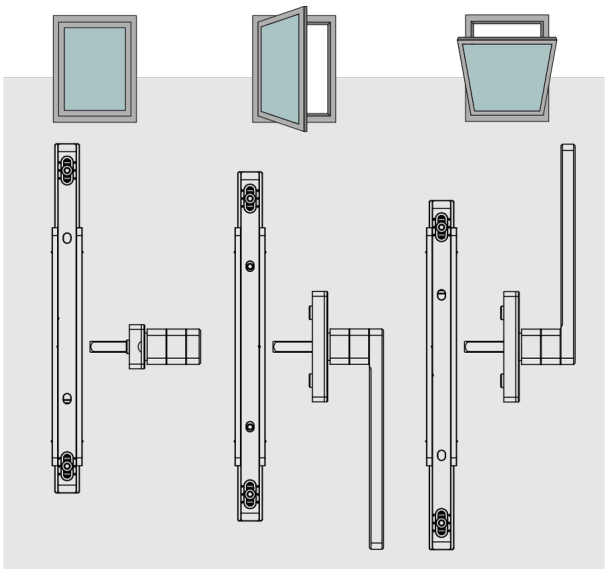

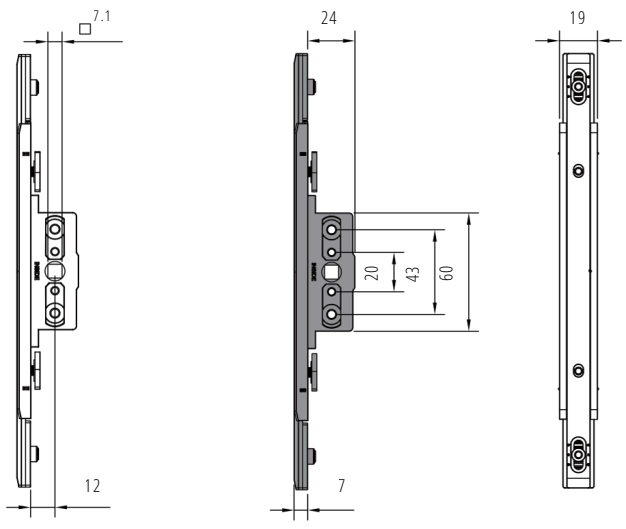

FLOW SWING HANDLE

W23061

100

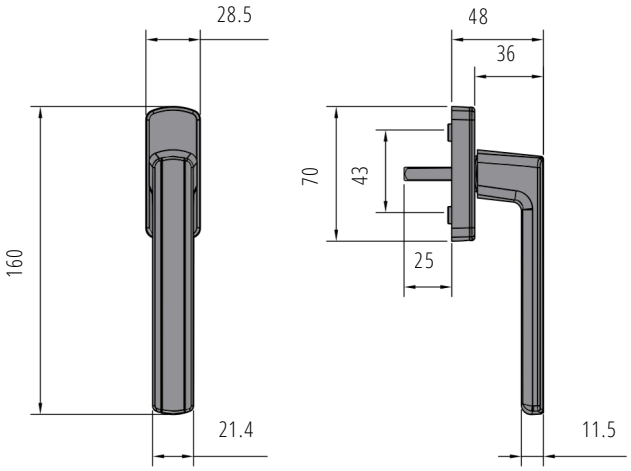

FLOW SWING HANDLE

W23061R

100

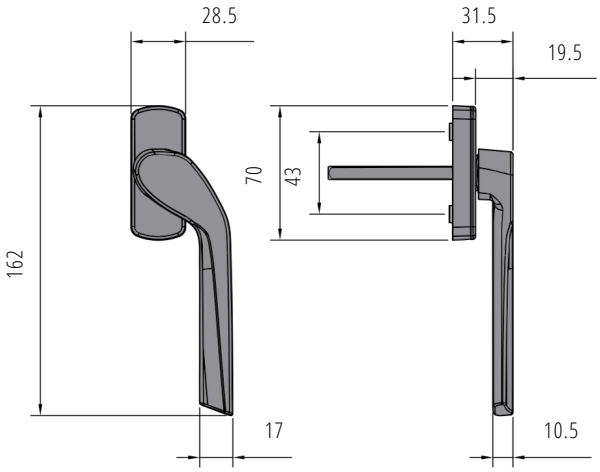

FLOW SWING HANDLE

W23061L

100

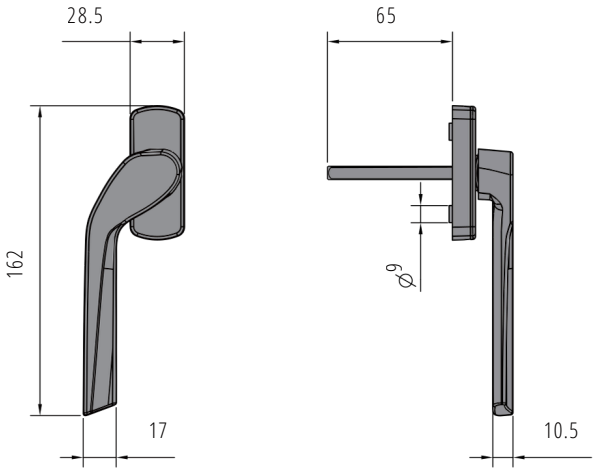

CURVE STRAIGHT HANDLE

W23105

100

AL ZA Css 7mm

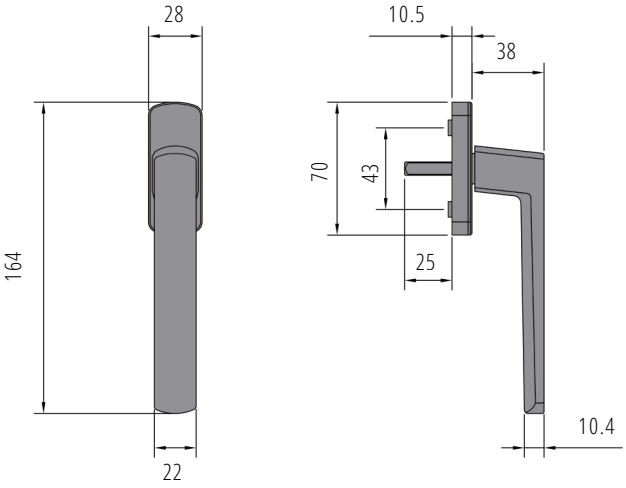

CURVE STRAIGHT HANDLE

W23105R

100

AL ZA Css 7mm

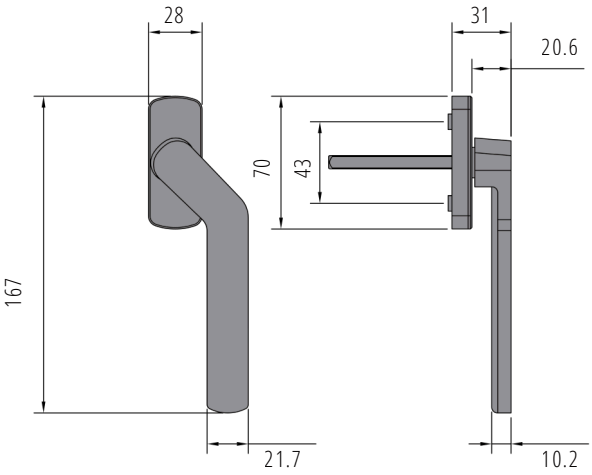

CURVE STRAIGHT HANDLE

W23105L

100

AL ZA Css 7mm

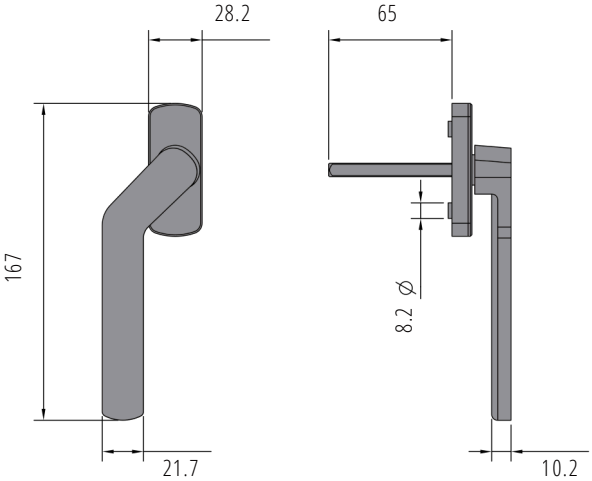

CELEST ARC HANDLE

W23108

AL ZA Css 7mm

100

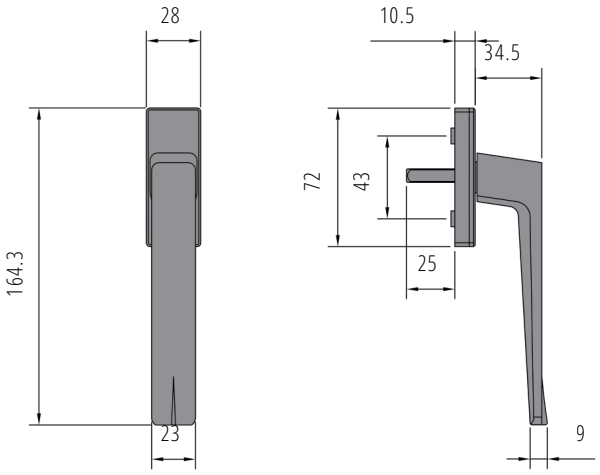

CELEST ARC HANDLE

W23108R

AL ZA Css 7mm

100

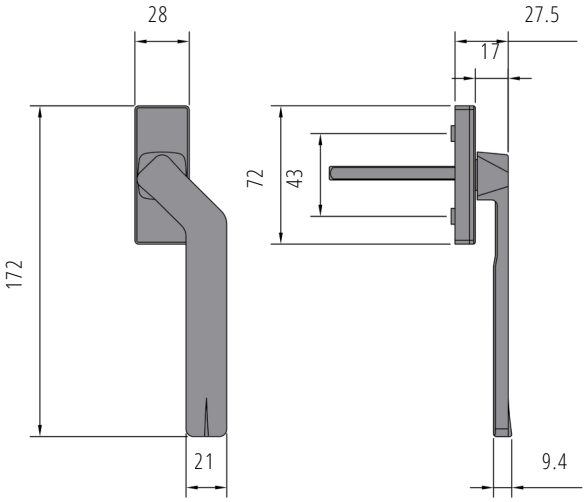

CELEST ARC HANDLE

W23108L

AL ZA Css 7mm

100

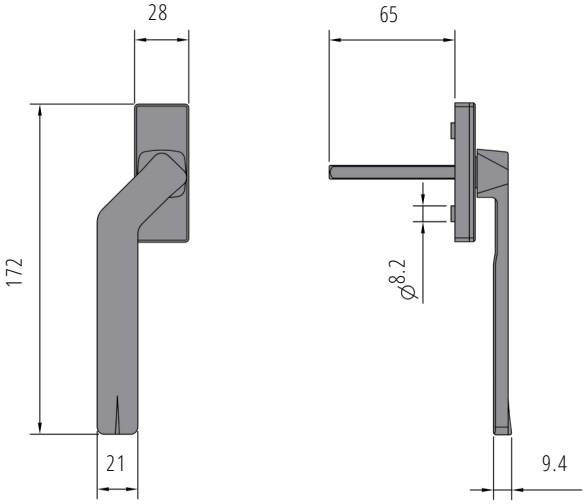

ROUND LEVER HANDLE

W23065

100

AL ZA
Css
7mm

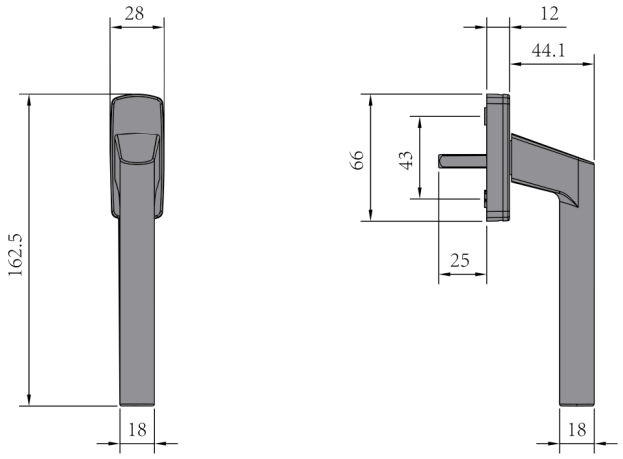

ROUND LEVER HANDLE

W23065R

100

AL ZA
Css
7mm

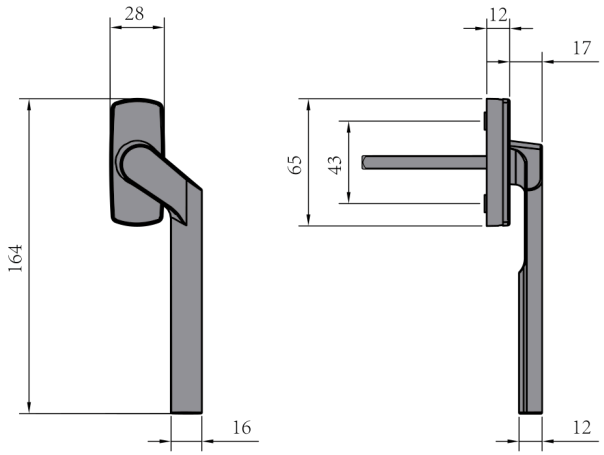

ROUND LEVER HANDLE

W23065L

100

AL ZA
Css
7mm

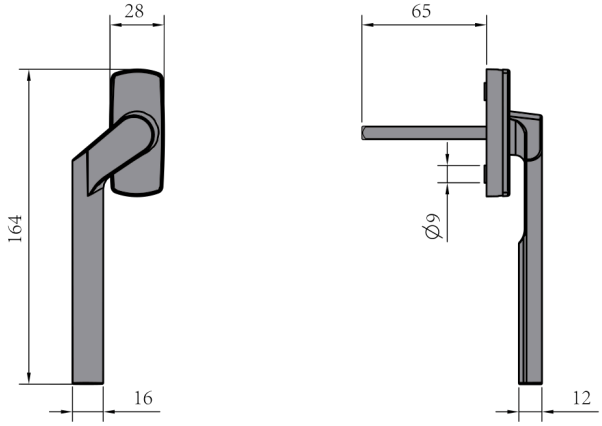

GUTTA LATCH HANDLE

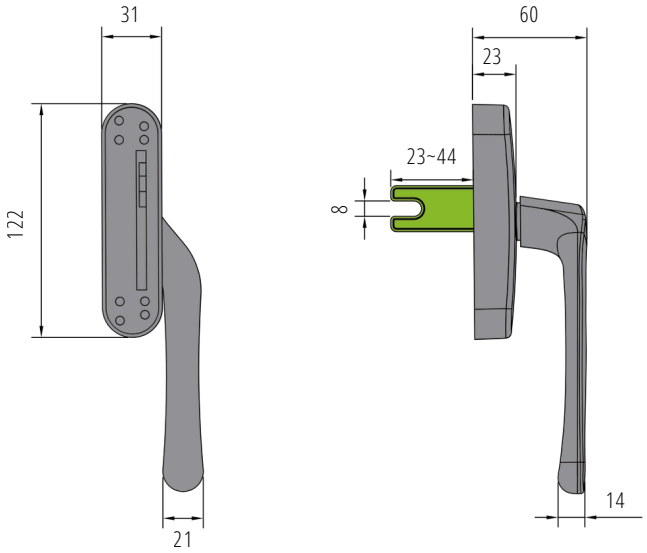

AL ZA

W23262

50

SQUIRC LELATCH PRO HANDLE

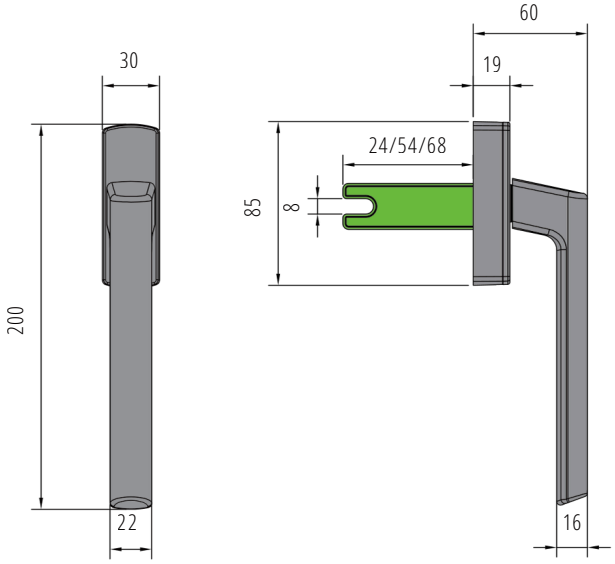

AL ZA

W23248

50

ZENITH GRIP HANDLE

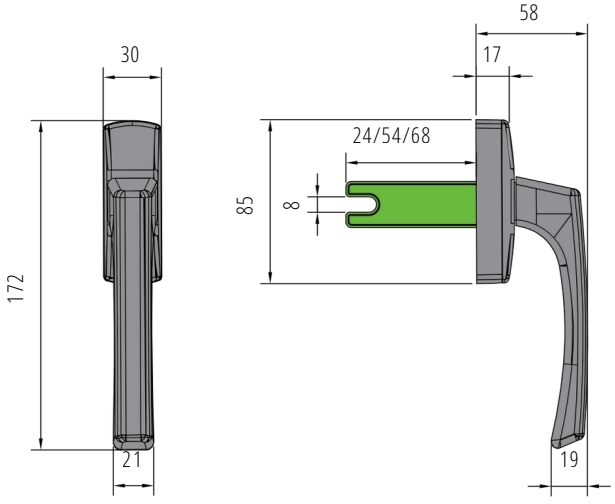

AL ZA

W23250

50

AEQUUS SHAPE HANDLE

W23247

50

AL ZA

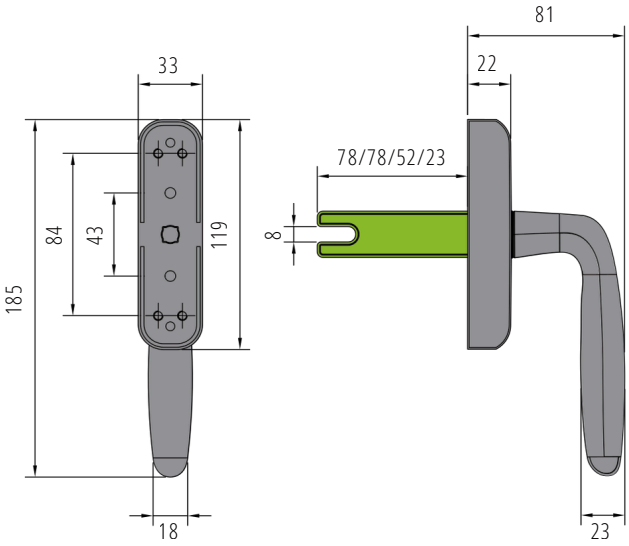

ZENITH GRIP HANDLE

W23251

50

AL ZA

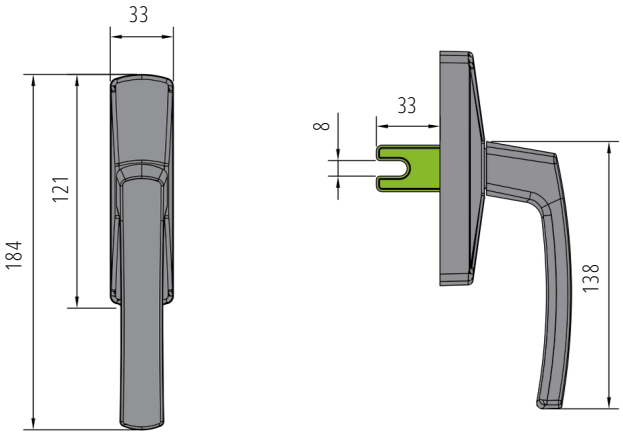

HANDLE WITH KEY CYLINDER

W23249

50

AL ZA

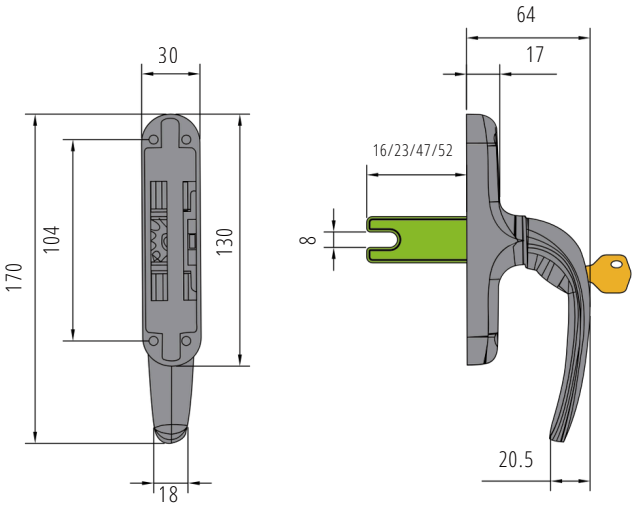

F7 TRANSMISSION GEARBOX

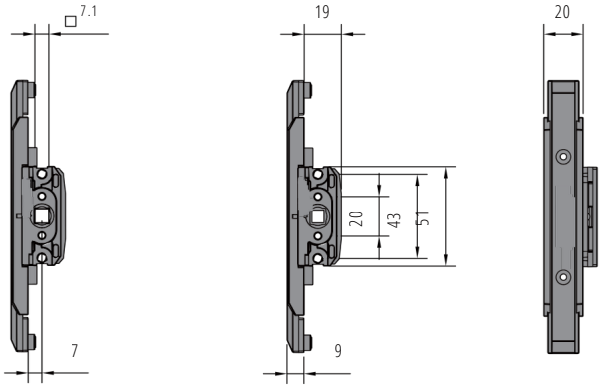

ZA

7mm

W22971

100

Convert 180 degrees to 90 degrees

- The transmission gearbox is the central control unit in tilt & turn window hardware systems. Connected directly to the window handle, it transfers rotational movement to multiple locking points along the sash. This enables smooth opening, secure locking, and reliable operation in both tilt and turn modes.

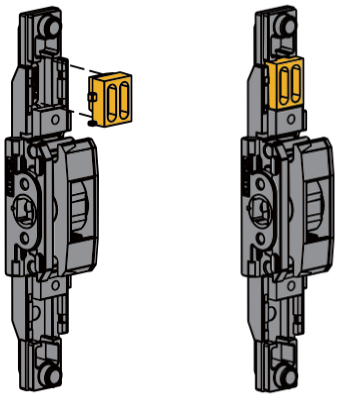

PROFILE HOLE SIZE

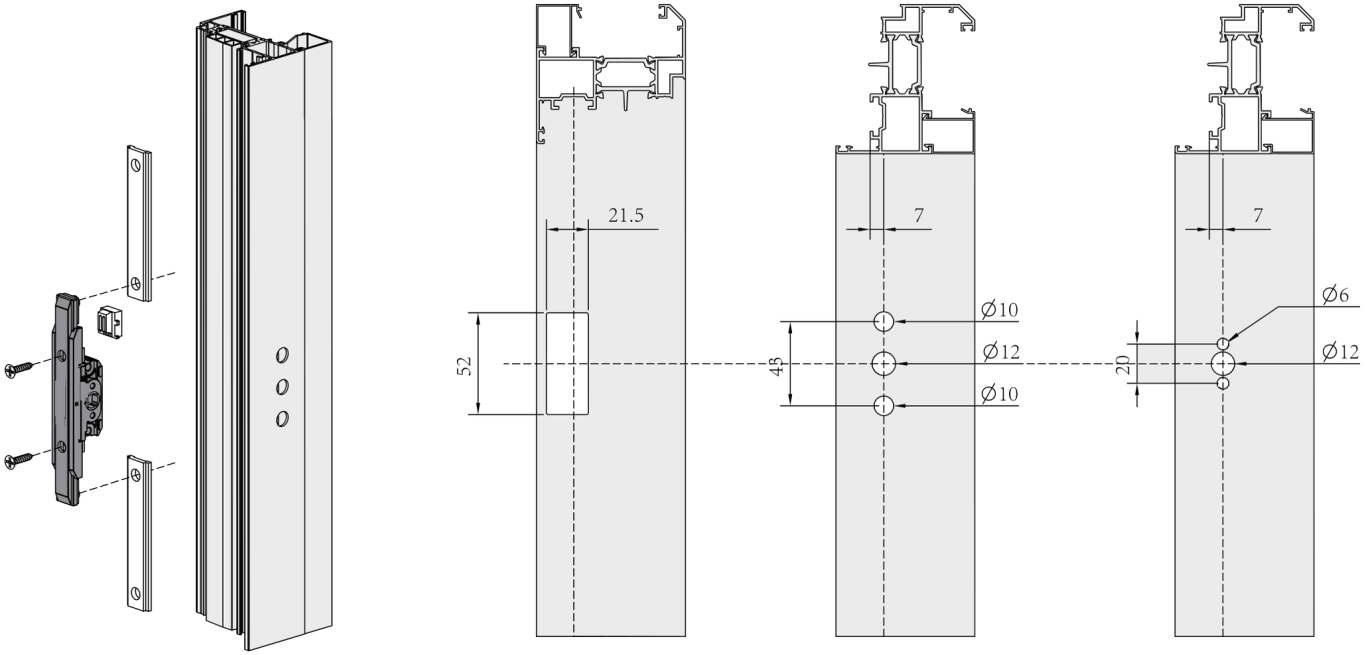

F12 TRANSMISSION GEARBOX

W23022

ZA

7mm

100

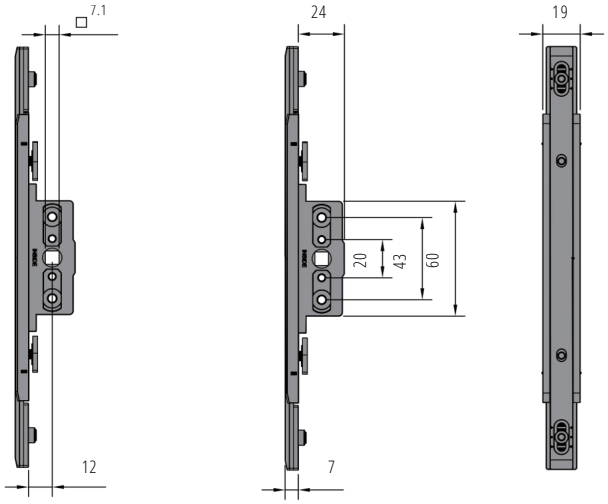

Technical Features:

- Converts handle rotation into linear motion
- Simultaneously activates upper, lower, and lateral locking points
- Provides secure multi-point locking for enhanced safety
- Compact design for seamless integration into sash profiles
- Produced from high-strength steel with corrosion-resistant coating

Convert 180 degrees to 90 degrees



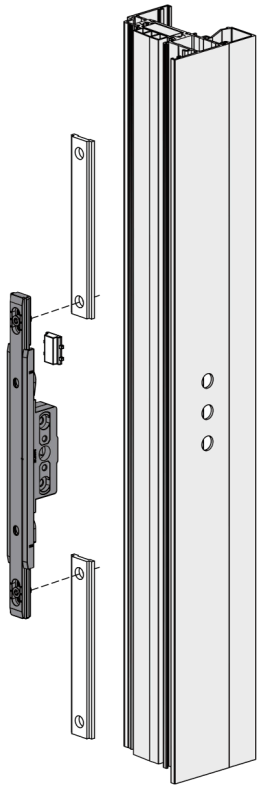

PROFILE HOLE SIZE

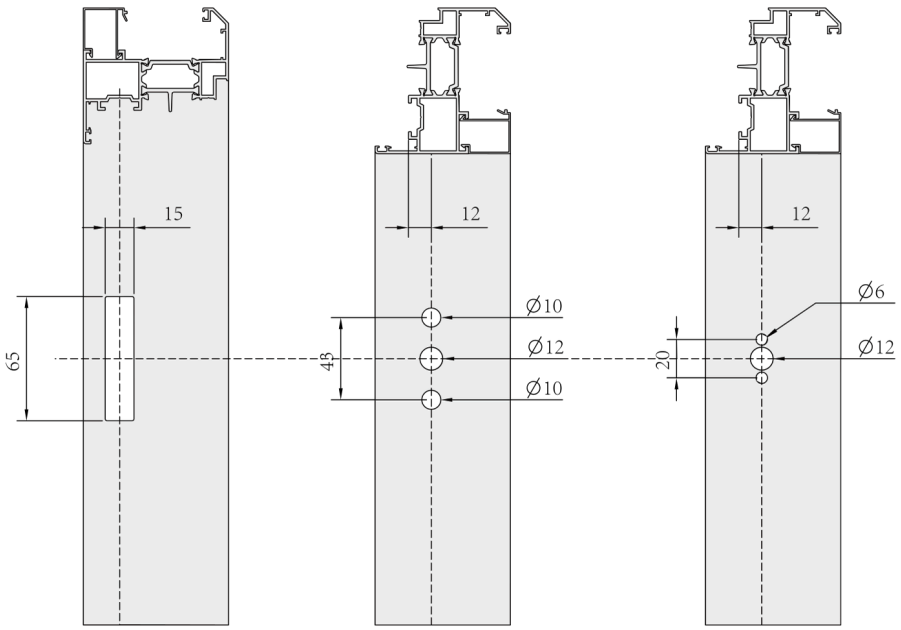

F15 TRANSMISSION GEARBOX

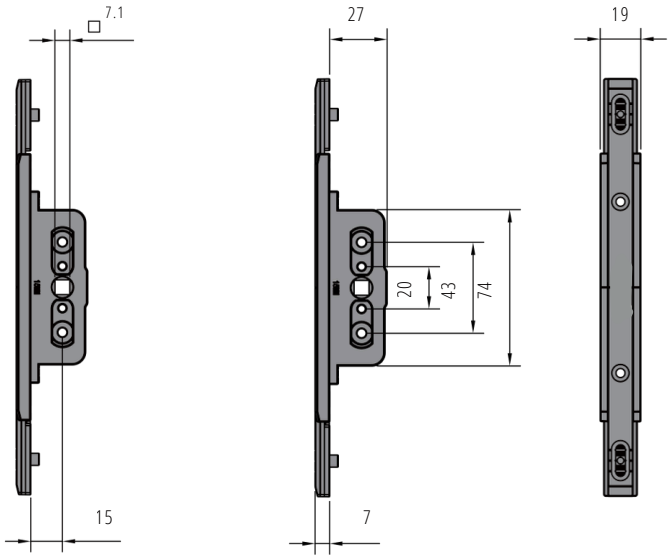

ZA

7mm

W23023

100

- The transmission gearbox ensures **optimal performance, durability, and user-friendly operation**, making it an essential component in modern window systems.

Convert 180 degrees to 90 degrees

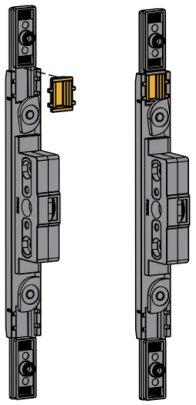

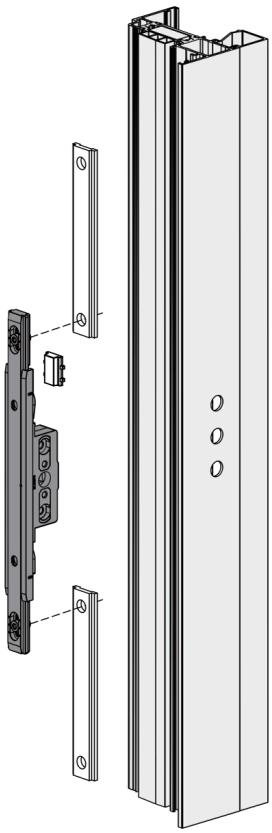

PROFILE HOLE SIZE

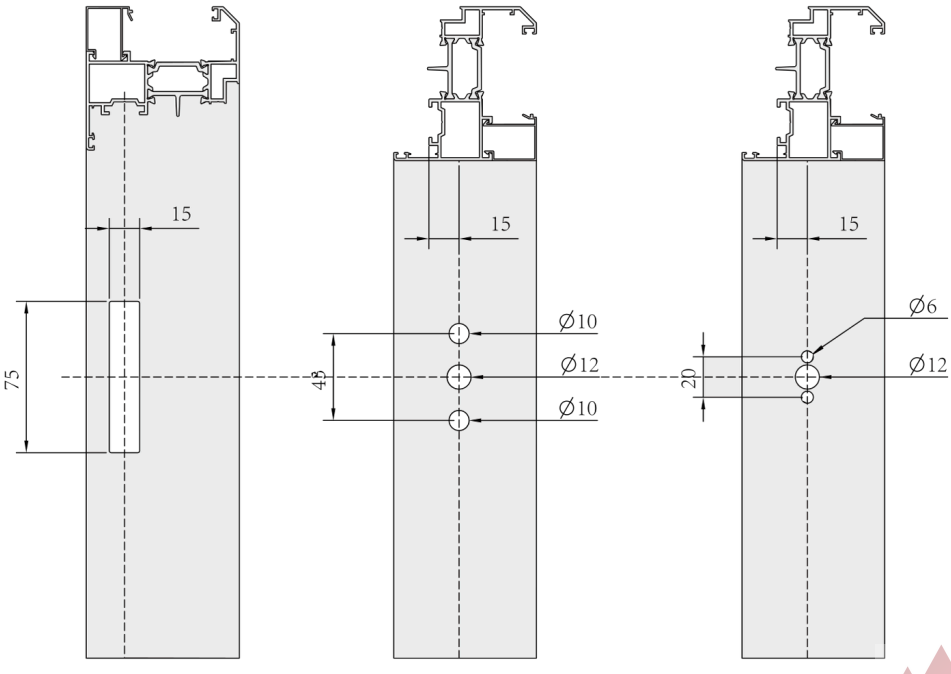

TRANSMISSION GEARBOX

W22987

100

SS

7mm

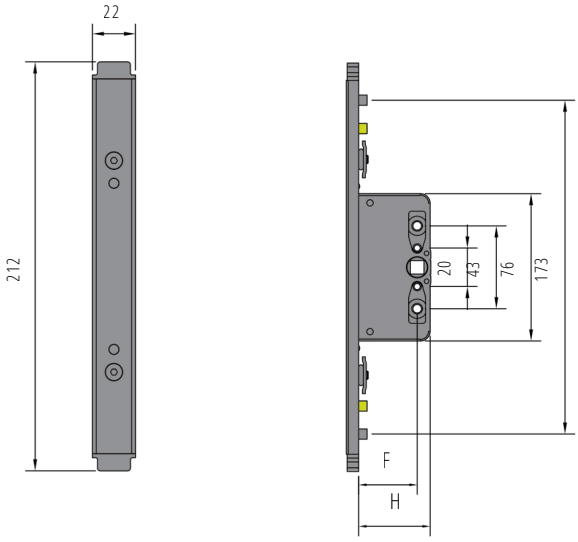

PRODUCT CODE	CENTER DISTANCE F	HEIGHT H
W22987 M10	10mm	17mm
W22987 M12	12mm	19mm
W22987 M20	20mm	27mm
W22987 M25	25mm	32mm
W22987 M30	30mm	37mm
W22987 M35	35mm	42mm

- In single-side opening window systems, the transmission gearbox configuration and dimensions are determined by the profile thickness, ensuring compatibility and optimal performance.

PROFILE HOLE SIZE

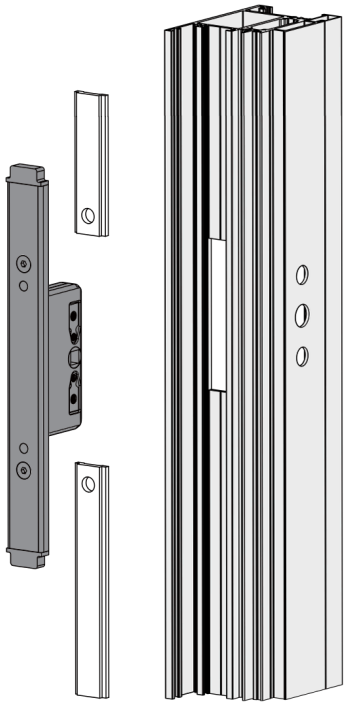

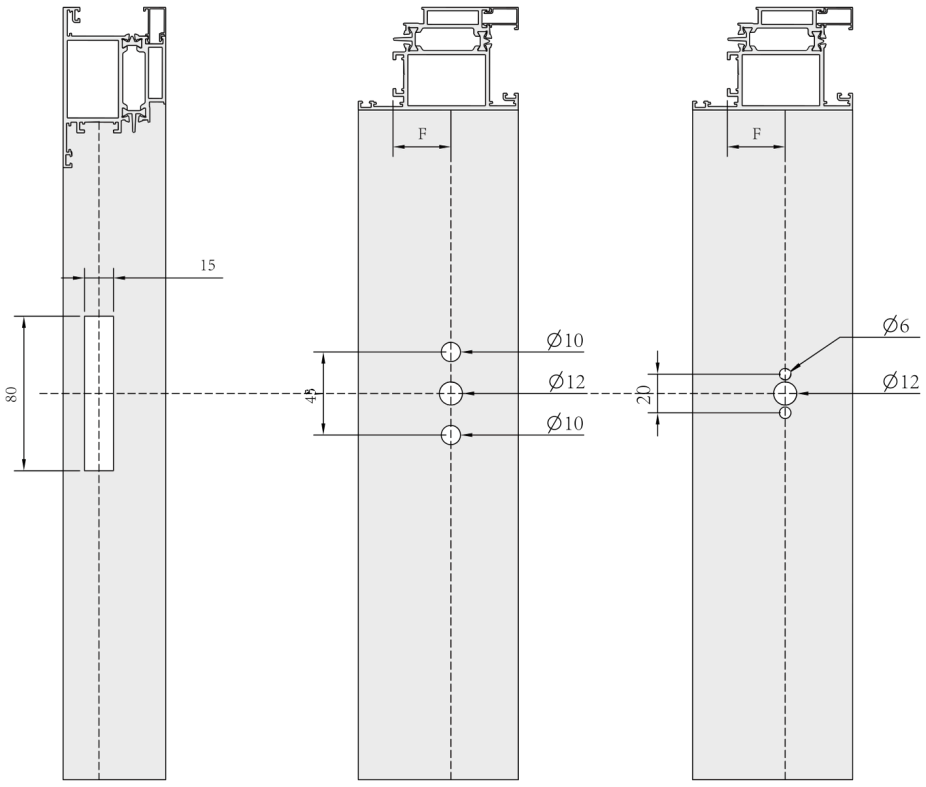

INNOVATION IN DOOR HARDWARE

DESIGN MEETS FUNCTIONALITY

MULTI-POINT LOCKING SWING DOOR SYSTEM

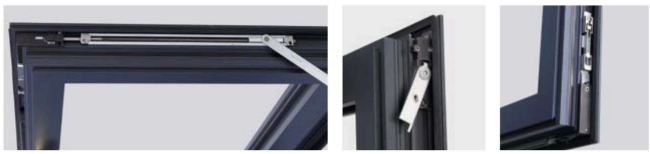

W00005	R / L	**









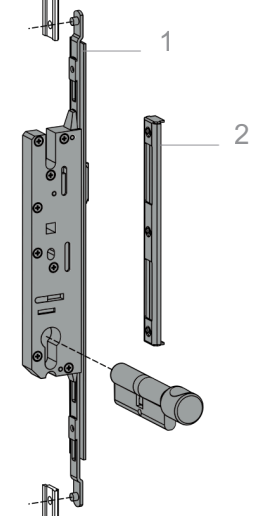





Restriction application detail

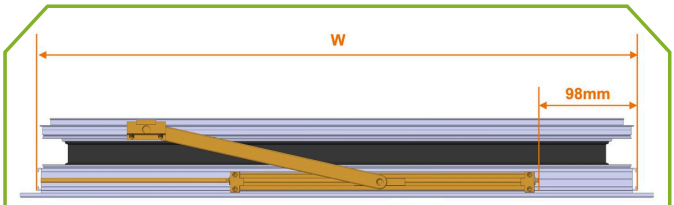

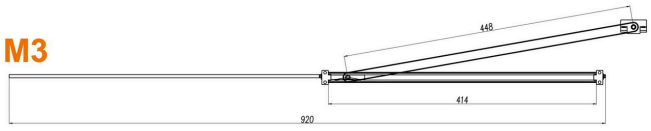

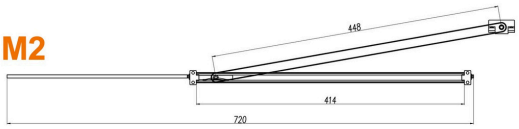



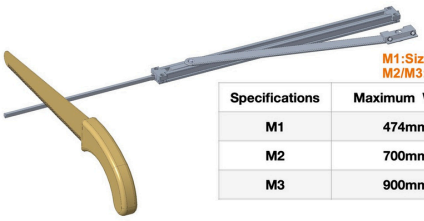

M1:Size to be cropped = W - 474mm
M2/M3:Size to be cropped = W - 598mm

Specifications	Maximum Width	Minimum Width
M1	474mm	700mm
M2	700mm	900mm
M3	900mm	1100mm

TECHNICAL CHARACTERISTICS:

I. Swing Door System with multi-point locking mechanism exceeds European security standards (EN 12209 Class 3+)
II. Triaxial adjustable hinges (vertical, lateral, depth) installed in sets of three, supporting heavy door loads up to 150KG (EN 1935 Grade 13)
III. Free-positioning hardware enables door fixation at any angle via handle operation, offering flexible user control (EN 13126-8 compliant)
IV. Lift block device ensures smooth door closing, provides vertical support in closed position, and reduces lateral tension on the top hinge caused by gravity
Significantly extends hinge service life by at least 40%, verified through fatigue testing (EN 13927)

S/N	Product Name	Code	Finish	Notes
1	Multi point lock body 8528	W23180	304Polishing and drawing	Select according to the window sash profile
	Multi point lock body 8530	W23180	304Polishing and drawing	
	Multi point lock body 8533	W23180	304Polishing and drawing	
	Multi point lock body 8535	W23180	304Polishing and drawing	
2	Lock Seat Lock	W23120	304Polishing and drawing	
3	Point	W22981	Black Zinc / Zn-Ni	
4	Lock Seat	W22961	Black Zinc / Zn-Ni	
5	Adjustable Hinge	W23178	Silvery / Black	
6	Position Adjuster Position	W22960	Black Zinc / Zn-Ni	
7	Adjuster Cap Positioning	W01327	Black	
8	Corner Device	W22947	Black Zinc / Zn-Ni	
9	Stopper	W22964 M01	Zn-Ni	Select according to the width of the fan
		W22964 M01	Zn-Ni	
		W22964 M03	Zn-Ni Black	
10	Lifting Device（L）	W22980	Zn-Ni Black	Optional accessories
	Lifting Device（R）	W22979	Black Zinc / Zn-Ni	Optional accessories

- Robust construction increases durability and long-term performance in demanding applications.

ULTRA-LIGHTWEIGHT PRECISION FOLDING DOOR SYSTEM

W00006	R L	**

Dual-Material Drive System

A 6063-T5 aerospace-grade aluminum alloy track combined with a stainless steel precision-cast pulley set achieves a push-pull force of ≤35N. Compliant with EN 1527:2013, the system reduces weight by 58% compared to traditional steel systems, while maintaining a 200,000-cycle lifespan (BS 6375:2009 certified).

Folding Synchronization on Control

Stainless steel central synchronizer connected via 12 mm torque tube ensures multi-leaf synchronization accuracy ≤ 0.8 mm (DIN 18111 dynamic load certified), suitable for heavy-duty systems up to 120 kg per group

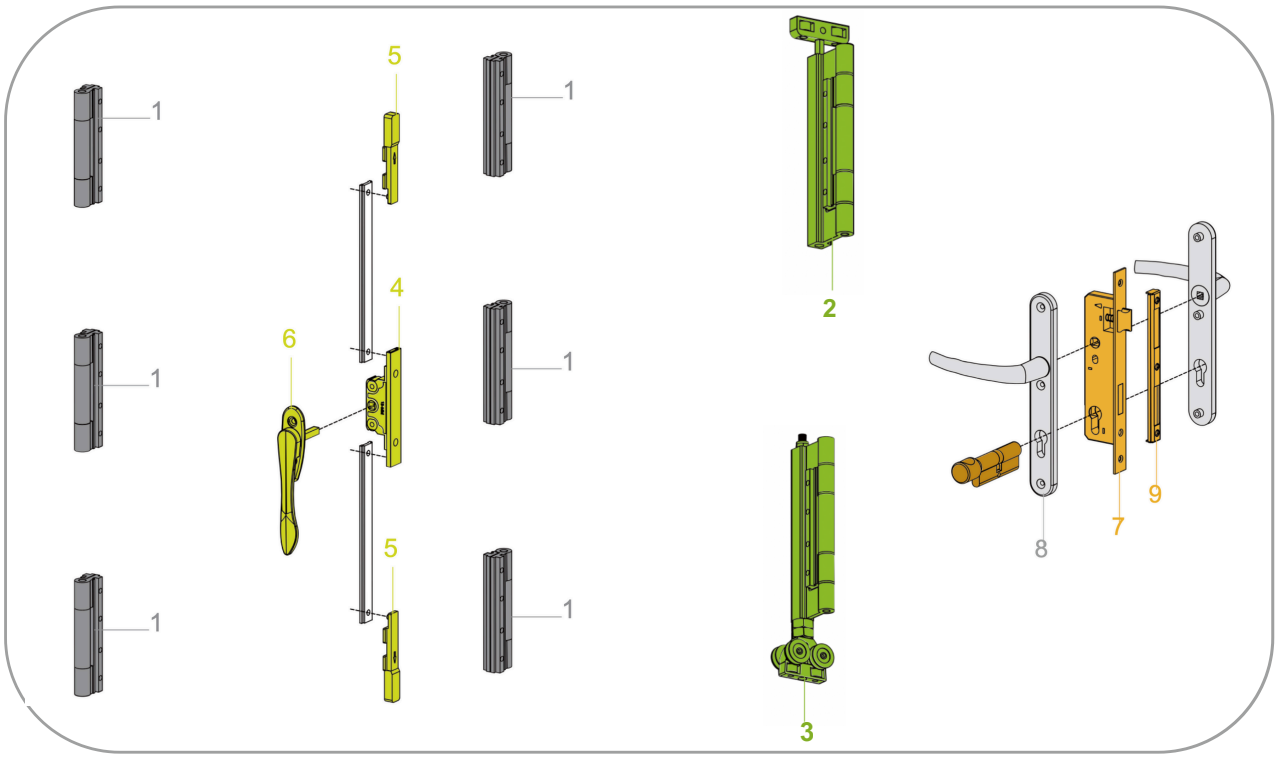

S/N	Product Name	Code	Finish	
1	Hinge	W23253	Black	
1A	Hinge With Pull Handle	W23254	Black	
2	Top Hinge	W23255	Black	
3	Bottom Hinge	W23256	Black	
4	Gear Box	W23257	Black	
5	Bolt	W23258	Black	
6	Window Handle	W23261	SUS304	
7	Mortise Lock With Cylinder F25	W23122 M25	SUS304	
	Mortise Lock With Cylinder F28	W23122 M28	SUS304	
	Mortise Lock With Cylinder F30	W23122M30	SUS304	
	Mortise Lock With Cylinder F35	W23122M35	SUS304	
8	Door Handle	W23260	Black	
9	Lock Striker	W23120	SUS304	

TECHNICAL CHARACTERISTICS:

Surface Protection Treatment

Anodized coating ≥ 15 µm (AA20 grade) with nano-ceramic layer passes 1000 hrs neutral salt spray test (ISO 9227 NSS), with operational temperature range -40 °C to +80 °C (BS EN 1670:2007 corrosion resistance RC3)

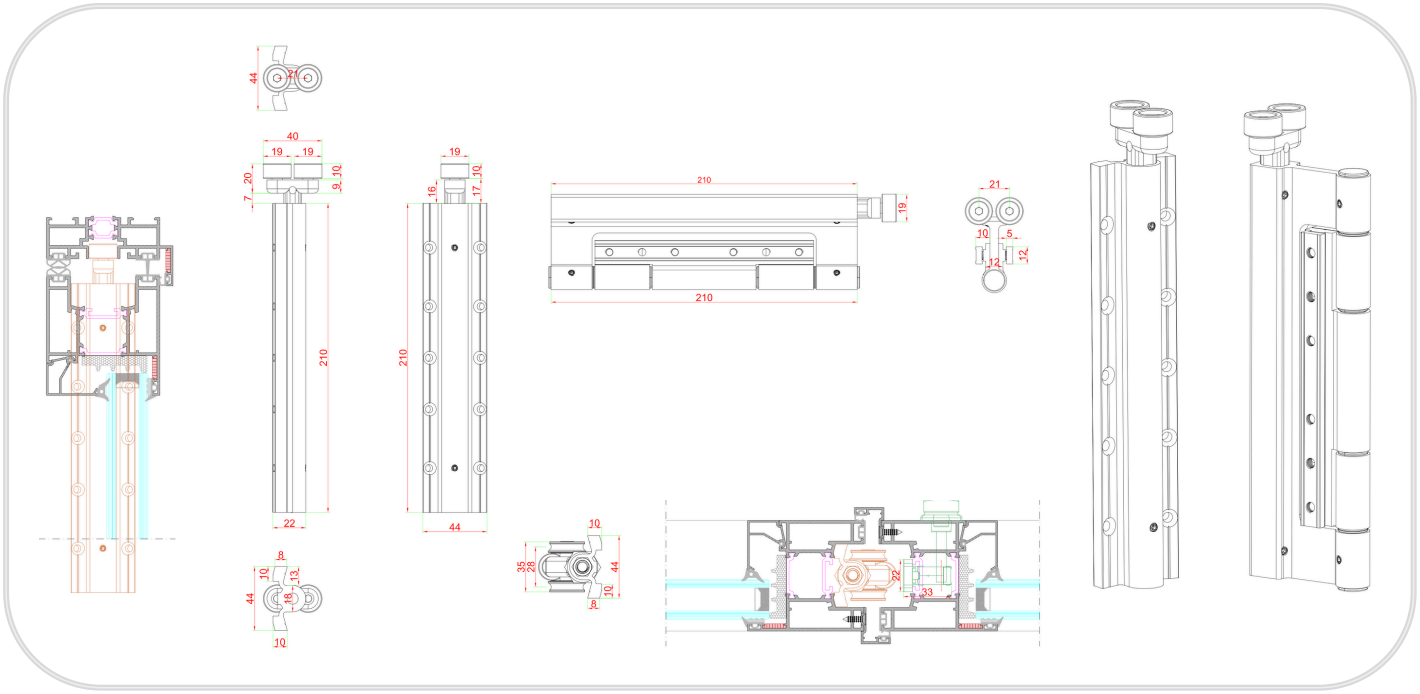

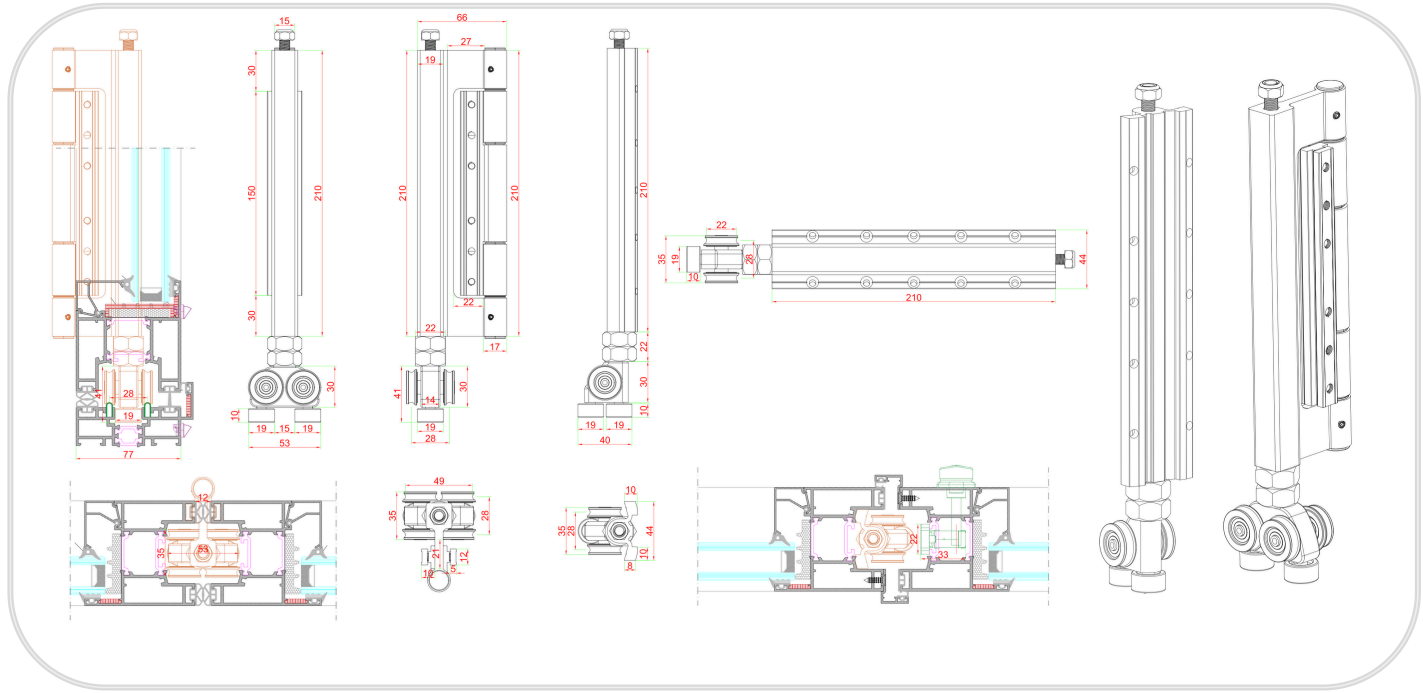

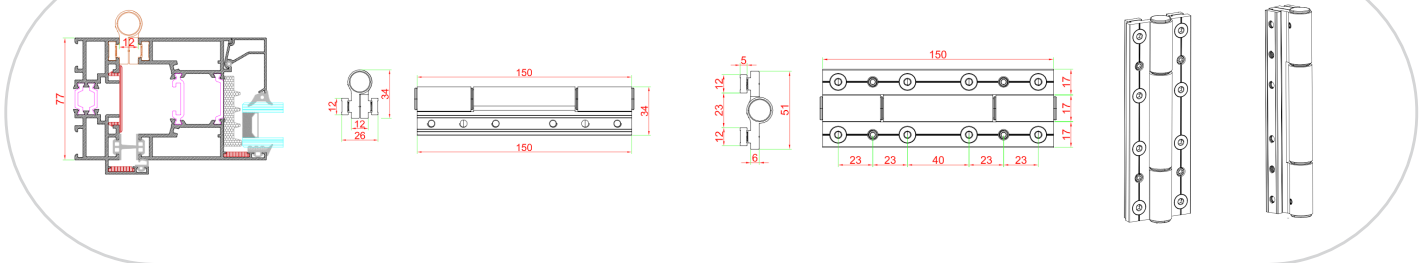

SWIFT TAIL LEVER HANDLE

W23160

AL ZA Css 8mm

20

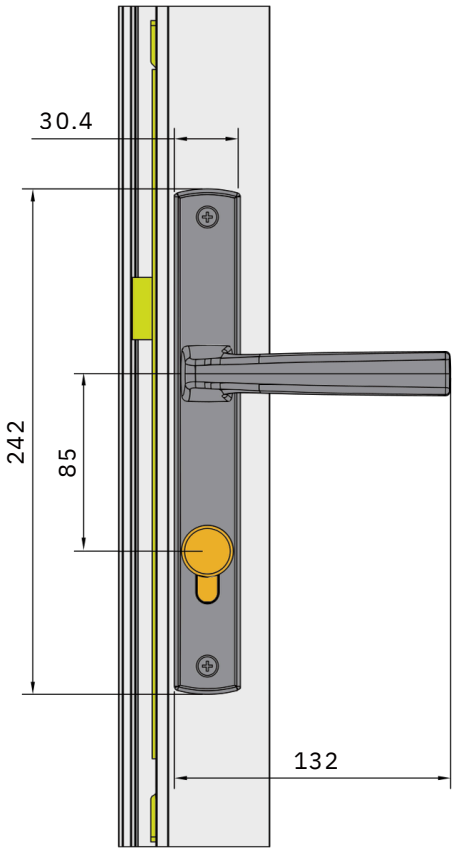

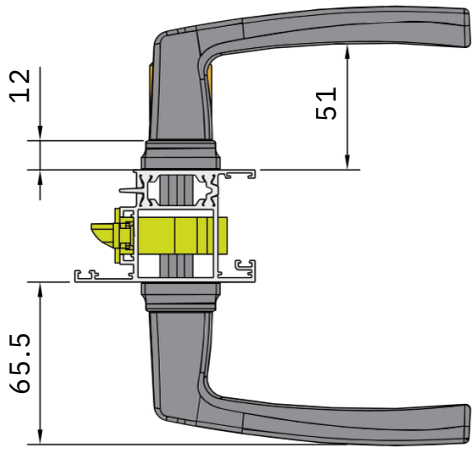

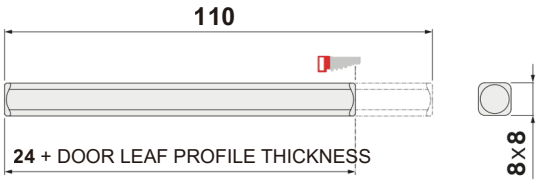

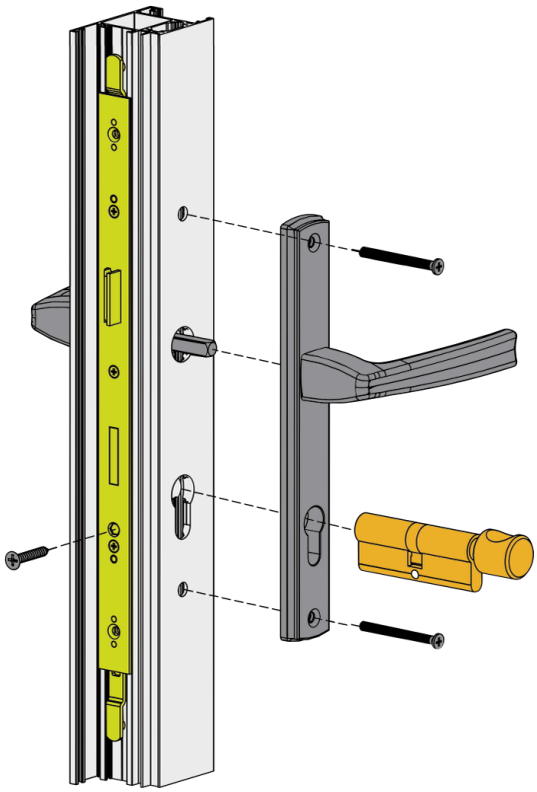

PROFILE HOLE SIZE

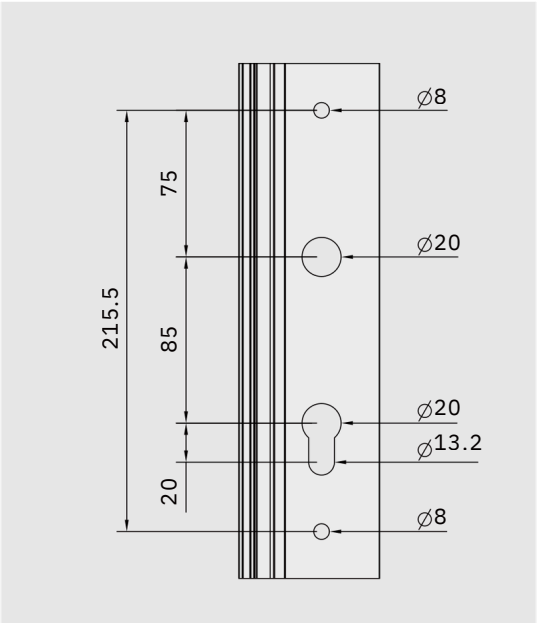

SWIFT TAIL LEVER HANDLE

W23160A

20

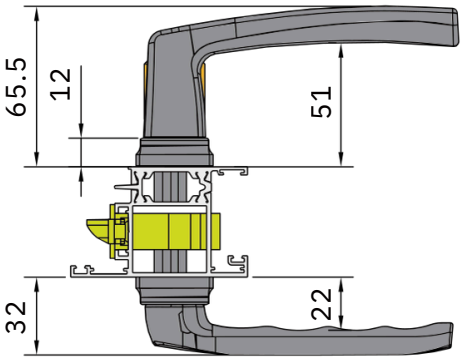

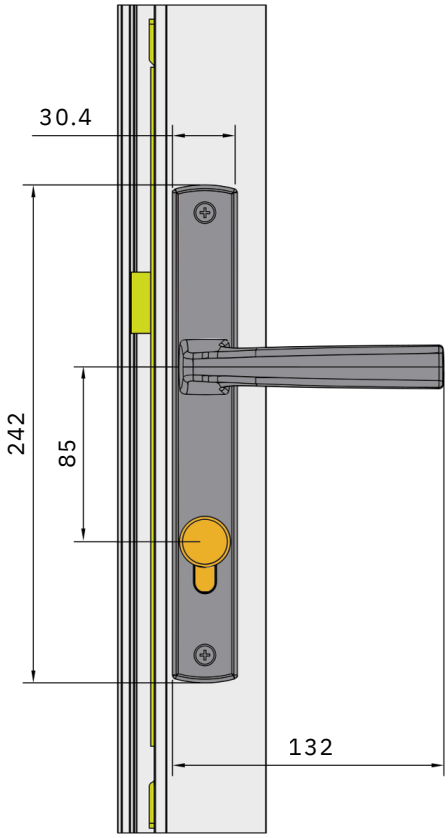

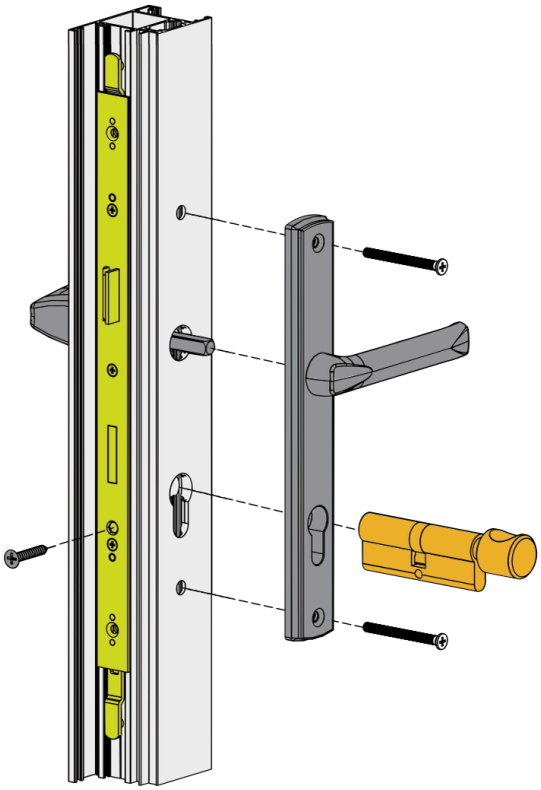

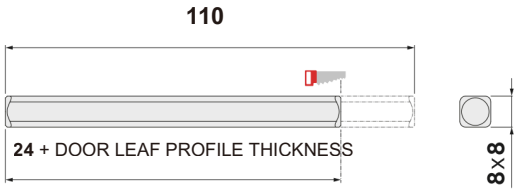

PROFILE HOLE SIZE

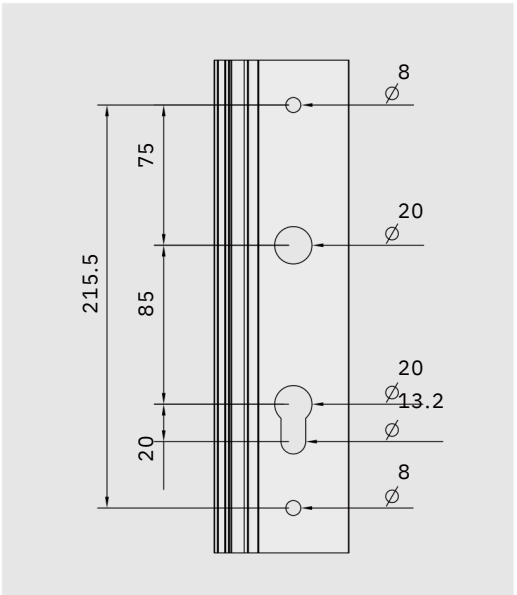

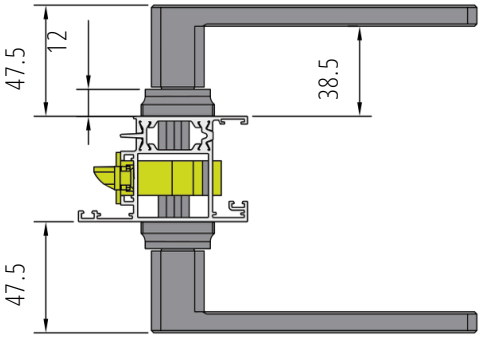

VANESIA HANDLE

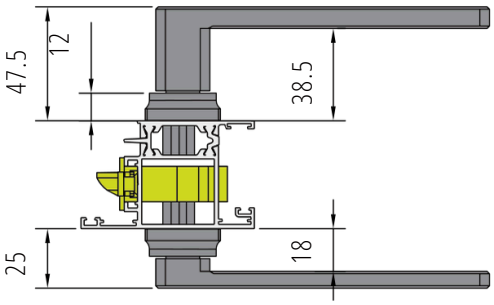

110

VANESIA HANDLE

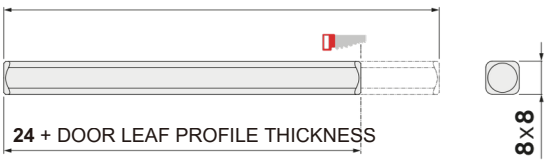

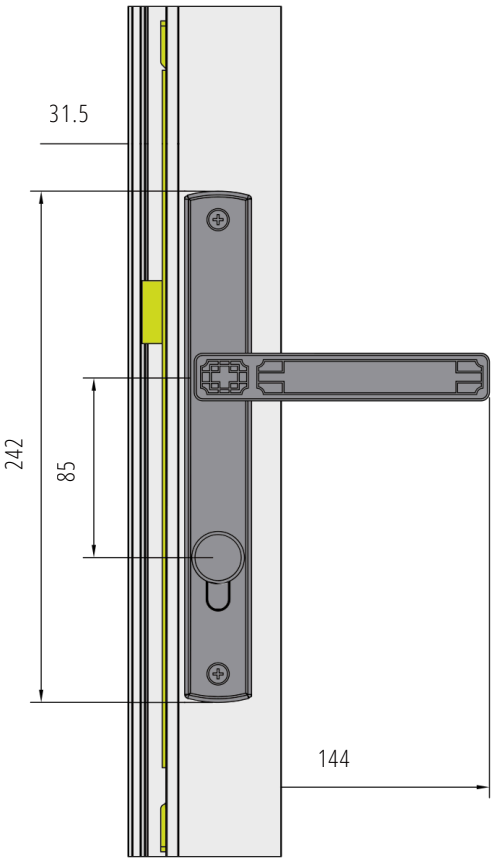

PROFILE HOLE SIZE

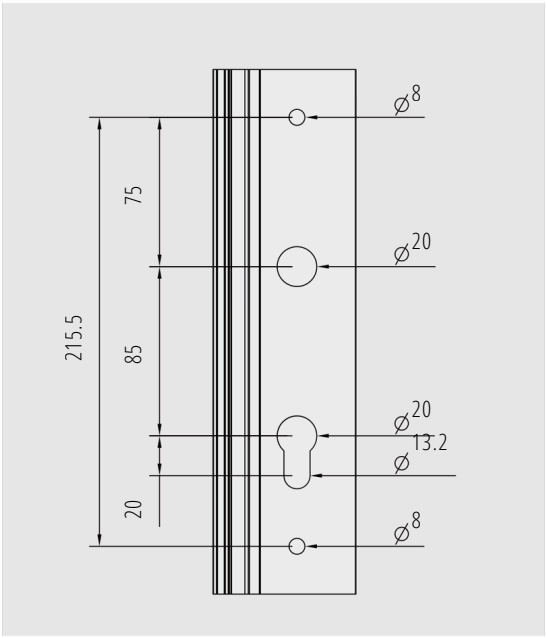

QUADRA HANDLE

W23163

20

AL ZM
Css
8mm

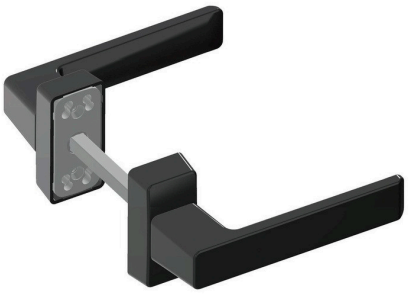

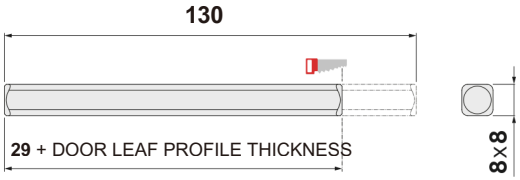

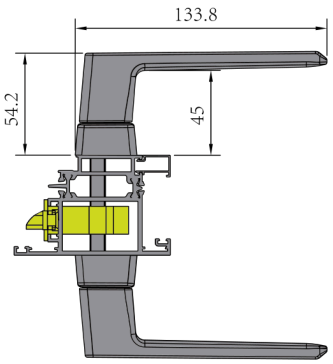

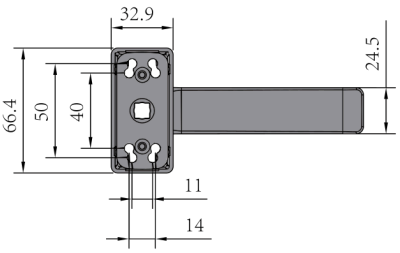

PROFILE HOLE SIZE

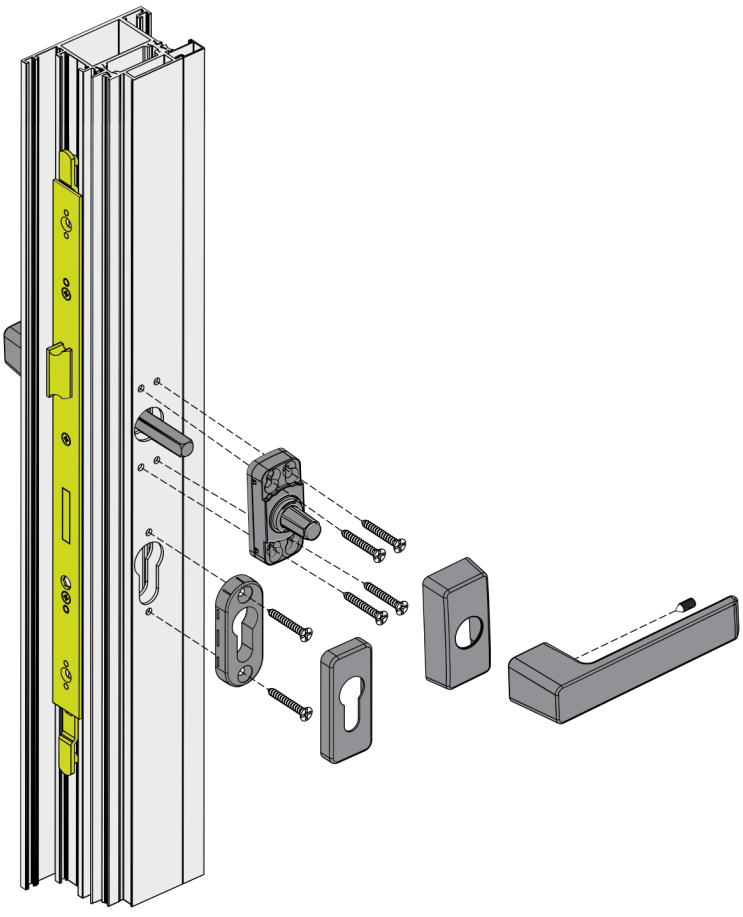

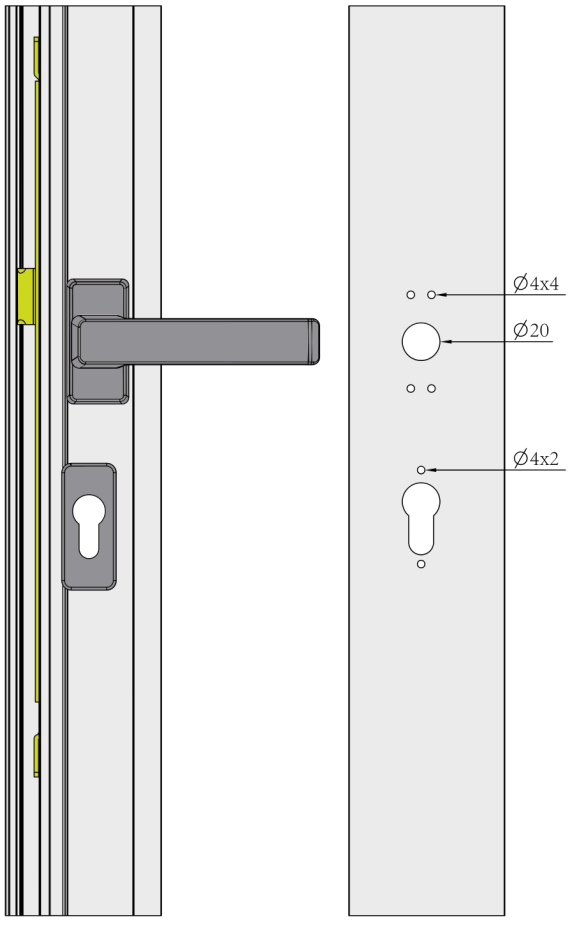

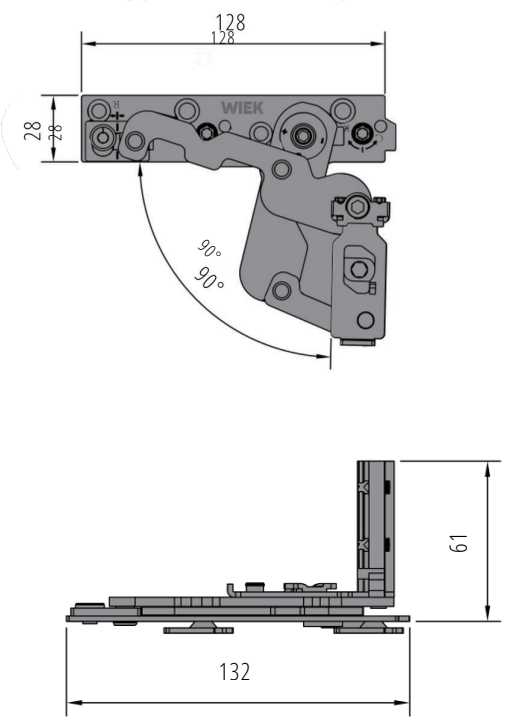

HINGE WITH 90-DEGREE ROTATION

Css

AL

W22973	R
W22972	L

50

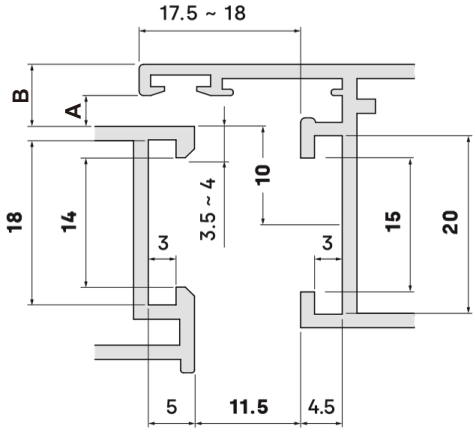

TECHNICAL CHARACTERISTICS:

This hinge is constructed from high-strength automotive structural steel and 6063-T5 aluminum alloy, with a maximum opening angle of 90° and a maximum load capacity of 150 kg. Its repeated opening/closing cycles comply with European durability standards, and it has passed a 1000-hour neutral salt spray test (per ASTM B117/ISO 9227)

HINGE ADJUSTMENT PARAMETERS

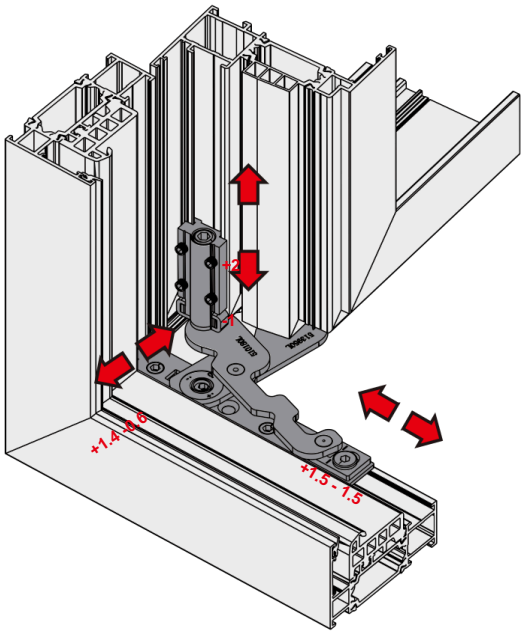

European Standards

FRAME GROOVE SIZE	14 - 18 mm
SASH GROOVE SIZE	15 - 20 mm
HINGE SWING CLEARANCE	11.5 mm
FIT DIMENSION	10 mm

MAXIMUM VALUE (A)

3	90°
4.5	90°
5.5	90°

MAXIMUM VALUE (B)

3	90°
4.5	90°
5.5	90°

HINGE WITH 90-DEGREE ROTATION

W23030	R
W23029	L

Css

AL

50

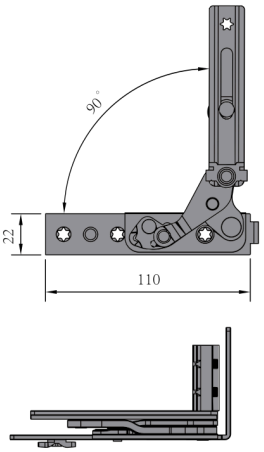

TECHNICAL CHARACTERISTICS:

This hinge is constructed from 304 stainless steel and 6063-T5 aluminum alloy, with a maximum opening angle of 90° and a maximum load capacity of 60 kg. Its repeated opening/closing cycles comply with European durability standards.

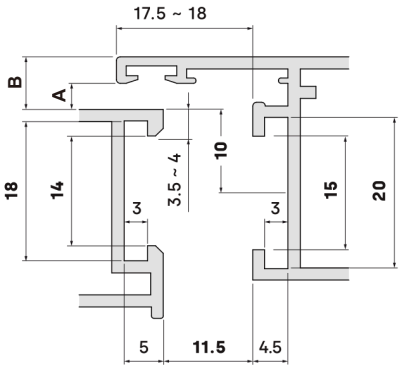

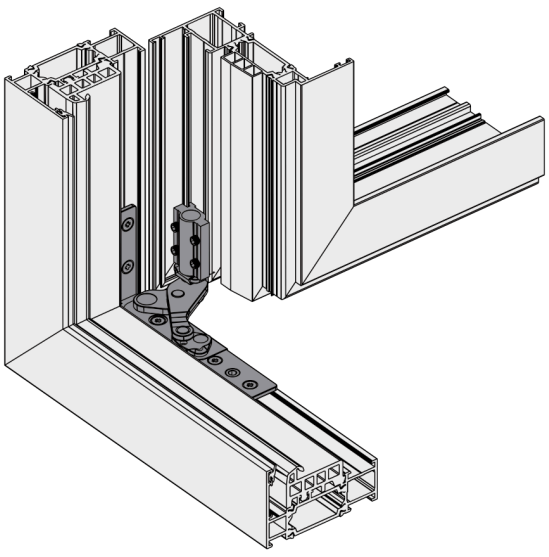

European Standards

FRAME GROOVE SIZE	14 - 18 mm
SASH GROOVE SIZE	15 - 20 mm
HINGE SWING CLEARANCE	11.5 mm
FIT DIMENSION	10 mm

MAXIMUM VALUE (A)

3	90°
4.5	90°
5.5	90°

MAXIMUM VALUE (B)

3	90°
4.5	90°
5.5	90°

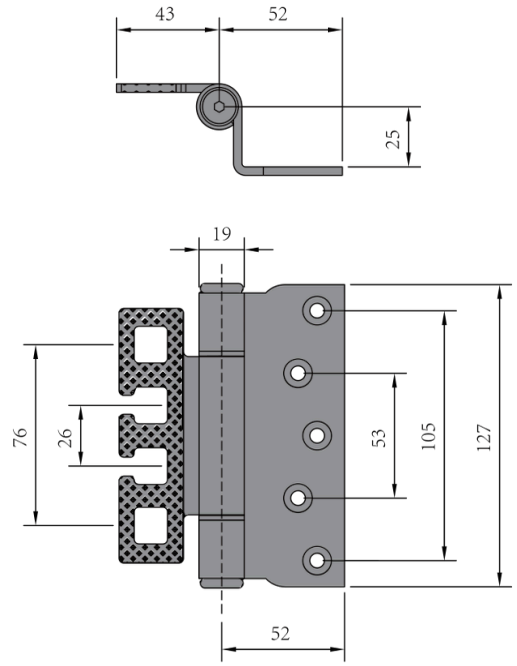

FIRE DOOR HINGE

W22969

Hss

20

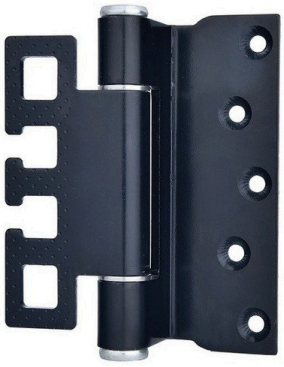

FIRE DOOR HINGE

Hss

W22970

20

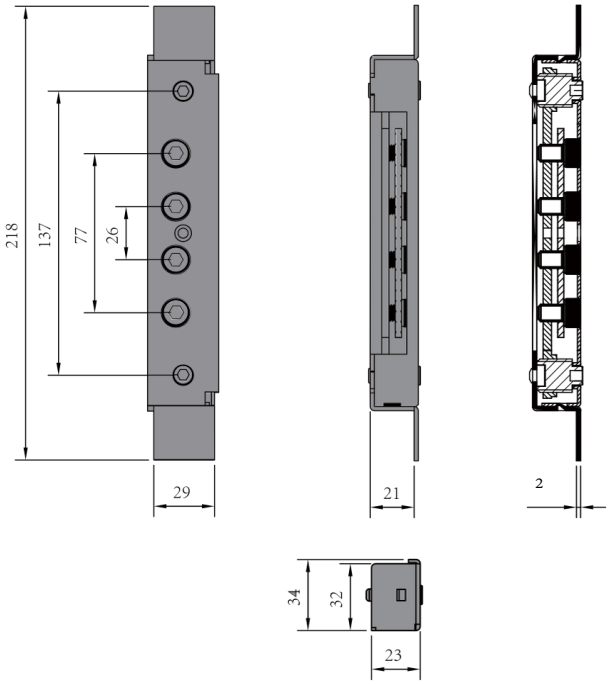

Fire Door Hinge Technical Specifications

Engineered to withstand high temperatures, fire door hinges maintain door functionality and structural integrity during fire events. Made from heat- and corrosion-resistant materials, they comply with EN 1935 Grade 13 and EN 1634-1 standards. Suitable for residential, commercial, and industrial fire-rated doors, these hinges ensure reliable operation and help contain fire and smoke, enhancing safety.

ADJUSTABLE DOOR HINGE 150kg

W23178

30

AL SS Hss

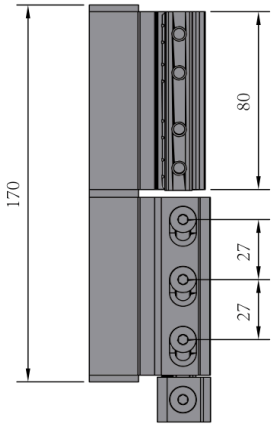

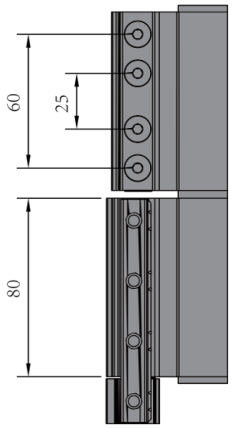

Equipped with needle bearings in the pin housing, it operates smoothly and quietly without play. The stainless steel central joint prevents wear over time, unlike plastic components, ensuring long-lasting durability and silent performance.

HINGE ADJUSTMENT PARAMETERS

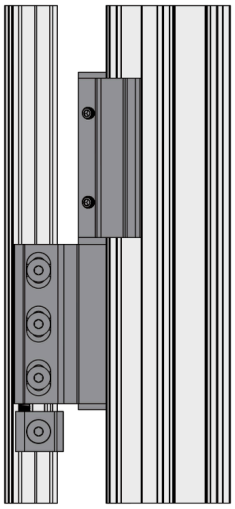

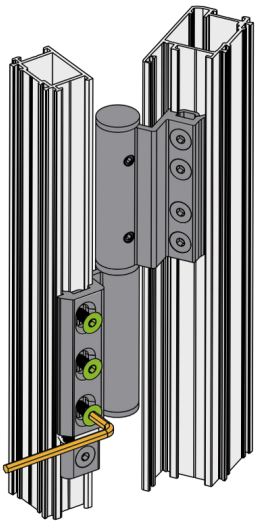

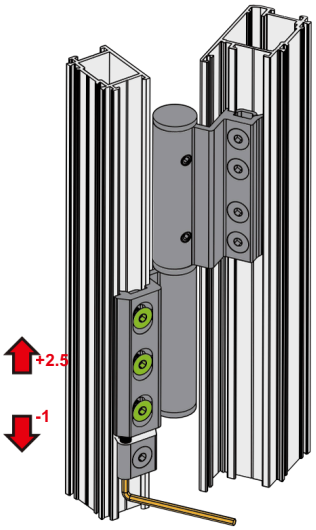

EUROPEAN STANDARD GROOVE

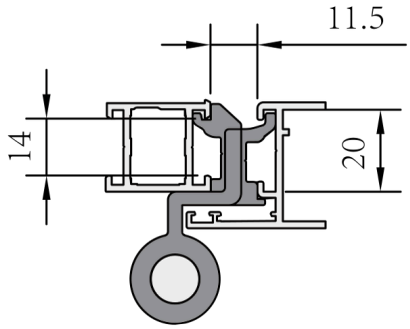

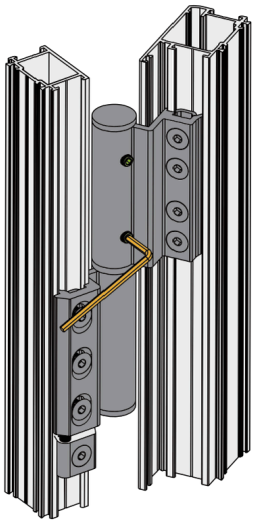

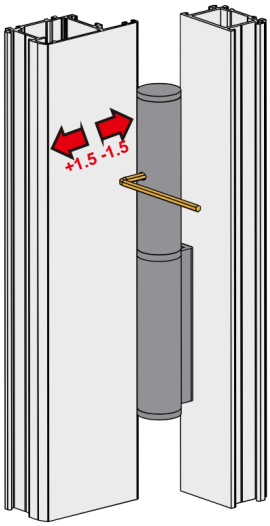

Robust door hinge with triaxial adjustment (vertical, lateral, depth) supporting door weights up to 150 kg.

MULTI-POINT LOCKING CURTAIN WALL TOP-HUNG WINDOW

W00004	*	*
	*	*

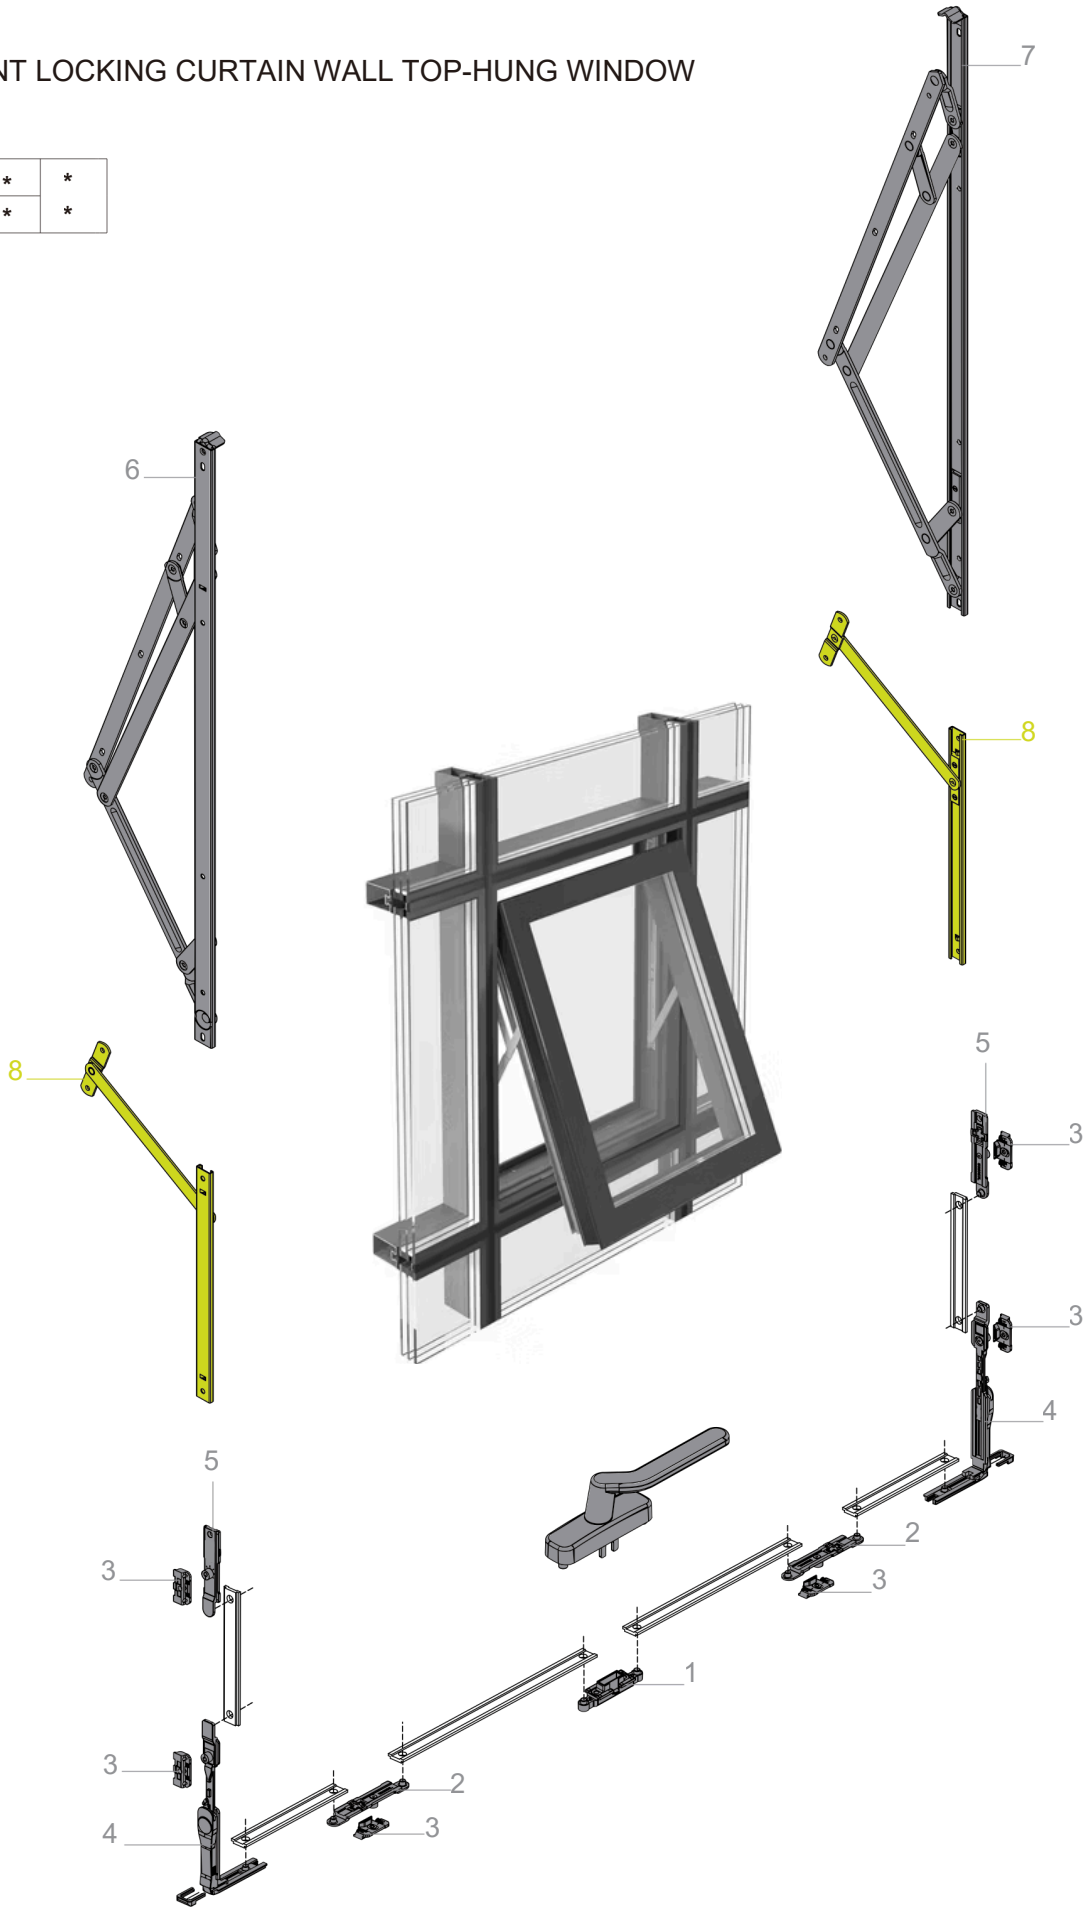

Top-Hung Projected Window for Curtain Wall Systems

TECHNICAL CHARACTERISTICS:

Description:
Designed for integ ration into curtain wall façades, this window system offers smooth outward opening from the top, ensuring both functionali ty and architectural harmony. Ideal for high-rise applications where ventilation and aesthetics are equally important.

Openin g Type:
Top-hung, outward opening.

Purpose:
Provides natural ventilation in high-rise buildings while preserving the seamless look of the façade.

S/N	Product Name	Code	Finish	Notes
1	Lock Box	W23007	Black Zinc	
2	Double Lock Point	W23016	Black Zinc	
3	Lock Seat	W22966	Black Zinc	
4	Corner Drive	W23015A	Black Zinc	
5	Lock Point	W22981	Black Zinc	
6	12 Inch Sliding Brace	W23138 M12	SUS304	Choose the appropriate product based on the height of the window sash
	14 Inch Sliding Brace	W23138 M14	SUS304	
	16 Inch Sliding Brace	W23138 M16	SUS304	
	20 Inch Sliding Brace	W23138 M20	SUS304	
	24 Inch Sliding Brace	W23138 M24	SUS304	
	26 Inch Sliding Brace	W23138 M26	SUS304	
7	Wind support	W23143	SUS304	

Advantages:

- Aesthetic uniformity (flush with the façade)
- Controlled opening (resistant to wind loads)
- Concealed hinge and hardware options
- Easy maintenance
- Improved natural ventilation (optimized airflow)
- Enhanced security (multi-point locking systems)
- Weather tightness (excellent sealing against rain and air infiltration)
- Durability (corrosion-resistant materials)
- Noise reduction (better acoustic insulation)
- Customizable design (variety of sizes, finishes, and glass types)

TECHNICAL CHARACTERISTICS:

Hinge sets with limiting function, designed for projected opening systems (Chamber 16-18)

I. Supplied in AISI 304 stainless steel, sets of 2 units.

II. Adjustment flange with pressure control.

III. Reinforced projected hinges available.

PROJECTED HINGE

SS

W23138	R
W23137	L

20

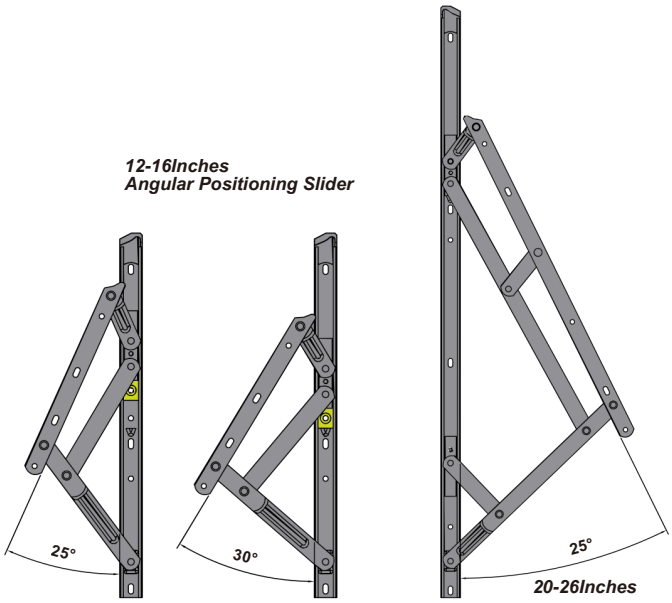

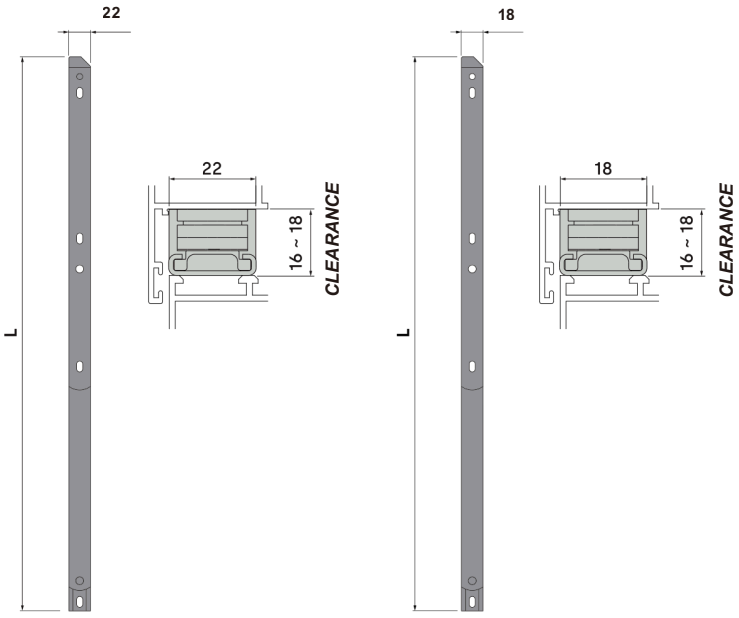

PRODUCT CODE	HINGE LENGTH L (INCHES)	OPENING ANGLE	MATERIAL
W23137L1812	12Inches	25°/30°	AISI304
W23138R1812			
W23138R1814	14Inches	25°/30°	AISI304
W23137L1814			
W23138R1816	16Inches	25°/30°	AISI304
W23137L1816			
W23138R1820	20Inches	25°	AISI304
W23137L1820			
W23138R1824	24Inches	25°	AISI304
W23137L1824			
W23138R1826	26Inches	25°	AISI304
W23137L1826			

PRODUCT CODE	HINGE LENGTH L (INCHES)	OPENING ANGLE	MATERIAL
W23138R2212	12Inches	25°/30°	AISI304
W23137L2212			
W23138R2214	14Inches	25°/30°	AISI304
W23137L2214			
W23138R2216	16Inches	25°/30°	AISI304
W23137L2216			
W23138R2220	20Inches	25°	AISI304
W23137L2220			
W23138R2224	24Inches	25°	AISI304
W23137L2224			
W23138R2226	26Inches	25°	AISI304
W23137L2226			

PROJECTED HINGE

W23136	R
W23135	L

20

SS

TECHNICAL CHARACTERISTICS:

Hinge sets with limiting function, designed for curtain wall systems (Chamber 16-18):

I. Supplied in AISI 304 stainless steel (AISI 316 available).

II. Adjustment flange with pressure control.

PRODUCT CODE	HINGE LENGTH L (INCHES)	OPENING ANGLE	MATERIAL
W23136L1812	12Inches	25°/30°	AISI304
W23135L1812			
W23136R1814	14Inches	25°/30°	AISI304
W23135R1814			
W23136R1816	16Inches	25°/30°	AISI304
W23135R1816			
W23136R1820	20Inches	25°	AISI304
W23135R1820			
W23136R1824	24Inches	25°	AISI304
W23135R1824			
W23136R1826	26Inches	25°	AISI304
W23135R1826			

PRODUCT CODE	HINGE LENGTH L (INCHES)	OPENING ANGLE	MATERIAL
W23136L2212	12Inches	25°/30°	AISI304
W23135L2212			
W23136L2214	14Inches	25°/30°	AISI304
W23135L2214			
W23136L2216	16Inches	25°/30°	AISI304
W23135L2216			
W23136L2220	20Inches	25°	AISI304
W23135L2220			
W23136L2224	24Inches	25°	AISI304
W23135L2224			
W23136L2226	26Inches	25°	AISI304
W23135L2224			

CLEARANCE 16~18



CLEARANCE 16~18



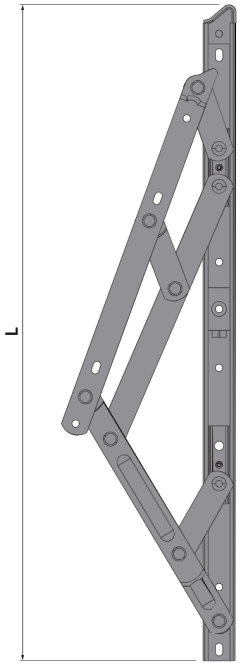

TECHNICAL CHARACTERISTICS:

Set of limiting hinges for projected:

I. Suitable for European Groove profiles or 40 ~ 20 Groove profiles (Series 4000 / 6000).

II. Allows window opening in 5 defined positions.

III. The sash opening is adjustable with positioning.

IV. To close the sash, place the hinge in the maximum opening position.

EXTENSIBLE/ADJUSTABLE LIMITING HINGE

SS

W23045

20

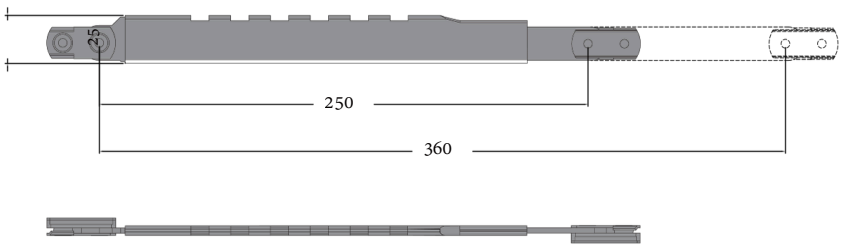

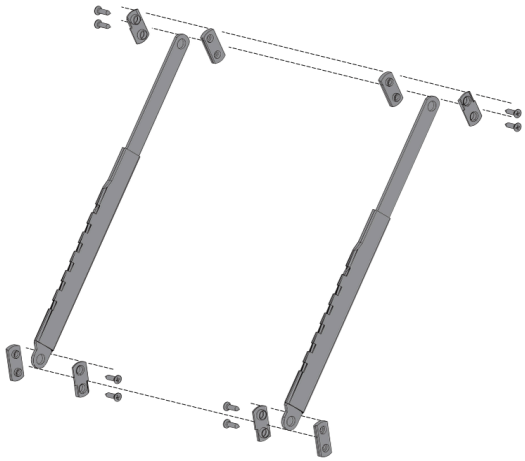

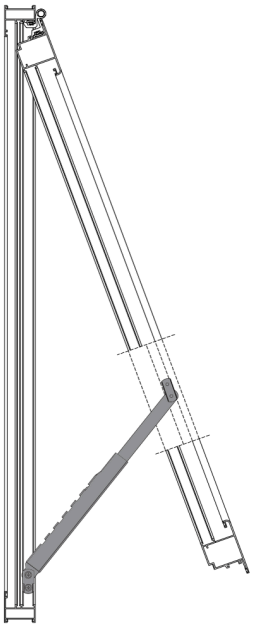

L = 0





800	380	430
1000	360	400
1200	340	385
1400	330	390
1600	320	360

H = 1200



100	380	430
200	430	480
300	565	490
400	575	640
500	700	770

STAINLESS STEEL LIMITING HINGE

W23143

SS

20

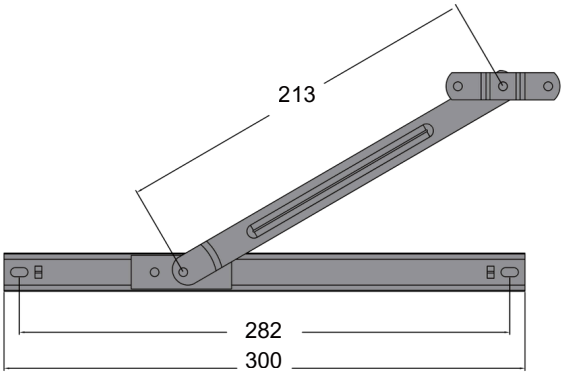

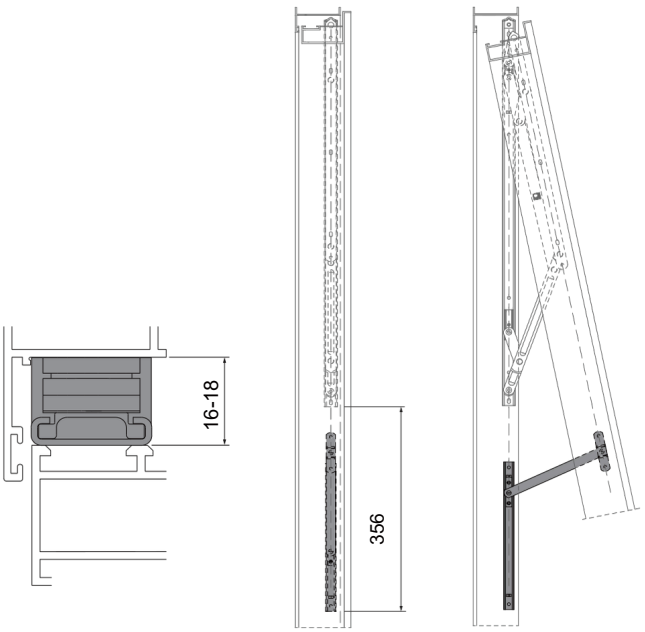

TECHNICAL CHARACTERISTICS:

Limiting hinge sets for projected opening windows:

I. Compatible with European Channel or Flat Frame profiles.

II. For window sashes exceeding 1800 mm in height, it is recommended to use limiting hinges as supplementary components to the primary projected hinges.

III. In areas prone to strong winds or requiring restricted opening angles, the use of limiting hinges is advised.

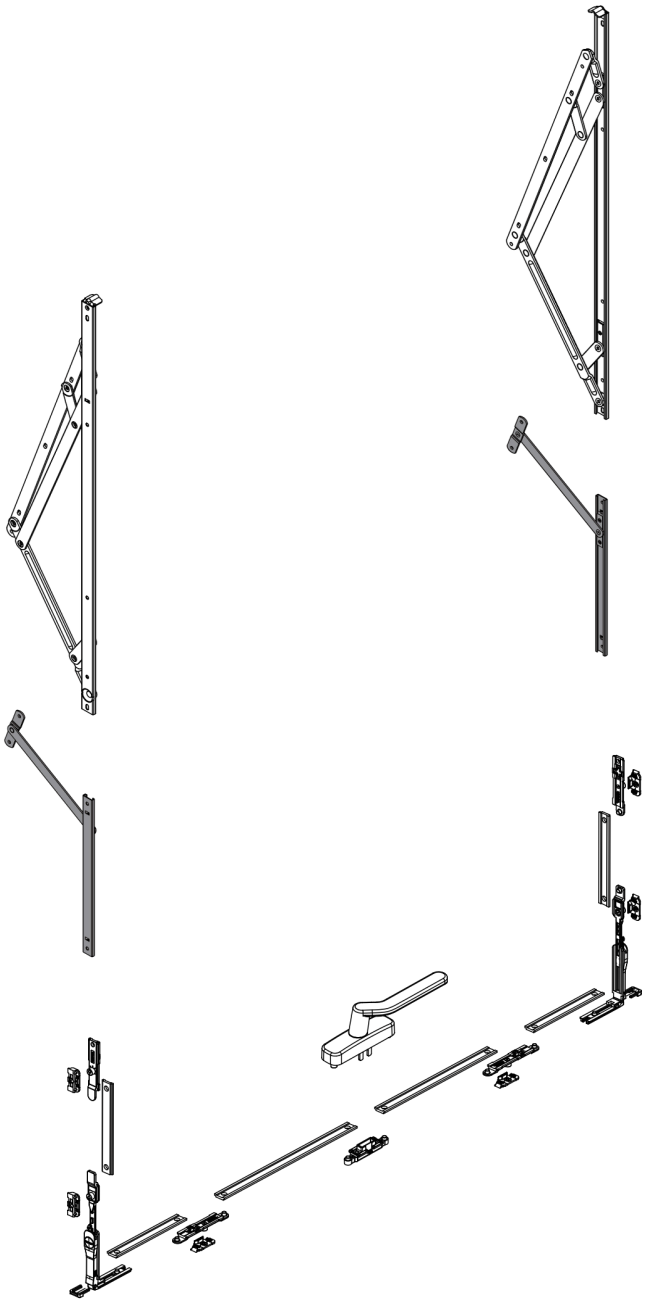

LOCKING POINT&STRIKE

TECHNICAL DATA
Product Name : Lock point & Lock seat
Material:Stainless steel 304
Finish:Plating Zn-Ni

Made from stainless steel, locking points and strikes feature double pins and dual locking points for enhanced security. With adjustable pins for precise alignment, they ensure reliable engagement with multi-point locking systems, offering superior durability and corrosion resistance.

SS

W00008

100

LOCKING POINT&STRIKE

TECHNICAL DATA
Product Name : Lock point & Lock seat
Material:Stainless steel 304
Finish:Plating Zn-Ni

Manufactured from stainless steel, the locking point features adjustable dual pins for secure top and bottom locking, paired with a reversible strike for flexible installation. This corrosion-resistant material ensures long-lasting performance, precise alignment, and enhanced security in multi-point locking systems.

SS

W00009

100

LOCKING POINT&STRIKE

TECHNICAL DATA
Product Name : Lock point & Lock seat & Corner Divice
Material:Zine 5#
Finish:Plating Zn-Ni / black zinc

Manufactured from durable zamak alloy, the locking point features an adjustable single pin for secure locking, paired with a reversible strike for flexible installation. This corrosion-resistant material ensures long-lasting performance, precise alignment, and enhanced security in multi-point locking systems. Additionally, the set includes a façade and window corner turn locking mechanism, designed for smooth operation and reliable security in both façade and window applications.

ZA

W00022

100

LOCKING POINT&STRIKE

W00023

100

ZA

TECHNICAL DATA
Product Name : Lock point & Lock seat
Material:Zine 5#
Finish:Plating Zn-Ni / black zinc

Manufactured from durable zamak alloy and available in black finish, the locking point features an adjustable single pin with center locking, paired with a single-direction strike for straightforward installation. This corrosion-resistant material ensures precise alignment, reliable engagement, and long-lasting performance in multi-point locking systems.

LOCKING POINT&STRIKE

W00024

100

ZA

TECHNICAL DATA
Product Name : Lock point & Lock seat
Material:Zine 5#
Finish:Plating Zn-Ni / black zinc

Manufactured from durable zamak alloy and available in black finish, the locking point features an adjustable single pin with center locking, paired with a reversible strike for versatile installation. This corrosion-resistant material ensures precise alignment, reliable engagement, and long-lasting performance in multi-point locking systems.

LOCKING POINT&STRIKE

W00025

100

ZA

TECHNICAL DATA
Product Name : Lock point & Lock seat
Material:Zine 5#
Finish:Plating Zn-Ni / black zinc

Manufactured from durable zamak alloy and available in black finish, the locking point features an adjustable single pin with center locking and supports both single- and double-direction locking. Paired with a single-direction strike for flexible installation, this corrosion-resistant material ensures precise alignment, reliable engagement, and long-lasting performance in multi-point locking systems.

Freedom for Your Home, Security for Your Loved Ones.

Common Configurations
Lift Slide DOOR

LIFT&SLIDE SYSTEM LS150

W00007	* / *	**

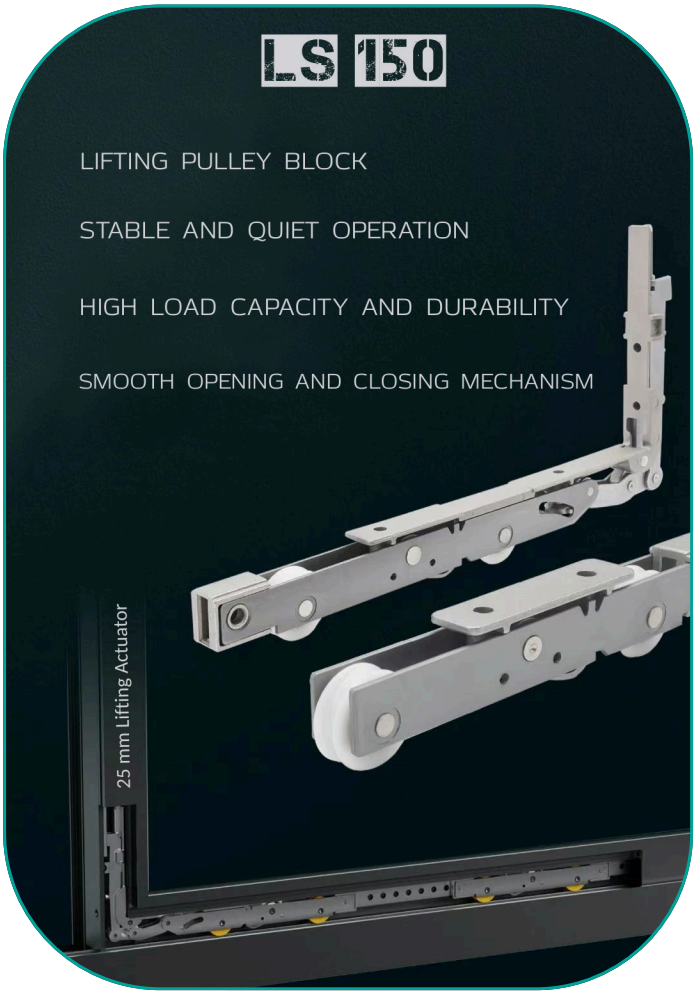

TECHNICAL CHARACTERISTICS:

I. The optimal market choice in its performance range. The smooth, silent, and effortless sliding of door leaves enables the creation of spacious, unobstructed areas through various configurations of up to six leaves with diverse combinations.

II. ≤150 kg per leaf: Requires installation of front and rear main pulley assemblies

III. 150–200 kg per leaf: Mandatory addition of two auxiliary load-bearing pulleys.

IV. Silent sliding track system (patented roller damping technology)

V. Multi-leaf synchronization positioning accuracy ±1.5 mm (EN 13126 compliant)

Items Require For Scheme							Name	Code	Specifications	Finish	Remarks
A	B	C	D	E	F	G					
1	2	1	3	2	4	2	1-Espag1502	W229541502	1500mm	Black/Silver	Choose according to the height of the door
							1- Espag2202	W229542202	2200mm		
1	2	1	3	2	4	2	1A-Espag1502A	W22954A1502	1500mm	Black/Silver	
							1A-Espag2202A	W22954A2202	2200mm		
1	2	1	3	2	4	2	5-Connecting rod	W13883M150		Colored zinc	Choose according to the width of the door
								W13883M200			
								W13883M250			
1	2	1	3	2	4	2	2-Bogie handle side	W22955		Zn-Ni	
1	2	1	3	2	4	2	3-Bogie	W22956		Zn-Ni	
1	2	1	3	2	4	2	4-Tandem bogie	W22957		Zn-Ni	Optional
1	2	1	3	2	4	2	6-Pin	W13891			
1	2	1	3	2	4	2	Install the screw package	W00002A		304	
1	2	1	3	2	4	2	7-Bogie Support	W01341A		Black	
1	2	1	3	2	2	0	8- Small Bumper block	W01342		Black	Optional

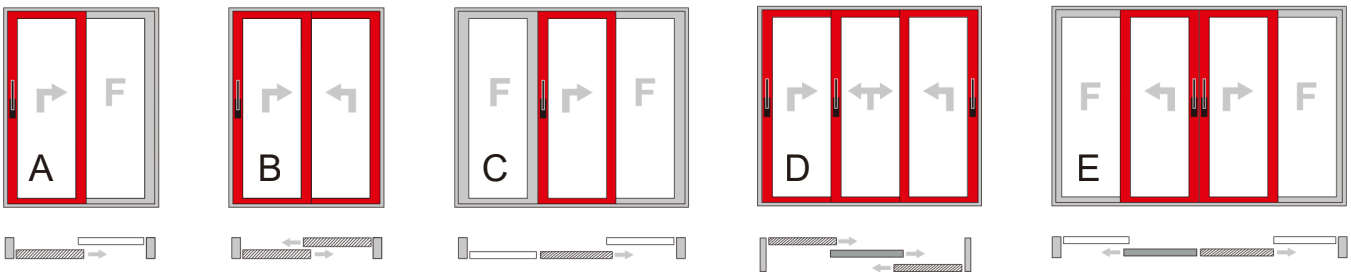

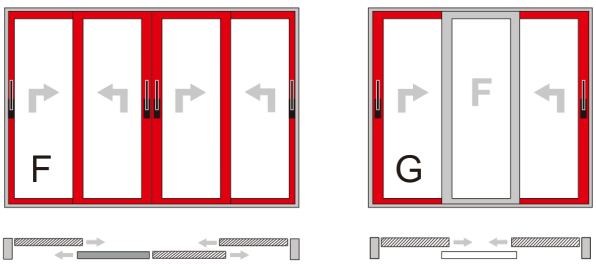

LIFT&SLIDE SYSTEM LS200

W00008	* / *	**

TECHNICAL CHARACTERISTICS:

I. The optimal market choice in its performance range. The smooth, silent, and effortless sliding of door leaves enables the creation of spacious, unobstructed areas through various configurations of up to six leaves with diverse combinations.
II. ≤200 kg per leaf: Installation of front and rear main pulley assemblies is required.
III. 200–400 kg per leaf: Mandatory installation of two auxiliary load-bearing pulleys.
IV. Silent sliding track system (patented roller damping technology)
V. Multi-leaf synchronization positioning accuracy ±1.5 mm (EN 13126 compliant)

Items Require For Scheme							Name	Code	Specifications	Finish	Remarks
A	B	C	D	E	F	G					
1	2	1	3	2	4	2	1-Espag2402	W230082402	2400mm	Black/Silver	Choose according to the height of the door
							1-Espag2603	W230082603	2600mm		
							1-Espag3004	W230083004	3000mm		
1	2	1	3	2	4	2	1A-Espag2402A	W23008A2402	2400mm	Black/Silver	Choose according to the height of the door
							1A-Espag2603A	W23008A2603	2600mm		
							1A-Espag3004A	W23008A300	3000mm		
1	2	1	3	2	4	2	5-Connecting rod	W13883M150		Colored zinc	Choose according to the width of the door
								W13883M1200			
								W13883M1250			
1	2	1	3	2	4	2	2-Bogie handle side	W22955		Zn-Ni	
1	2	1	3	2	4	2	3-Bogie	W22956		Zn-Ni	
1	2	1	3	2	4	2	4-Tandem bogie	W22957		Zn-Ni	Optional
1	2	1	3	2	4	2	8-Packer bogie	W01377 M8	8mm	Grey	Optional according to profile
								W01377 M10	10mm		
								W01377 M12	12mm		
								W01377 M14.5	14.5mm		
								W01377 M16	16mm		
								W01377 M18	18mm		
								W01377 M20	20mm		
								W01377 M23	23mm		
1	2	1	3	2	4	2	9-Packer espag	W00210A M8	8mm	Grey	
								W00210A M10	10mm		
								W00210A M12	12mm		
								W00210A M14.5	14.5mm		
								W00210A M16	16mm		
								W00210A M18	18mm		
								W00210A M20	20mm		
								W00210A M23	23mm		
1	2	1	3	2	4	2	6-Pin Install the screw	W13891			
1	2	1	3	2	4	2	package	W00001A		304	
1	2	1	3	2	4	2	7-Bogie Support	W01341A		Black	
1	1	1	2	2	2	0	10- Small Bumper block	W623187		Black	Optional
1	2	1	3	2	4	2	11-Spring	W14151		Black	Optional
1	2	1	3	2	4	2	12-Damper device	W23031		Black	Optional

LIFT&SLIDE SYSTEM LS300

W00009	*	**
	*	

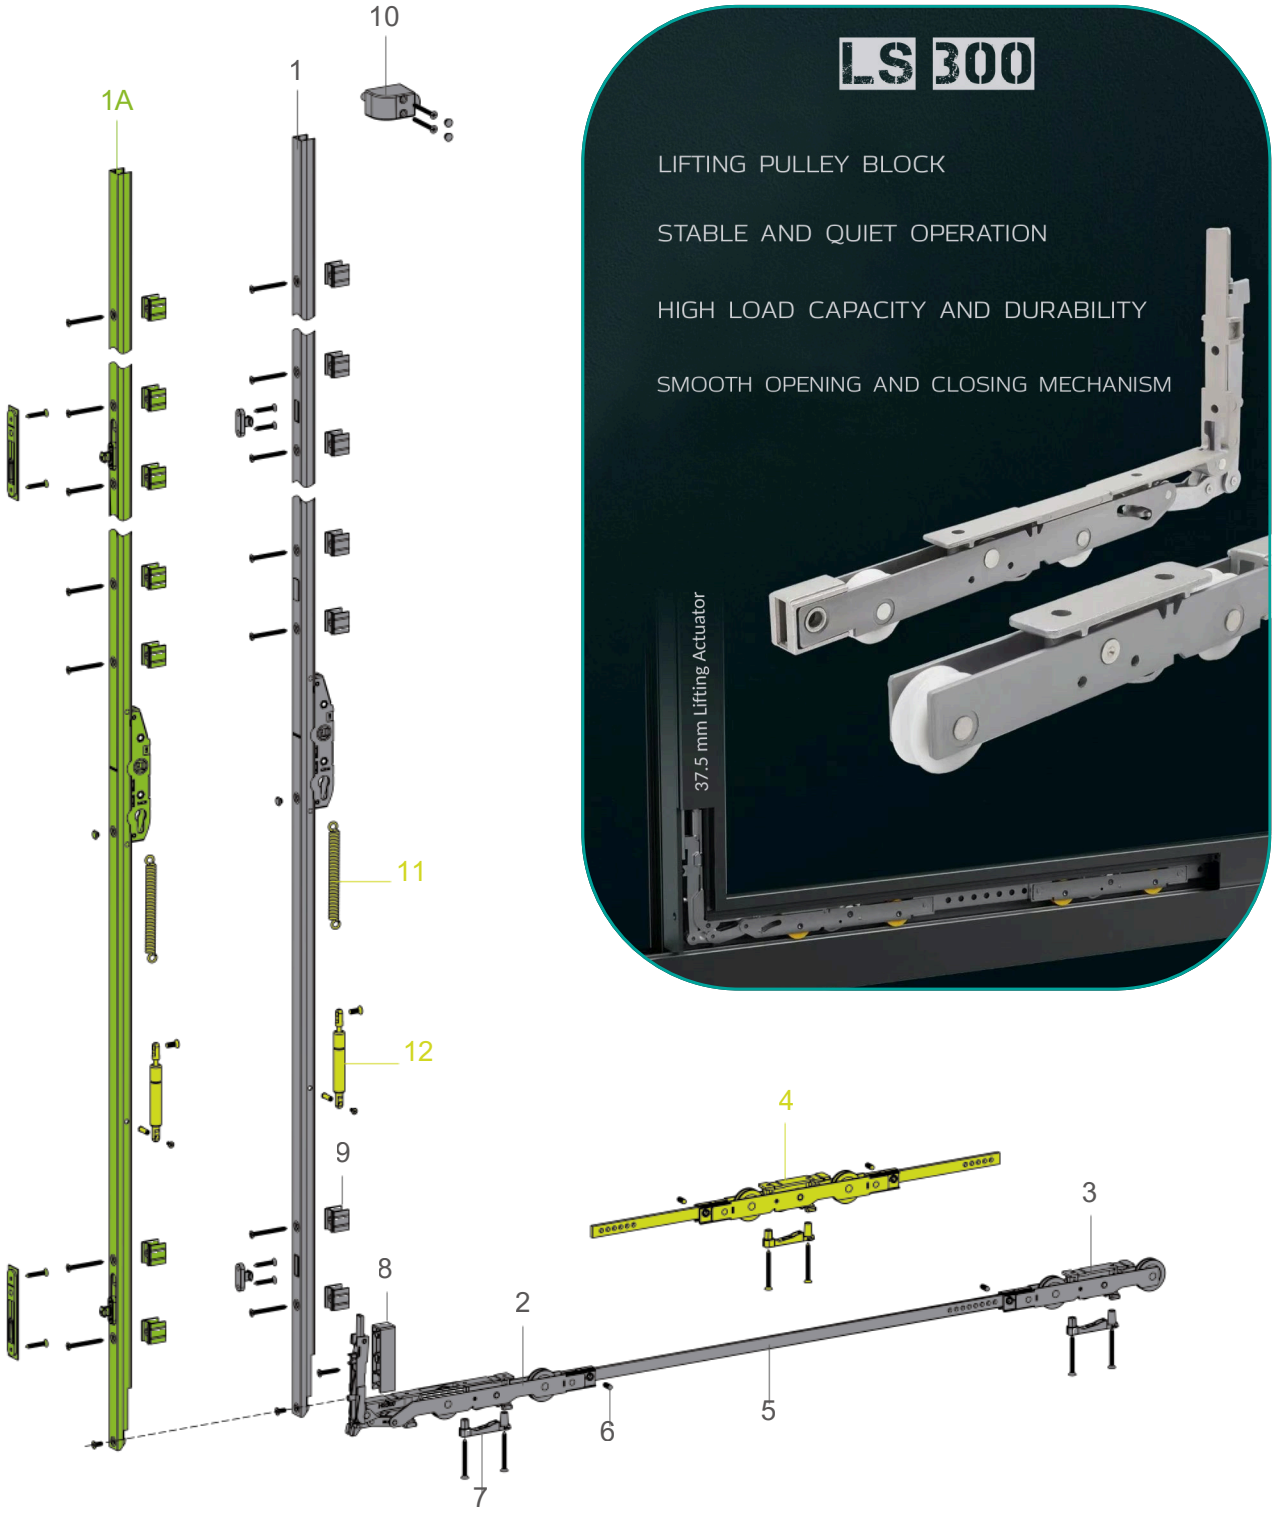

TECHNICAL CHARACTERISTICS:

I. The optimal market choice in its performance range. The smooth, silent, and effortless sliding of door leaves allows the creation of spacious, unobstructed areas, supporting various configurations of up to 6 leaves with diverse combinations.
II. ≤300 kg per leaf: Installation of front and rear main pulley assemblies is required.
III. 300–600 kg per leaf: Mandatory installation of two auxiliary load-bearing pulleys.
IV. Silent sliding track system (patented roller damping technology)
V. Multi-leaf synchronization positioning accuracy ±1.5 mm (EN 13126 compliant)

Items Require For Scheme							Name	Code	Specifications	Finish	Remarks
A	B	C	D	E	F	G					
1	2	1	3	2	4	2	1-Espag2402	W229502402	2400m m	Black/Silver	Choose according to the height of the door
							1-Espag2603	W229502603	2600m m		
							1-Espag3004	W229503004	3000m m		
1	2	1	3	2	4	2	1A-Espag2402A	W22950A2402	2400m m	Black/Silver	Choose according to the height of the door
							1A-Espag2603A	W22950A2603	2600m m		
							1A-Espag3004A	W22950A3004	3000m m		
1	2	1	3	2	4	2	5-Connecting rod	W13883M150		Colored zinc	Choose according to the width of the door
								W13883M200			
								W13883M250			
1	2	1	3	2	4	2	2-Bogie handle side	W22948		Zn-Ni	
1	2	1	3	2	4	2	3-Bogie	W22949		Zn-Ni	
1	2	1	3	2	4	2	4-Tandem bogie	W23005		Zn-Ni	Optional
1	2	1	3	2	4	2	8-Packer bogie	W01377M8	8mm	Grey	Optional according to profile
								W01377M10	10mm		
								W01377M12	12mm		
								W01377 M14.5	14.5mm		
								W01377 M16	16mm		
								W01377 M18	18mm		
								W01377 M20	20mm		
								W01377 M23	23mm		
1	2	1	3	2	4	2	9-Packer espag	W00210 M8	8mm	Grey	
								W00210 M10	10mm		
								W00210 M12	12mm		
								W00210 M14.5	14.5mm		
								W00210 M16	16mm		
								W22671 M18	18mm		
								W22671 M20	20mm		
								W22671 M23	23mm		
1	2	1	3	2	4	2	6-Pin Install the	W13891			
1	2	1	3	2	4	2	screw package	W00001		304	
1	2	1	3	2	4	2	7-Bogie Support	W01341		Black	
1	1	1	2	2	2	0	10- Big Bumper block	W23188		Black	Optional
1	2	1	3	2	4	2	11-Spring	W14151		Black	Optional
1	2	1	3	2	4	2	12-Damper device	W23031		Black	Optional

TECHNICAL CHARACTERISTICS:

I. Integrated keyhole reinforcement structure (EN 1627 Burglar Resistance Class B)
II. Dual-action lever system for ±15mm vertical leaf adjustment (BS 6375-1 operational force compliance)
III. Raw handle substrate (surface roughness Ra 6.3μm, ISO 1302)
IV. Client-applied coatings supported:
V. Electrostatic powder coating (QUALICOAT Class 2 certified)
VI. Anodized finish (20±2μm thickness, EN 12373-1 tested)
VII. 25,000-cycle operational testing (EN 1906:2012 Grade 2 certification)
VIII. Axial load capacity ≥800N (ISO 8275 test protocol)

ERGO FLEX LEVER HANDLE

W23150

20

Set Code: W80.3150D

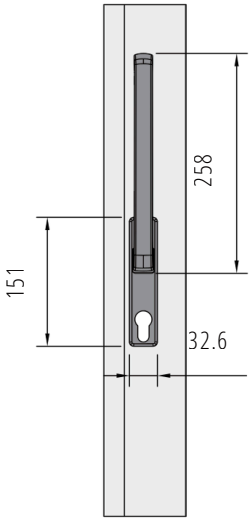

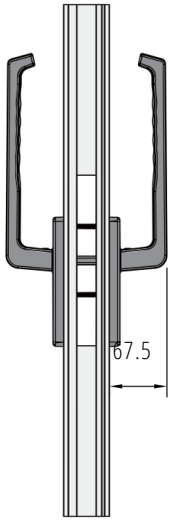

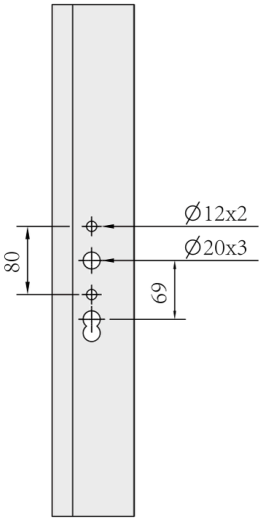

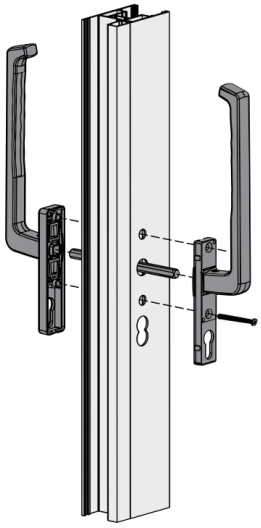

Set Code: W80.3150S

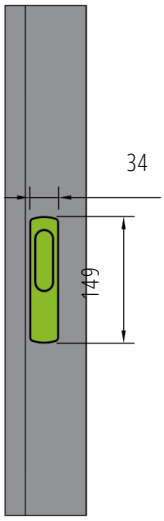

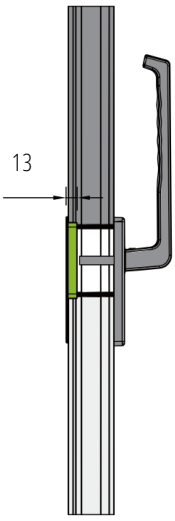

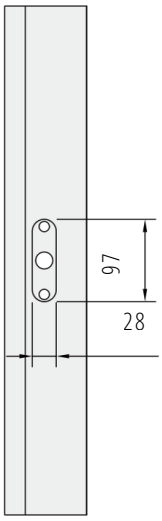

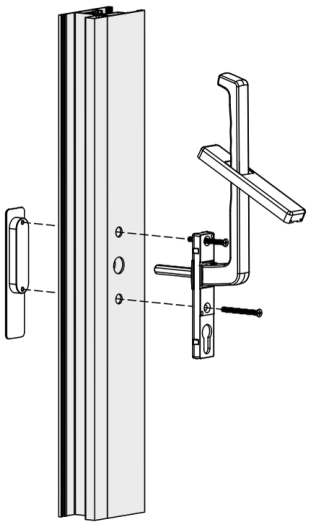

CONTOUR SYNC HANDLE

W23203

20

AL ZA Css

10 mm

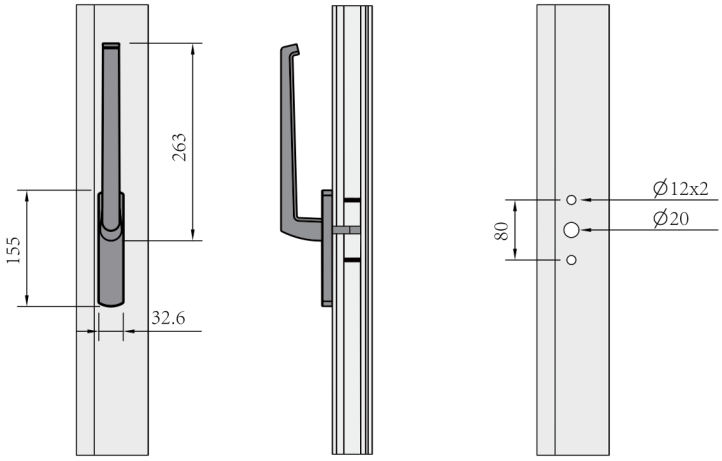

CONTOUR SYNC HANDLE

W03203S

20

AL ZA Css

10 mm

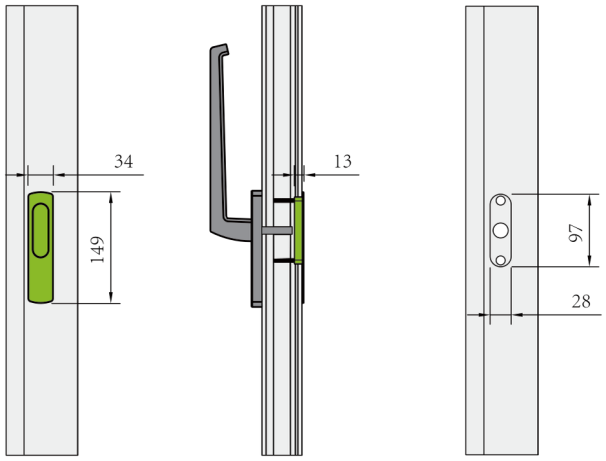

CONTOUR SYNC HANDLE

W03203D

20

AL ZA Css

10 mm

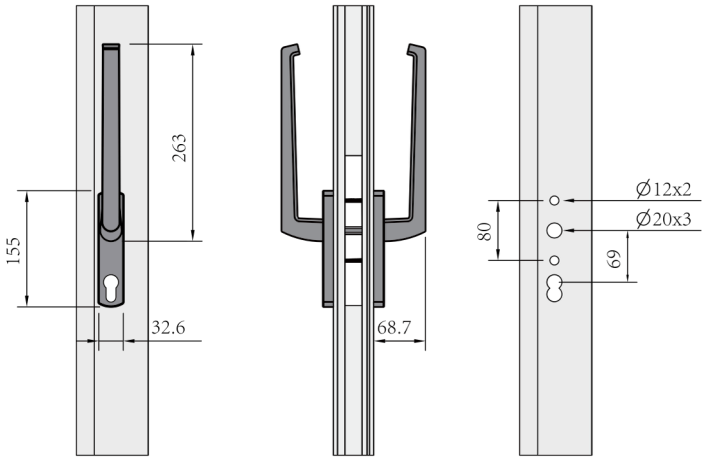

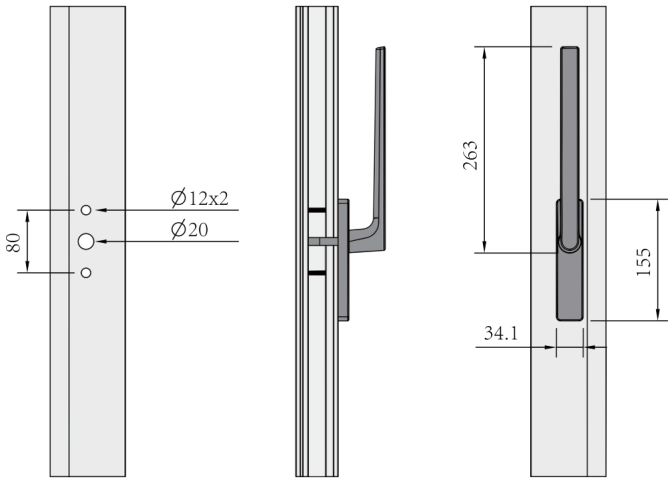

FLEX FLOW HANDLE

W23221

AL ZA Css

10mm

20

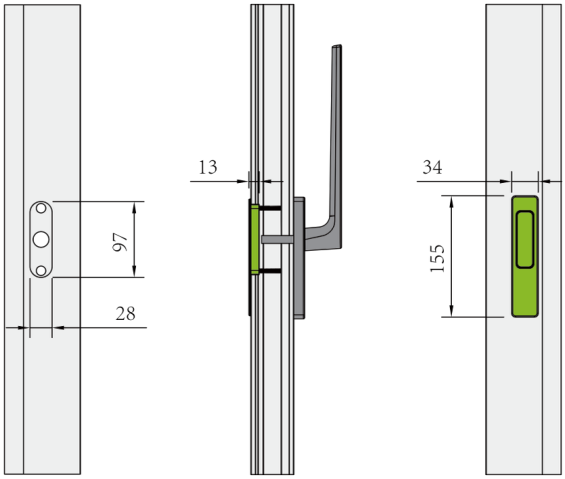

FLEX FLOW HANDLE

W03221S

AL ZA Css

10mm

20

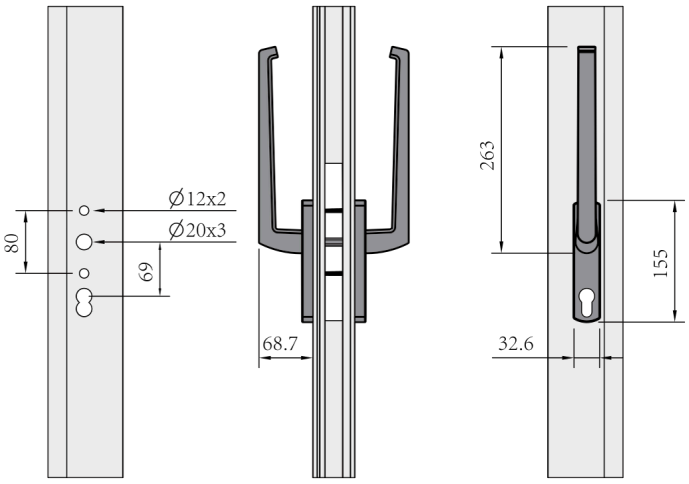

FLEX FLOW HANDLE

W03221D

AL ZA Css

10 mm

20

BIO CURVE HANDLE

W23204

20

AL ZA Css

7mm

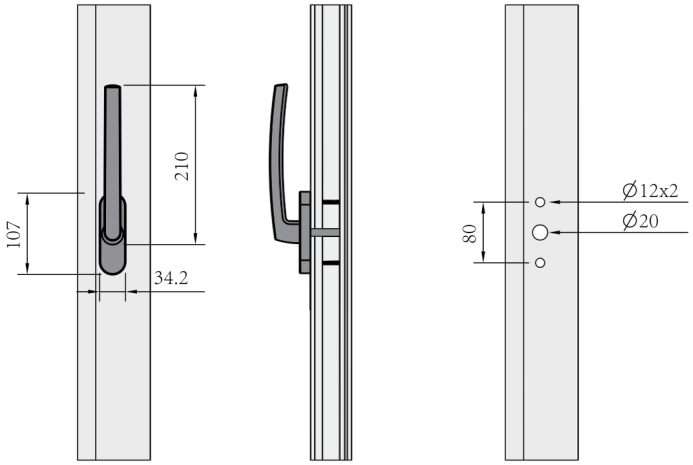

BIO CURVE HANDLE

W03204S

20

AL ZA Css

7mm

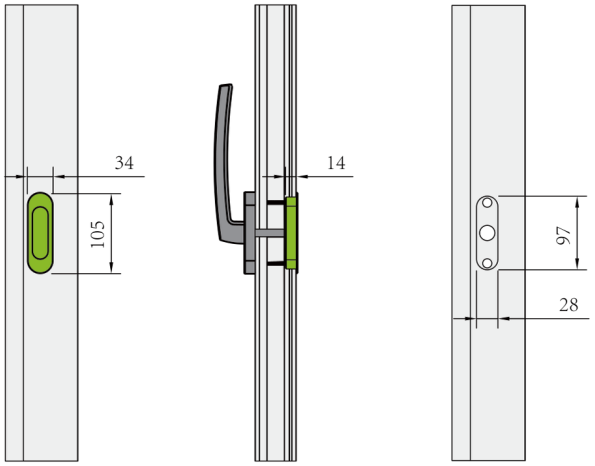

PULL HANDLE

W22992LA

20

AL ZA Css

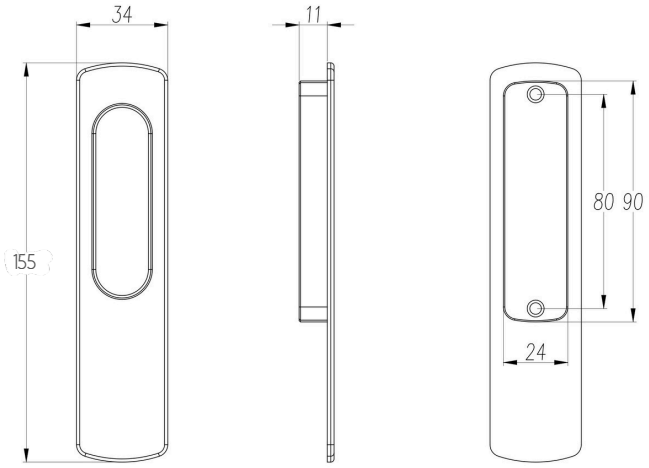

F25 ESPAG

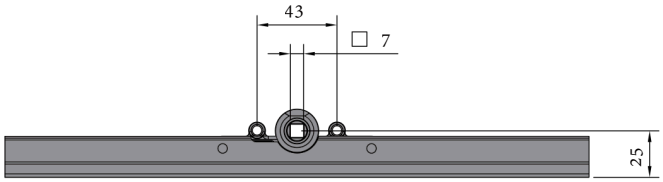

AL ZA

Hss

7mm

W22954A

10

PRODUCT CODE	CENTER DISTANCE	HANDLE PRODUCT	PRODUCT LENGTH	PRODUCT PARAMETERS				LOCK POINT DISTRIBUTION		
		H	L	A	B	C	D	L1	L2	L3
W22954A150	25mm	365mm	1500mm	148mm	886mm		190mm	203mm	939mm	
W22954A150	25mm	465mm	1500mm	148mm	886mm		190mm	203mm	939mm	
W22954A1502	25mm	565mm	1500mm	148mm	886mm		190mm	203mm	939mm	
W22954A150	25mm	765mm	1500mm	148mm	886mm		190mm	203mm	939mm	
W22950A220	25mm	950mm	2200mm	148mm	1506mm		285mm	203mm	1559mm	

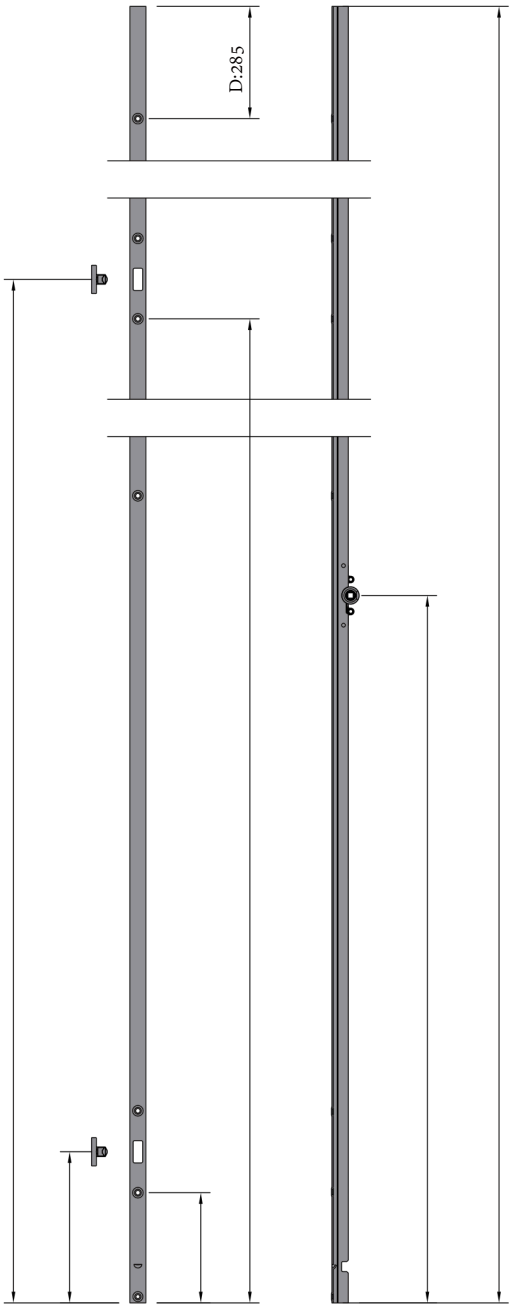

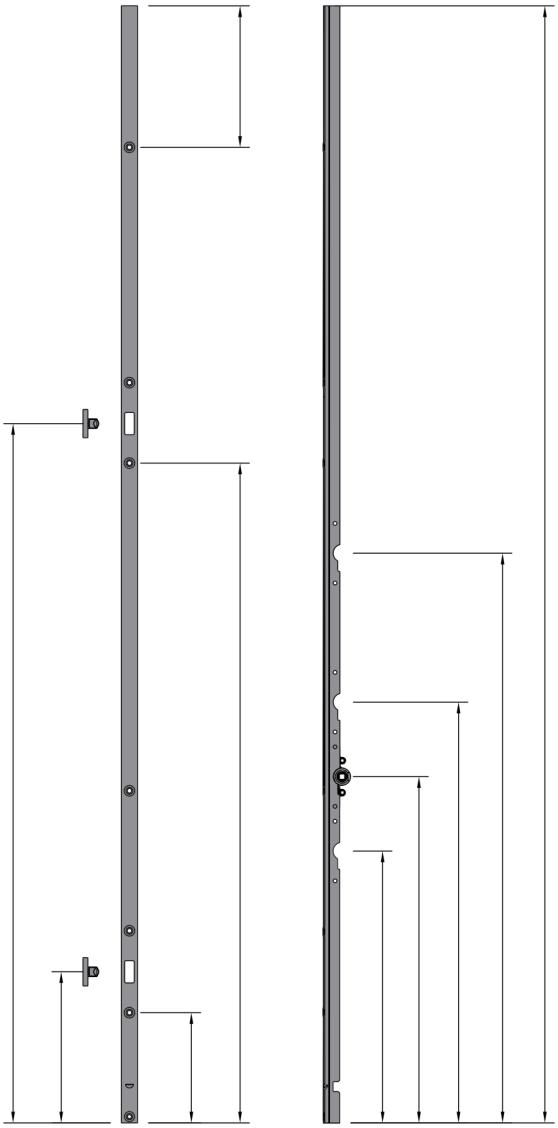

F25 ESPAG

W22954

10

AL ZA Hss

7mm

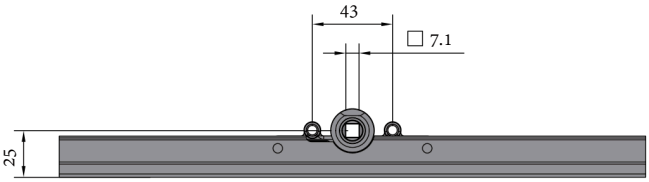

PRODUCT CODE	CENTER DISTANCE	HANDLE PRODUCT	PRODUCT LENGTH	PRODUCT PARAMETERS				LOCKPOINT DISTRIBUTION		
		H	L	A	B	C	D	L1	L1	L3
W229541502	25mm	365mm	1500mm	148mm	886mm		190mm	189mm	926mm	
W229541502	25mm	465mm	1500mm	148mm	886mm		190mm	189mm	926mm	
W229541502	25mm	565mm	1500mm	148mm	886mm		190mm	189mm	926mm	
W229541502	25mm	765mm	1500mm	148mm	886mm		190mm	189mm	926mm	
W229502202	25mm	950mm	2200mm	148mm	1506mm		285mm	189mm	1545mm	

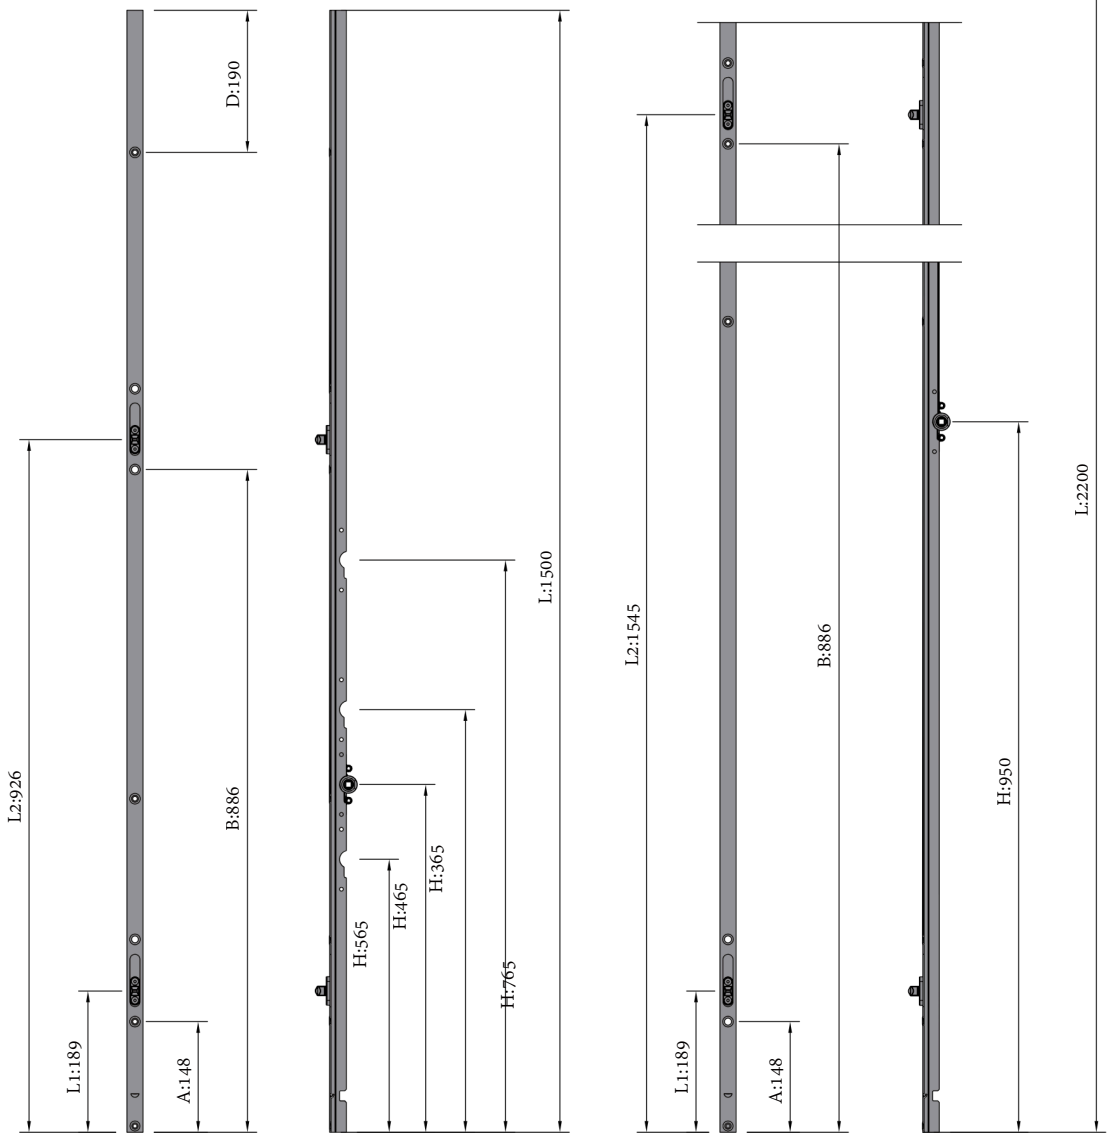

F27.5 ESPAG

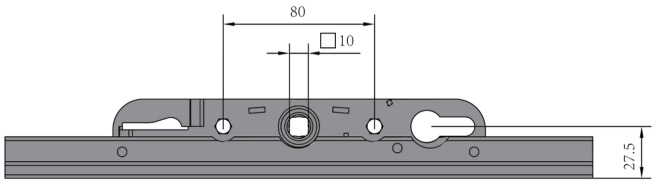

W23008A

AL ZA
Hss
10mm

10

PRODUCT CODE	CENTER DISTANCE	HANDLE. HEIGHT	PRODUCT LENGTH	PRODUCT PARAMETERS				LOCK POINT DISTRIBUTION		
	F	H	L	A	B	C	D	L1	L2	L3
W23008A1202	27.5mm	380mm	1190mm	135mm	515mm		150mm	190mm	570mm	
W23008A1802	27.5mm	380mm	1770mm	135mm	515mm	955mm	250mm	190mm	570mm	1010mm
W23008A2402	27.5mm	953mm	2400mm	135mm	1115mm	1585mm	200mm	190mm	1170mm	1640mm
W23008A2603	27.5mm	953mm	2600mm	135mm		1835mm	250mm	190mm	1170mm	1890mm

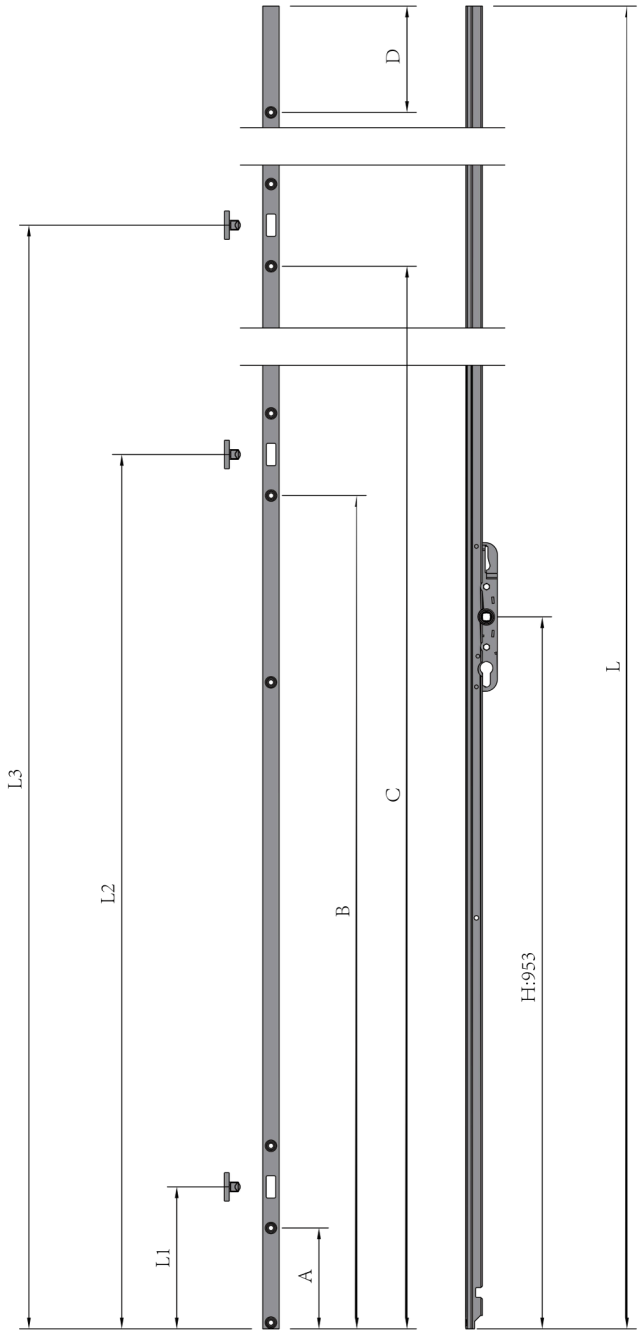

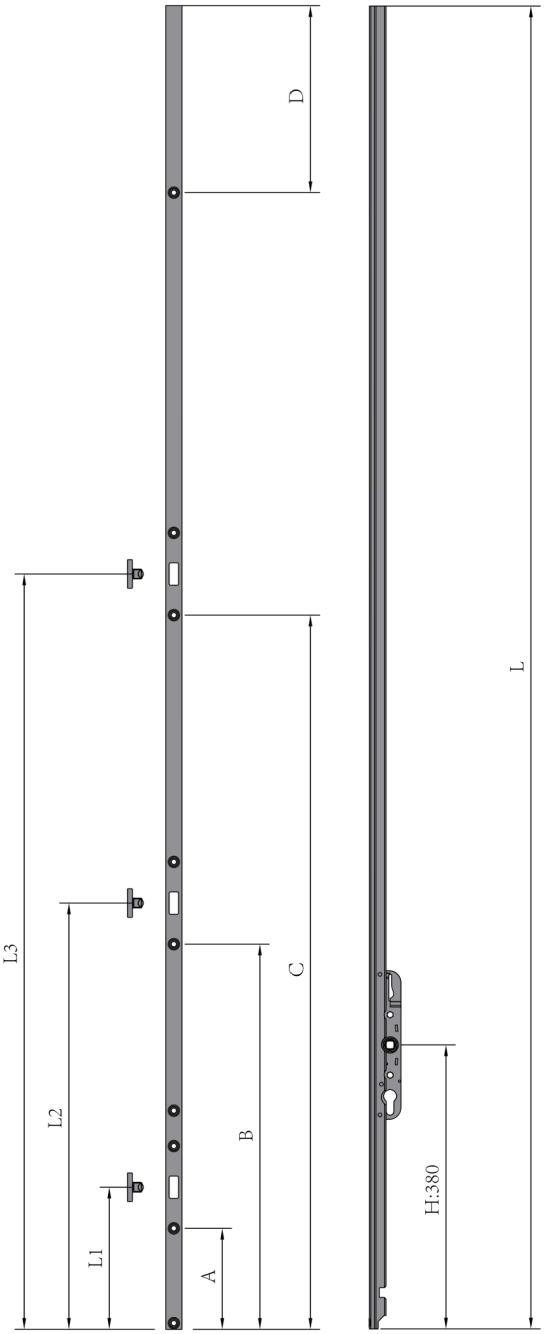

F27.5 ESPAG

W23008

10

AL ZA Hss

10 mm

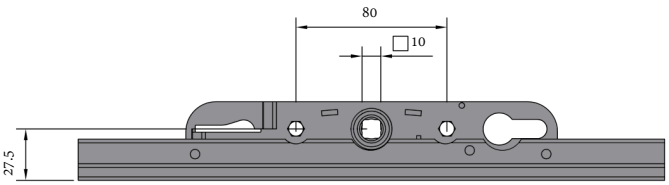

PRODUCT CODE	CENTER DISTANCE	HANDLE HEIGHT	PRODUCT LENGTH	PRODUCT PARAMETERS				LOCK POINT DISTRIBUTION		
	F	H	L	A	B	C	D	L1	L2	L3
W230081202	27.5mm	380mm	1190mm	135mm	515mm		150mm	178mm	588mm	
W230081802	27.5mm	380mm	1770mm	135mm	515mm	955mm	250mm	178mm		998mm
W230082402	27.5mm	953mm	2400mm	135mm	1115mm	1585mm	200mm	178mm		1628mm
W230082603	27.5mm	953mm	2600mm	135mm	1115mm	1835mm	250mm	178mm	1158mm	1878mm

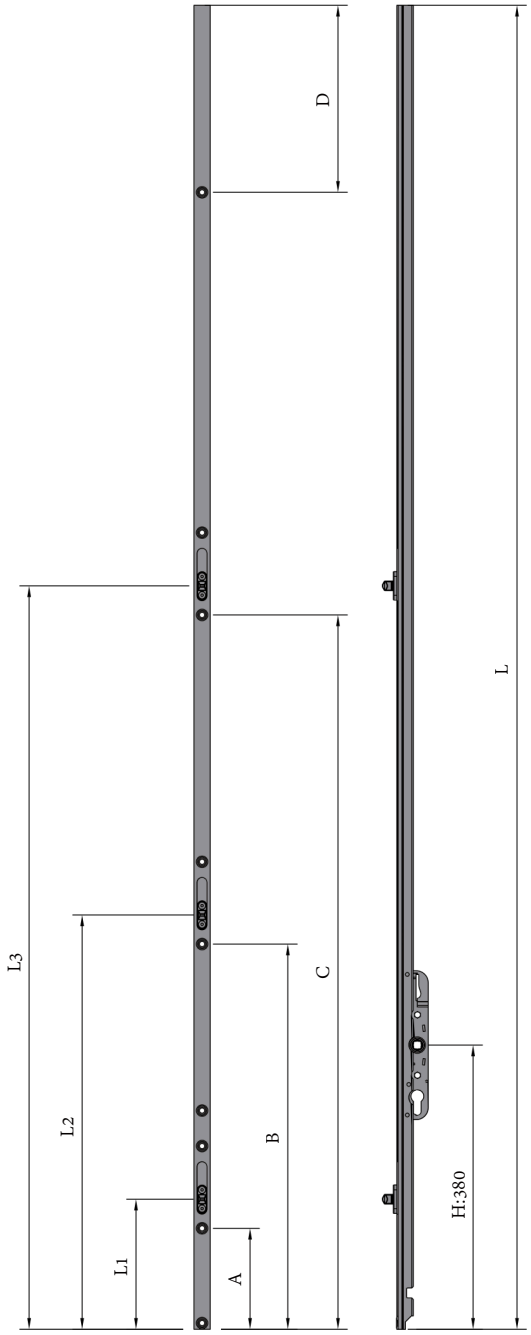

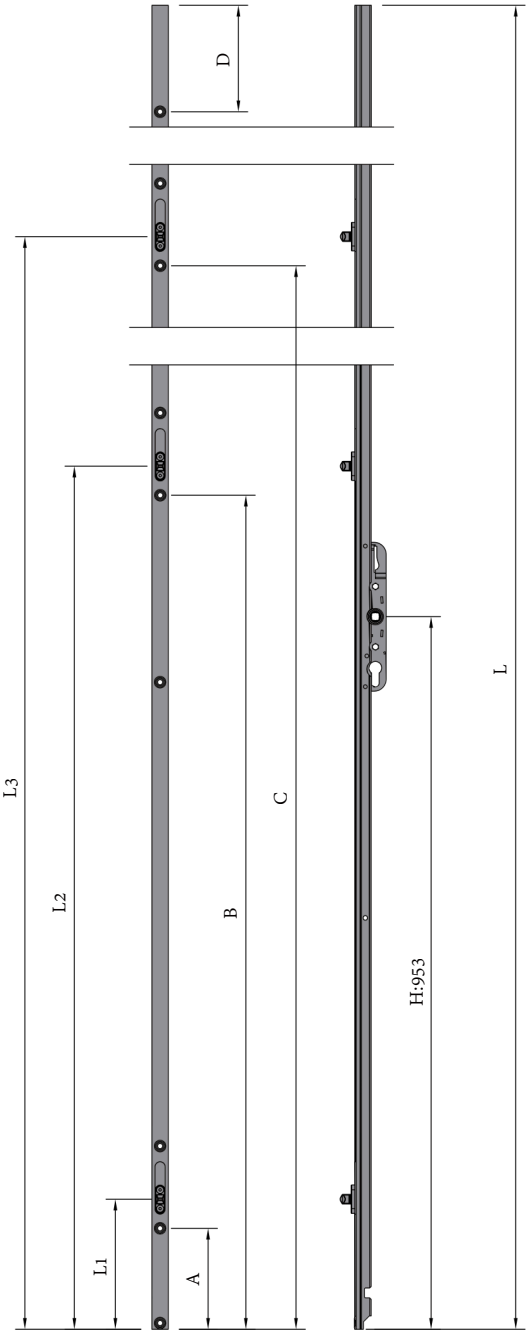

F37.5 ESPAG

W23218A

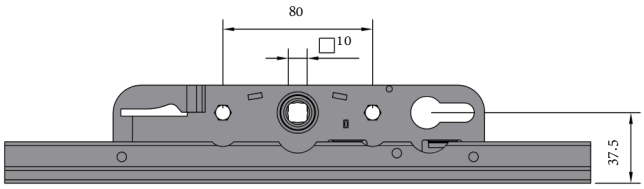

AL ZA Hss

10mm

10

PRODUCT CODE	CENTER DISTANCE	HANDLE HEIGHT	PRODUCT LENGTH	PRODUCTPARAMETERS				LOCK POINTDISTRIBUTION		
		H	L	A	B	C	D	L1	L2	L3
W23229A1202	37.5mm	380mm	1190mm	135mm	515mm		150mm	190mm	570mm	
W23229A1802	37.5mm	380mm	1770mm	135mm	515mm	955mm	250mm	190mm	570mm	1010mm
W23229A2402	37.5mm	953mm	2400mm	135mm	1115mm	1585mm	200mm	190mm	1170mm	1640mm
W23229A2603	37.5mm	953mm	2600mm	135mm	1115mm	1835mm	250mm	190mm	1170mm	1890mm

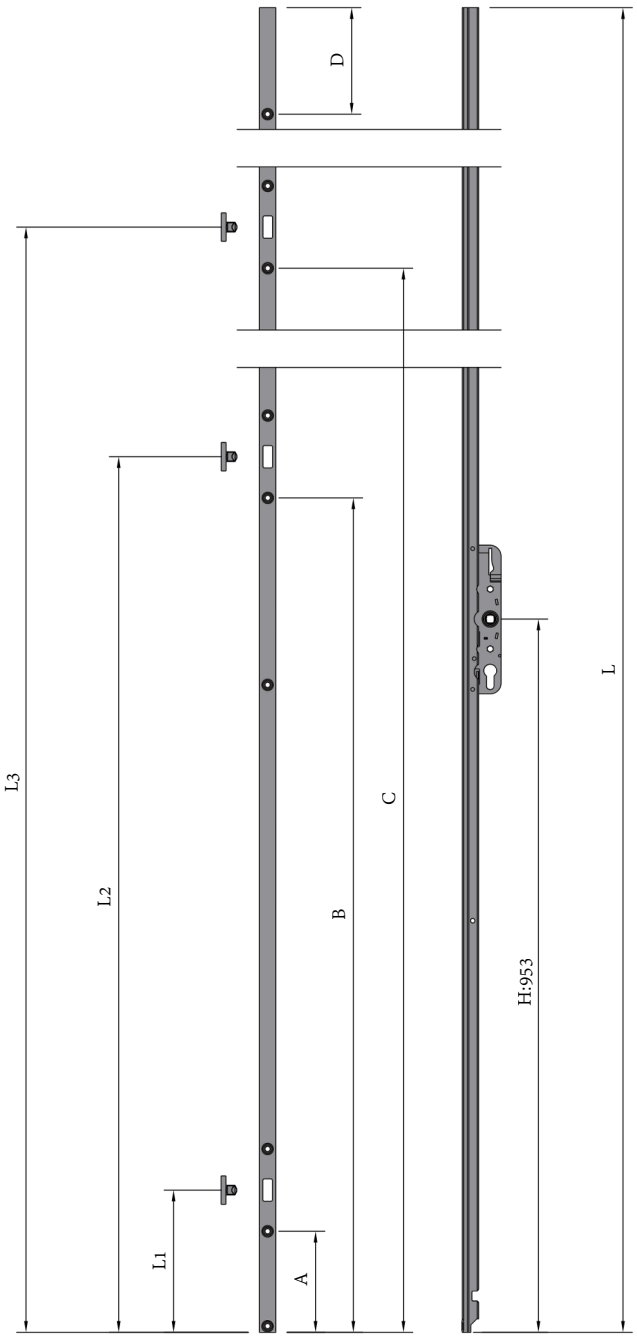

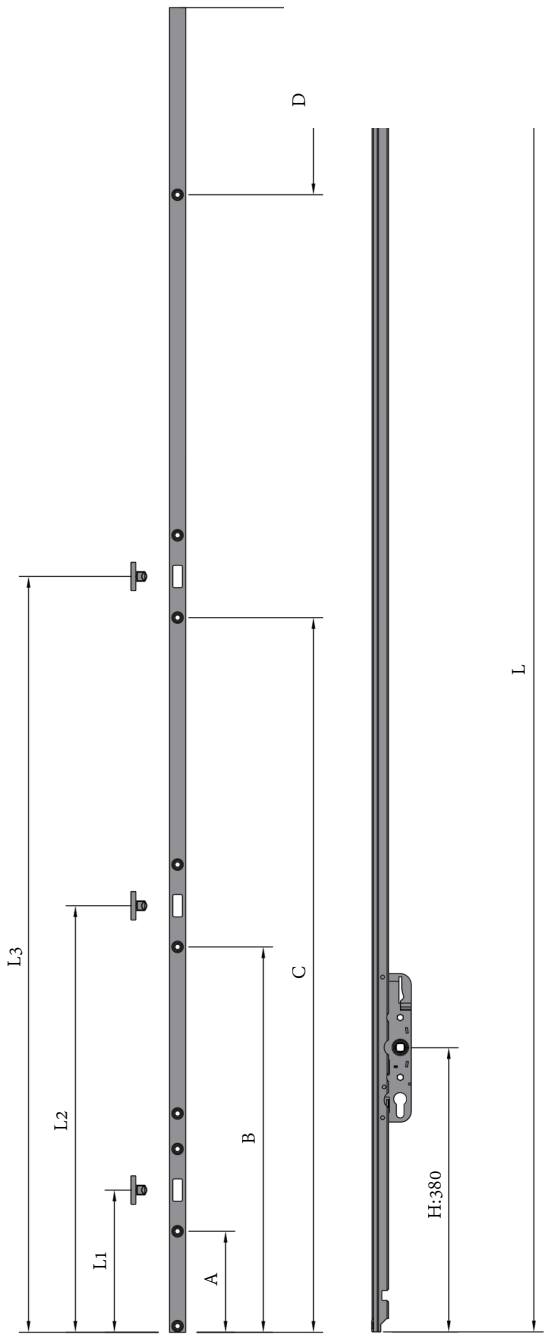

F37.5 ESPAG

W23218

10

AL ZA Hss

10 mm

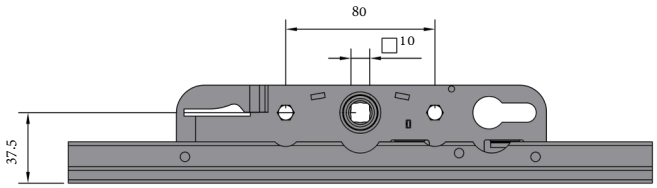

PRODUCT CODE	CENTER DISTANCE	HANDLE HEIGHT	PRODUCT LENGTH	PRODUCT PARAMETERS				LOCK POINT DISTRIBUTION		
		H	L	A	B	C	D	L1	L2	L3
W232291202	37.5mm	380mm	1190mm	135mm	515mm		150mm	178mm	588mm	
W232291802	37.5mm	380mm	1770mm	135mm	515mm	955mm	250mm	178mm		998mm
W232292402	37.5mm	953mm	2400mm	135mm	1115mm	1585mm	200mm	178mm		1628mm
W232292603	37.5mm	953mm	2600mm	135mm	1115mm	1835mm	250mm	178mm	1158mm	1878mm

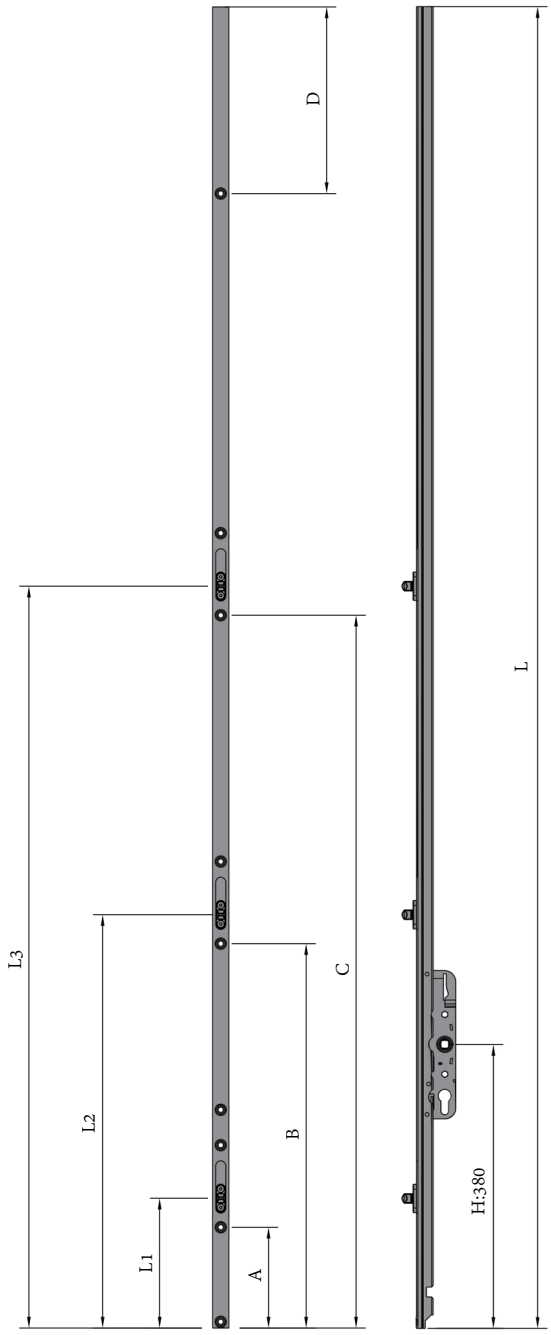

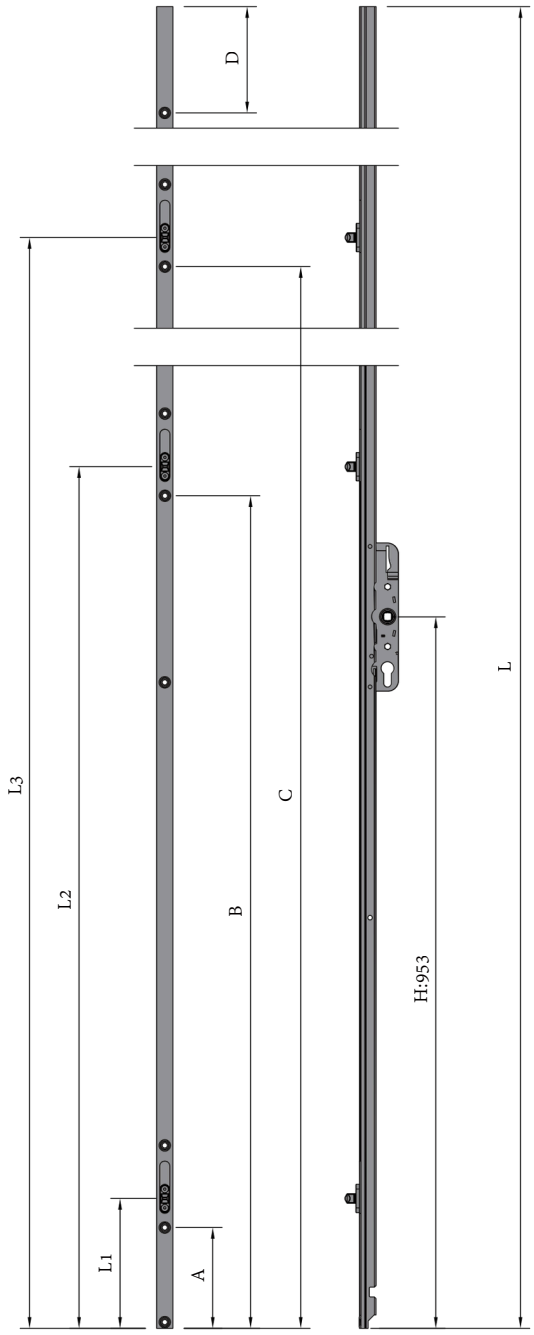

F37 ESPAG

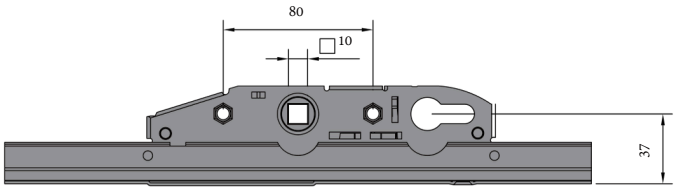

W22950

AL ZA
Hss
10 mm

10

PRODUCT CODE	CENTER DISTANCE	HANDLE HEIGHT	PRODUCT LENGTH	PRODUCT PARAMETERS				LOCK POINT DISTRIBUTION		
		L	L	A	B	C	D	L1	L2	L3
W229502402	37mm	953mm	2400mm	155mm	1105mm	1585mm	200mm	195mm		1870mm
W229502603	37mm	953mm	2600mm	155mm	1105mm	1835mm	250mm	195mm	1145mm	1890mm
W22950A2402	37mm	953mm	2400mm	155mm	1105mm	1585mm	200mm	210mm		1640mm
W22950A2603	37mm	953mm	2600mm	155mm	1105mm	1835mm	250mm	210mm	1160mm	1890mm

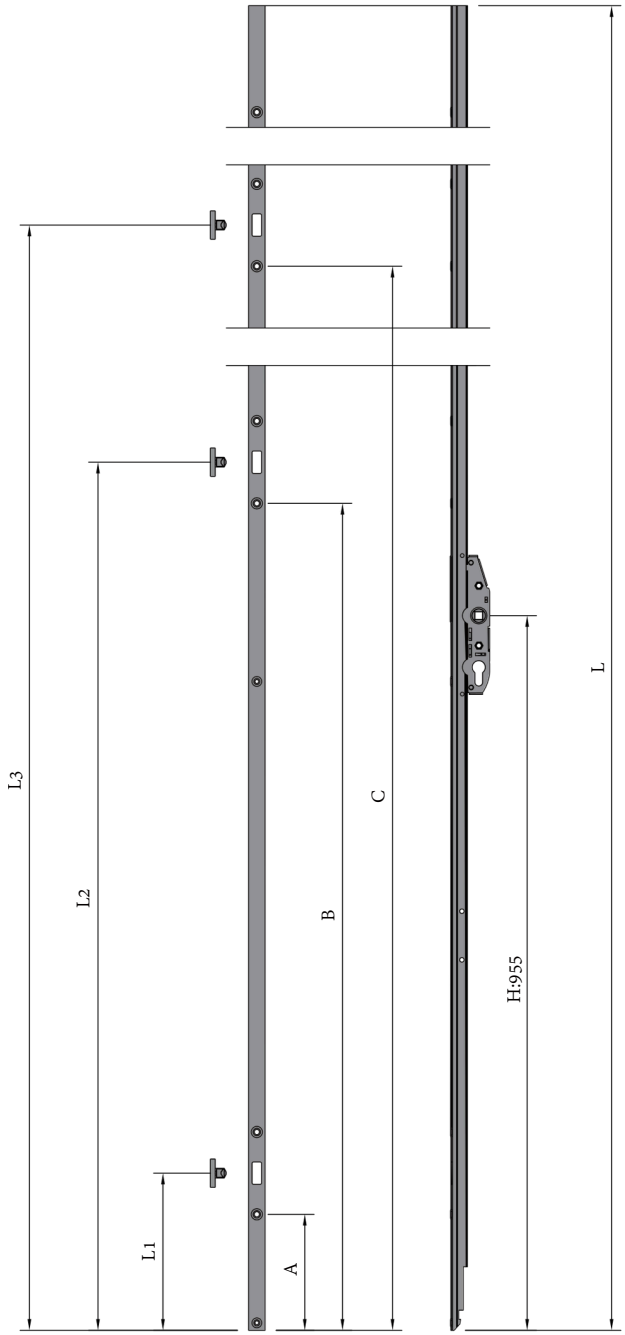

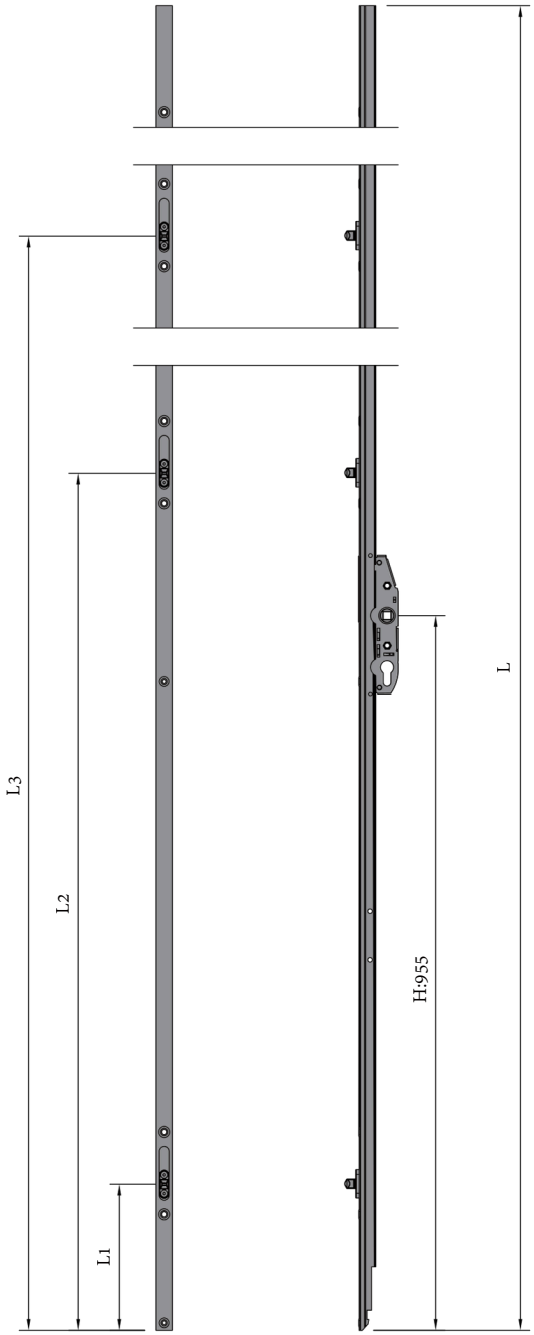

EXTENSION ROD

W23241

10

TECHNICAL CHARACTERISTICS:

I. Extension rods combined with a custom-cut lock mechanism cover between accessories provide an additional locking point for any transmission locking system.

II. Enables supplementary locking in configurations exceeding 3000mm height, extending maximum door leaf height to 3600mm.

III. Rod fixation via set screw; profile attachment using Pozidrive-head screws (ISO 1481-compliant).

IV. Zinc-plated steel components guarantee 240-hour salt spray corrosion resistance (UNE-EN 1670, equivalent to ISO 9227-NSS testing).

EXTENSION ROD INSTALLATION STEPS

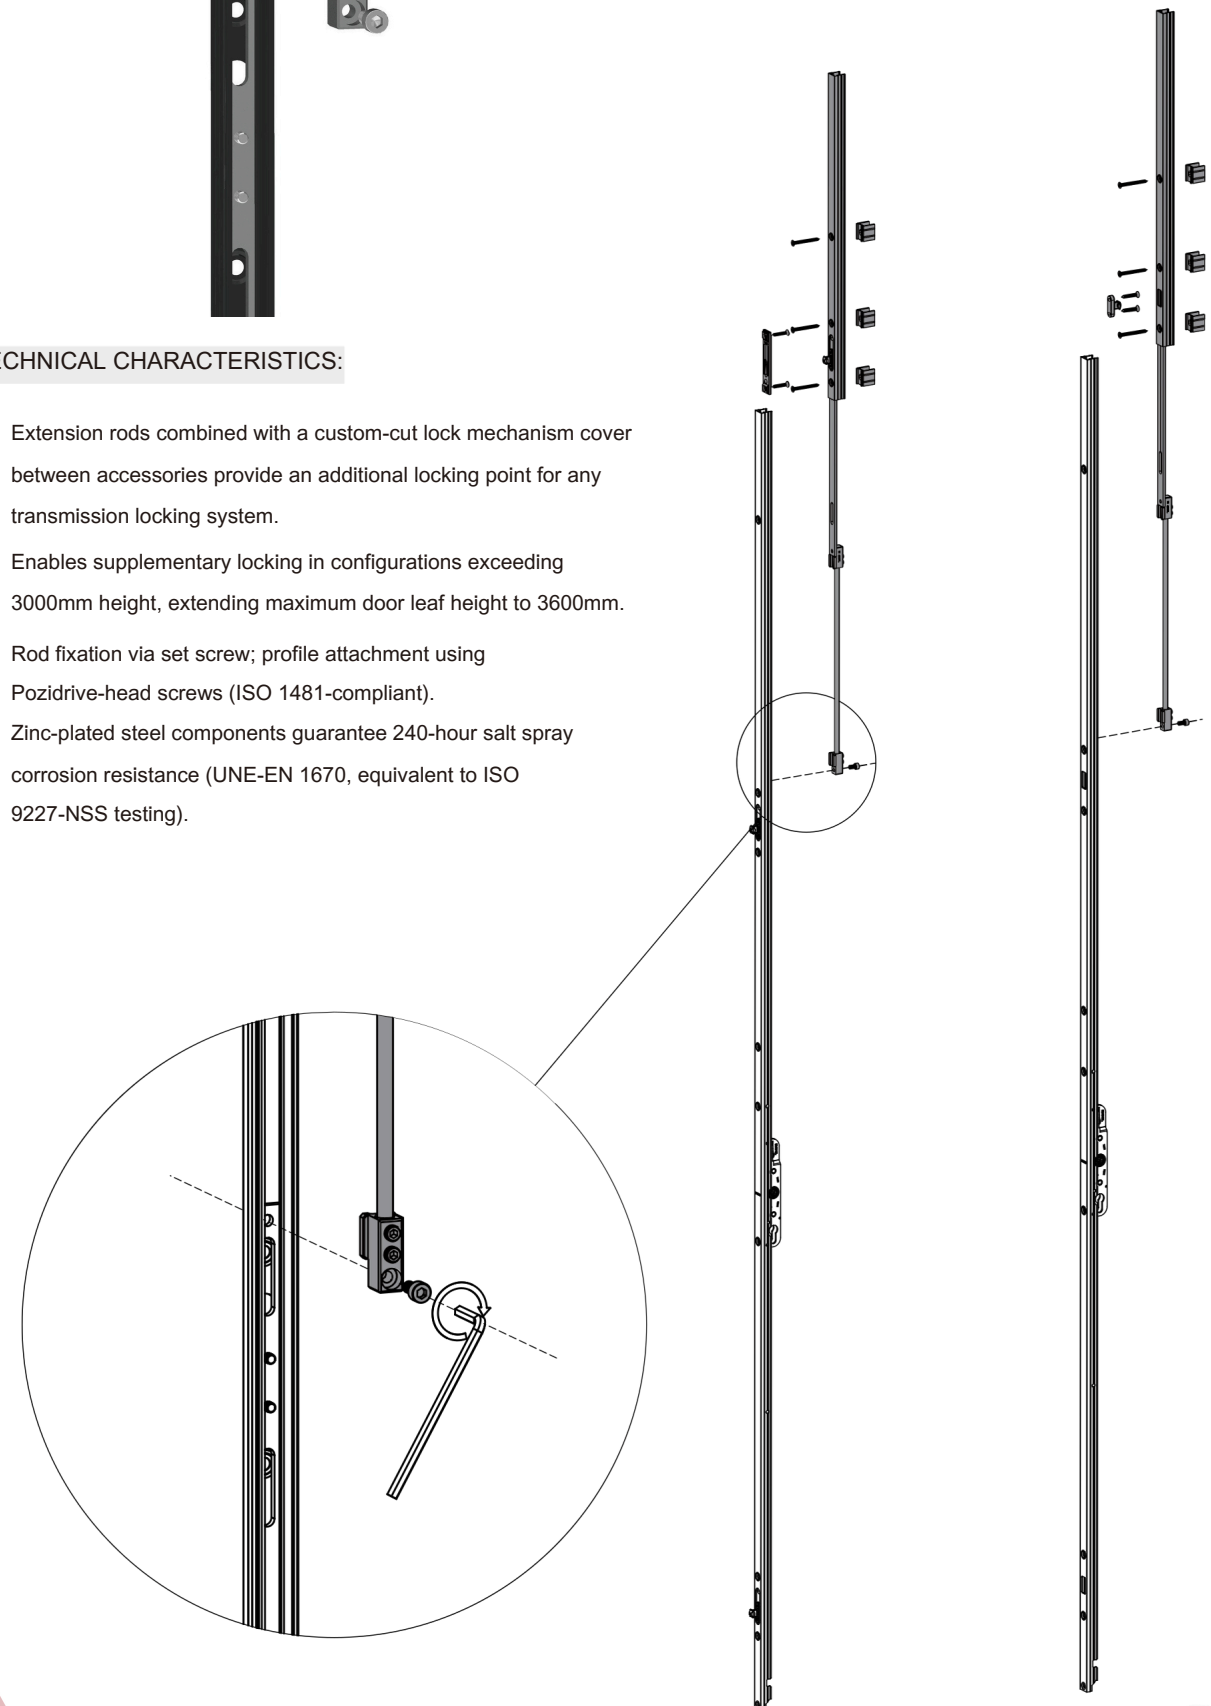

LS200 BOGIE HANDLE SIDE

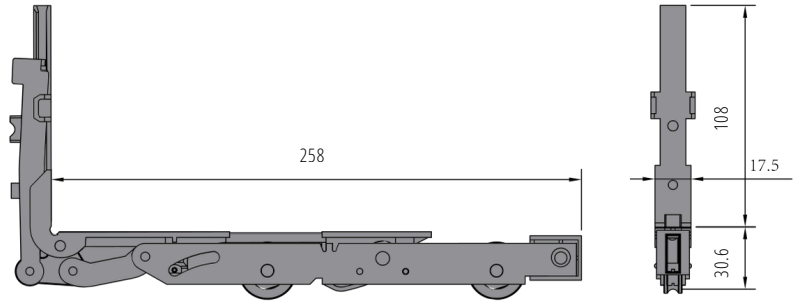



HSS

ZA

LS200

W22955

10

*When opening, the maximum lifting height of pulley is **7.5mm***

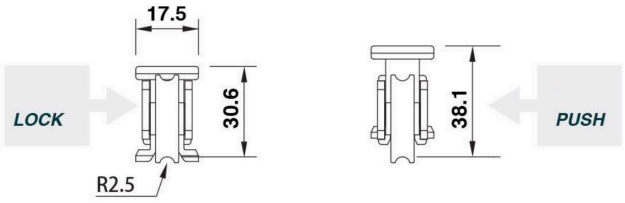

LS200 BOGIE

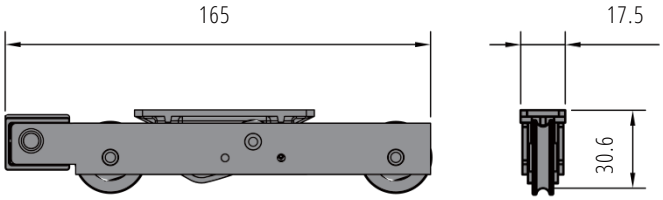

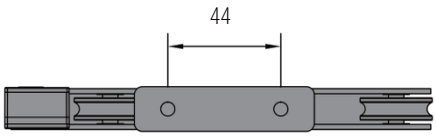

HSS

ZA

LS200

W22957

10

TECHNICAL CHARACTERISTICS:

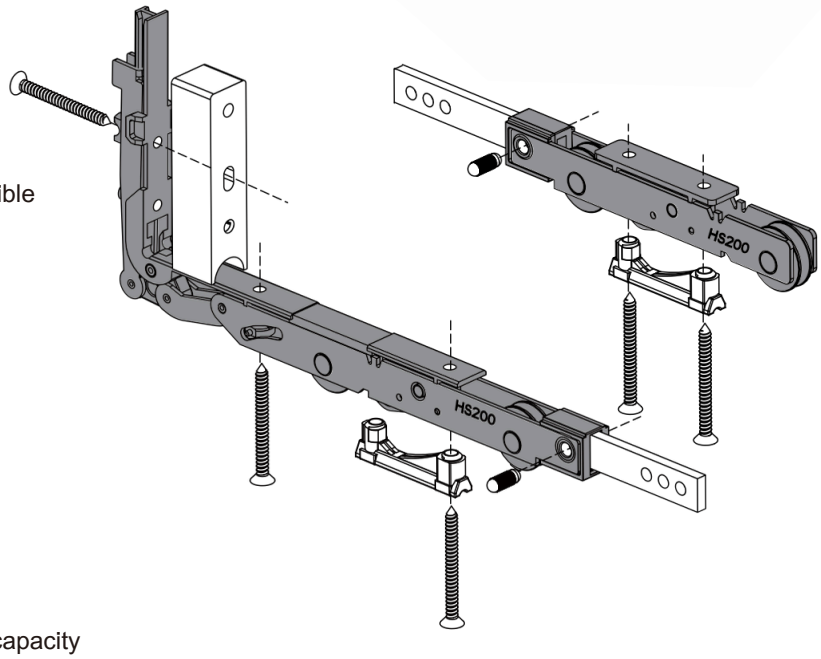

LS200 Lift-and-Slide Roller Assembly (Compatible with 18 mm channel profiles)

I. Supports door leaf configurations up to 200 kg

II. Compatible with 18/22 mm channels using included adaptation shims

III. Supplementary roller assemblies required for configurat ons up to 200 kg

IV. Secured to the profile via Pozidriv head screws

V. Wheels made of reinforced resin for high-load capacity

LS200 TANDEM BOGIE

W22956

10

HSS

ZA

LS200

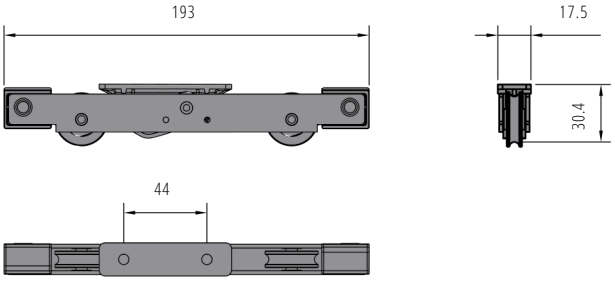

TECHNICAL CHARACTERISTICS:

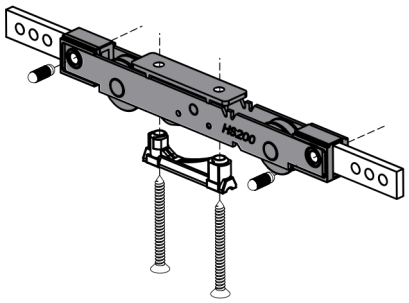

LS200 Lift-and-Sl de Roller Assembly (Compatible with 18 mm channel profiles)

I. Supports door leaf configurations up to 200 kg

II. Compatible with 18/22 mm channels using included adaptation shims

III. Supplementary roller assemblies required for configurat ons up to 200 kg

IV. Secured to the profile via Pozidriv head screws

V. Wheels made of reinforced resin for high-load capacity

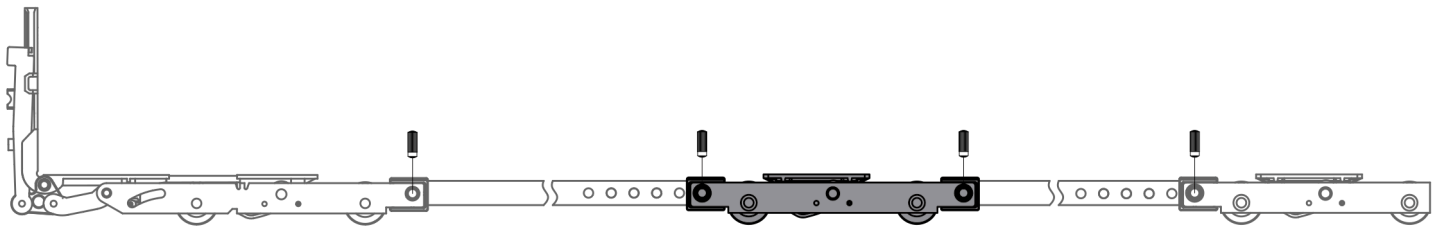

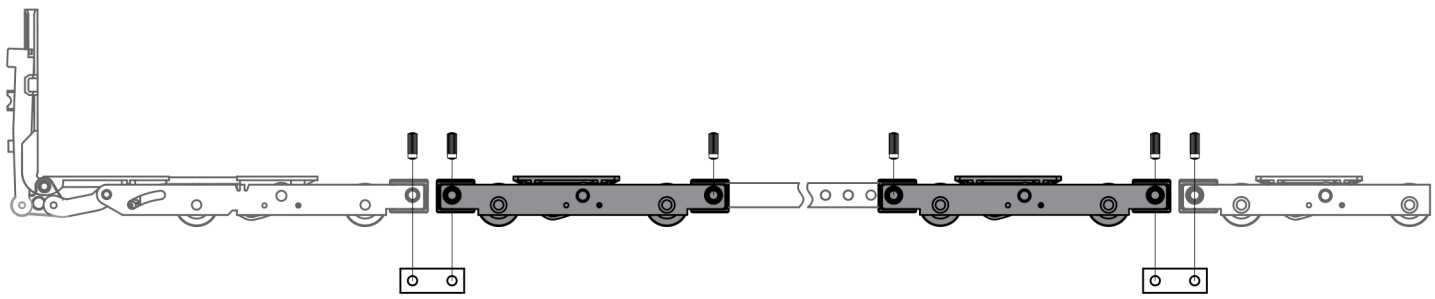

LS300 BOGIE HANDLE SIDE

HSS

ZA

LS300

W22948

10

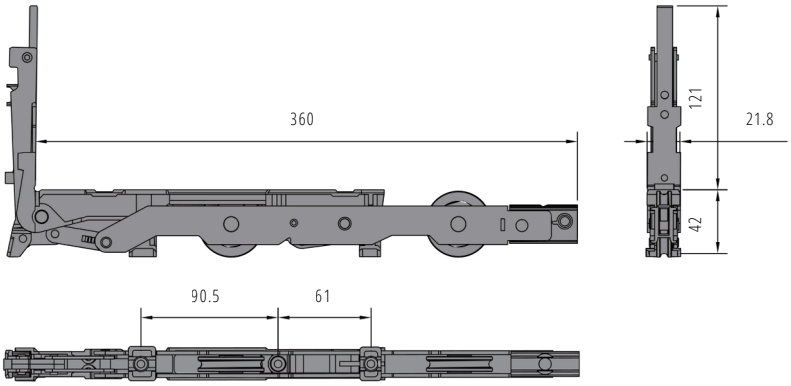

When opening, the maximum lifting height of pulley is ***7.5mm***

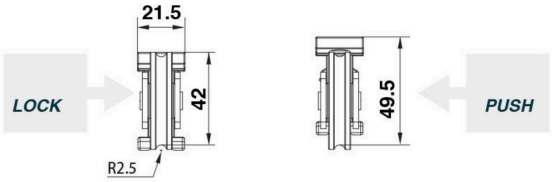

LS300 BOGIE

HSS

ZA

LS300

W22949

10

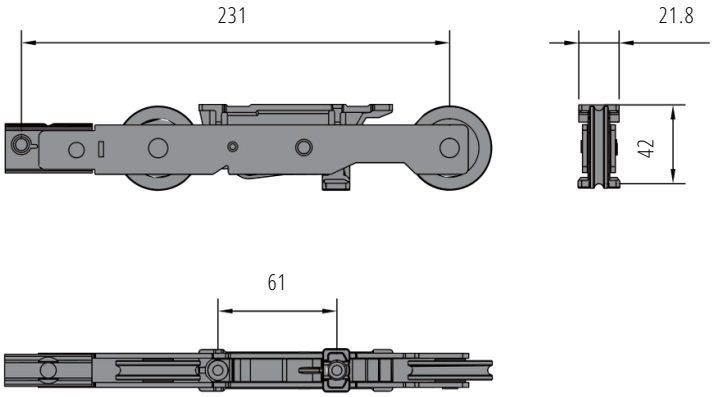

TECHNICAL CHARACTERISTICS:

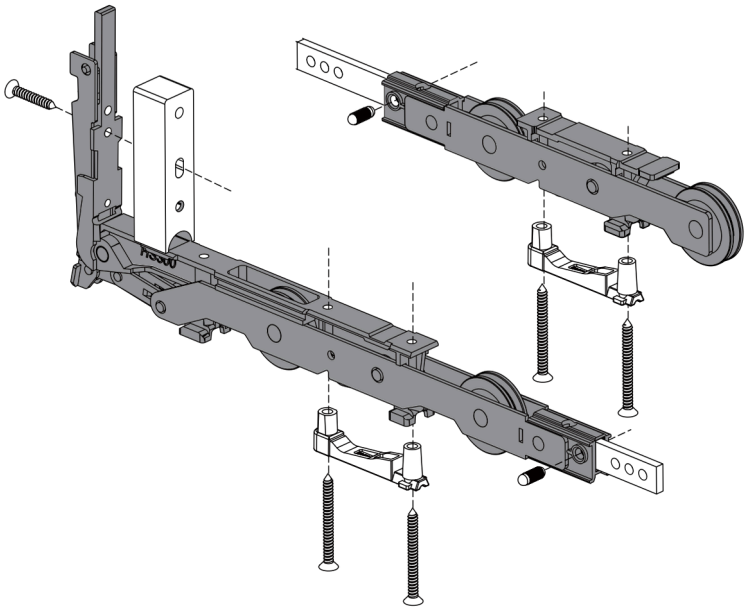

LS300 L ft-and-Slide Roller Assembly (Compatible with 22 mm channel profiles)

I. Supports door leaf configurations up to 300 kg

II. Compatible with 22 mm channels using included adaptation shims

III. Supplementary roller assemblies required for configurat ons up to 300 kg

IV. Secured to the profile via Pozidriv head screws

V. Wheels made of reinforced resin for high-load capacity

LS300 TANDEM BOGIE

W23005

HSS

10

ZA

LS300

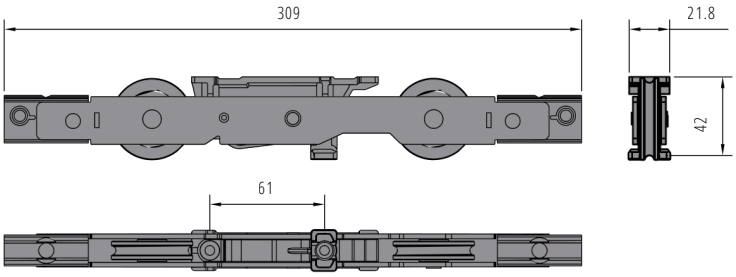

TECHNICAL CHARACTERISTICS:

LS300 L ft-and-Slide Roller Assembly (Compatible with 22 mm channel profiles)

I. Supports door leaf configurations up to 300 kg

II. Compatible with 22 mm channels using included adaptation shims

III. Supplementary roller assemblies required for configurat ons up to 300 kg

IV. Secured to the profile via Pozidriv head screws

V. Wheels made of reinforced resin for high-load capacity

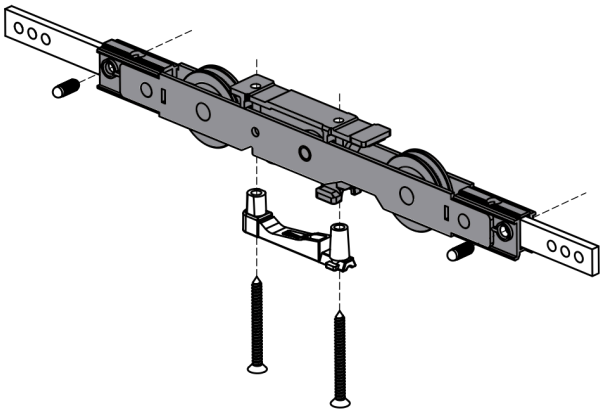

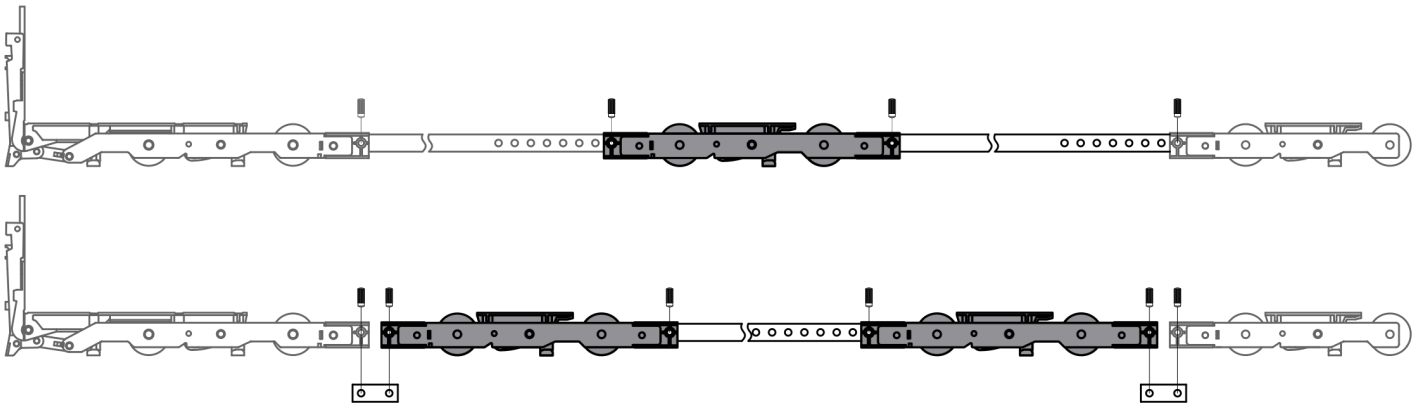

PACKER ESPAG&BOGIE

POM

W00026

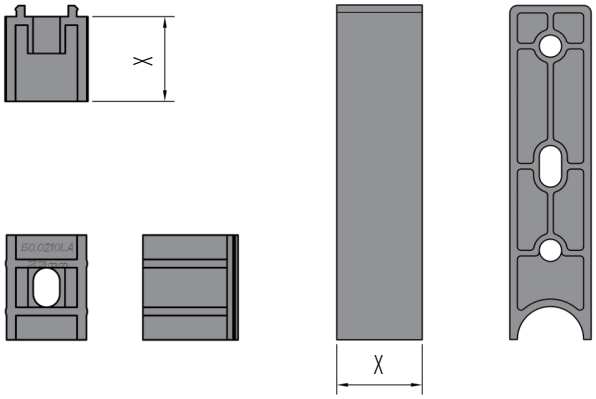



For use with :
W23008/W23008A/W23218/W23218A Espag

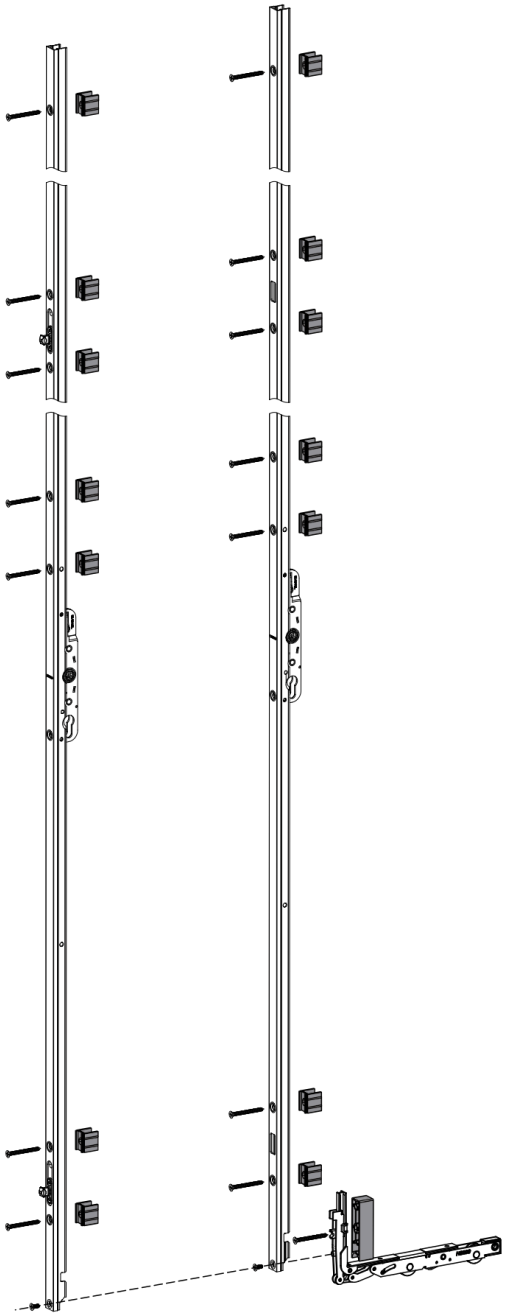

TECHNICAL CHARACTERISTICS:

Lifting-Sliding Packer for Lift and Slide Espag & Bogie handle side

I. PA6 polyamide with 10% glass fiber reinforcement (ISO 16396-compliant)

II. Available in 8–23mm width range (increments configurable per EN 13125:2001)

III. Maintains thermal bridge integrity (EN ISO 12676 compliance)

IV. Includes 8 lock mechanism shims + 1 front carriage shim

PRODUCT CODE	HEIGHT X
W00026M8	8mm
W00026M10	10mm
W00026M12	12mm
W00026M14.5	14.5mm
W00026M16	16mm
W00026M18	18mm
W00026M20	20mm
W00026M23	23mm

PACKER ESPAG & BOGIE

W00027

POM



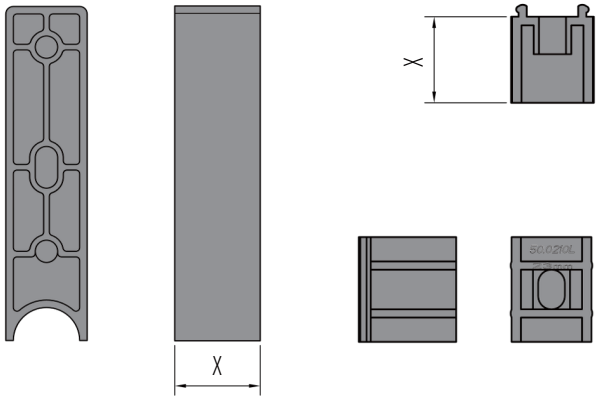

For use with :
W22950/W22950A/W22954/W22954A Espag

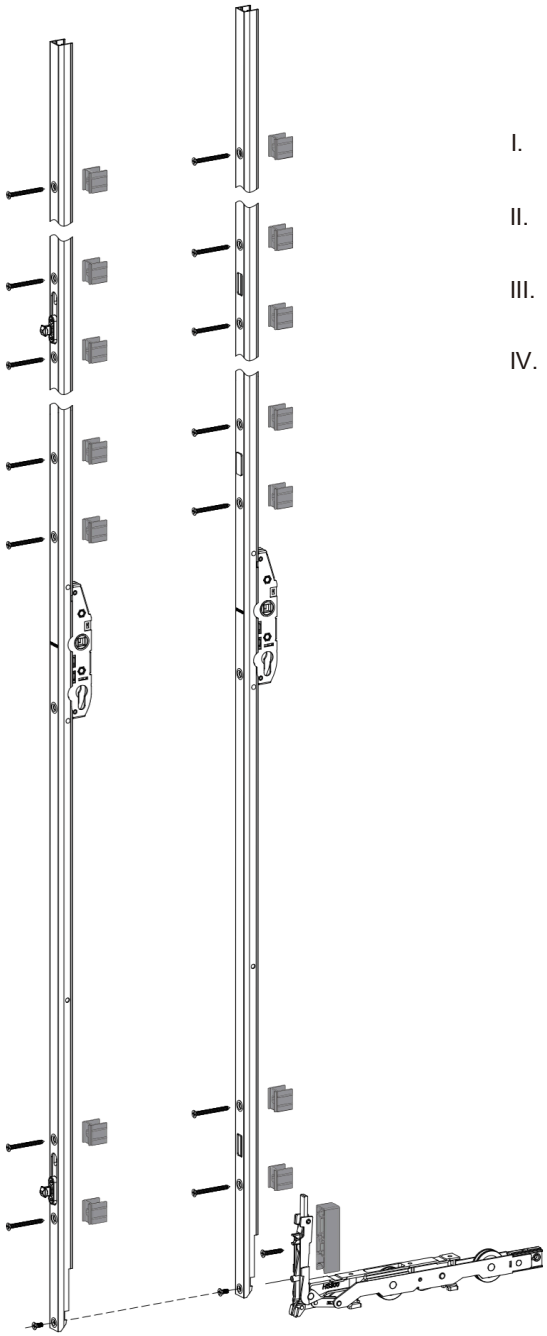

TECHNICAL CHARACTERISTICS:

Lifting-Sliding Packer for Lift and Slide Espag & Bogie handle side

I. PA6 polyamide with 10% glass fiber reinforcement (ISO 16396-compliant)

II. Available in 8–23mm width range (increments configurable per EN 13125:2001)

III. Maintains thermal bridge integrity (EN ISO 12676 compliance)

IV. Includes 8 lock mechanism shims + 1 front carriage shim

	HEIGHT
PRODUCT CODE	X
W00026M8	8mm
W00026M10	10mm
W00026M12	12mm
W00026M14.5	14.5mm
W00026M16	16mm
W00026M18	18mm
W00026M20	20mm
W00026M23	23mm

CONNECTING ROD

Hss

W13883

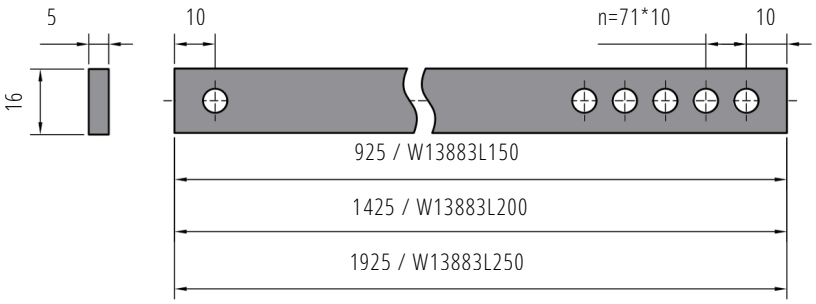

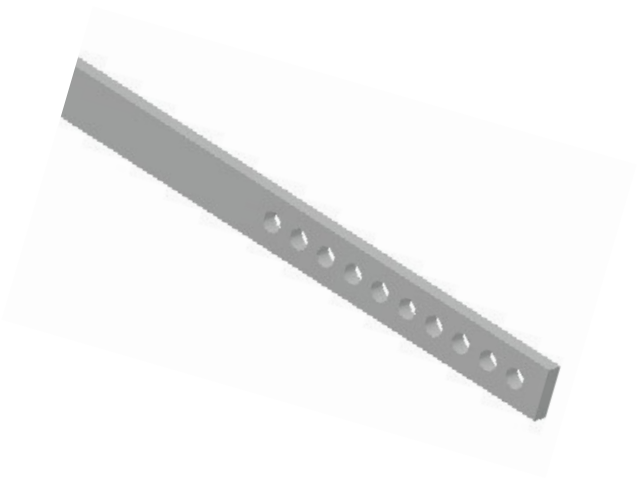

CALCULATION METHOD FOR THE CUTTING LENGTH OF THE CONNECTING ROD IN A LIFT-AND-SLIDE ROLLER ASSEMBLY

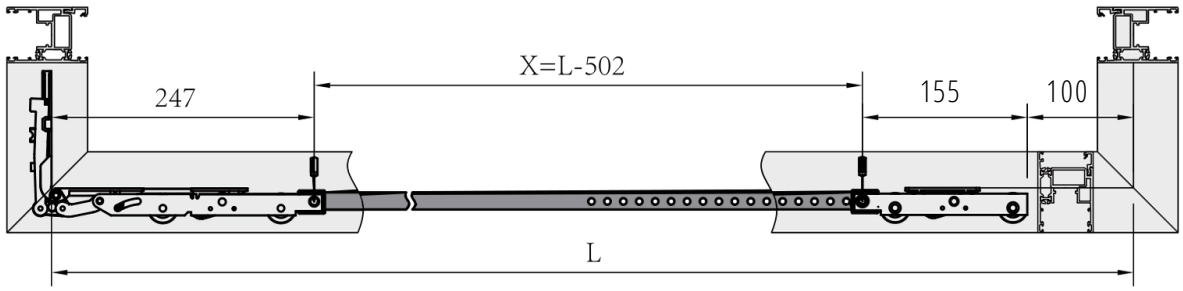

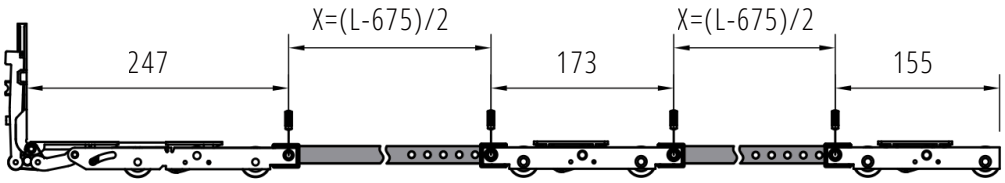

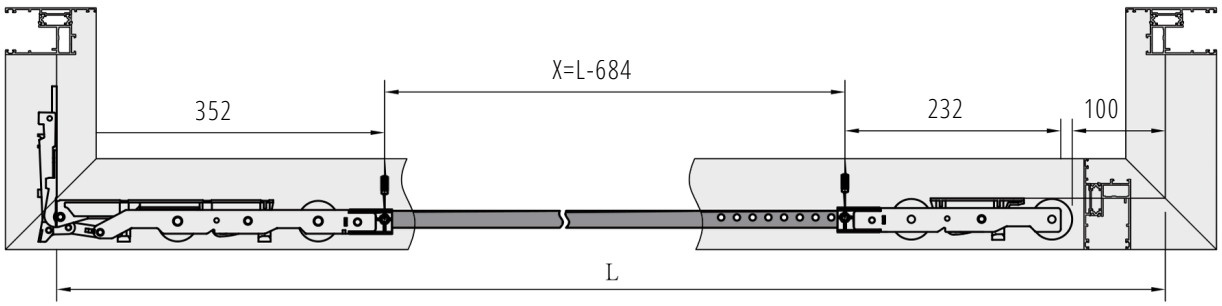

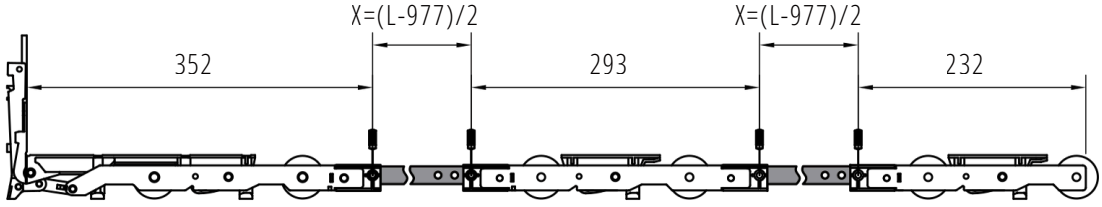

COMPENSTATION SPRING

W14151

H S

ENERGY STORAGE DEVICE

W23031

H SS

TECHNICAL CHARACTERISTICS:

Leaf Damping and Compensation Systems for Transmission-Type Espagnolette Locks

Energy storage device (623031)

A damping system that enables smooth and intuitive movement of the handle to the closed position.

I. Moderate and precise leaf cushioning during downward motion.

II. Compatible with transmission-type espagnolette locks of 2400, 2600, and 3000 millimeters.

III. Prevents abrupt handle impacts and significantly enhances the durability of the lifting mechanism.

Compenasation Spring (514151)

Compensates for the weight of the liftable leaf, reducing lifting effort.

I. Minimizes handle torque during leaf descent.

II. Recommended for installation on leaves weighing 200 kg or more.

ENERGY STORAGE INSTALLATION STEPS

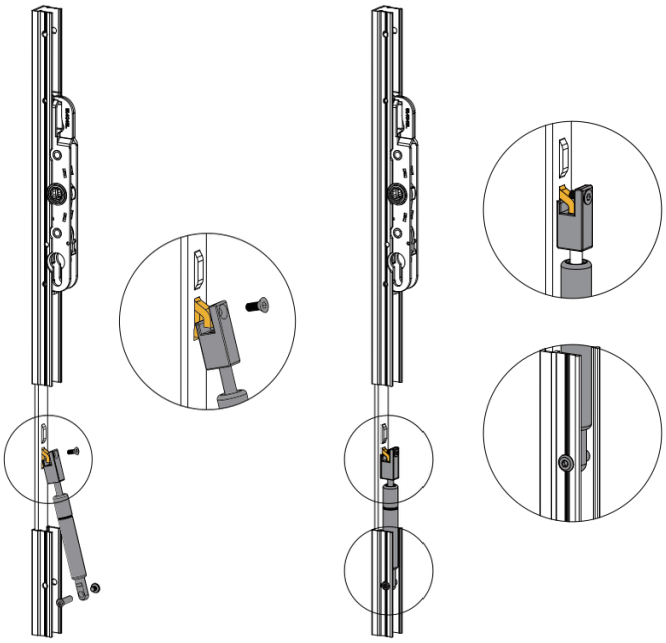

COMPENSTATION SPRING INSTALLATION STEPS

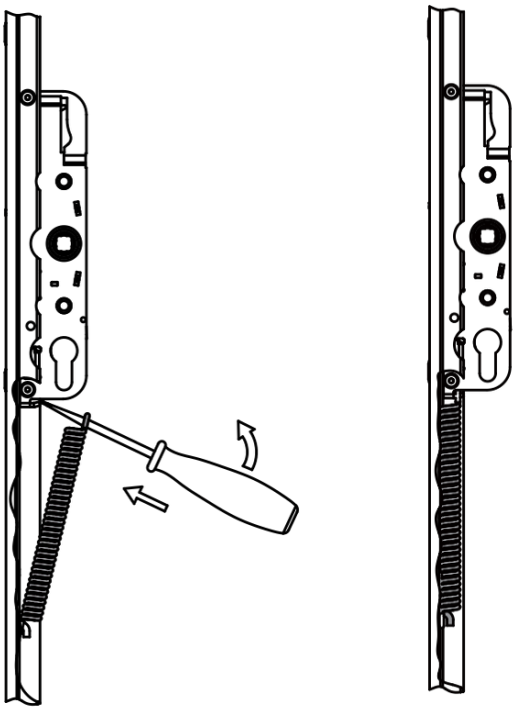

ANTI-COLLISION BLOCK

POM

W01343

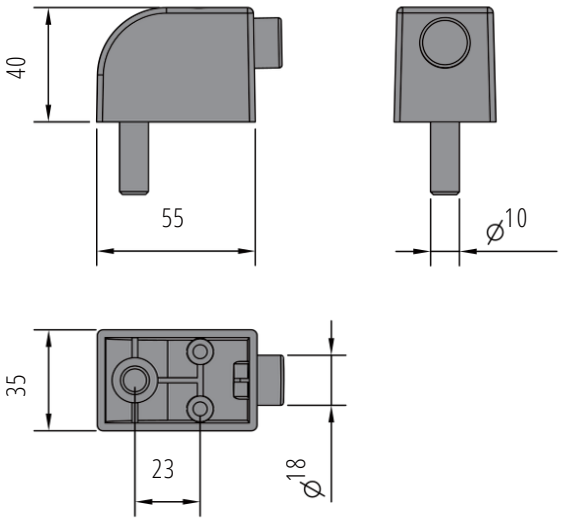

ANTI-COLLISION BLOCK

POM

W01342

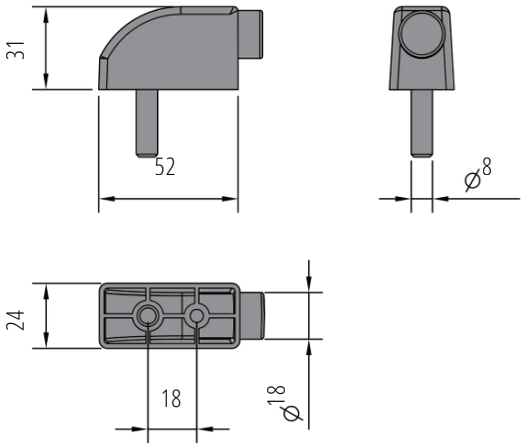

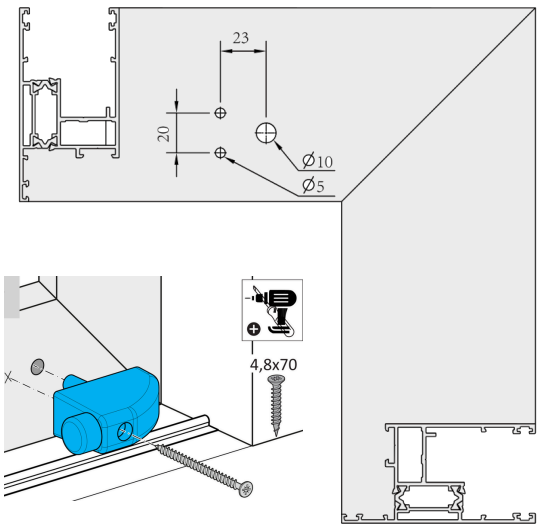

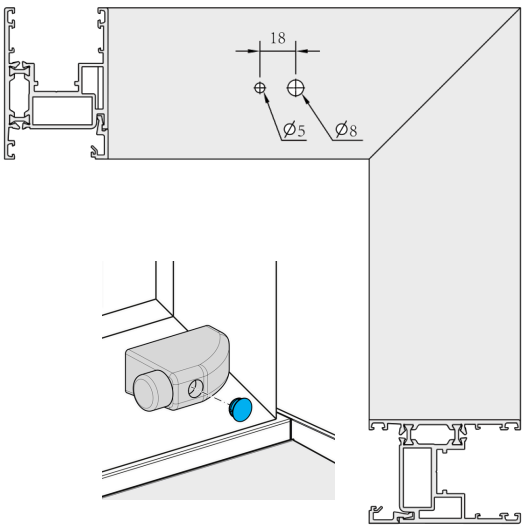

ANTI-COLLISION BLOCK

W01344

POM

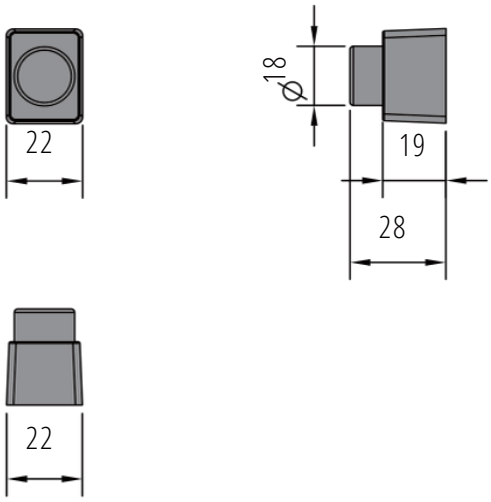

ANTI SWING WHEEL

W23201

SS

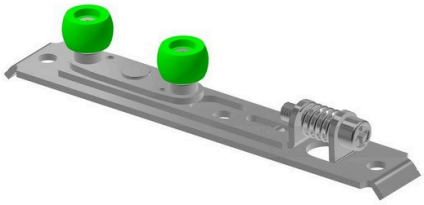

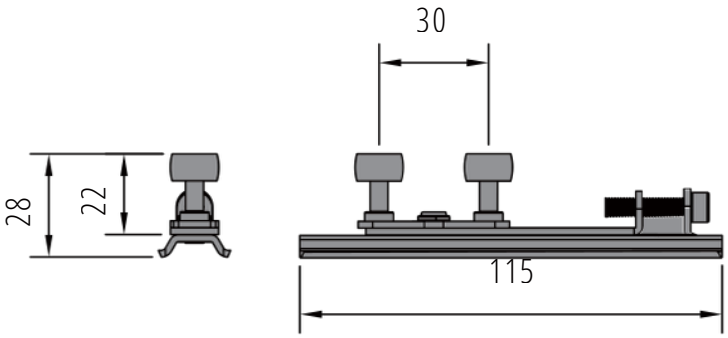

STRIKE POINT

W139993A

SS

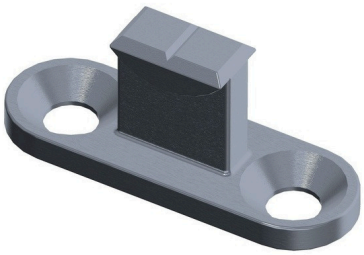

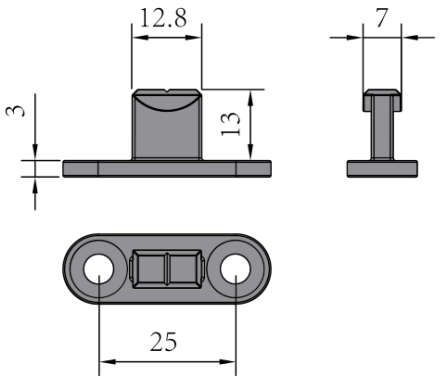

STRIKE POINT

SS

W13999

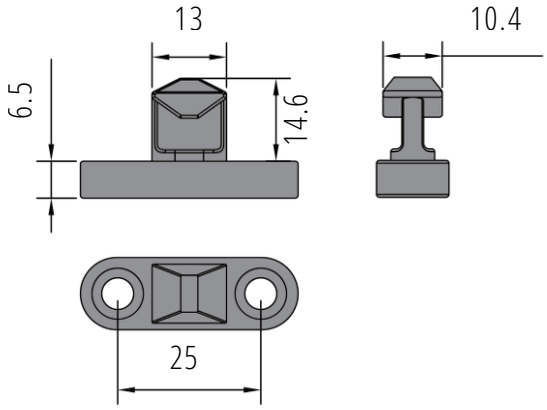

STRIKE POINT

SS

W139993

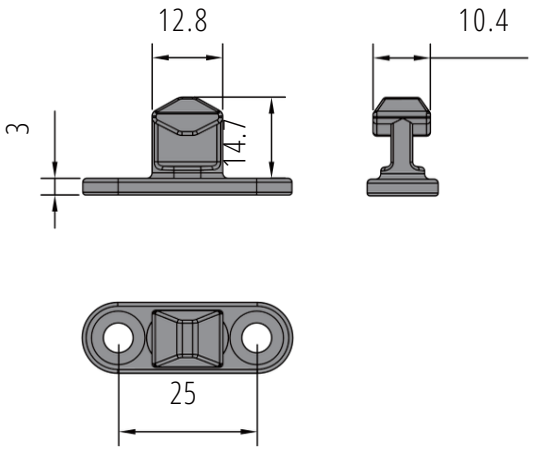

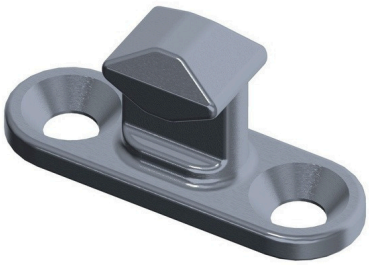

STRIKE POINT

SS

W141333

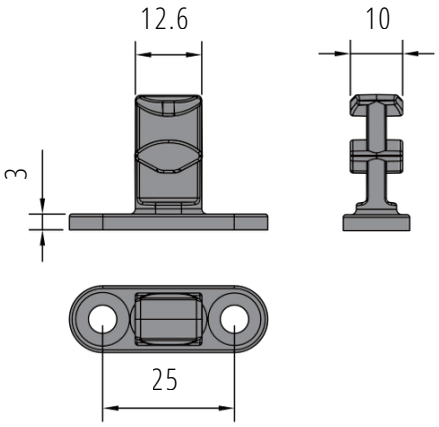

LOCK POINT WASHER

W22727

AL

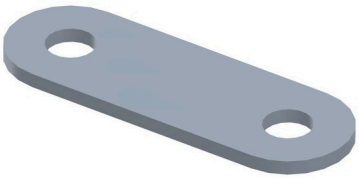

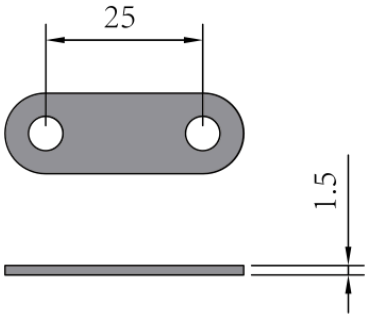

STRIKE PLATE

W14043

SS

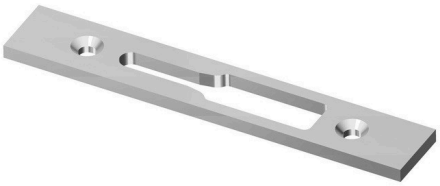





STRIKE PLATE

W23220

SS

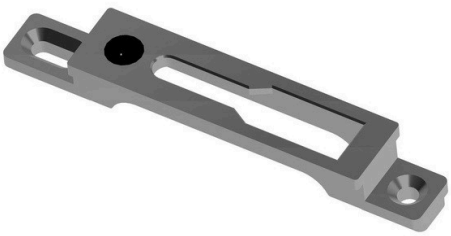





STRIKE PLATE

SS

W1404303

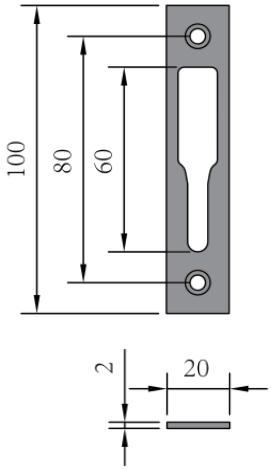

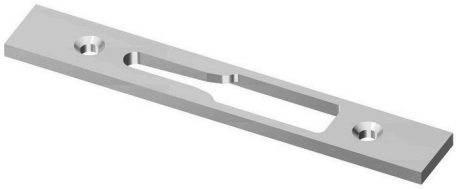

STRIKE PLATE

SS

W1404308

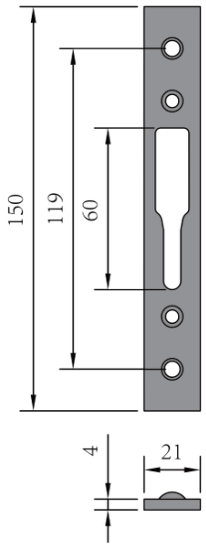

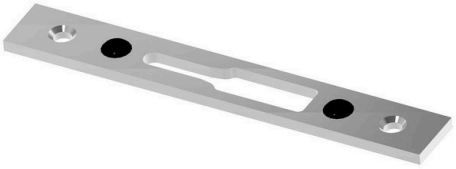

STRIKE PLATE

SS

W23219

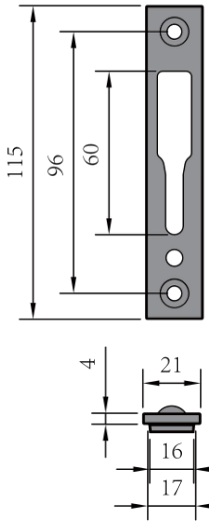

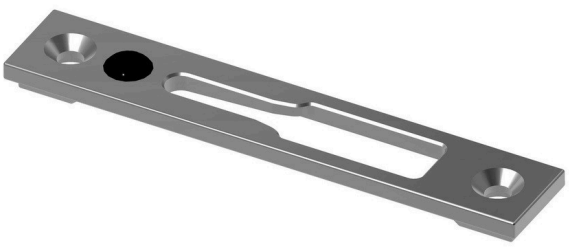

ERGO LINE LEVER HANDLE

W28002

20

AL ZA Css

7 mm

TECHNICAL CHARACTERISTICS:

Precision CNC machining ensures a reliable, sleek, and minimalist handle for office partitions

I. Integrated keyhole reinforcement structure (EN 1627 Burglar Resistance Class B)

II. Raw handle substrate (surface roughness Ra 6.3μm, ISO 1302)
Client-applied coatings supported:

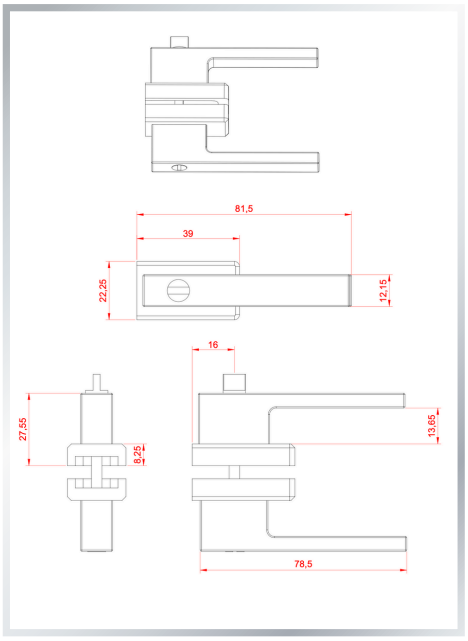

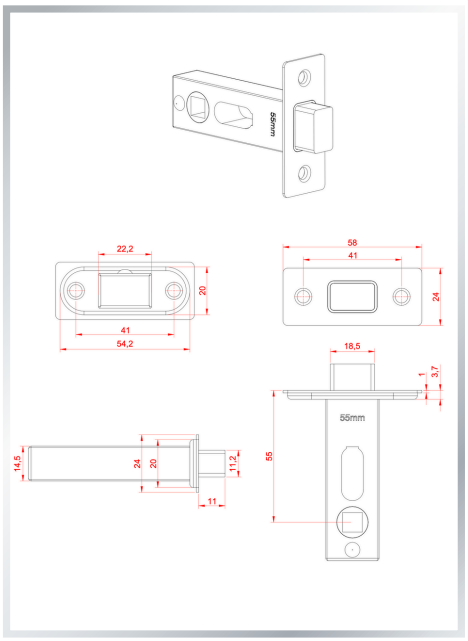

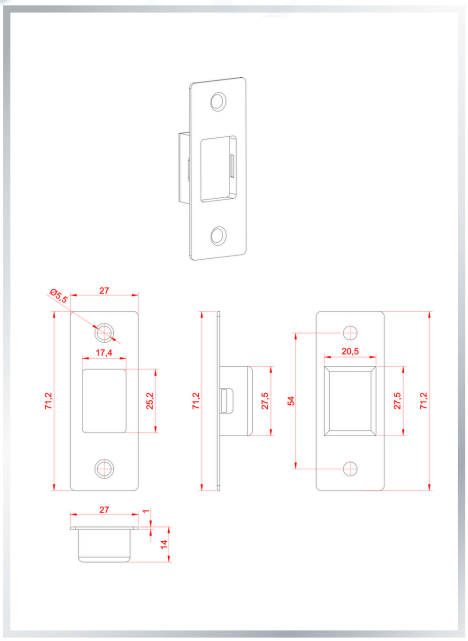

INVISIO CONCEALED HINGE

W2313

20

AL ZA Css

TECHNICAL CHARACTERISTICS:

Precision-engineered concealed hinge offering smooth motion, durability, and minimalist style for office partitions

I. Integrated keyhole reinforcement structure (EN 1627 Burglar Resistance Class B)

II. Raw Hinge substrate (surface roughness Ra 6.3μm, ISO 1302)
Client-applied coatings supported:

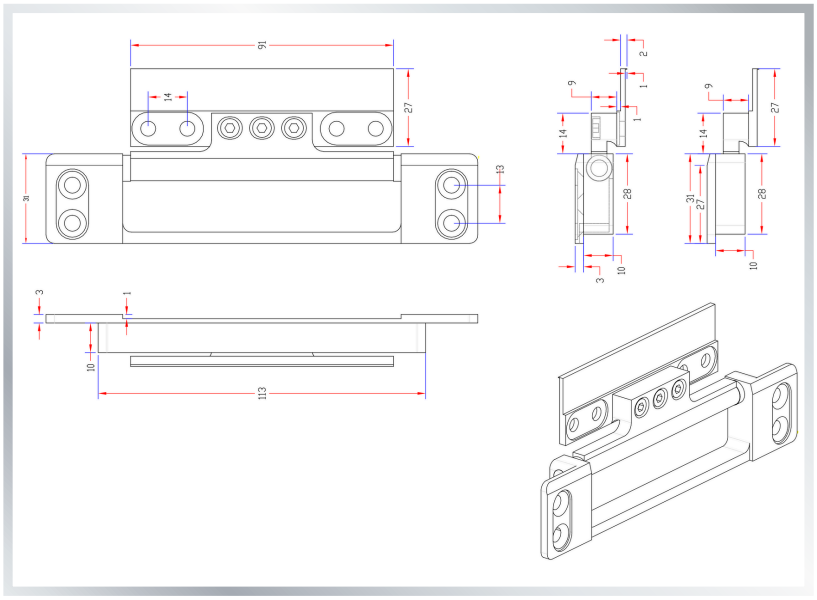

WIEK

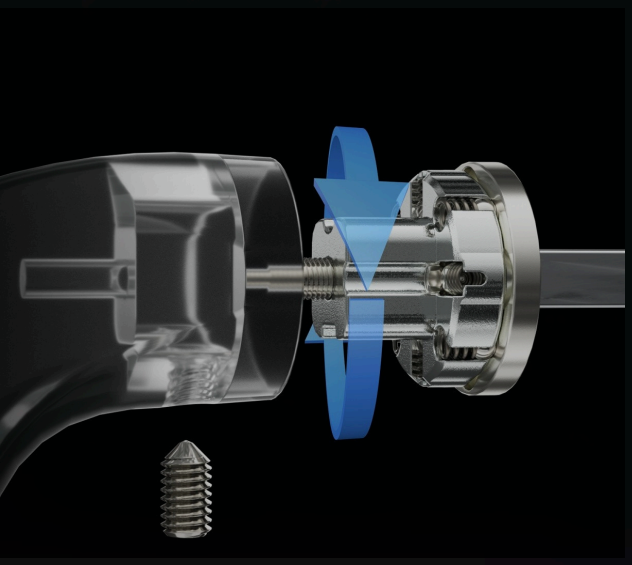

" To build the best windows and doors,
you have to use the best hardware. "

That's precisely what we offer.