

Lecture 4

Transport Layer, Part I

Homework #1

Due: 4/15 before Noon

Upload the report file at KLAS

1. Problem solving

- 1) From Chapter 1: R11, P6, P11, P13, P25, P31
- 2) From Chapter 2: R19, P8, P9

2. Wireshark Labs

- 1) Introduction
- 2) HTTP
- 3) DNS

Chapter 3: Transport Layer

Our goals:


- understand principles behind transport layer services:
 - multiplexing/demultiplexing
 - reliable data transfer
 - flow control
 - congestion control
- learn about transport layer protocols in the Internet:
 - UDP: connectionless transport
 - TCP: connection-oriented transport
 - TCP congestion control

Chapter 3 outline

- 3.1 Transport-layer services
- 3.2 Multiplexing and demultiplexing
- 3.3 Connectionless transport: UDP
- 3.4 Principles of reliable data transfer
- 3.5 Connection-oriented transport: TCP
 - segment structure
 - reliable data transfer
 - flow control
 - connection management
- 3.6 Principles of congestion control
- 3.7 TCP congestion control

Transport services and protocols

- provide *logical communication* between app processes running on different hosts
- transport protocols run in end systems
 - send side: breaks app messages into **segments**, passes to network layer
 - rcv side: reassembles segments into messages, passes to app layer
- more than one transport protocol available to apps
 - Internet: TCP and UDP

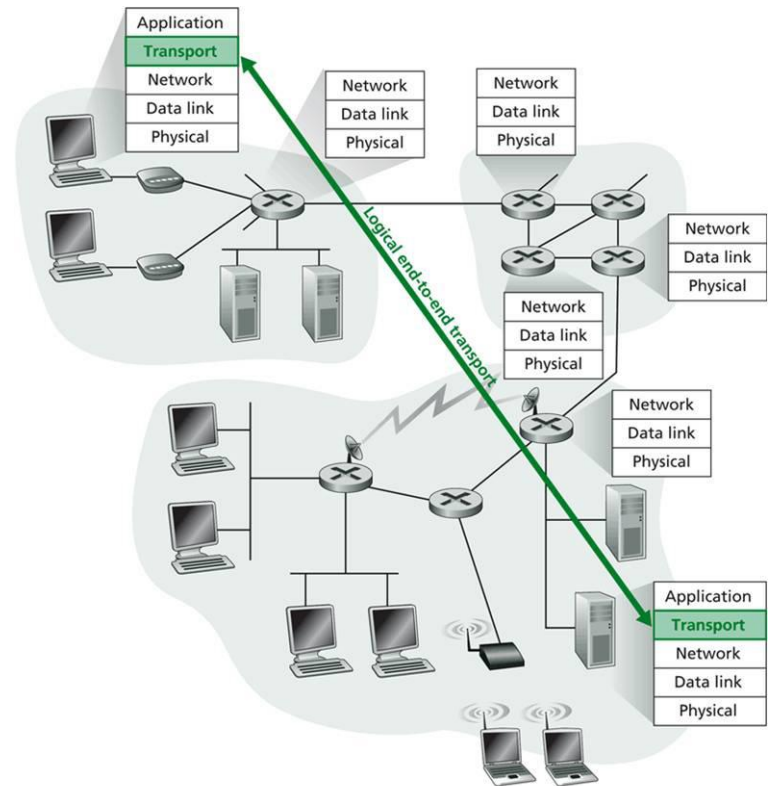

Transport vs. network layer

- *network layer*: logical communication between hosts
- *transport layer*: logical communication between processes
 - relies on, enhances, network layer services


Household analogy:

12 kids sending letters to 12 kids

- processes = kids
- app messages = letters in envelopes
- hosts = houses
- transport protocol = Ann and Bill
- network-layer protocol = postal service


Internet transport-layer protocols

- reliable, in-order delivery (TCP)
 - congestion control
 - flow control
 - connection setup
- unreliable, unordered delivery: UDP
 - no-frills extension of “best-effort” IP
- services not available:
 - delay guarantees
 - bandwidth guarantees

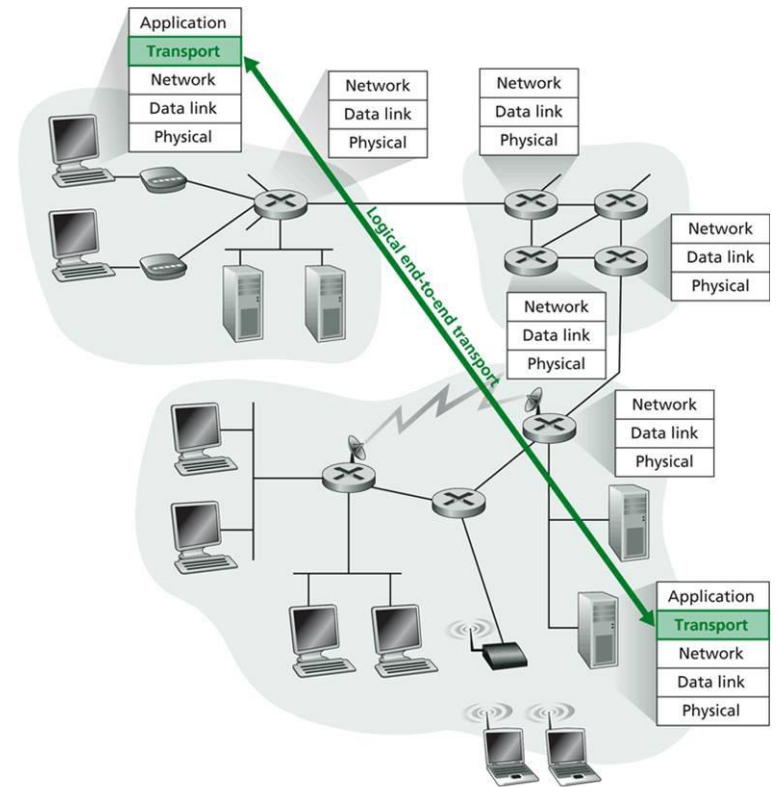


Multiplexing/demultiplexing

- **Demultiplexing at rcv host**
 - delivering received segments to correct socket
- **Multiplexing at send host:**
 - gathering data from multiple sockets, enveloping data with header (later used for demultiplexing)

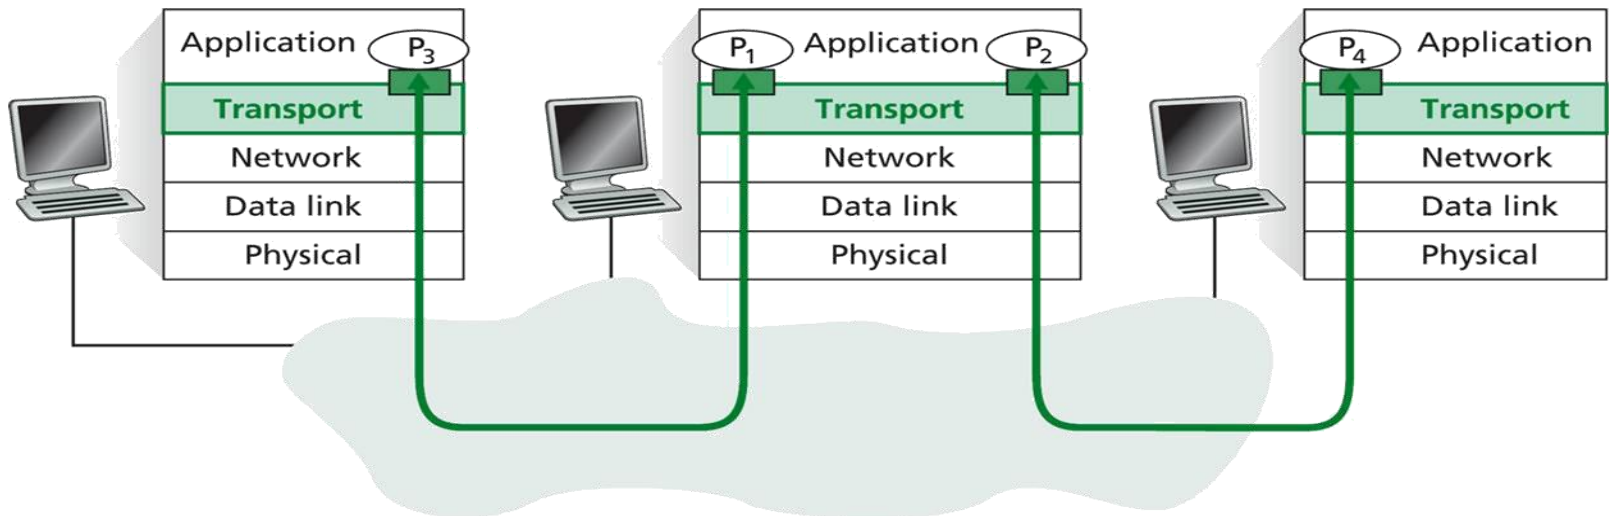


Key:



How demultiplexing works

- host receives IP datagrams
 - each datagram has source IP address, destination IP address
 - each datagram carries 1 transport-layer segment
 - each segment has source, destination port number
- host uses IP addresses & port numbers to direct segment to appropriate socket

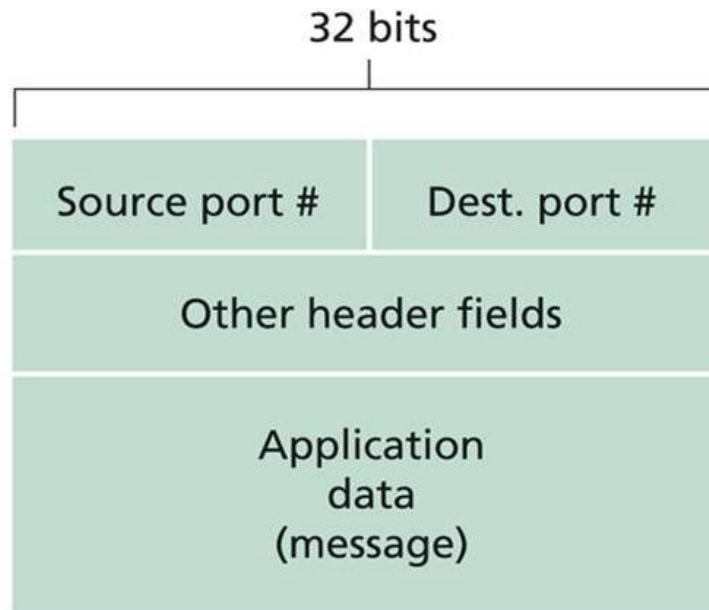

TCP/UDP segment format

Connectionless demultiplexing

- Create sockets with port numbers:


```
DatagramSocket mySocket1 = new DatagramSocket(19157);
```

```
DatagramSocket mySocket2 = new DatagramSocket(99222);
```

- UDP socket identified by two-tuple:
 - dest IP address
 - dest port number
- When host receives UDP segment:
 - checks destination port number in segment
 - directs UDP segment to socket with that port number
- IP datagrams with different source IP addresses and/or source port numbers directed to same socket

Connectionless demux (cont.)

```
DatagramSocket serverSocket = new DatagramSocket(6428);
```

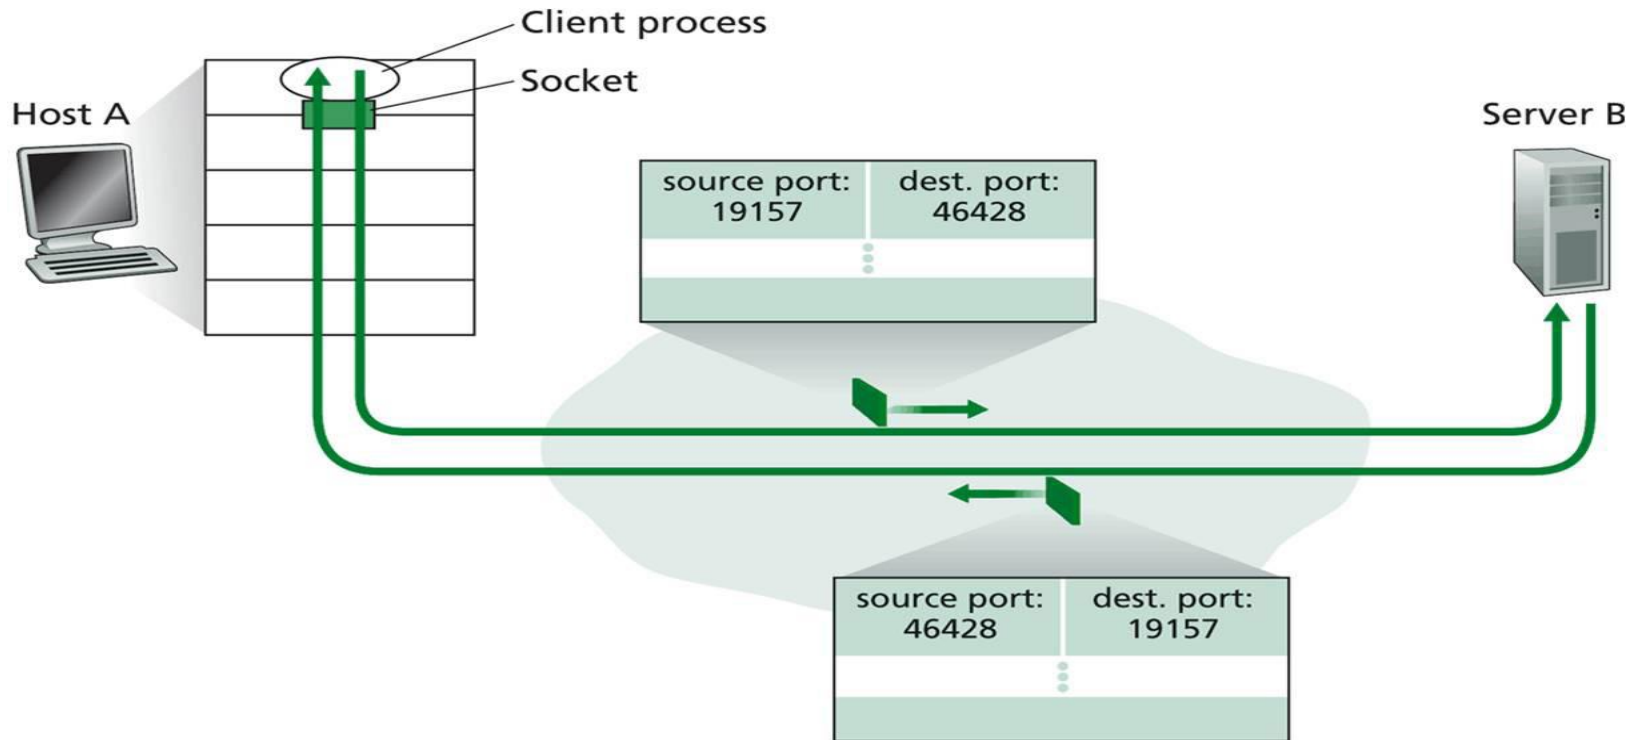


SP provides “return address”


Connection-oriented demux

- TCP socket identified by 4-tuple:
 - source IP address
 - source port number
 - dest IP address
 - dest port number
- recv host uses all four values to direct segment to appropriate socket
- Server host may support many simultaneous TCP sockets:
 - each socket identified by its own 4-tuple
- Web servers have different sockets for each connecting client
 - non-persistent HTTP will have different socket for each request

Connection-oriented demux (cont.)

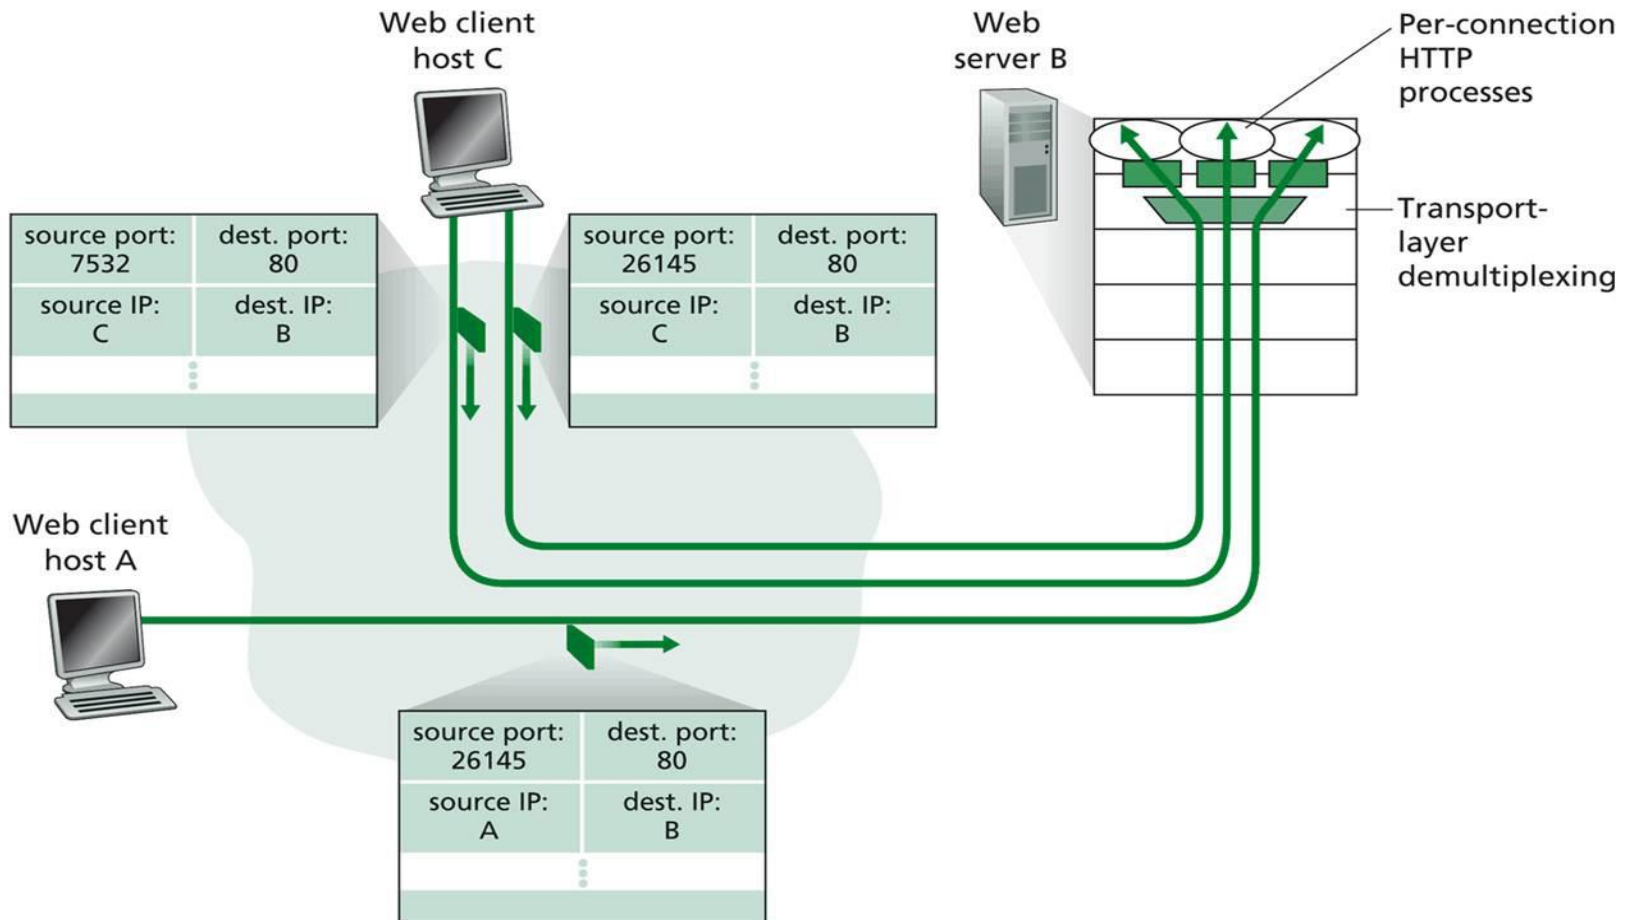

Connection-oriented demux: Threaded Web Server

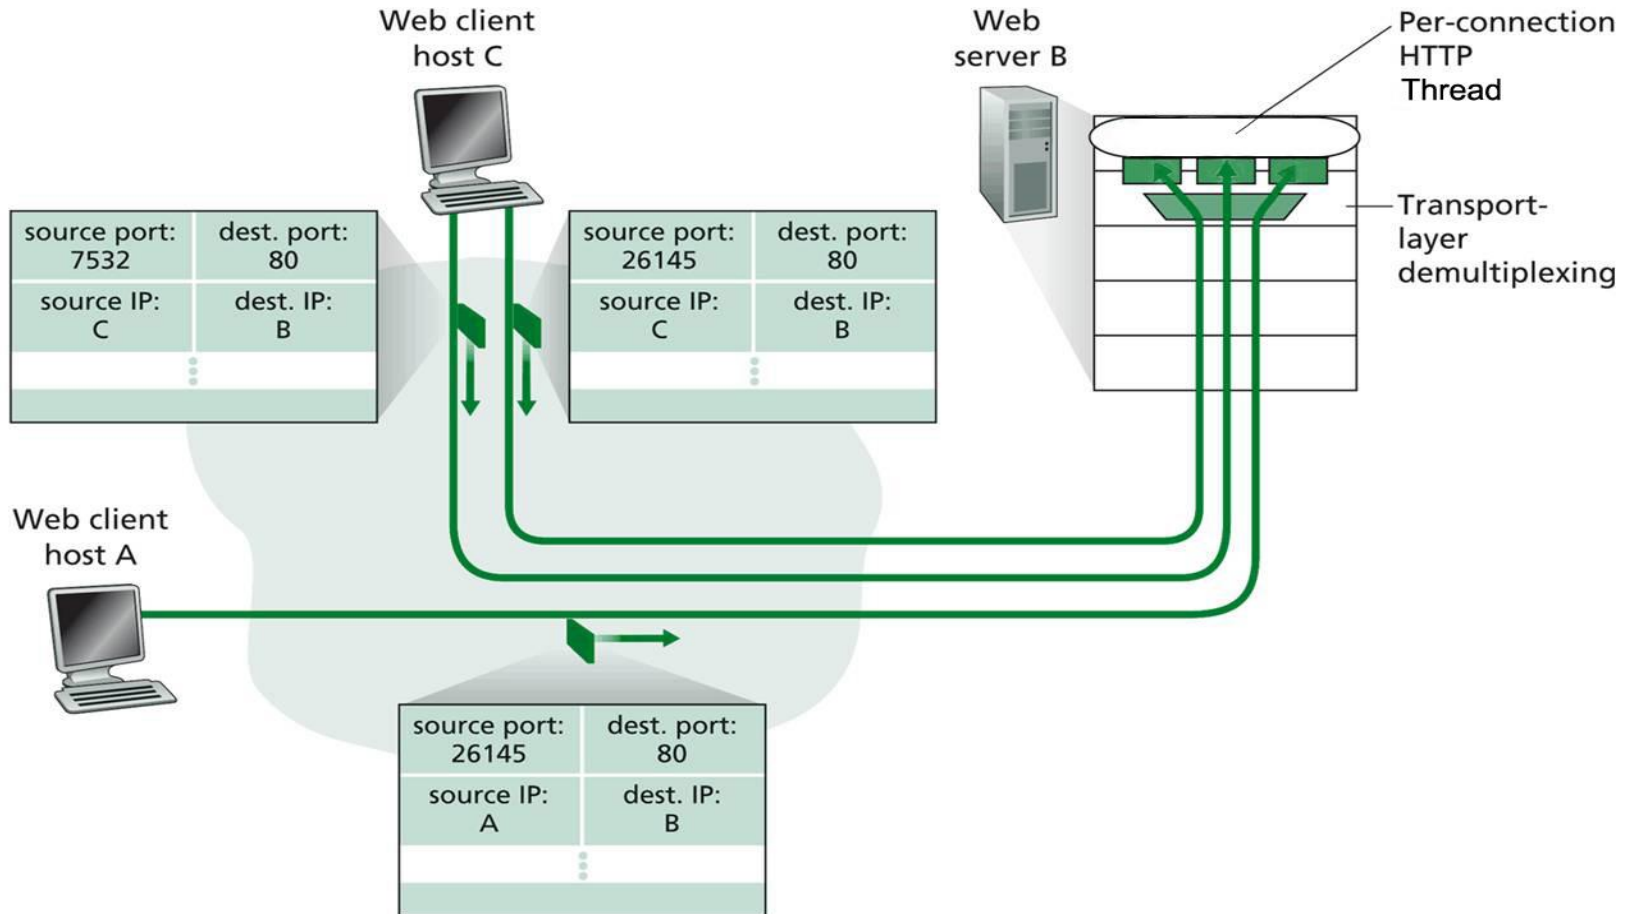

UDP: User Datagram Protocol [RFC 768]

- “no frills,” “bare bones” Internet transport protocol
- “best effort” service, UDP segments may be:
 - lost
 - delivered out of order to app
- *connectionless*:
 - no handshaking between UDP sender, receiver
 - each UDP segment handled independently of others


Why is there a UDP?

- no connection establishment (which can add delay)
- simple: no connection state at sender, receiver
- small segment header
- no congestion control: UDP can blast away as fast as desired

UDP: more

- often used for streaming multimedia apps
 - loss tolerant
 - rate sensitive
- other UDP uses
 - DNS
 - SNMP
- reliable transfer over UDP: add reliability ;
 - application-specific error recovery!

Length, in bytes of UDP segment,
including header

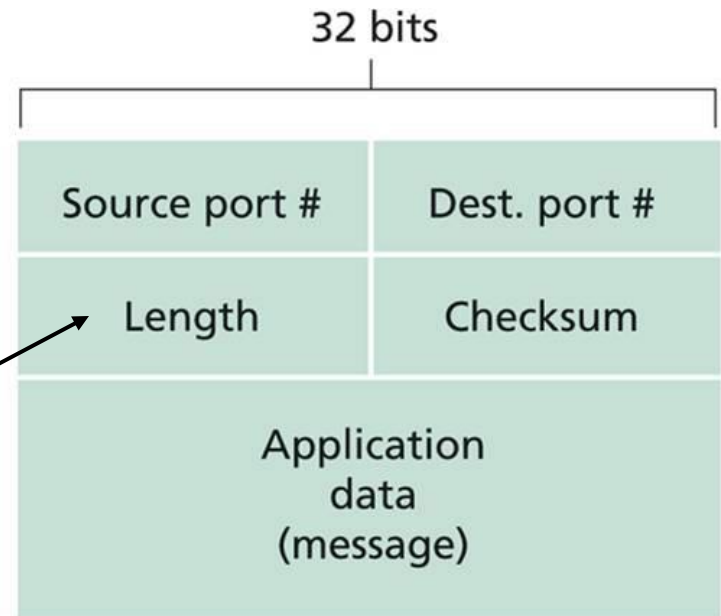

UDP segment format

UDP checksum

Goal: detect “errors” (e.g., flipped bits) in transmitted segment

Sender:

- treat segment contents as sequence of 16-bit integers
- checksum: addition (1's complement sum) of segment contents
- sender puts checksum value into UDP checksum field

Receiver:

- compute checksum of received segment
- check if computed checksum equals checksum field value:
 - NO - error detected
 - YES - no error detected. *But maybe errors nonetheless?* More later

Internet checksum: example

example: add two 16-bit integers


	1	1	1	0	0	1	1	0	0	1	1	0	0	1	1	0
	1	1	0	1	0	1	0	1	0	1	0	1	0	1	0	1
<hr/>																
wraparound	1	1	0	1	1	1	0	1	1	1	0	1	1	1	0	1
<hr/>																
sum	1	0	1	1	1	0	1	1	1	0	1	1	1	1	0	0
checksum	0	1	0	0	0	1	0	0	0	1	0	0	0	0	1	1

Note: when adding numbers, a carryout from the most significant bit needs to be added to the result

Sender transmits both of 16-bit numbers and checksum!

Principles of Reliable data transfer


- important in app., transport, link layers
- top-10 list of important networking topics!

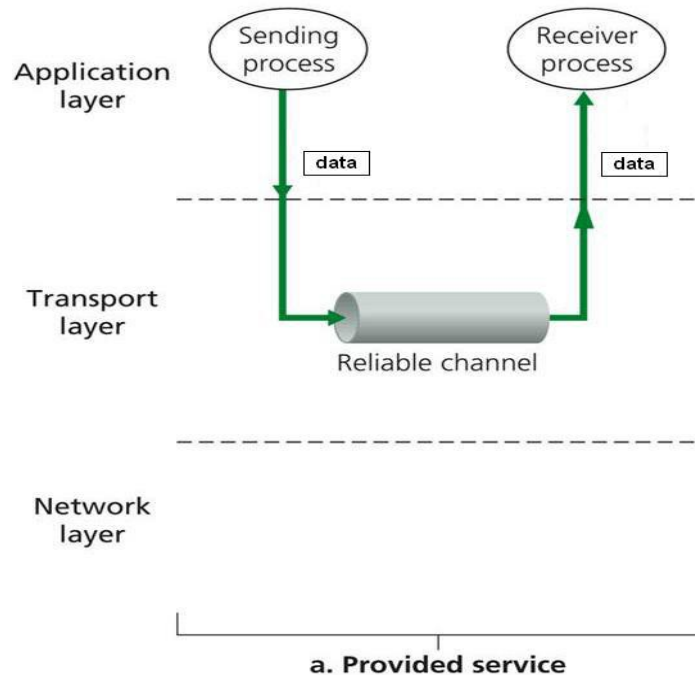

- characteristics of unreliable channel will determine complexity of reliable data transfer protocol (rdt)

Principles of Reliable data transfer


- important in app., transport, link layers
- top-10 list of important networking topics!

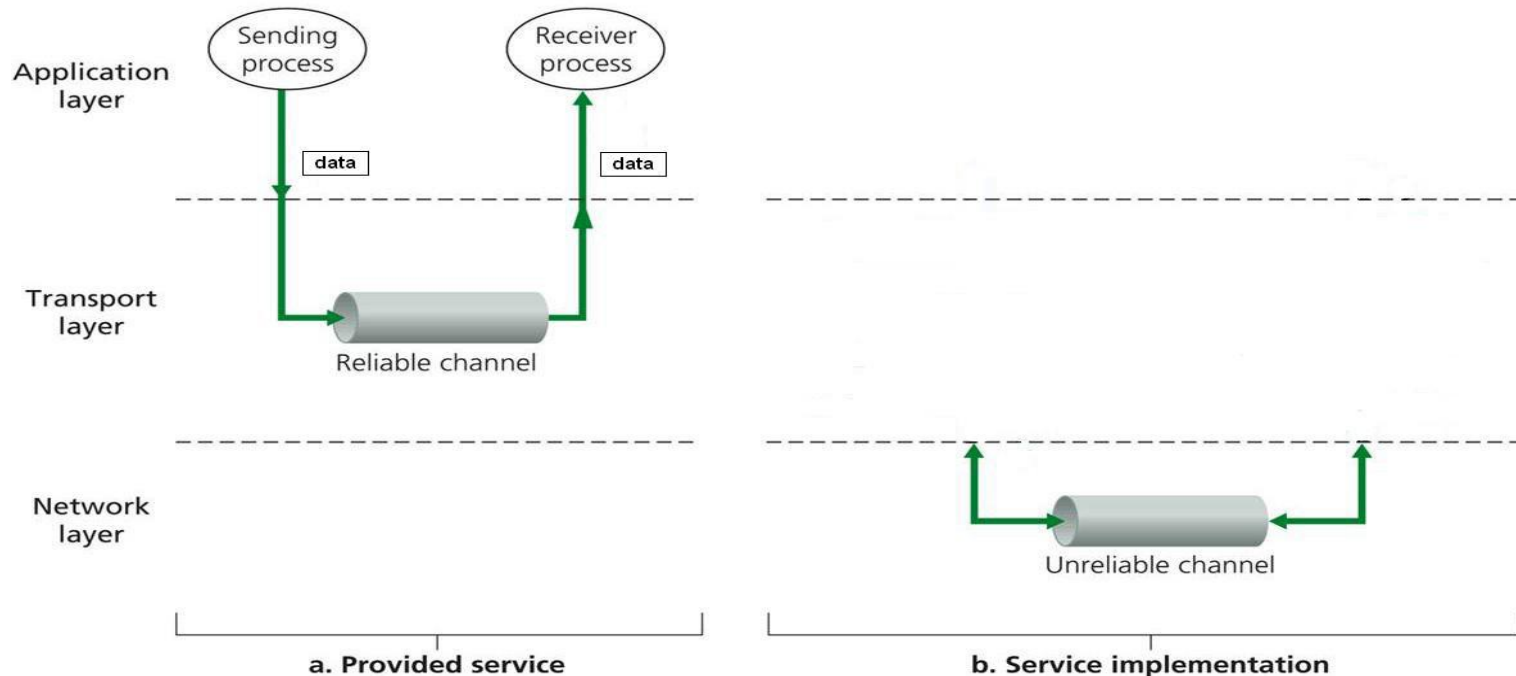

- characteristics of unreliable channel will determine complexity of reliable data transfer protocol (rdt)

Principles of Reliable data transfer

- important in app., transport, link layers
- top-10 list of important networking topics!

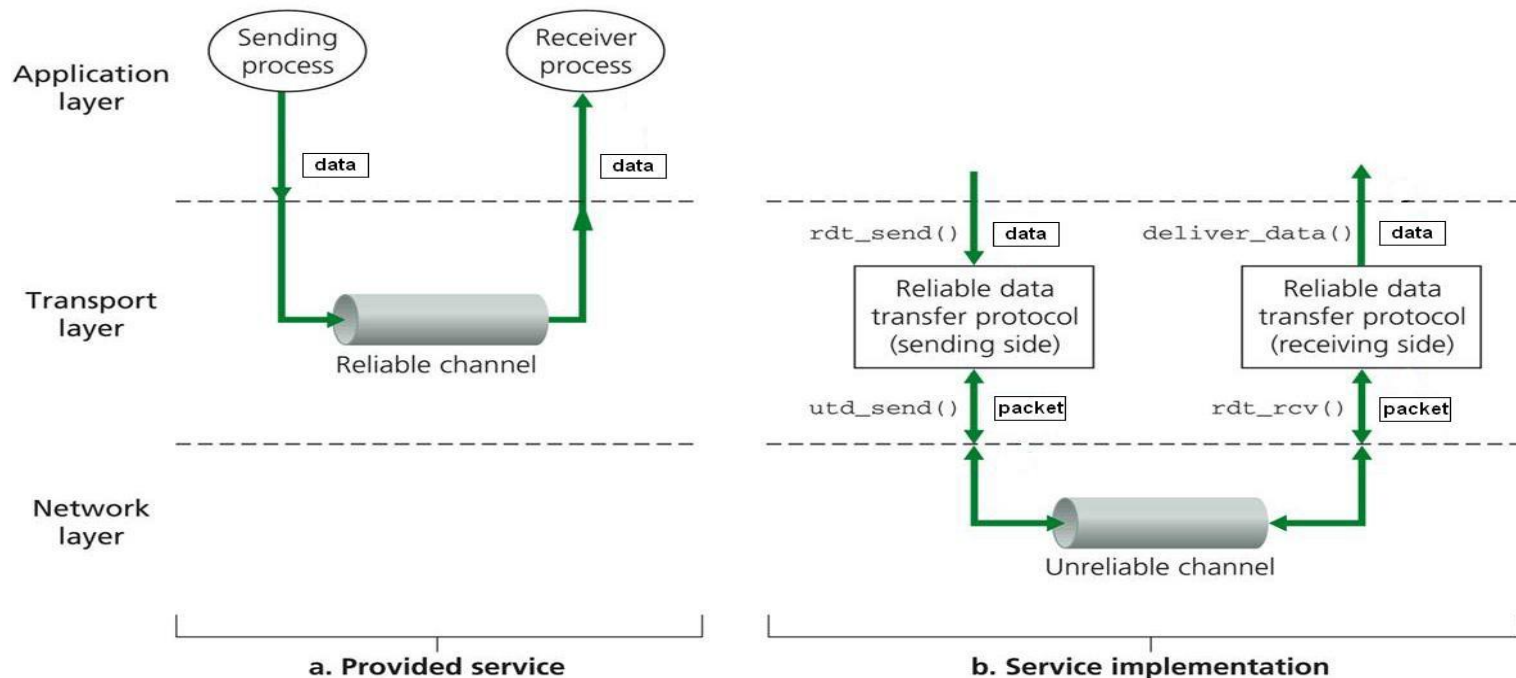

- characteristics of unreliable channel will determine complexity of reliable data transfer protocol (rdt)


Reliable data transfer: getting started

rdt_send(): called from above, (e.g., by app.). Passed data to deliver to receiver upper layer

deliver_data(): called by rdt to deliver data to upper

send
side

receive
side

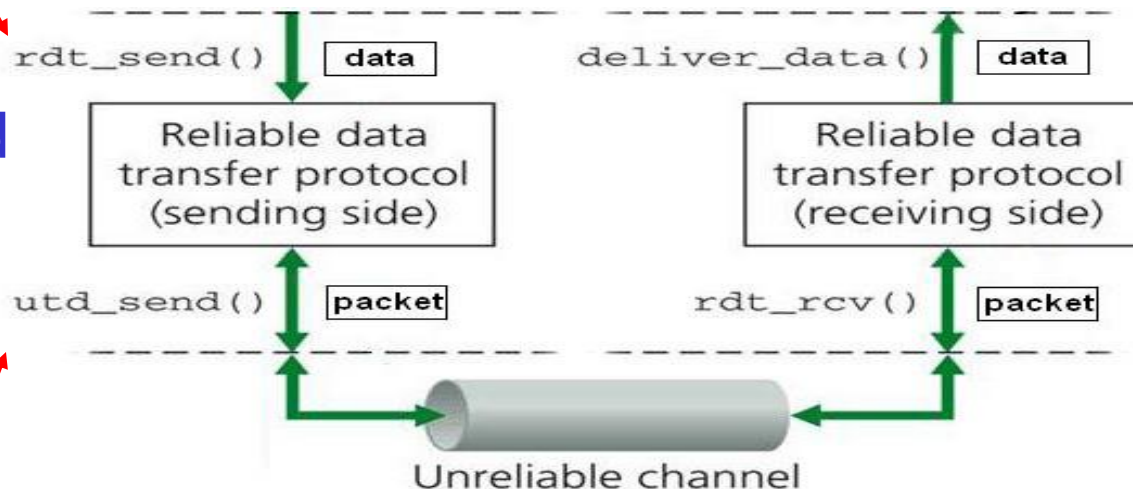


utd_send(): called by rdt, to transfer packet over unreliable channel to receiver

rdt_rcv(): called when packet arrives on rcv-side of channel

Reliable data transfer: getting started


We'll:

- incrementally develop sender, receiver sides of reliable data transfer protocol (rdt)
- consider only unidirectional data transfer
 - but control info will flow on both directions!
- use finite state machines (FSM) to specify sender, receiver

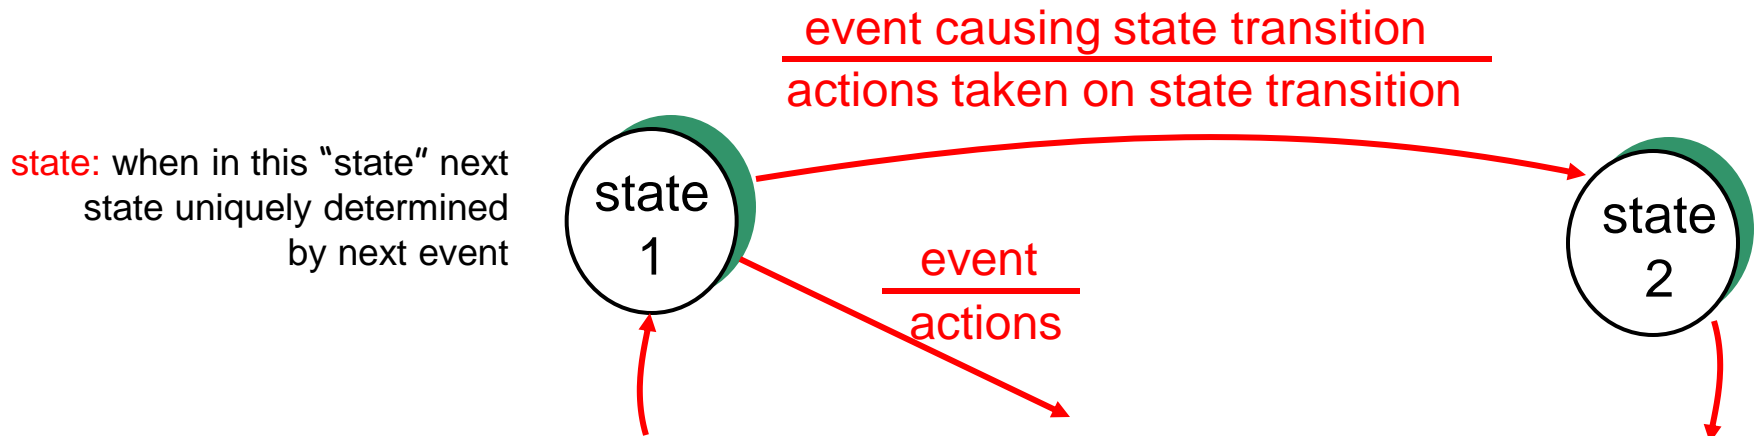


rdt1.0: reliable transfer over a reliable channel

- underlying channel perfectly reliable
 - no bit errors
 - no loss of packets
- separate FSMs for sender, receiver:
 - sender sends data into underlying channel
 - receiver read data from underlying channel

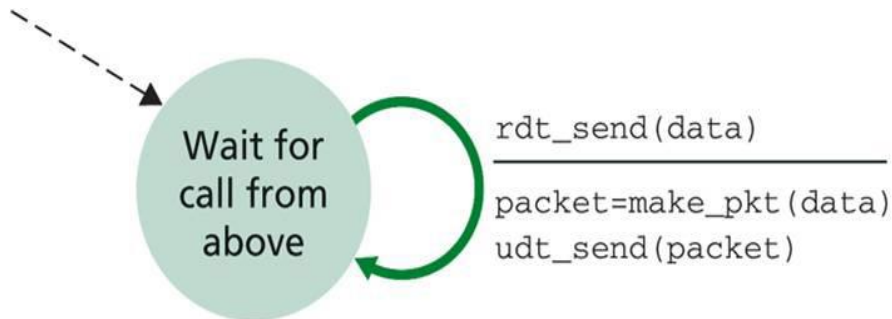

a. rdt1.0: sending side

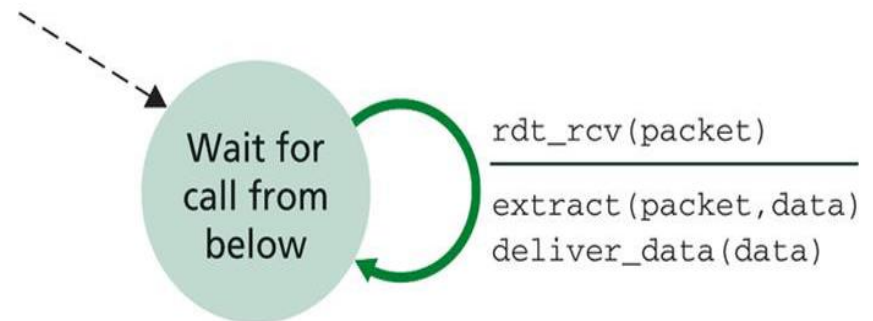


b. rdt1.0: receiving side

rdt2.0: channel with bit errors


- underlying channel may flip bits in packet
 -
- *the* question: how to recover from errors:
 -
 -
 -
- new mechanisms in **rdt2.0** (beyond **rdt1.0**):
 - error detection
 - receiver feedback: control msgs (ACK,NAK) rcvr->sender

rdt2.0: FSM specification

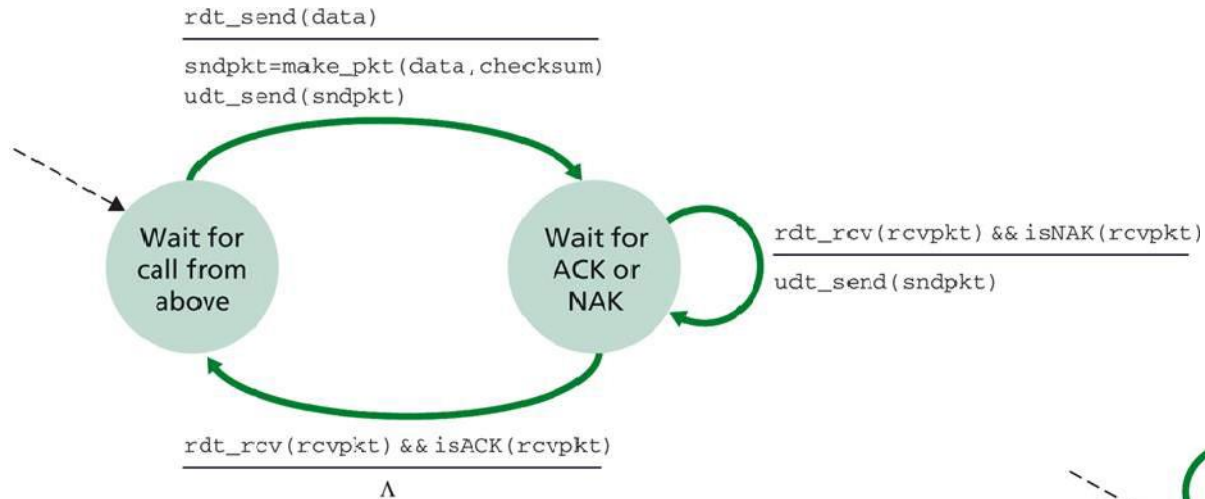


sender


receiver

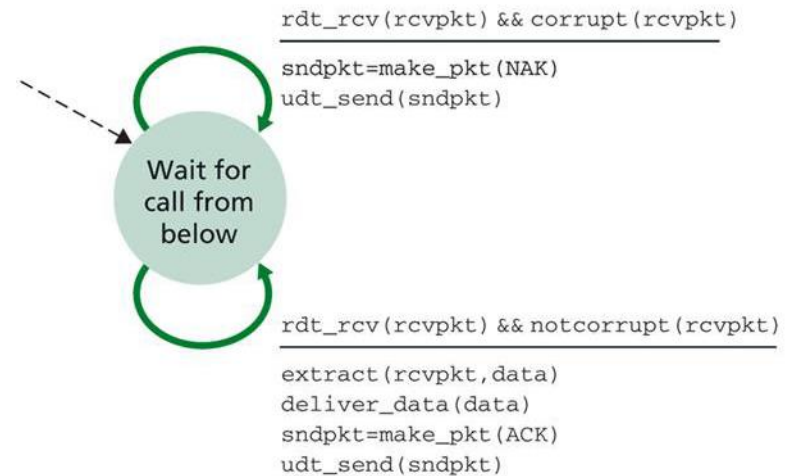

rdt2.0: operation with no errors

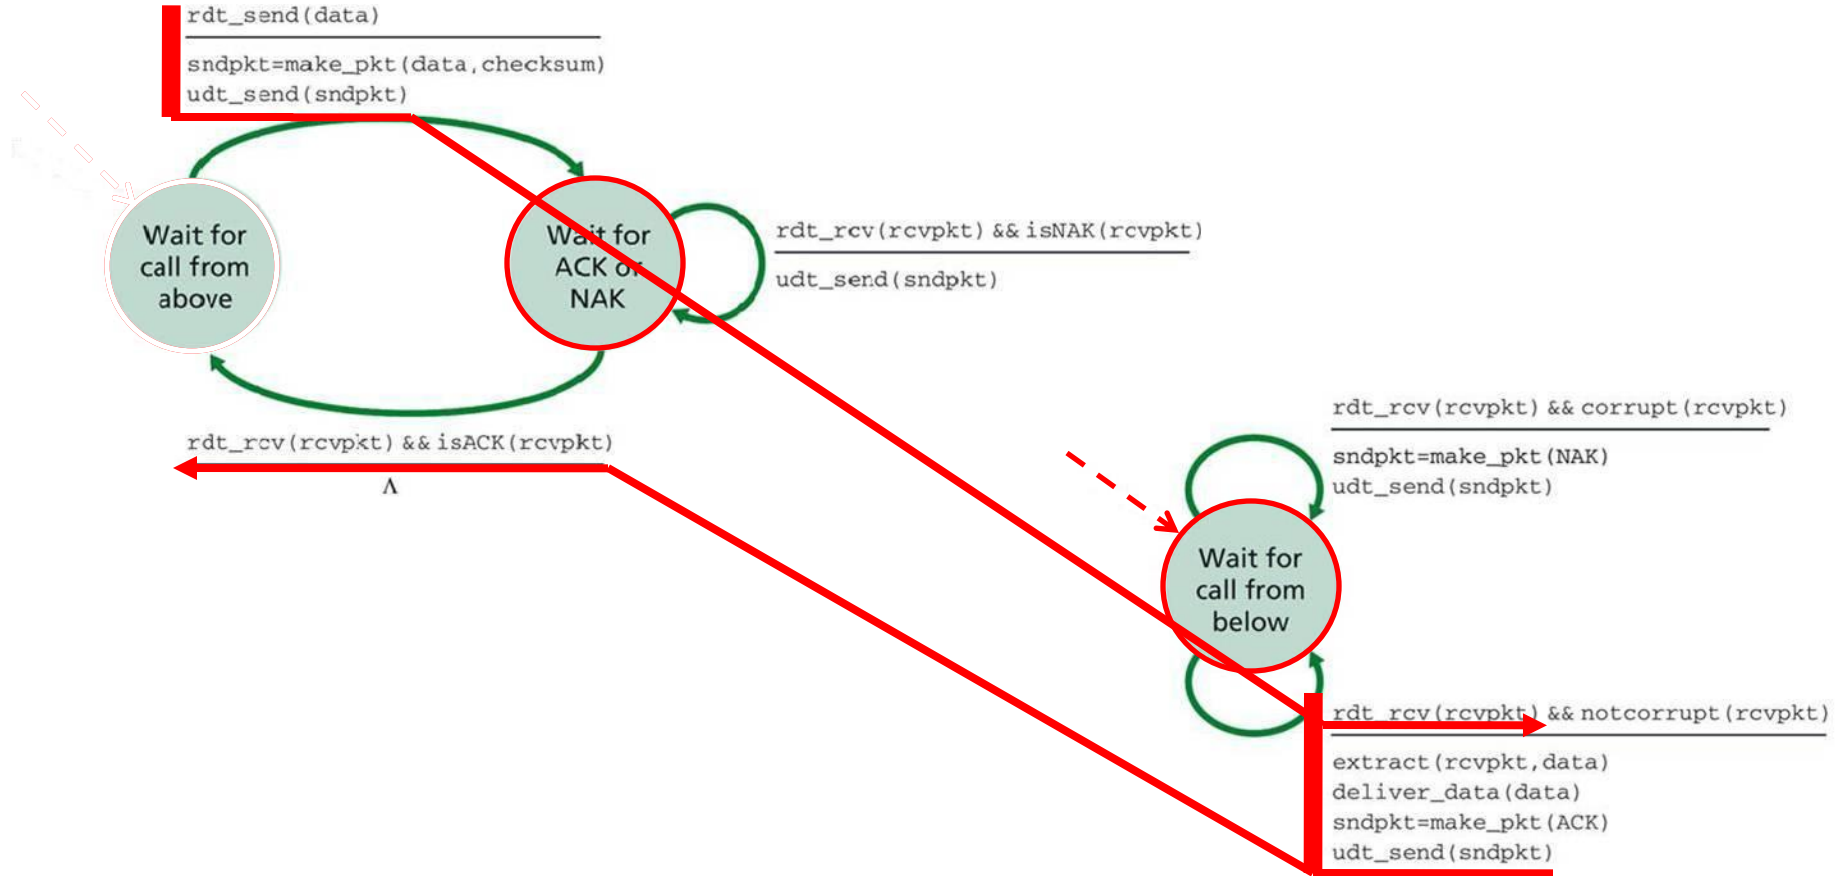

rdt2.0: error scenario

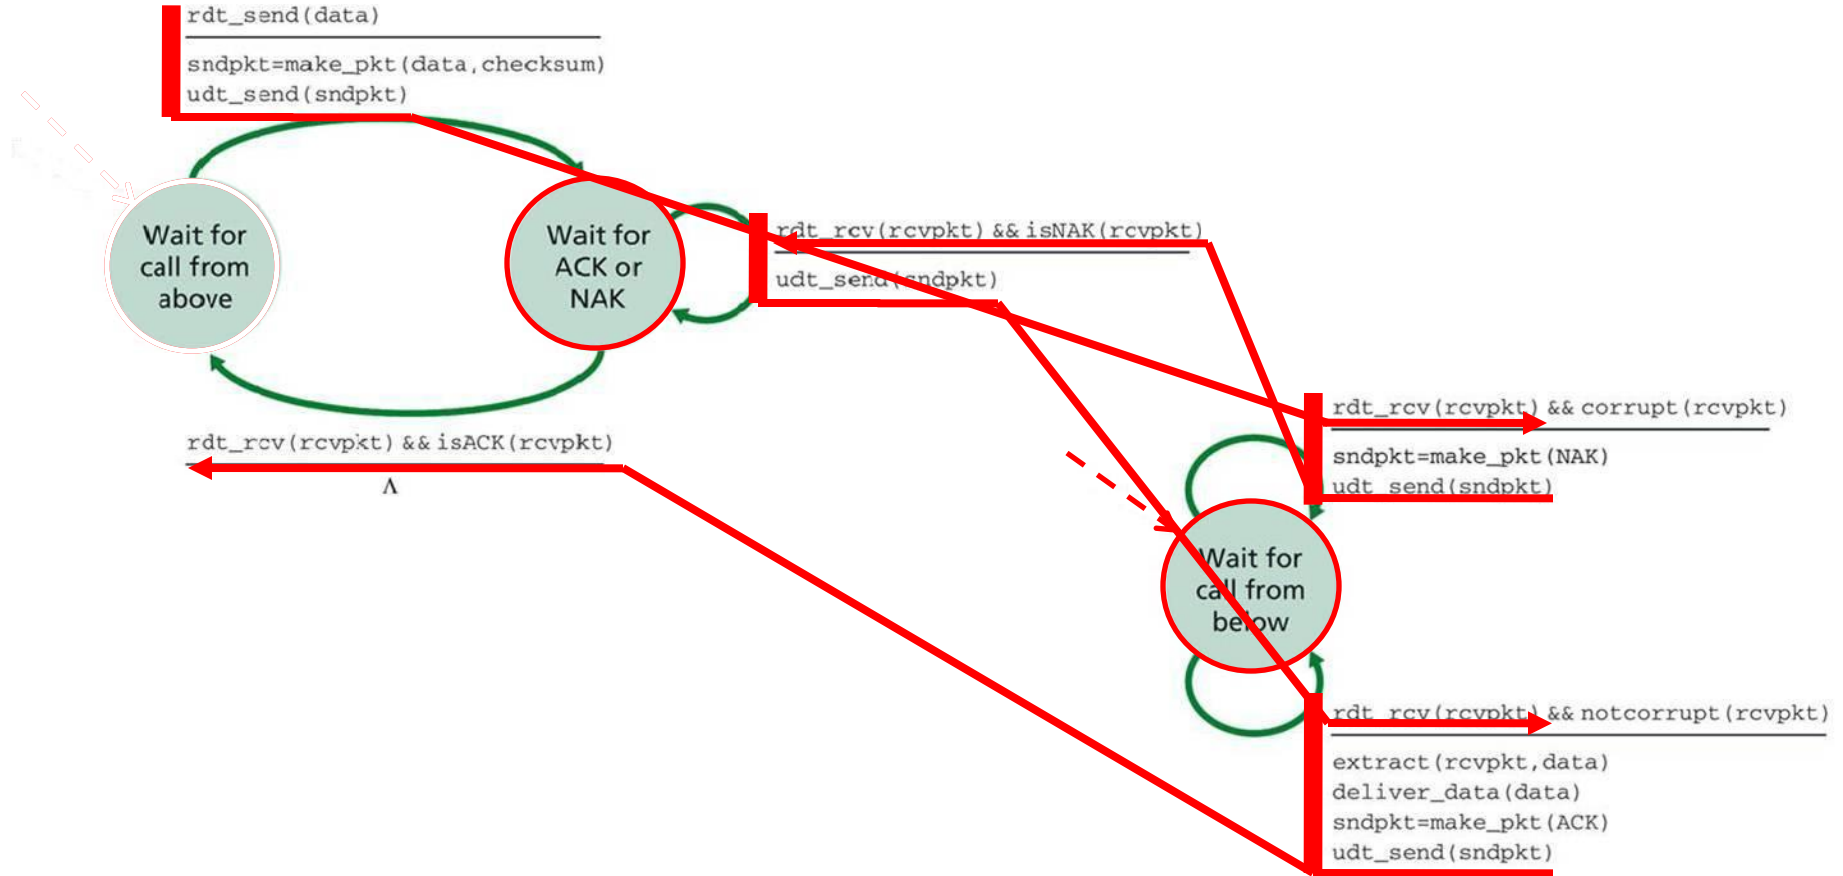

rdt2.0 has a fatal flaw!

What happens if ACK/NAK corrupted?

-
-

Handling duplicates:

-
-
-

Stop and wait

- Sender sends one packet, then waits for receiver response

rdt2.1: discussion


Sender:

- seq # added to pkt
- two seq. #'s (0,1) will suffice. Why?
- must check if received ACK/NAK corrupted
- twice as many states
 - state must “remember” whether “current” pkt has 0 or 1 seq. #


Receiver:

- must check if received packet is duplicate
 - state indicates whether 0 or 1 is expected pkt seq #
- note: receiver can *not* know if its last ACK/NAK received OK at sender

rdt2.1: sender, handles garbled ACK/NAKs

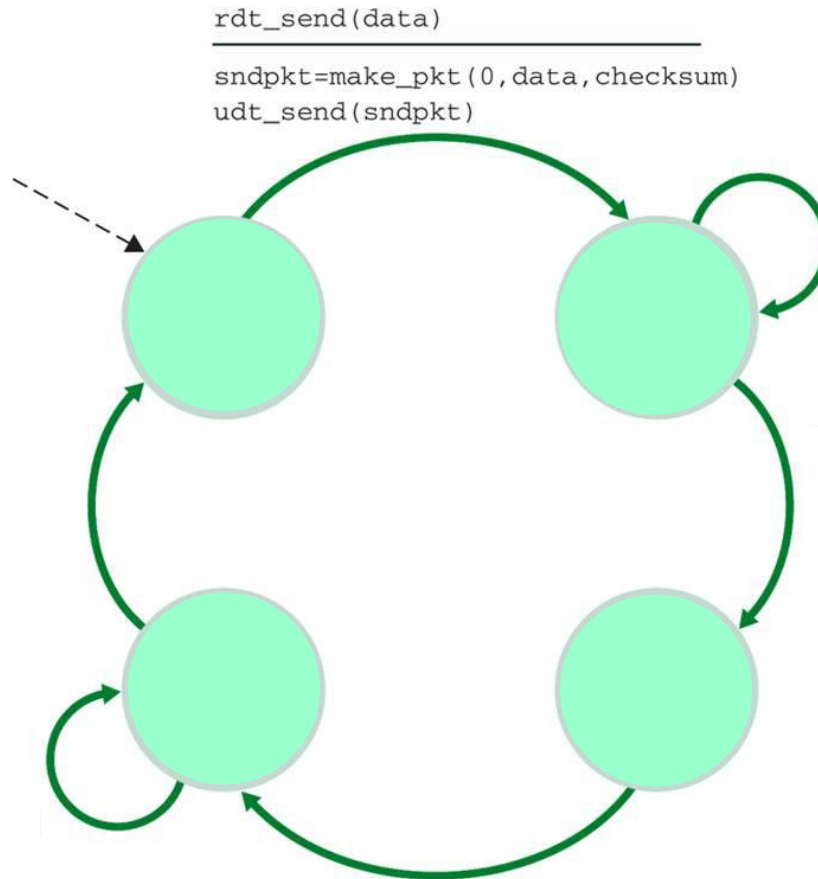

rdt2.1: receiver, handles garbled ACK/NAKs

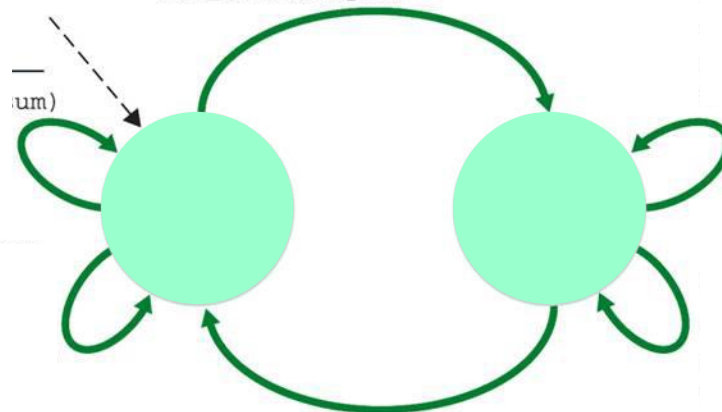


rdt2.2: a NAK-free protocol

- same functionality as rdt2.1, using ACKs only
- instead of NAK, receiver sends ACK for last pkt received OK
 -
- duplicate ACK at sender results in same action as NAK: *retransmit current pkt*

rdt2.2: sender, receiver fragments

```
rdt_send(data)  
-----  
sndpkt=make_pkt(0,data,checksum)  
udt_send(sndpkt)
```

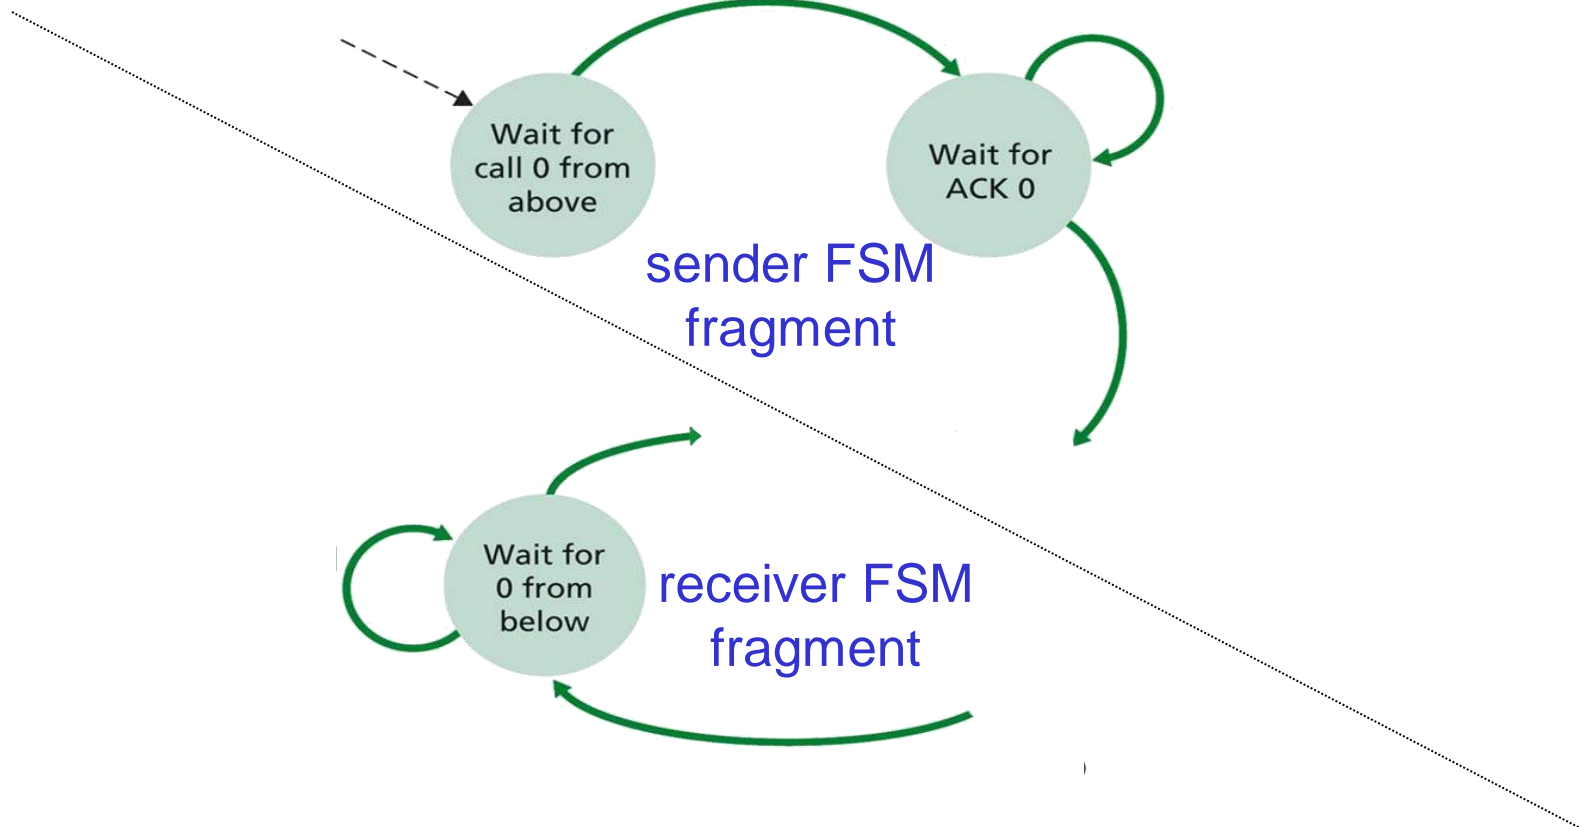

rdt3.0: channels with errors *and* loss

New assumption: underlying channel can also lose packets (data or ACKs)



- checksum, seq. #, ACKs, retransmissions will be of help, but not enough

Approach:


- if pkt (or ACK) just delayed (not lost):
 -
 -
- requires

rdt3.0 sender


rdt3.0 in action

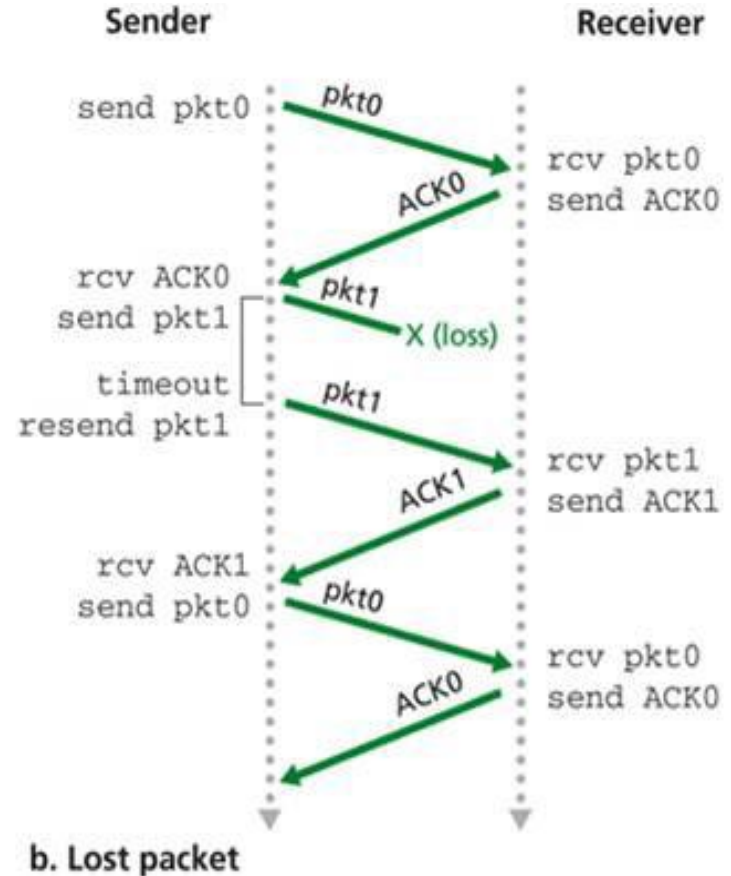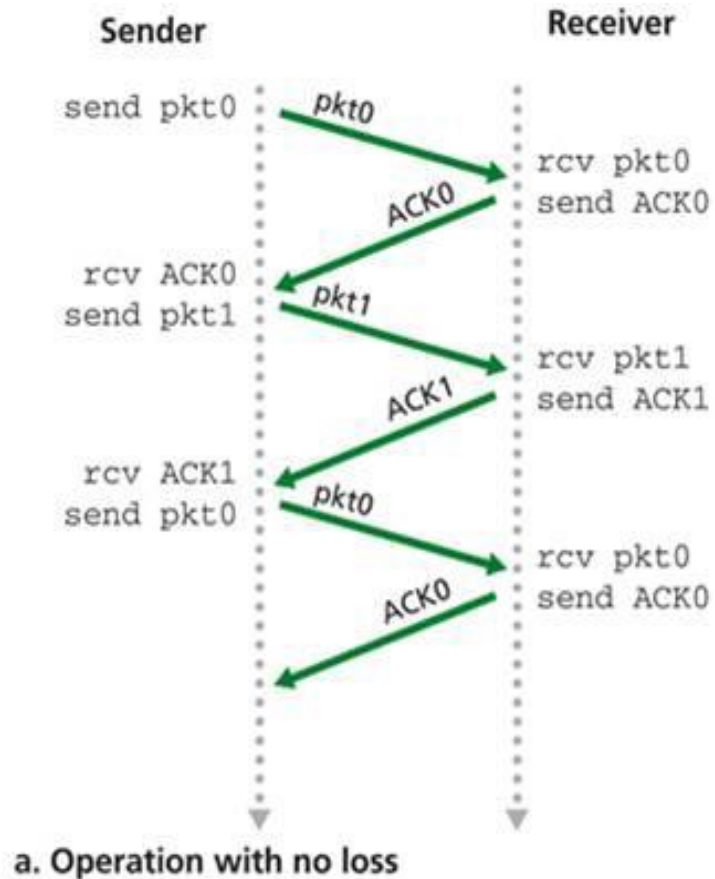

rdt3.0 in action

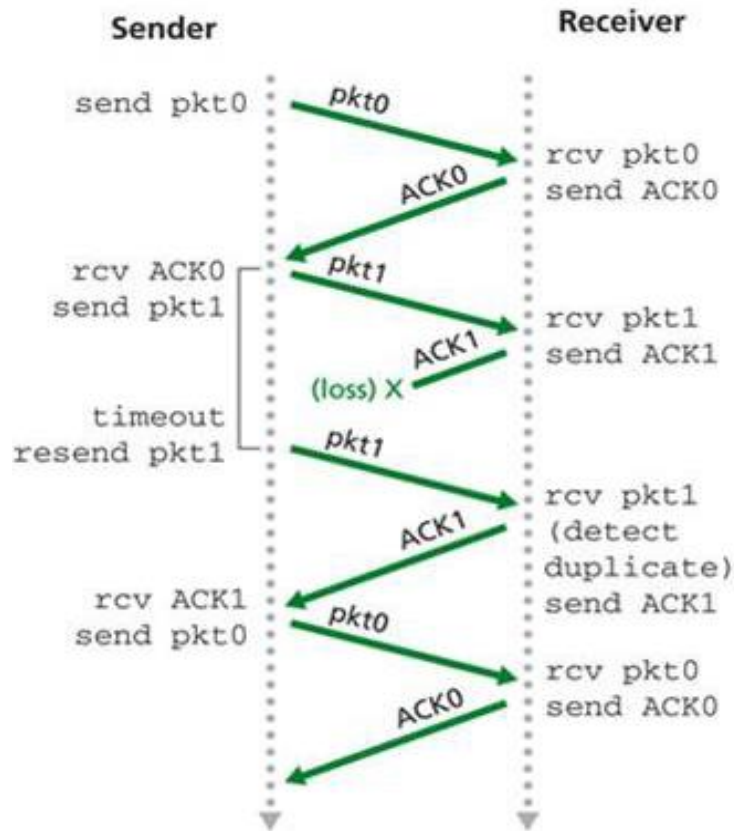

c. Lost ACK

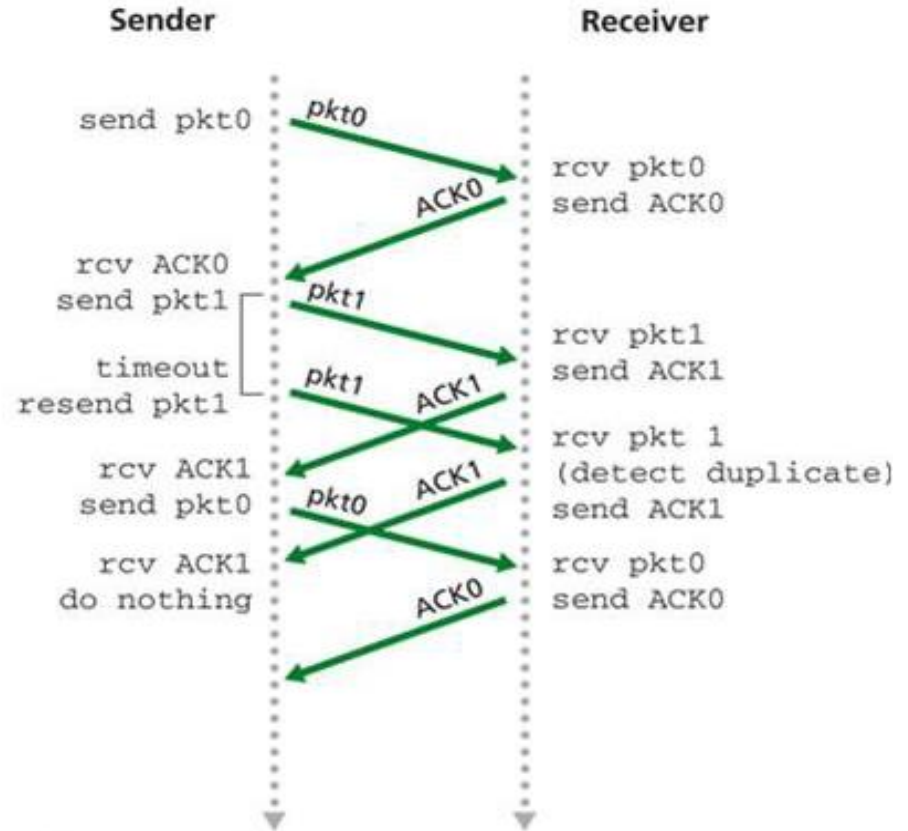

d. Premature timeout

Performance of rdt3.0

- rdt3.0 works, but performance stinks
- example: 1 Gbps link, 15 ms e-e prop. delay, 1KB packet:


$$T_{\text{transmit}} = \frac{L \text{ (packet length in bits)}}{R \text{ (transmission rate, bps)}} = \frac{8\text{kb/pkt}}{10^{**9} \text{ b/sec}} = 8 \text{ microsec}$$

- U_{sender} : **utilization** - fraction of time sender busy sending

$$U_{\text{sender}} = \frac{L / R}{RTT + L / R} = \frac{.008}{30.008} = 0.00027$$

- 1KB pkt every 30 msec -> 33kB/sec thruput over 1 Gbps link
- network protocol limits use of physical resources!

rdt3.0: stop-and-wait operation

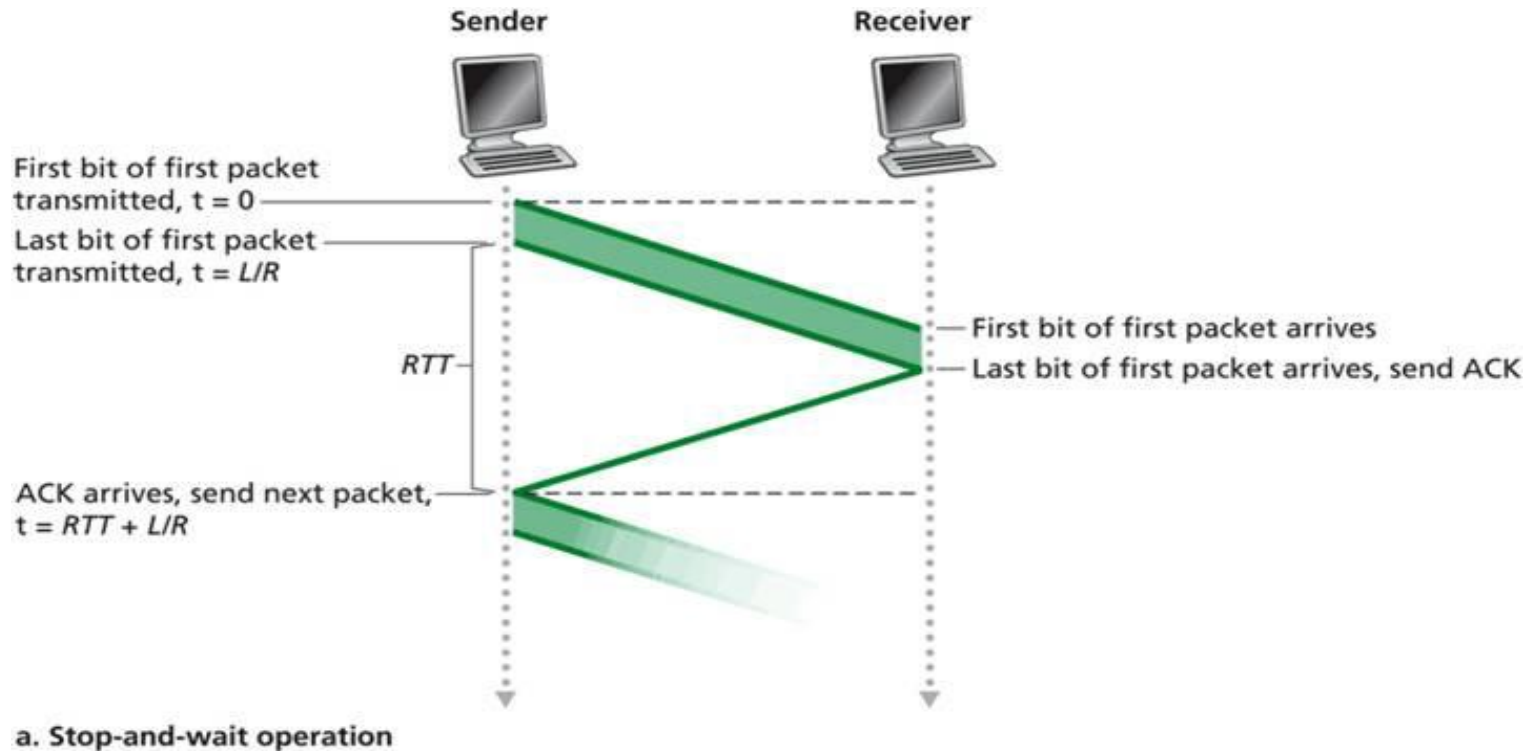


$$U_{\text{sender}} = \frac{L / R}{RTT + L / R} = \frac{.008}{30.008} = 0.00027$$


Pipelined protocols

Pipelining: sender allows multiple, “in-flight”, yet-to-be-acknowledged pkts

- range of sequence numbers must be increased
- buffering at sender and/or receiver

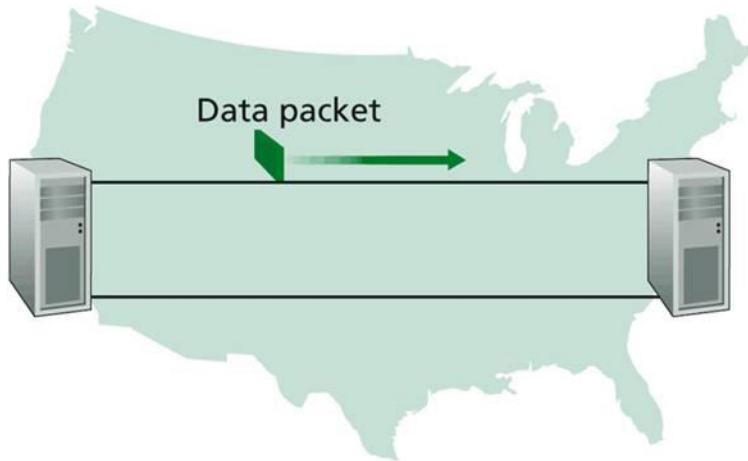


a. A stop-and-wait protocol in operation

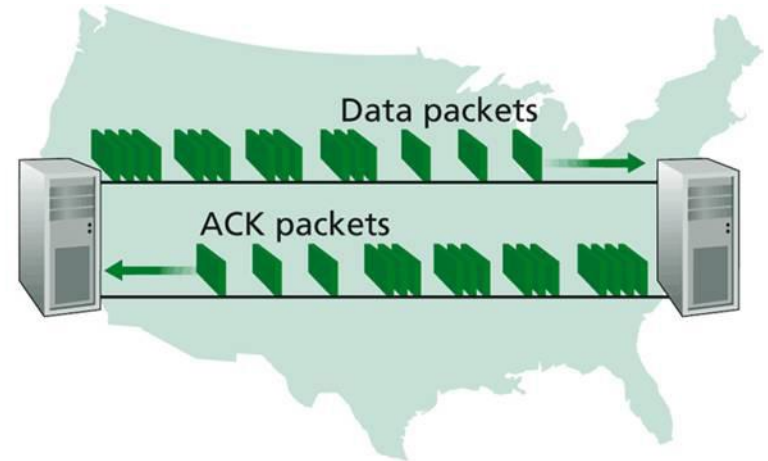

b. A pipelined protocol in operation

- Two generic forms of pipelined protocols: *go-Back-N*, *selective repeat*

Pipelining: increased utilization

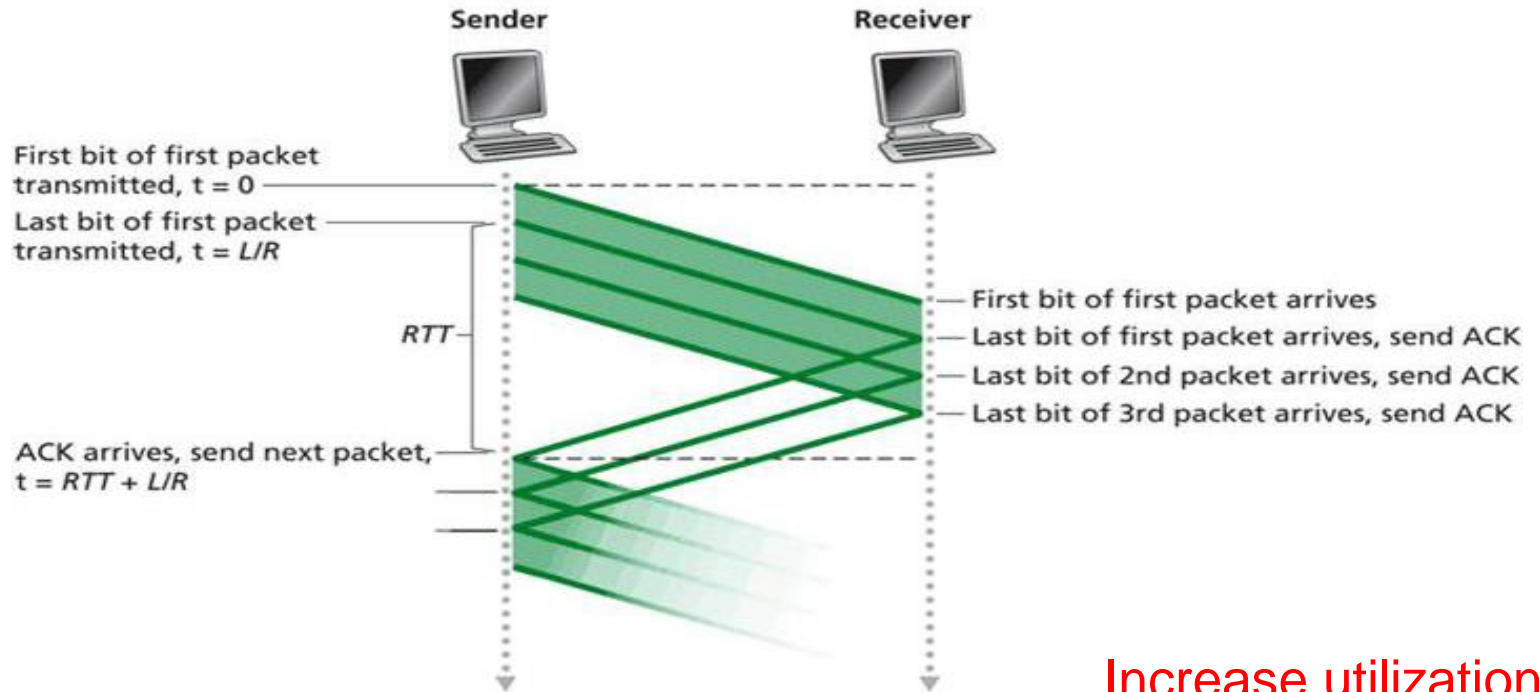

b. Pipelined operation


$$U_{\text{sender}} = \frac{3 * L / R}{RTT + L / R} = \frac{.024}{30.008} = 0.0008$$

Increase utilization
by a factor of 3!

Go-Back-N

Sender:

-
-

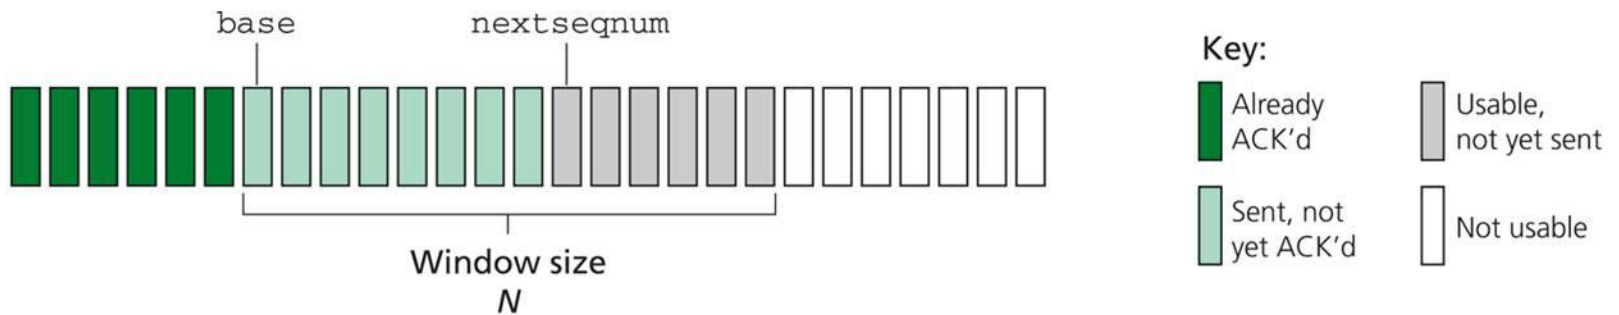

- ACK :
—
- timer
- *timeout* :


GBN: sender extended FSM

GBN: receiver extended FSM

ACK-only:

- duplicate ACKs?
 -
- out-of-order pkt:
 -
 - Ack?


GBN in action

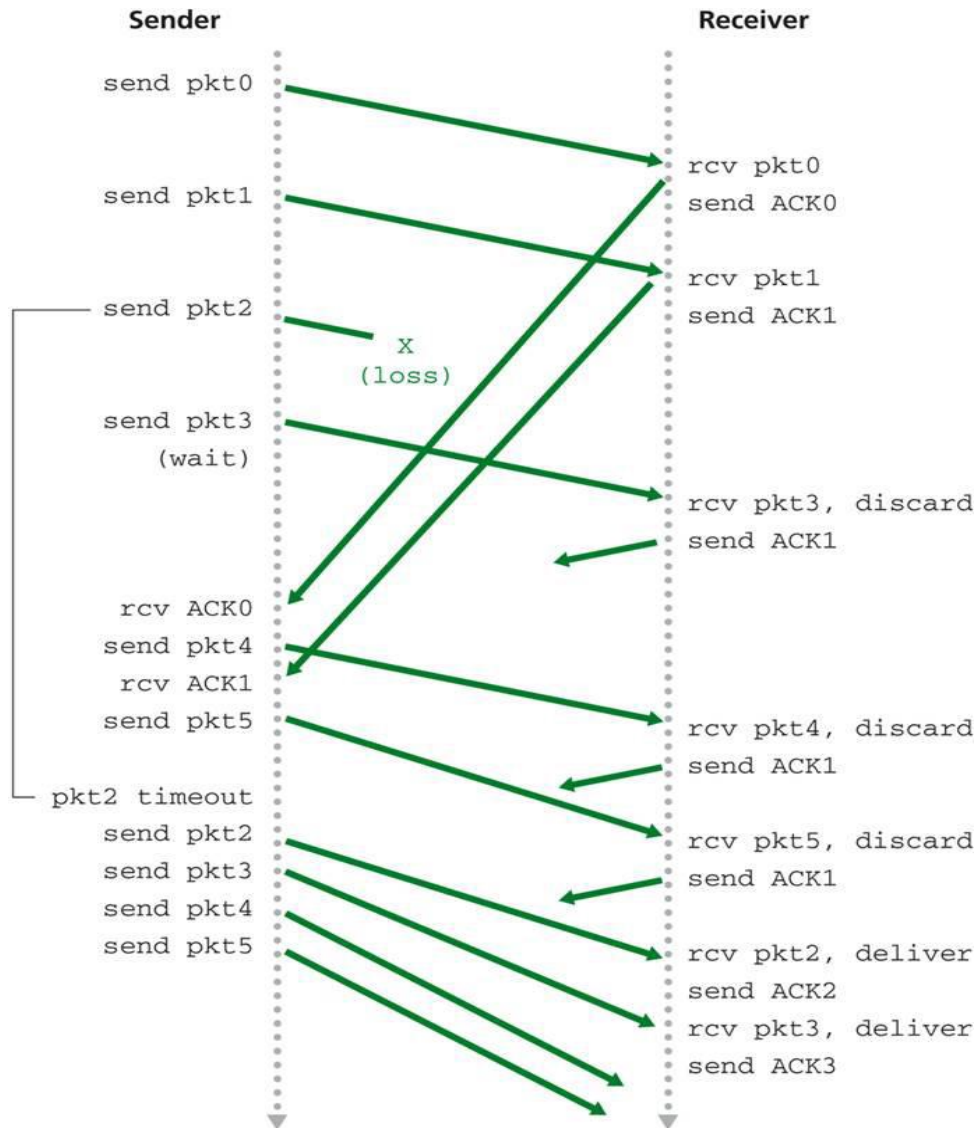

Selective Repeat



- receiver *individually* acknowledges all correctly received pkts
 - buffers pkts, as needed, for eventual in-order delivery to upper layer
- sender only resends pkts for which ACK not received
 - sender timer for each unACKed pkt
- sender window
 - N consecutive seq #'s
 - again limits seq #'s of sent, unACKed pkts

Selective repeat: sender, receiver windows

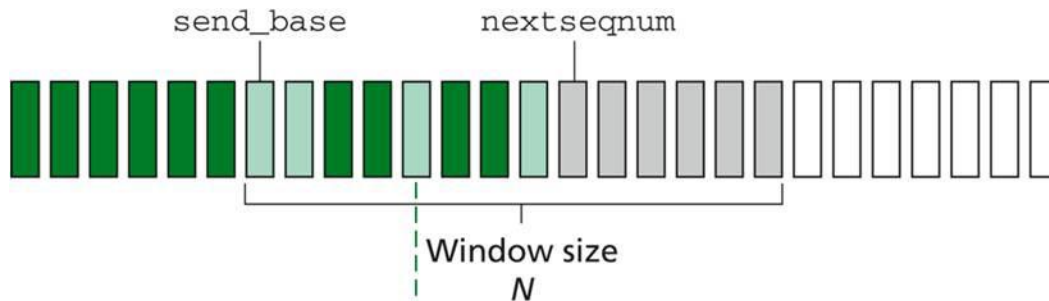


a. Sender view of sequence numbers

Key:

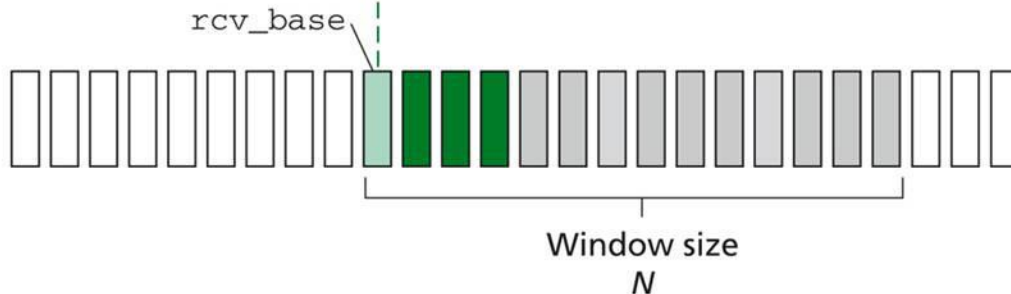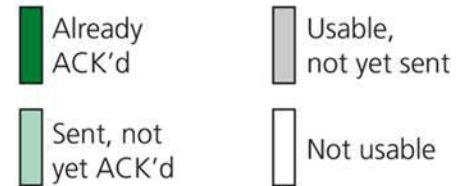

b. Receiver view of sequence numbers

Key:

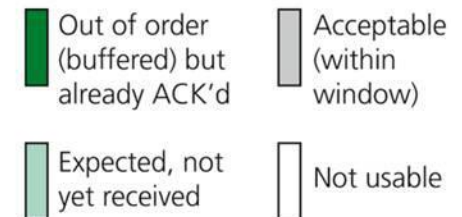

Selective repeat

Sender:

data from above :

- if next available seq # in window, send pkt

timeout(n):

- resend pkt n, restart timer

ACK(n) in [sendbase,sendbase+N]:

- mark pkt n as received
- if n smallest unACKed pkt, advance window base to next unACKed seq #

Selective repeat

Receiver:

pkt n in [rcvbase, rcvbase+N-1]

- send ACK(n)
- out-of-order: buffer
- in-order: deliver (also deliver buffered, in-order pkts), advance window to next not-yet-received pkt


pkt n in [rcvbase-N, rcvbase-1]

- ACK(n)

otherwise:

- ignore

Selective repeat in action

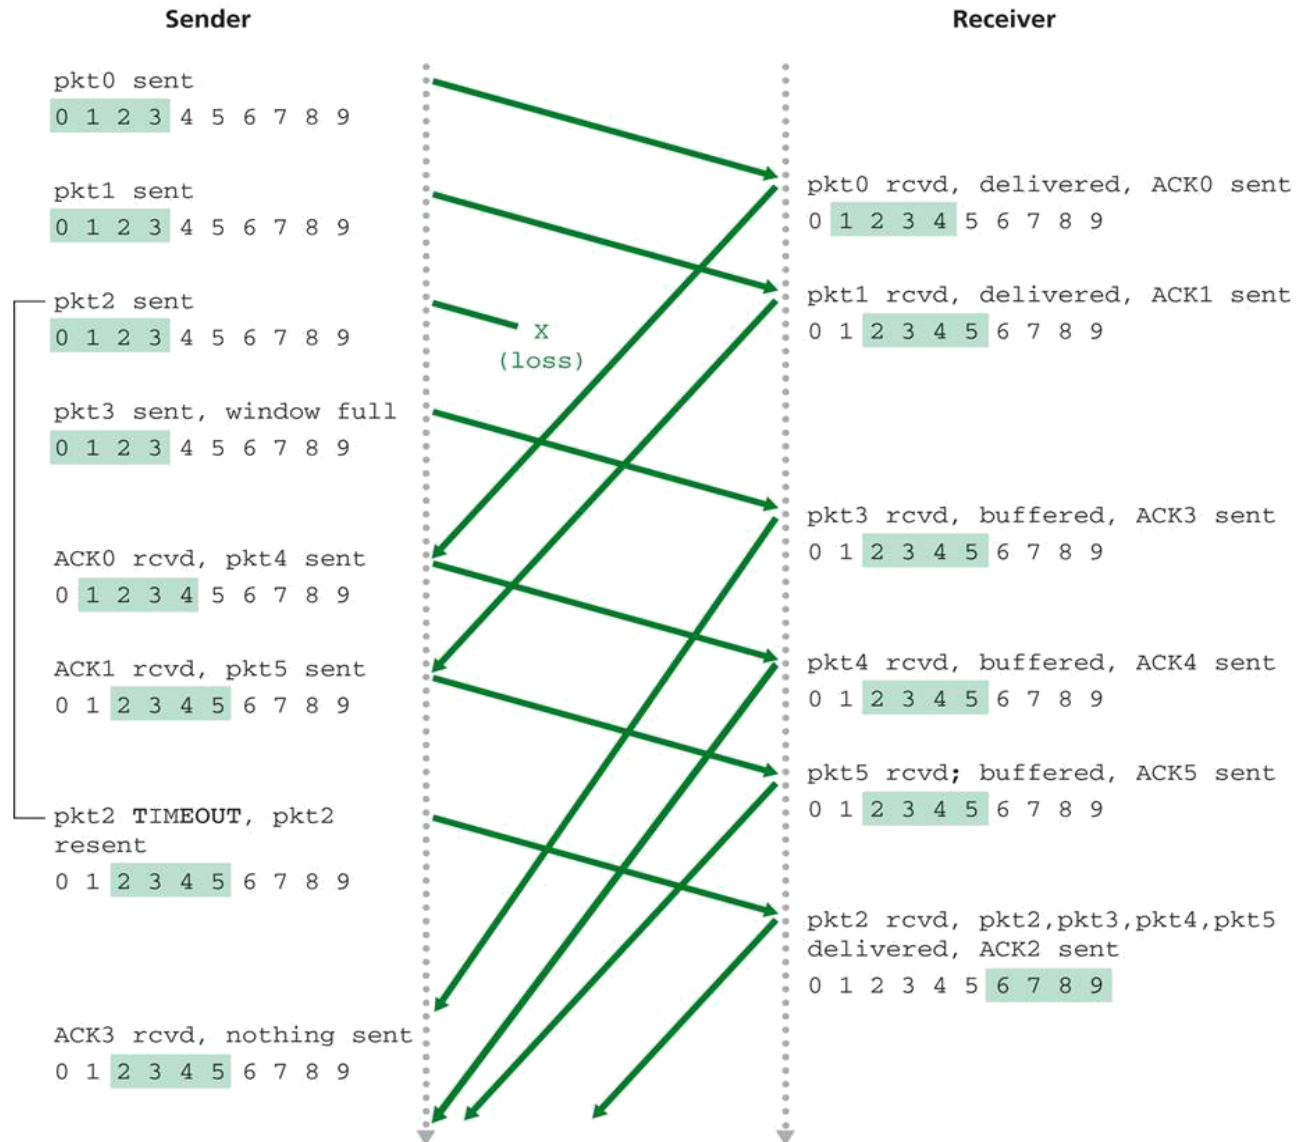

Selective repeat: dilemma

Example:

- seq #'s: 0, 1, 2, 3
- window size=3
- receiver sees no difference in two scenarios!
- incorrectly passes duplicate data as new in (a)

Q: what relationship between seq # size and window size?

