



# GENERAL PRODUCT DATA SHEET

Model : TL 2

LED ceiling luminaires



## KEY FEATURES

Type	Ceiling luminaire
Light distribution	PRO, OPAL
Light source	LED
Housing color	GO, GA, WHITE, BLACK,
Length	960, 1150, 1342, 1533mm
Colour temperature	3000K, 4000K
Electric power	33-52W
Light direction	Direct
Control	on/off, DALI, push dimming
Flux	-
Ra	>80
Weight	1.2 - 2.7 kg
Operating voltage	230V 50Hz

FLAT CEILING	✓
SLOPE CEILING	✗
WALL	✗
FLOOR	✗

## PRODUCT CODE CALCULATOR

TL2 - PRO - GO - L960 - 830 - 33 - 1 - 1

DISTRIBUTION CONTROL  
standard -> ( PRO, OPAL)  
PRO - BLACK RASTER  
PRO 2 - GOLD RASTER

OPAL- OPAL COVER  
on request -> ASYM 20°,  
60°, 90°  
LENGTH OF LED LUMINAIRE  
(960/1150/1342/1533mm)

COLOUR TEMPERATURE  
(830- 3000K, 840-4000K)

ELECTRIC POWER LED LUMINAIRE

LED LUMINAIRE  
MODEL #2

HOUSING COLOURE  
(GO - GOLDEN OAK  
GA - GRIGIO ANTICO  
WH - WHITE  
BLACK - RAL 9005

TYPE OF LED DRIVER  
1- ON/OFF , 2-DALI, DIMMING



LIGHTING DIRECTION  
(1 SIDE- DIRECT)

## TECHNICAL SPECIFICATION

TL 2 - luminaire					
Lenght luminaire	down light	up light	electric power	luminous flux*	neto weight
960mm	●	—	33W		1.8 kg
1150mm	●	—	39W		2 kg
1342mm	●	—	46W		2.2 kg
1533mm	●	—	52W		2.4 kg

All values marked with an \* are rated values  
Power may vary up to 5%

## STANDARD HOUSING COLOURE



GO - GOLDEN OAK / GA - GRIGIO ANTICO / WH - WHITE / BLACK RAL 9005

## OPTIC

### STANDARD

### ON REQUEST


PRO ugr<19

OPAL

ASYM 20°

60°




90°






PRO  
BLACK




OPAL  
WIDE ANGLE



PRO 2  
GOLD




## MOUNTING, DIMENSIONS

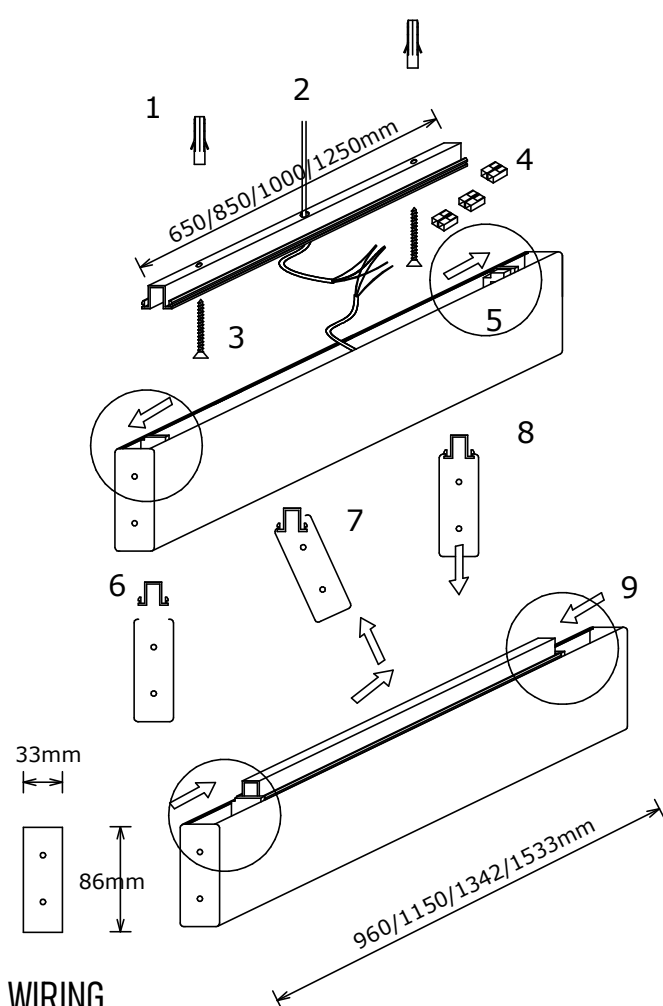


## WIRING

ELECTRICAL SCHEME - ON/OFF

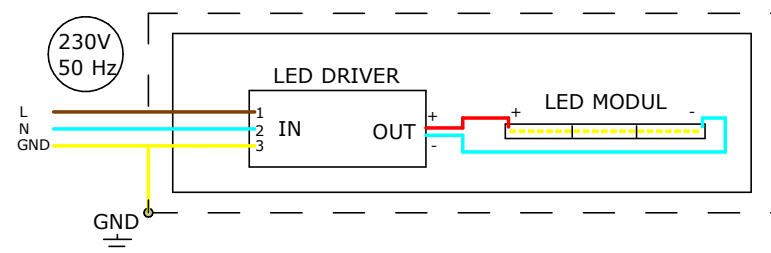

## VARIANT- LIGHT DIRECTION




OPAL COVER




PRO OFFICE COVER

## PRODUCT SET

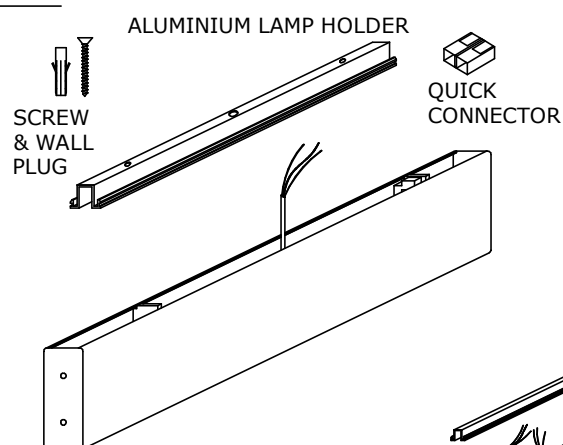

## MOUNTING IN LINE

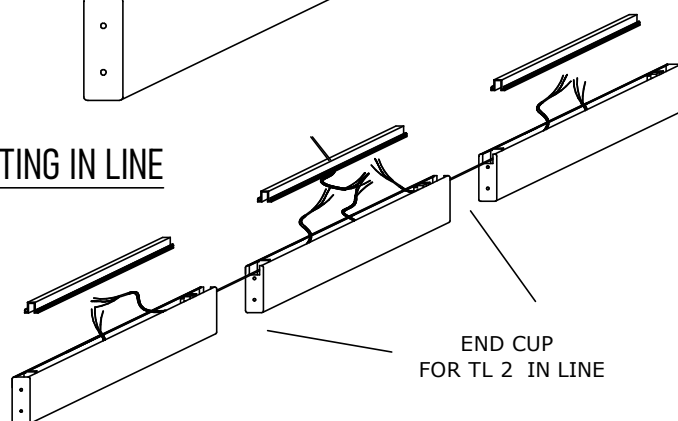

ELECTRICAL SCHEME - PUSH DIMMING

