



GENERAL PRODUCT DATA SHEET

Model : TL 1

LED pendant luminaires

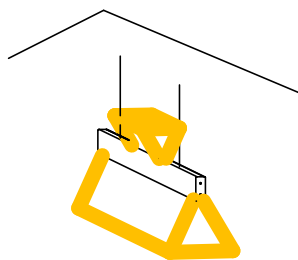

KEY FEATURES

Type	Pendant luminaire
Light distribution	PRO, OPAL
Light source	LED
Housing color	GO, GA, WHITE, BLACK,
Length	960, 1150, 1342, 1533mm
Colour temperature	3000K, 4000K
Electric power	33-58W
Light direction	Direct, Direct/Indirect
Control	on/off, DALI, push dimming
Flux	-
Ra	>80
Weight	1.2 - 2.7 kg
Operating voltage	230V 50Hz

FLAT CEILING	✓
SLOPE CEILING	✓
WALL	✗
FLOOR	✗

PRODUCT CODE CALCULATOR

TL1 - PRO - GO - L960 - 830 - 33 - 1 - 1

DISTRIBUTION CONTROL
standard -> (PRO, OPAL)
PRO - BLACK RASTER
PRO 2 - GOLD RASTER

OPAL- OPAL COVER
on request -> ASYM 20°,
60°, 90°

LENGTH OF LED LUMINAIRE
(960/1150/1342/1533mm)

COLOUR TEMPERATURE
(830- 3000K, 840-4000K)

ELECTRIC POWER LED LUMINAIRE



LED LUMINAIRE
MODEL #1

HOUSING COLOURE
(GO - GOLDEN OAK
GA - GRIGIO ANTICO
WH - WHITE
BLACK - RAL 9005

TYPE OF LED DRIVER
1- ON/OFF , 2-DALI, DIMMING

LIGHTING DIRECTION
(2 SIDE- DIRECT/INDIRECT,
1 SIDE- DIRECT)

STANDARD HOUSING COLOURE



GO - GOLDEN OAK / GA - GRIGIO ANTICO / WH - WHITE / BLACK RAL 9005

TECHNICAL SPECIFICATION

TL 1 - luminaire					
Lenght luminaire	down light	up light	electric power	luminous flux*	neto weight
960mm	●	●	39W		1.8 kg
960mm	●	—	33W		1.8 kg
1150mm	●	●	46W		2 kg
1150mm	●	—	39W		2 kg
1342mm	●	●	52W		2.2 kg
1342mm	●	—	46W		2.2 kg
1533mm	●	●	58W		2.4 kg
1533mm	●	—	52W		2.4 kg

All values marked with an * are rated values
Power may vary up to 5%

OPTIC

STANDARD

ON REQUEST


PRO ugr<19

OPAL

ASYM 20°

60°




90°






PRO
BLACK




OPAL
WIDE ANGLE



PRO 2
GOLD




VARIANT- LIGHT DIRECTION




OPAL COVER



PRO OFFICE COVER




OPAL COVER




PRO OFFICE COVER

MOUNTING, DIMENSIONS

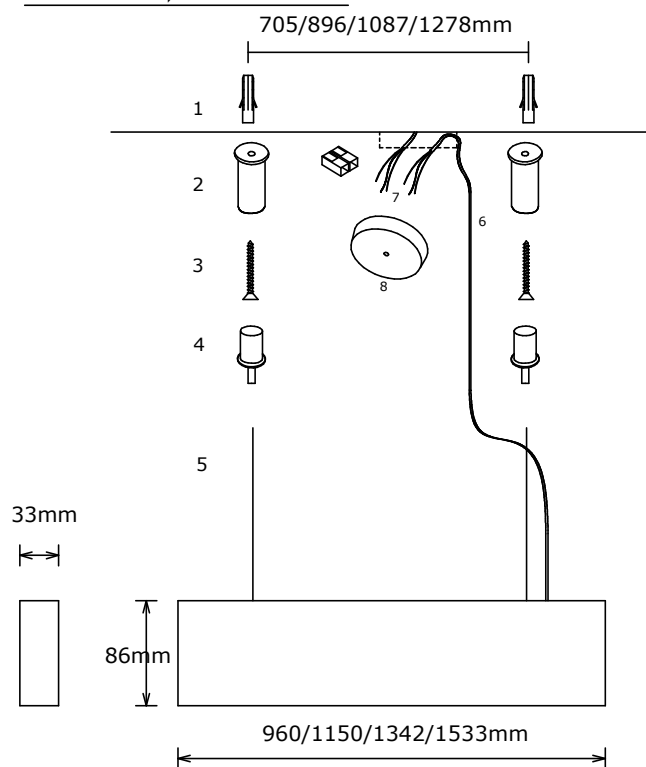


PRODUCT SET

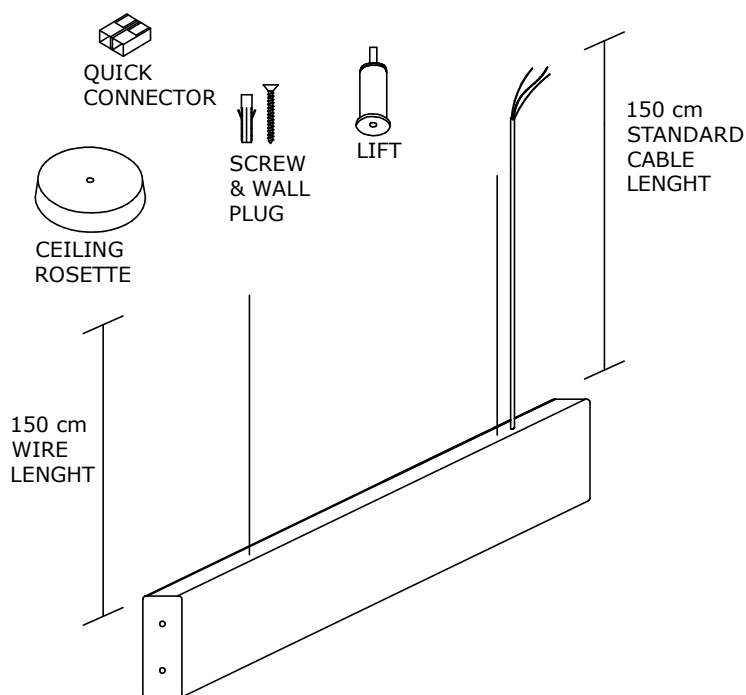

WIRING

ELECTRICAL SCHEME - ON/OFF

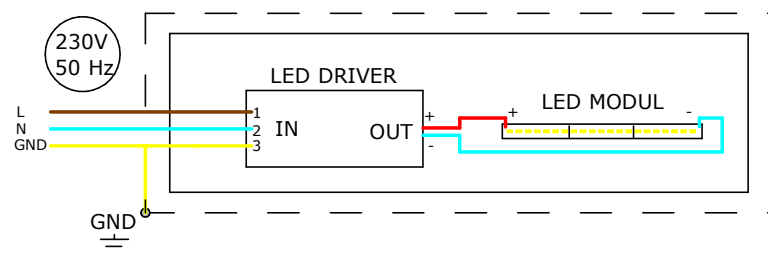

ELECTRICAL SCHEME - PUSH DIMMING

