



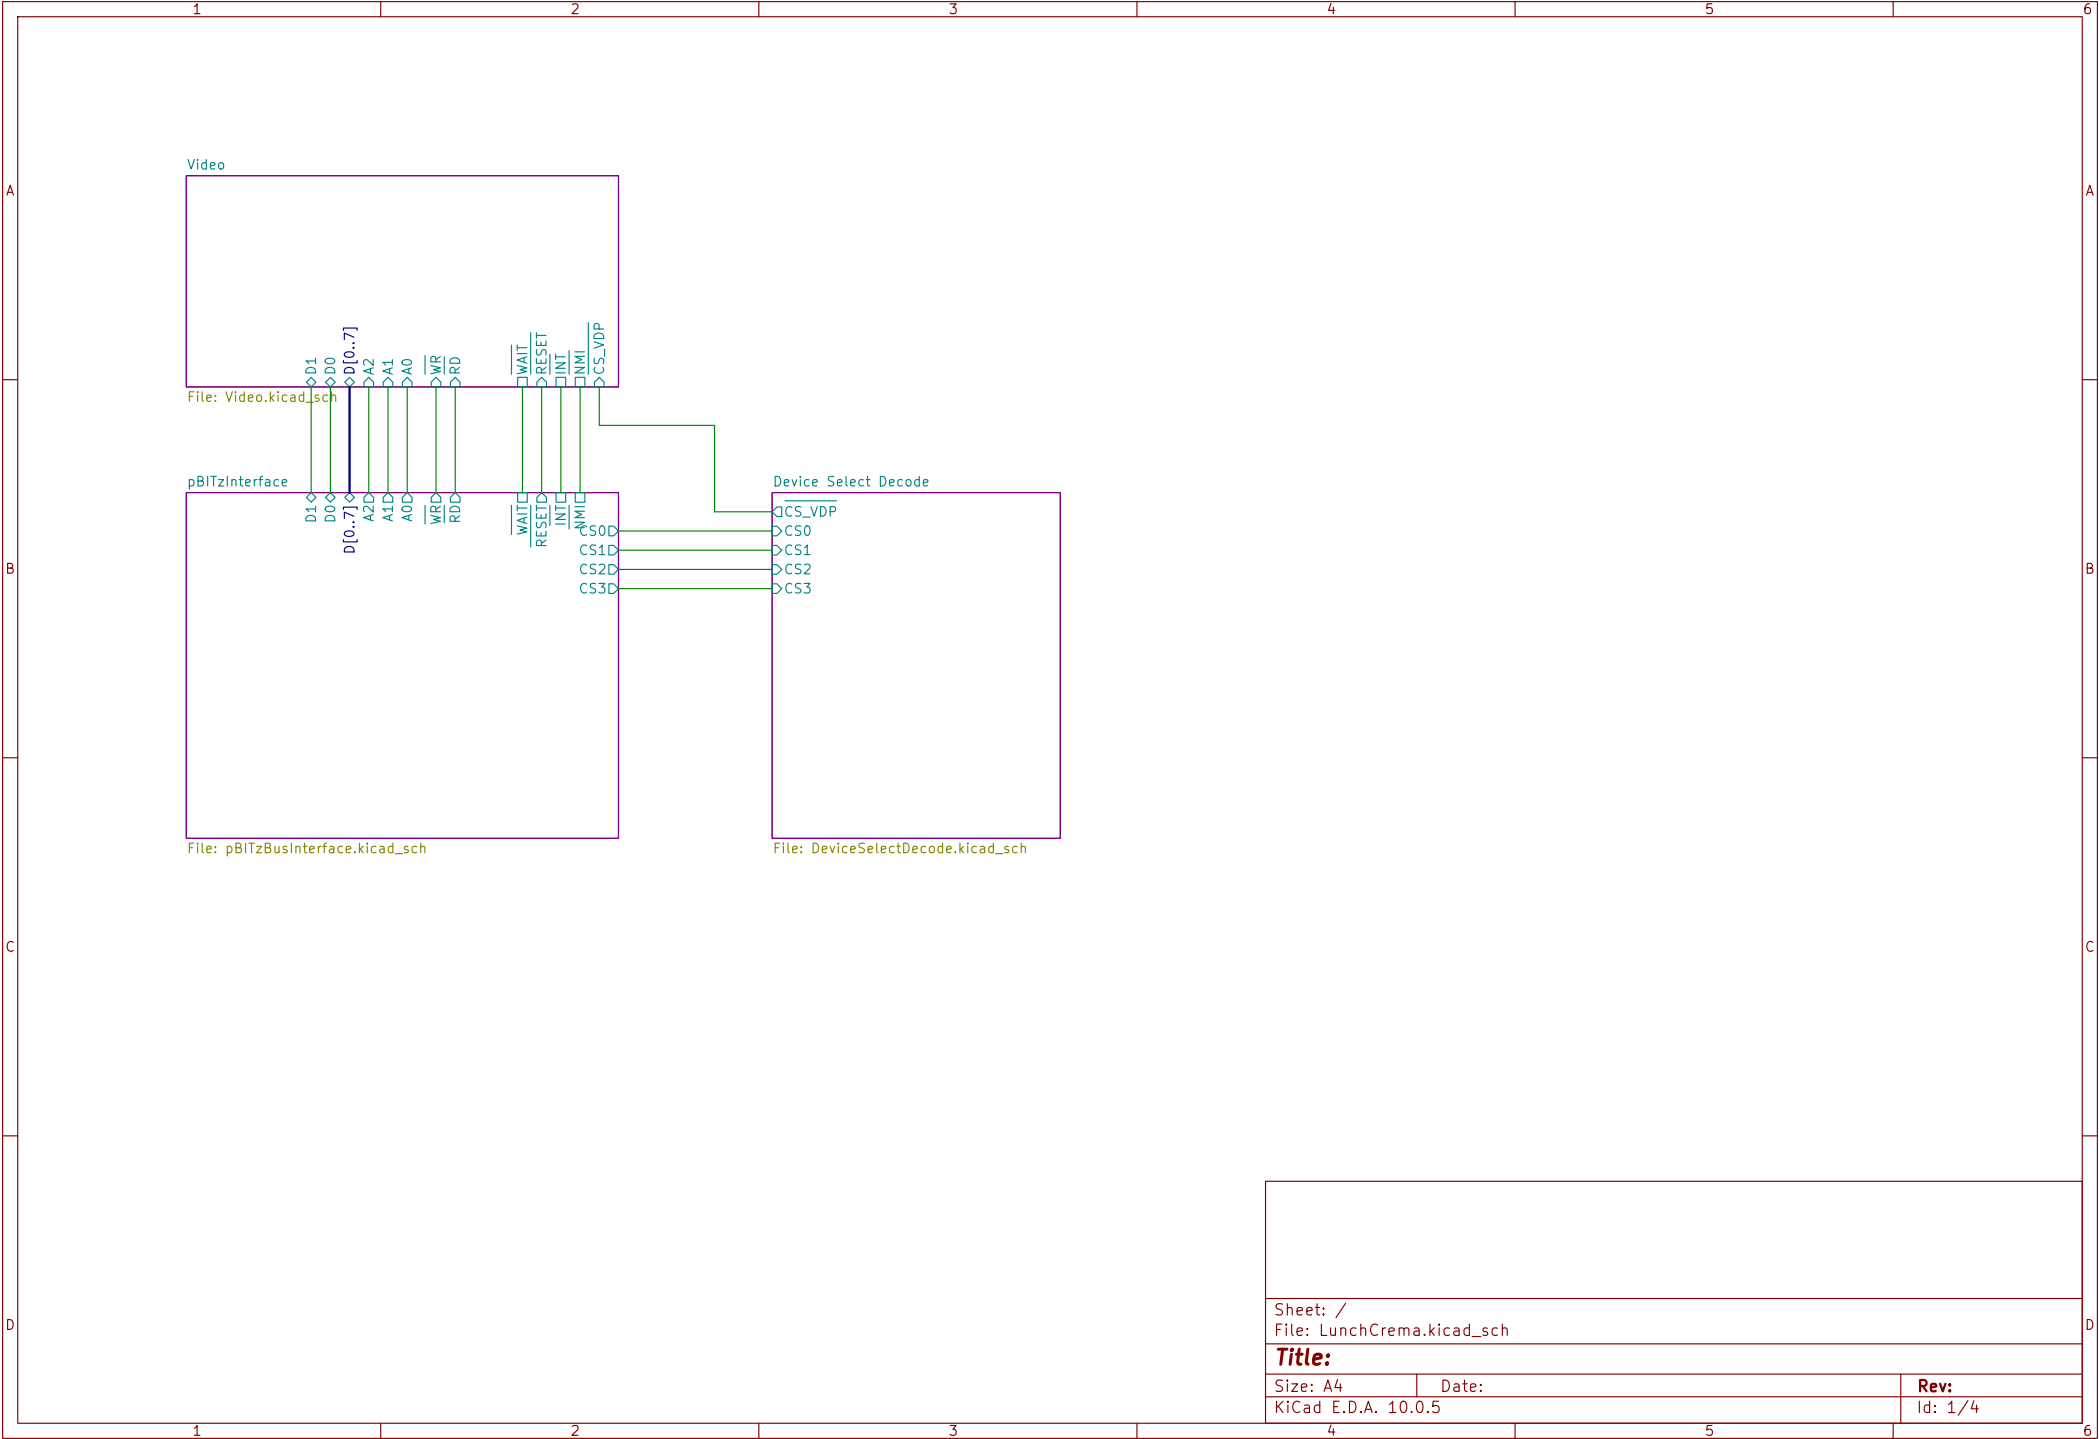
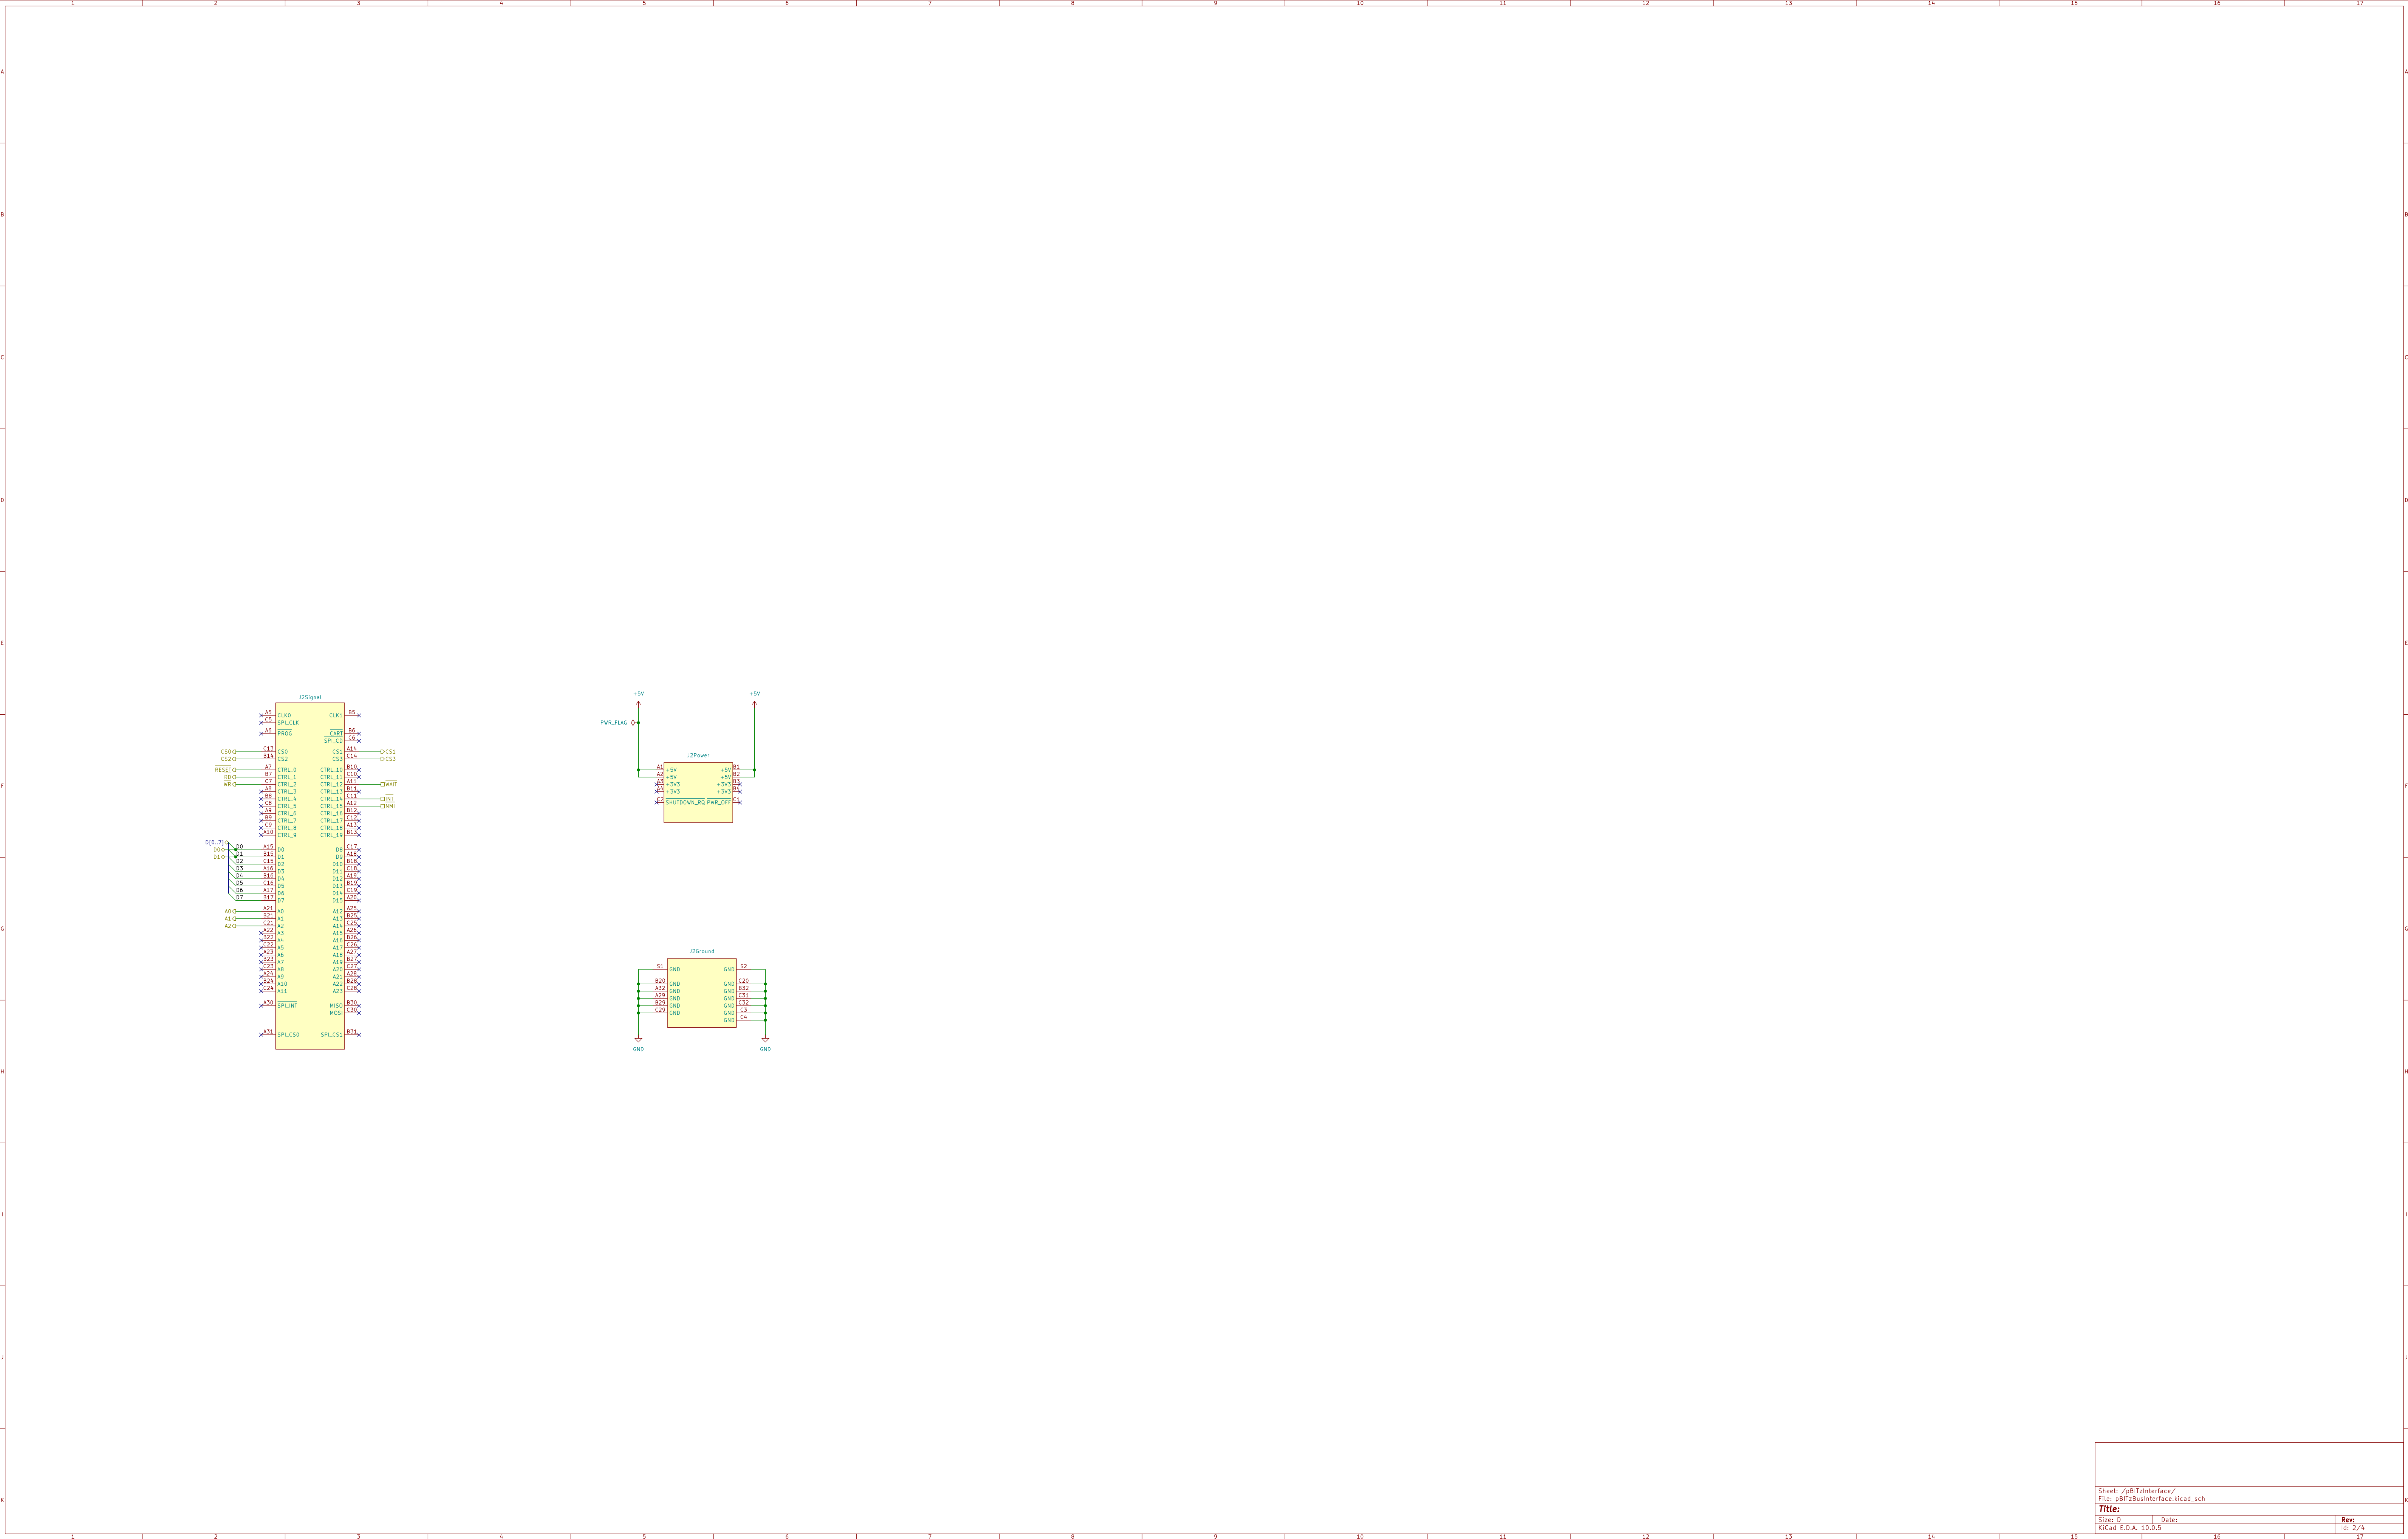


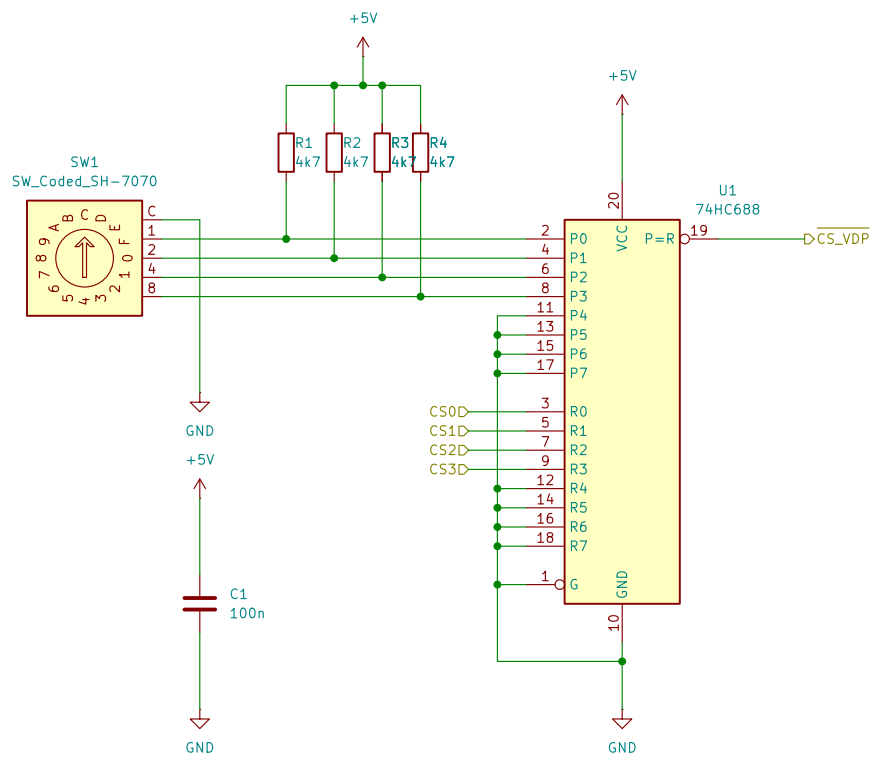

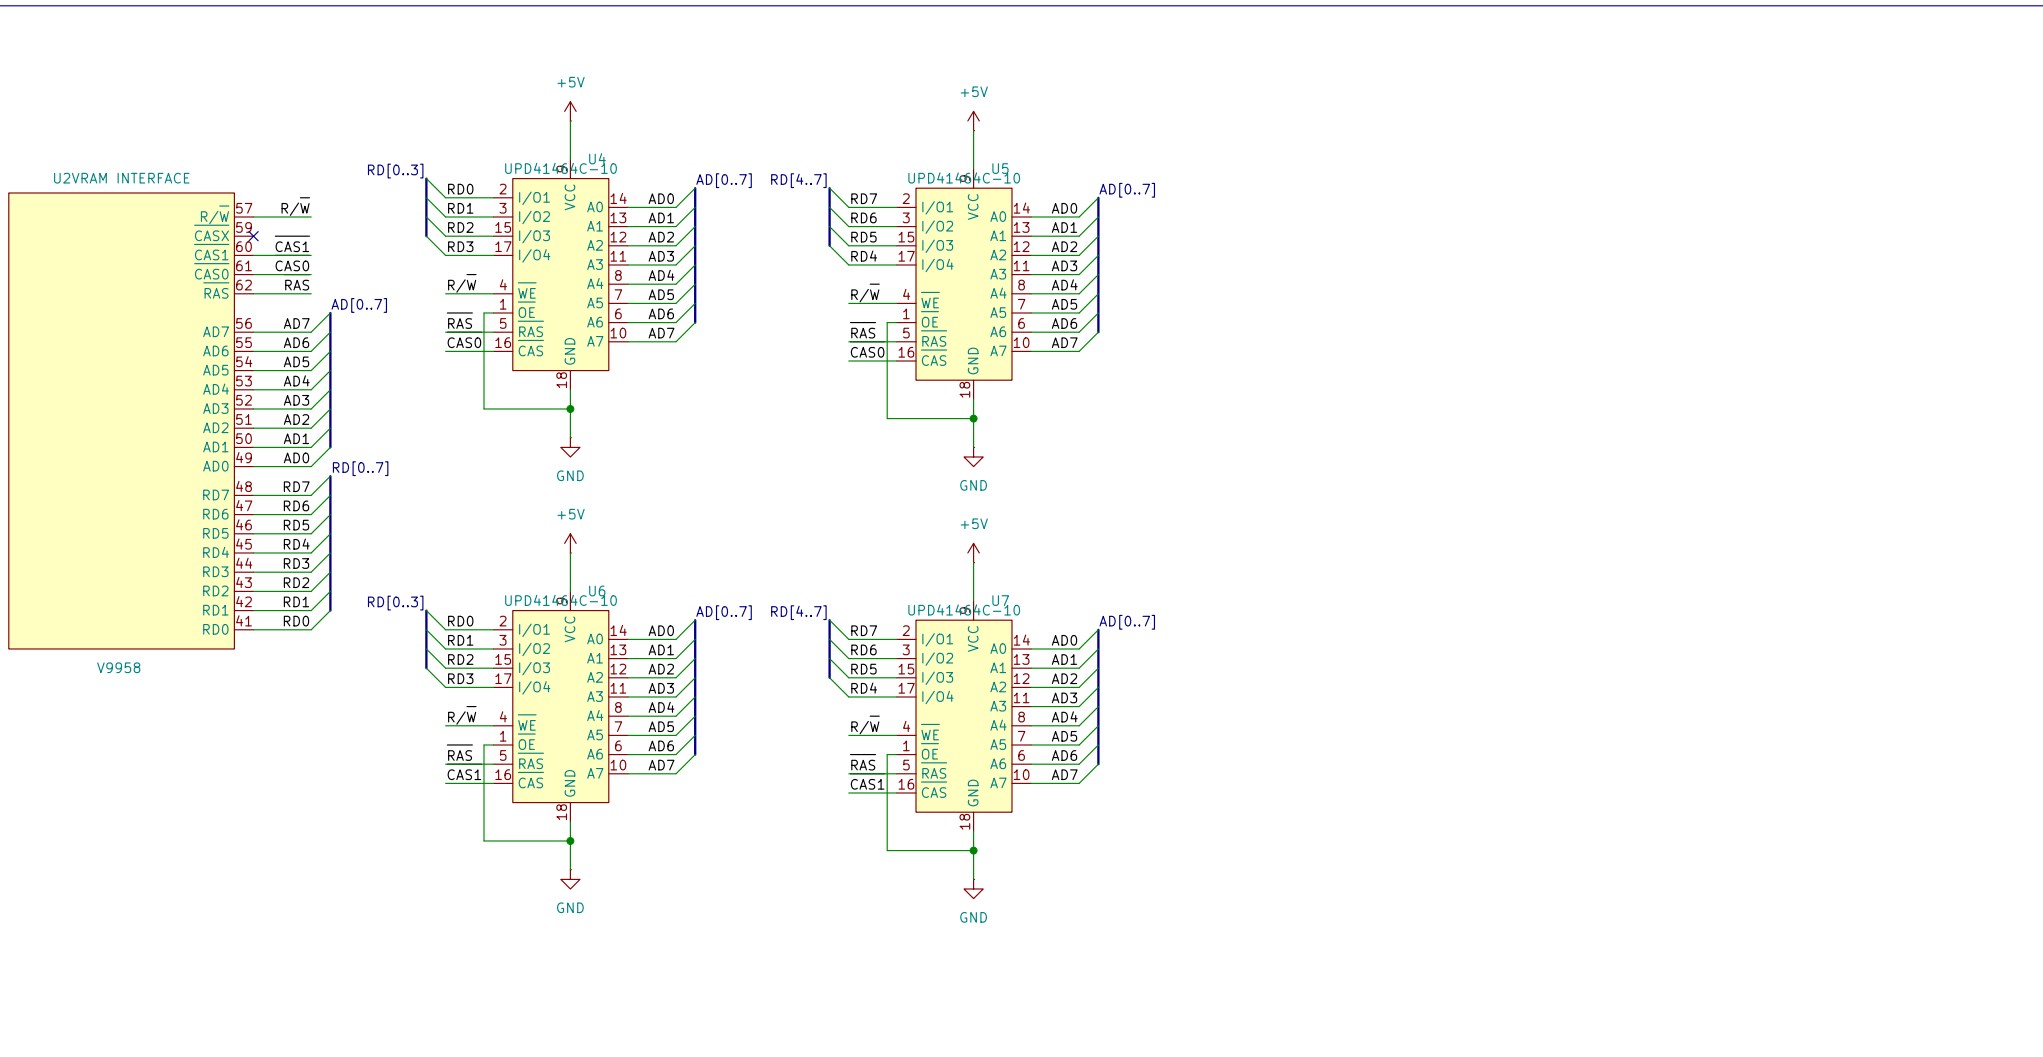

Device Selection Logic (device side):
CPU decodes the address and puts
a device-selection address on
the bus (CS0-CS3). The /CS line activated
matches the address selected on the rotary encoder

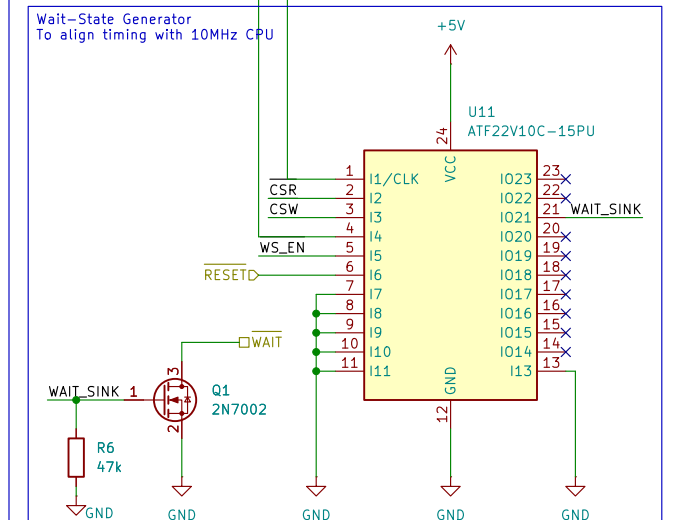

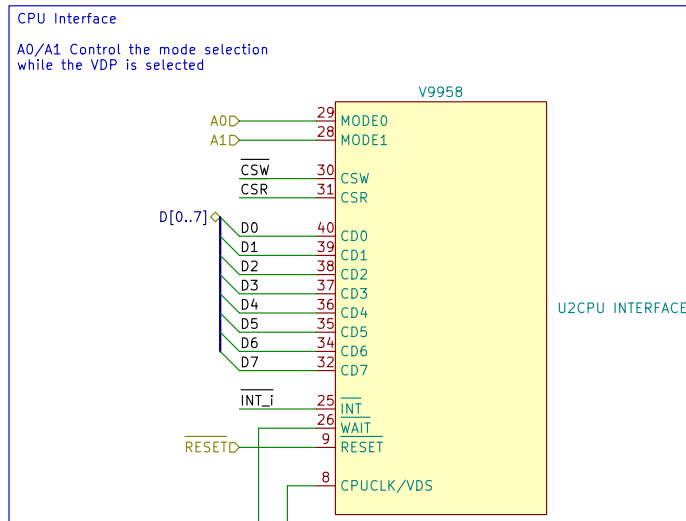

Interrupt Selection Logic
If VDP is selected and writing to the VDP and address line # is asserted, then we are writing a bit to the INT MODE select latch.
Upon interrupt from the VDP /RMI or /INT is asserted, the slide is there to ensure the interrupt lines are tri-state when there is no interrupt active.
Default is INT

