




Sheet: /		
File: AfternoonBlend.kicad_sch		
Title:		
Size: A4	Date:	Rev:
KiCad E.D.A. 10.0.3		Id: 1/4

Device Selection Logic (device side):
CPU decodes the address and puts
a device-selection address on
the bus (CS0-CS3). The /CS line activated
matches the address selected on the rotary encoder

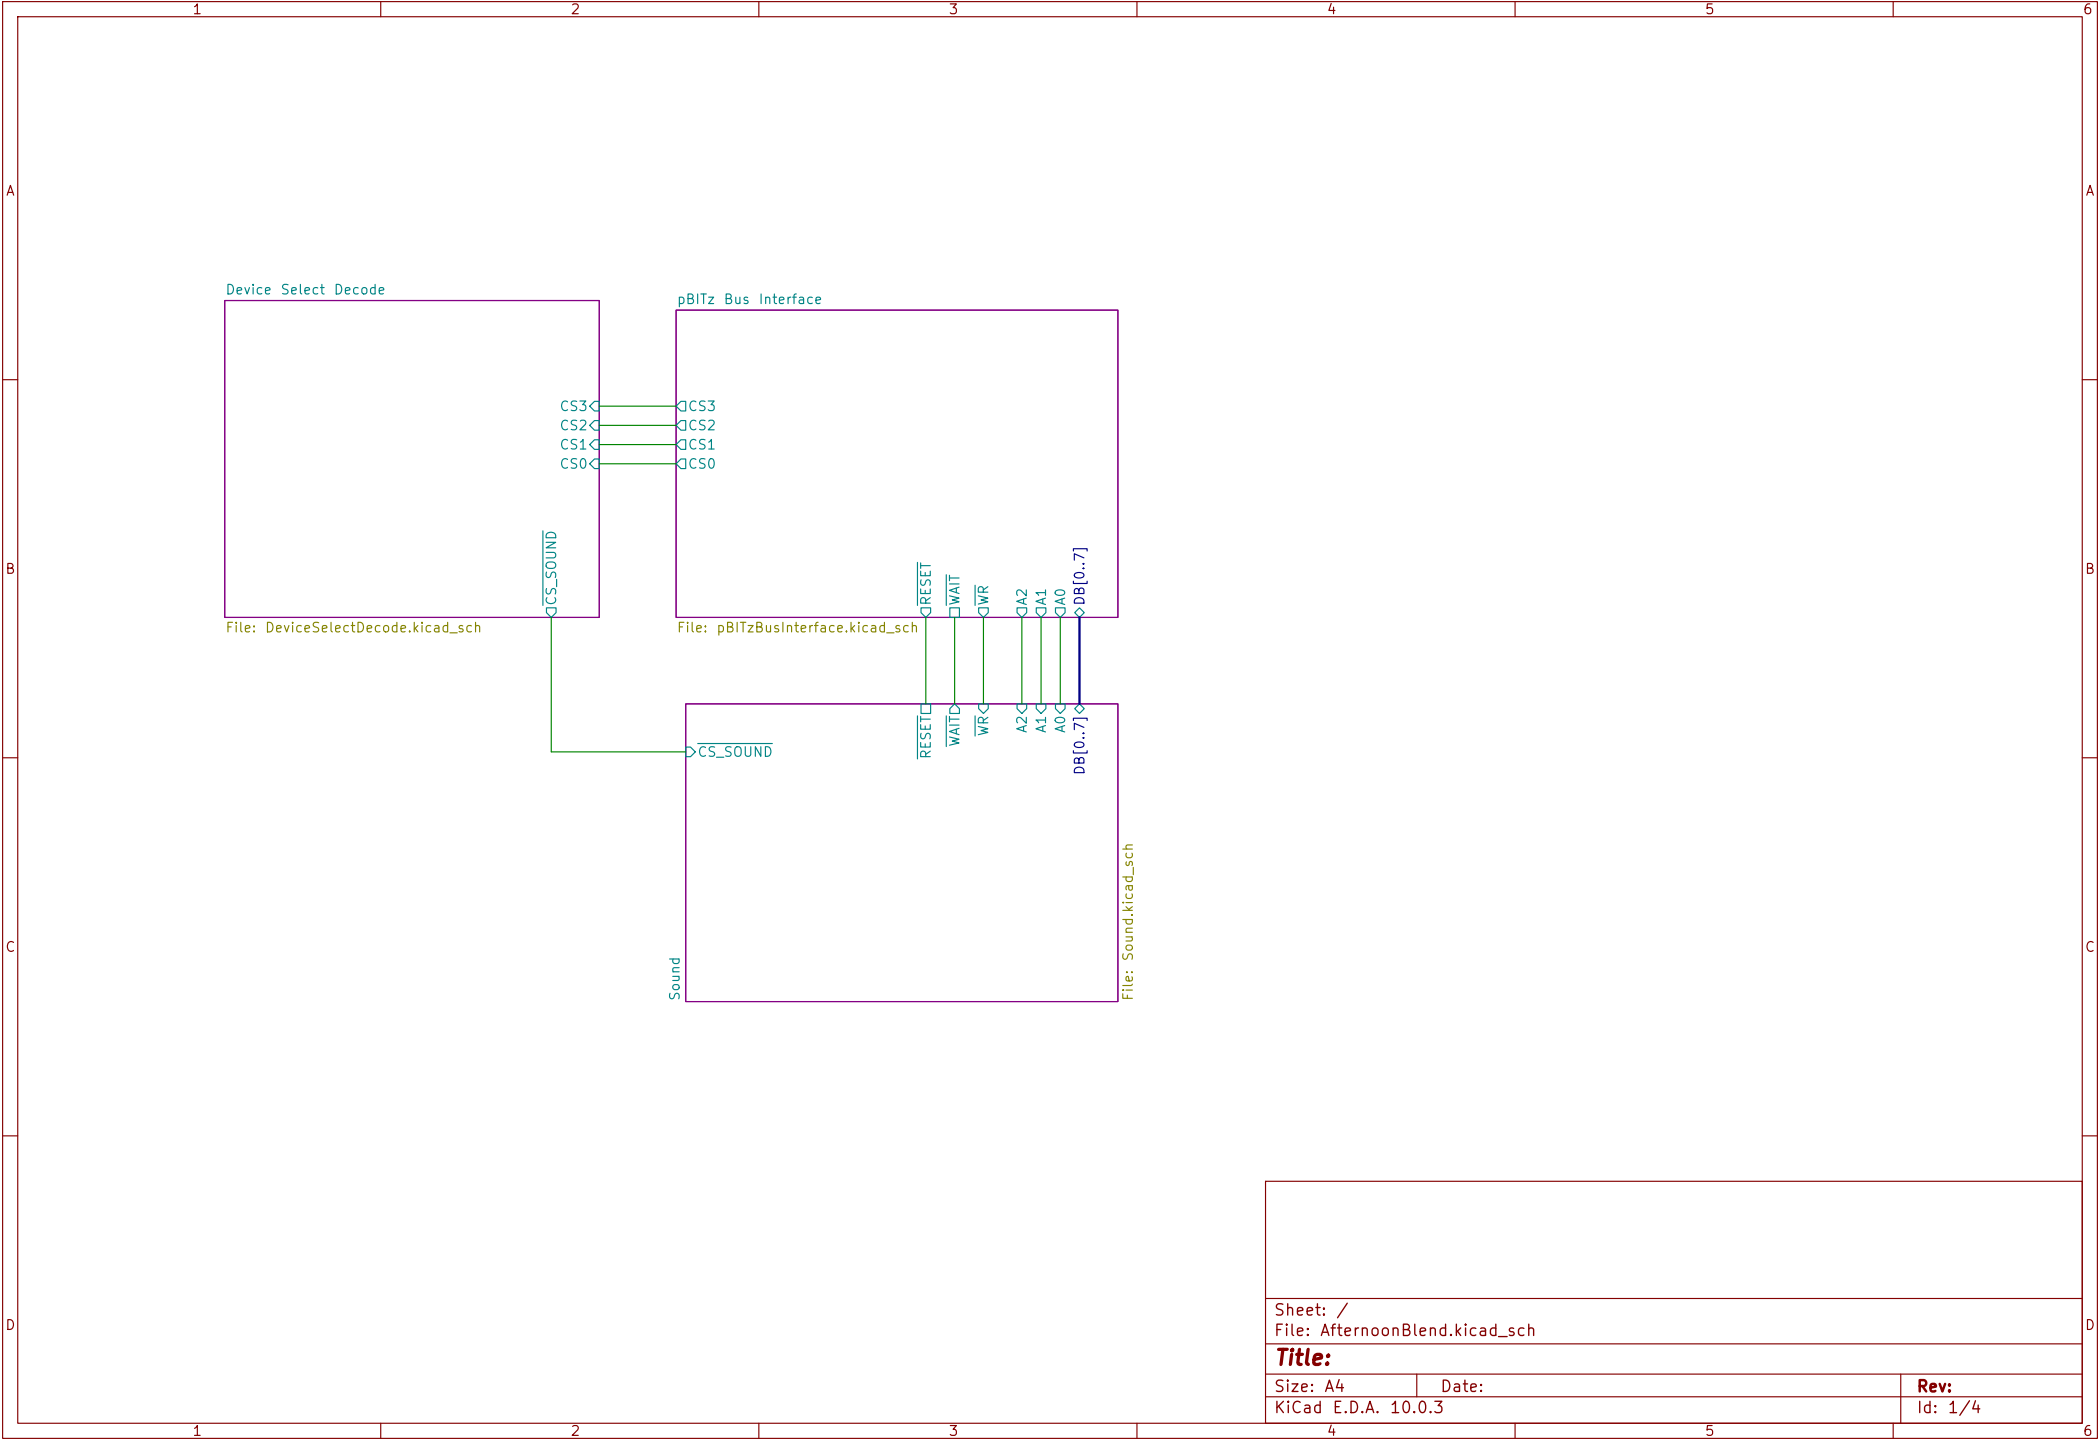