




Device Selection Logic (device side):
CPU decodes the address and puts
a device-selection address on
the bus (CS0-CS3). The /CS line activated
matches the address selected on the rotary encoder

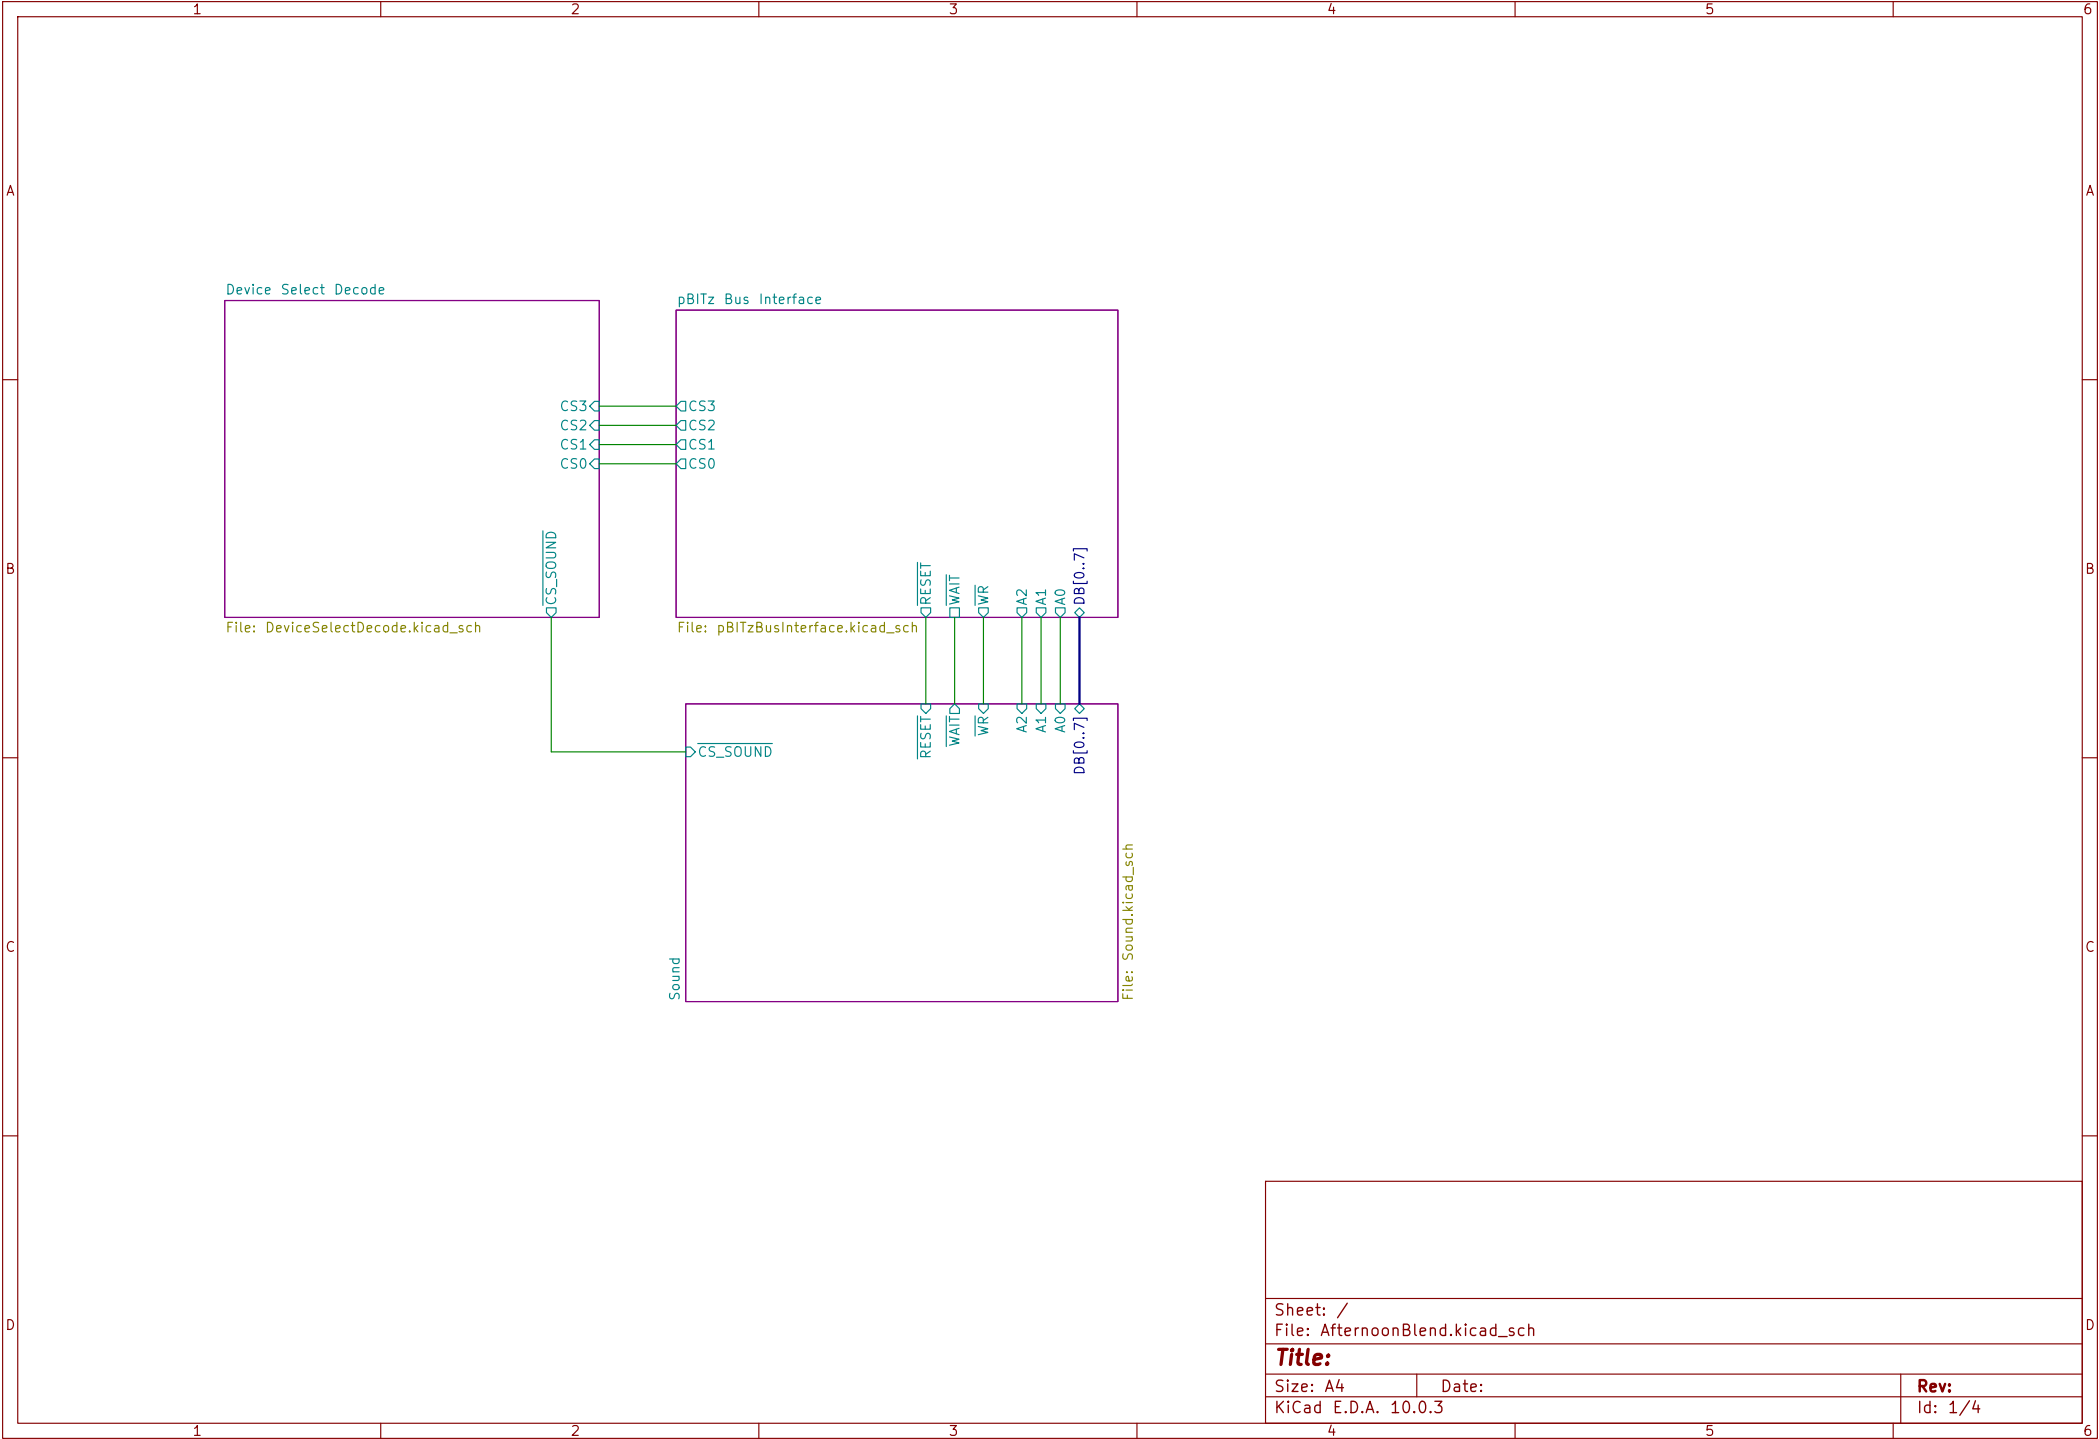