




Signal	Function
POWER_OFF_RQ	Sent by power supply manager to request shutdown
POWER_OFF	Sent to power supply manager to turn off
RESET	Outputting general reset
RESET_SW	Tied to physical RESET Switch
NMI_Rq	Tied to physical NMI button
NMI	Tied to NMI signal of CPU
SD_PRESENT	Tied to CS0, PRESENT of SD Card and BCD of SIO1
USB_PRESENT	Tied to USB Port UP and BCD of SIO0
SD_BUSY	Optional LED, Signal SD Card activity
USB_RST	Output to RESET USB Controller
USB_INT	Interrupt Input from USB Controller
USB_CS/SD_CS	SPI Chip Selects

SIO Device	SIO Channel	Function	Baud Rate	Address (Data/Ctrl)
SIO0	A	User Port	CTC Controlled	21/22
SIO0	B	Console	115200	20/22
SIO1	A	Bulk Data	SPI	31/33
SIO1	B	Command	SPI	30/32
CTBL	N/A	Controllers	SPI	E0-FF

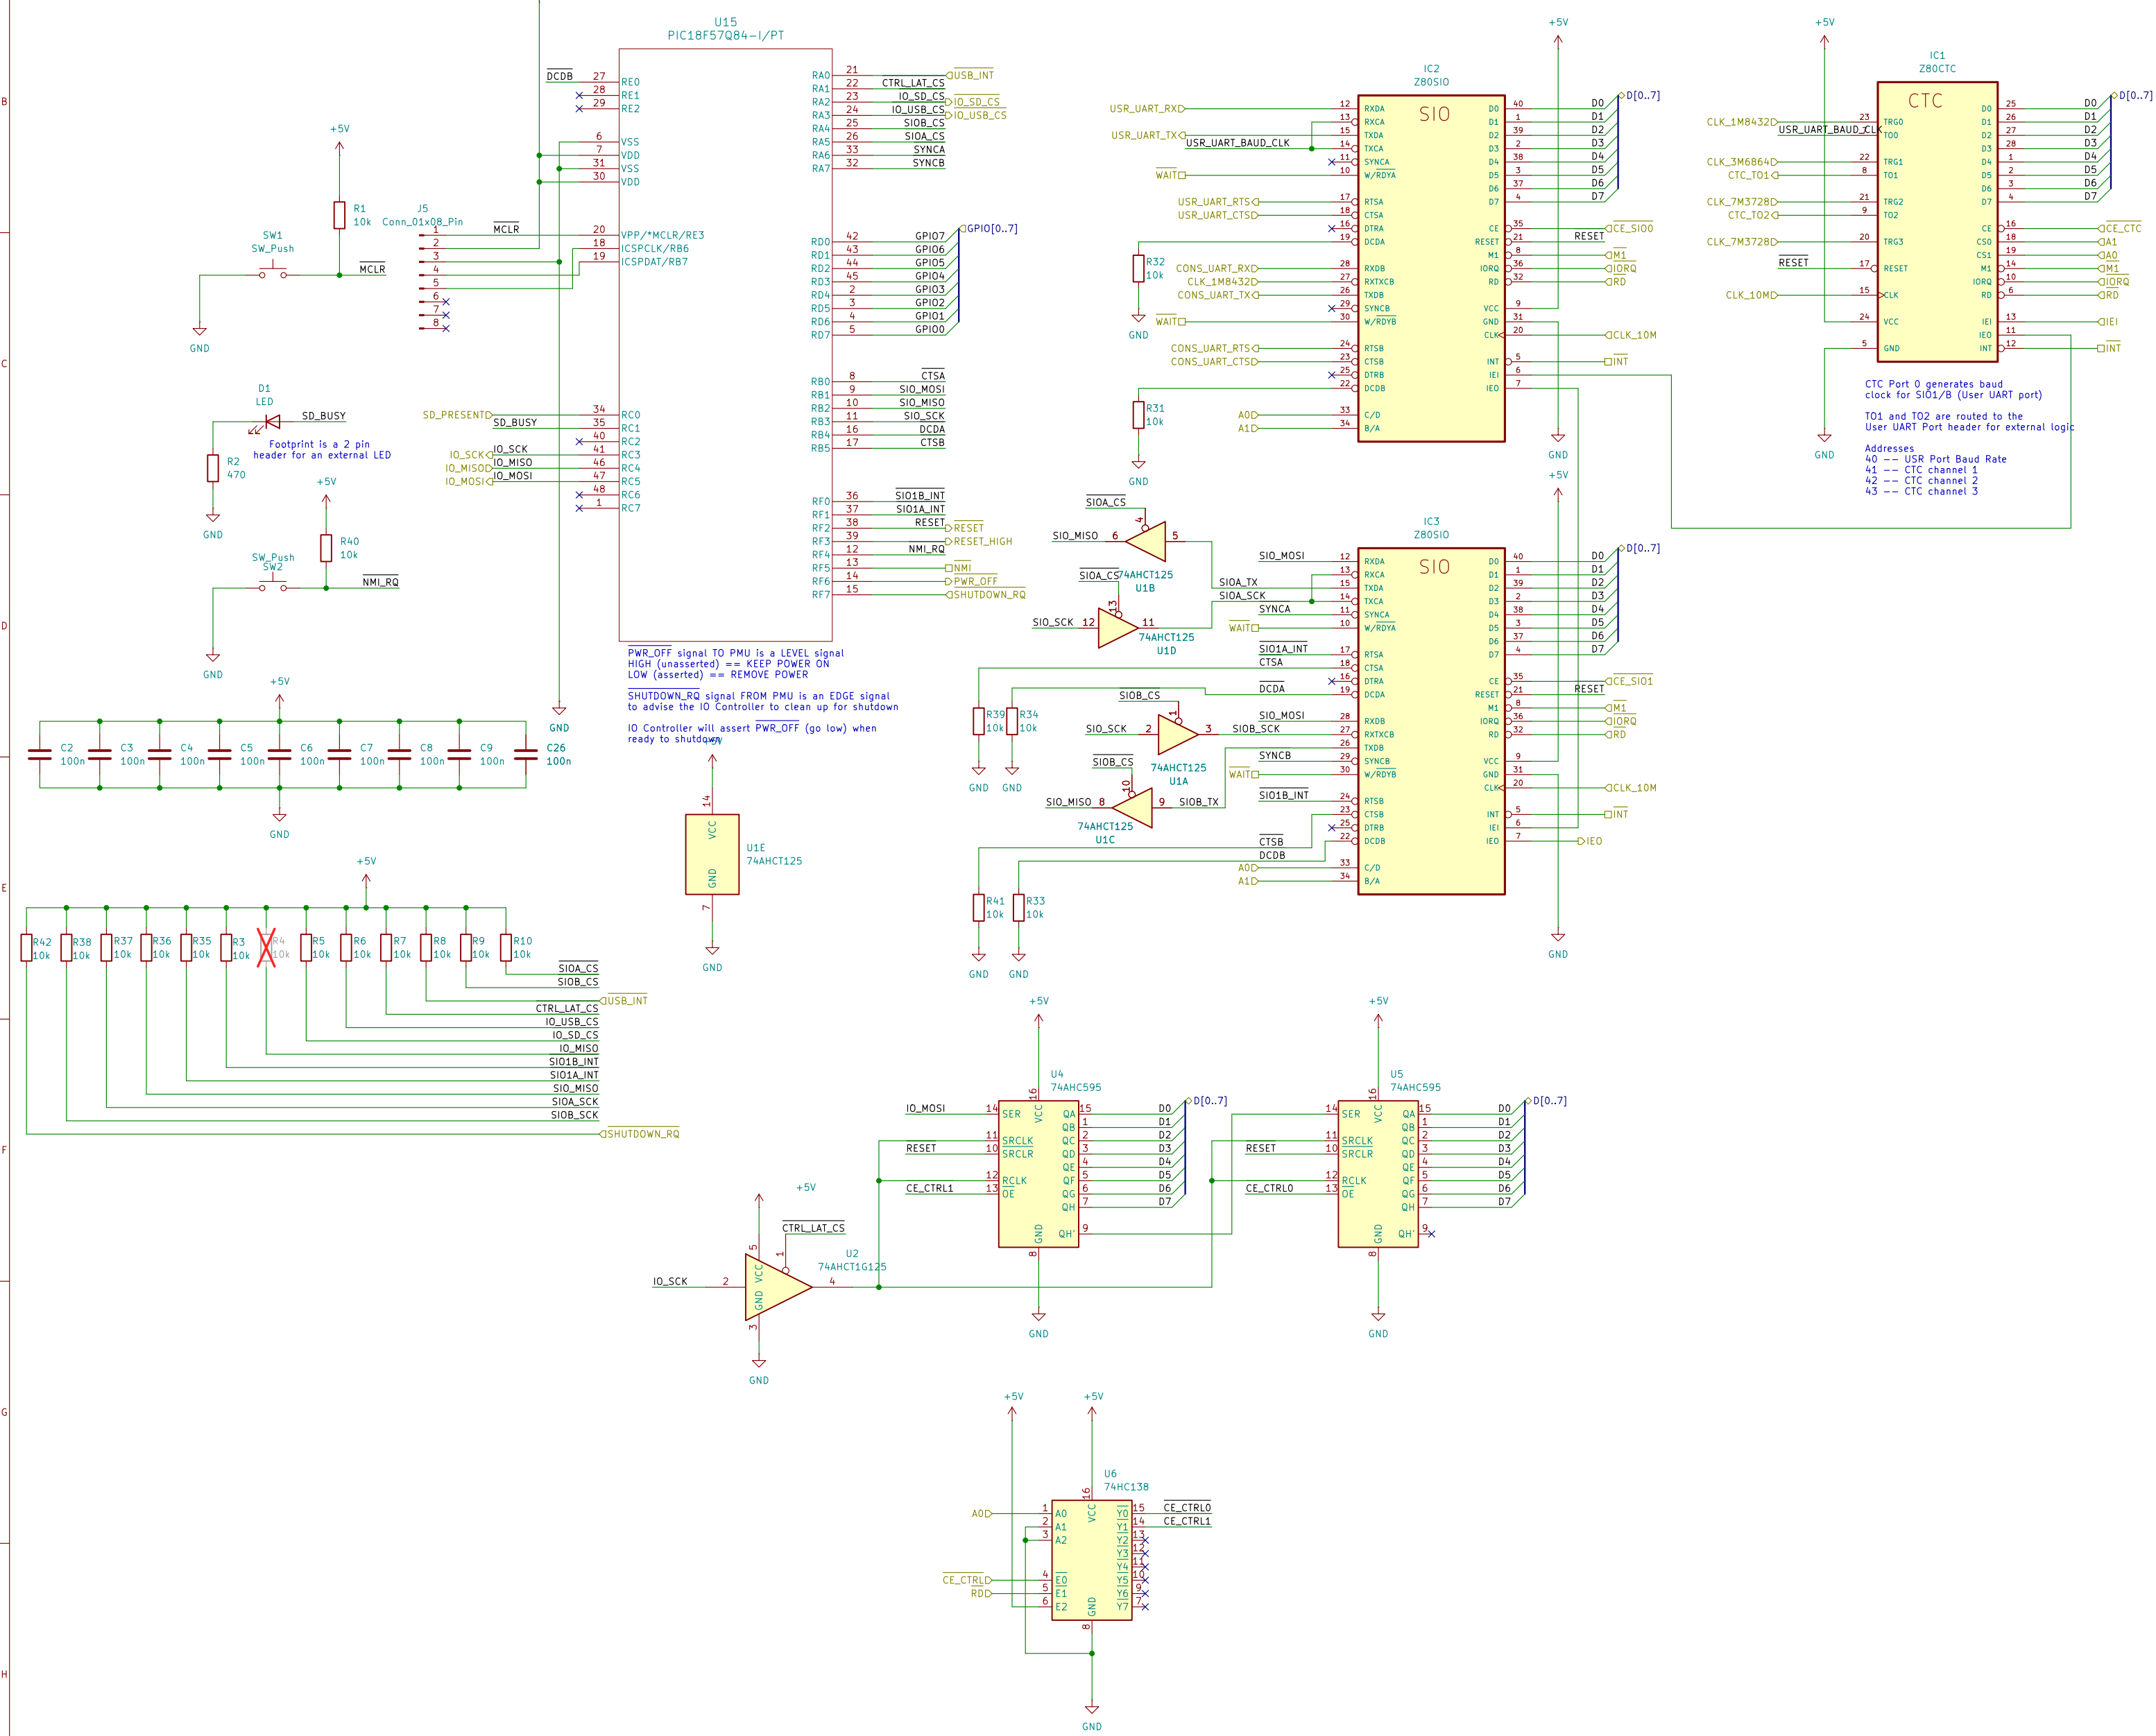

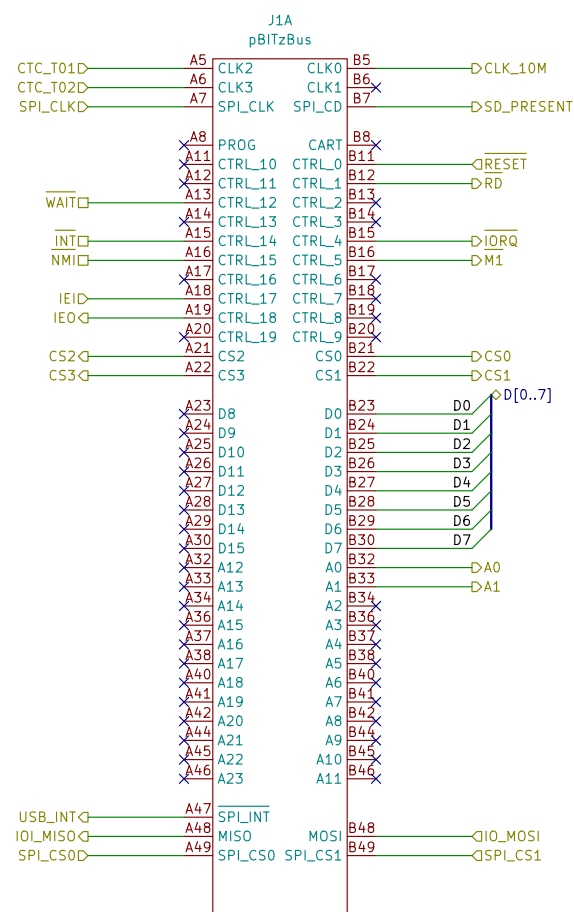

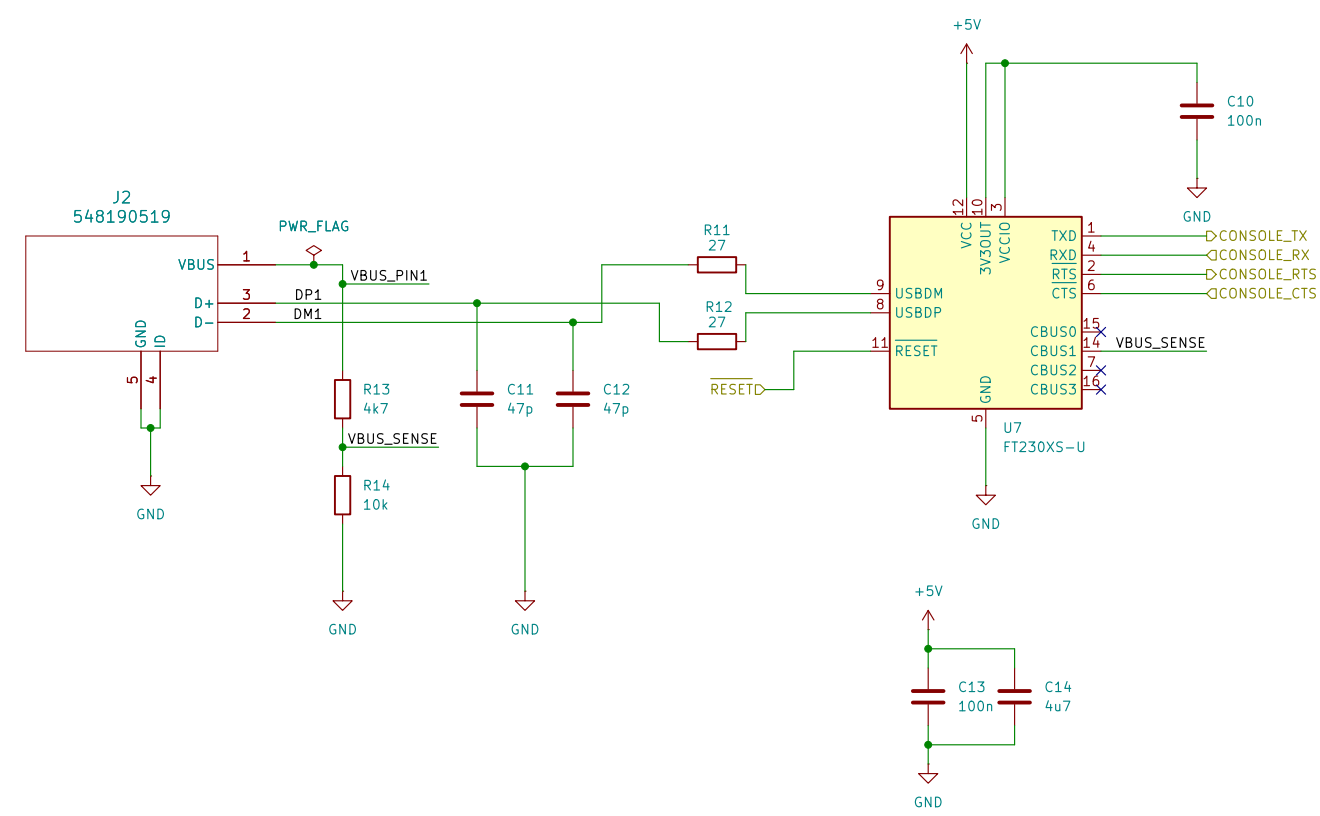



Device Selection Logic (device slide):
CPU decodes the address and puts
a device selection address on
the bus (CS0-CS3). The /CS line activated
matches the address selected on the rotary encoder

This IO Card has 3 devices that can be selected by the
CPU, therefore 3 comparators and rotary encoders

