



PRODUCT FEATURES

- Smooth and high transparency opal polycarbonate diffuser
- Built-in aluminium heatsink with excellent heat dissipation
- Even light distribution
- Loop in and loop out tool-less installation
- Loop through by 4 wires for non-dim version, 6 wires for Dali version
- DALI driver with dimming range 5~100%
- IP66 and IK08 rated
- M20 waterproof cable gland
- Optional PIR sensor module with leader-follower function
- Compatible with 170-278VDC for emergency lighting



APPLICATIONS

- Car parks
- Garages
- Workshops
- Warehouses
- Underground areas

GENERAL INFORMATION

Input Voltage / Frequency	220-240 VAC / 50-60Hz (Compatible with 170-278VDC for emergency lighting)
Power Factor	> 0.9
Power Supply Unit	Integrated
Dimmable	Yes
CRI	≥ 80
Beam Angle	120°
Colour Consistency	SDCM ≤ 4
Lifetime	70 000hrs L80 B10 at 25°C (50 000hrs L80 B50 at 25°C for v0 version)
Number of Switching Cycles	> 100 000
IP	66
IK	08
Protection Class	II
Glow Wire	850°C
Photobiological Safety Group	RG 0
Flicker percentage	≤ 3% at 100Hz
Working Temperature	-30°C to +50°C
Material & Colour	Polycarbonate, SV16
Installation	Surface Mounted; Suspension with Hook [Wire not included]
Approvals	EN60598-1, EN60598-2-1, EN62493, EN62471, EN60598-2-24, EN55015; EN61547, EN61000-3-2, EN61000-3-3

PRODUCT INFORMATION

Model No.	MM Code	Length mm	Power W	Luminous Flux lm	Luminous Efficacy lm/W	Color Temp. K	CRI
FOB80000v0-ds	-	610	9 / 17	1000 / 1800	111 / 106	3000	Ra 80
FOB80000v0-ds	711849/MM11849	610	9 / 17	1100 / 2000	122 / 118	4000	Ra 80
FOB80000v0-ds	-	610	9 / 17	1100 / 2000	122 / 118	6500	Ra 80
FOB80000v1-ds	711797/MM11797	610	9 / 17	1200 / 2200	133 / 129	3000	Ra 80
FOB80000v1-ds	711798/MM11798	610	9 / 17	1300 / 2400	144 / 141	4000	Ra 80
FOB80000v1-ds	711799/MM11799	610	9 / 17	1300 / 2400	144 / 141	6500	Ra 80
FOB80100v0-ds	-	1210	17 / 33	2300 / 4000	124 / 112	3000	Ra 80
FOB80100v0-ds	711820/MM11820	1210	17 / 33	2300 / 4000	135 / 121	4000	Ra 80
FOB80100v0-ds	-	1210	17 / 33	2300 / 4000	135 / 121	6500	Ra 80
FOB80100v1-ds	711800/MM11800	1210	17 / 33	2200 / 4200	129 / 127	3000	Ra 80
FOB80100v1-ds	711801/MM11801	1210	17 / 33	2400 / 4600	141 / 139	4000	Ra 80
FOB80100v1-ds	711802/MM11802	1210	17 / 33	2400 / 4600	141 / 139	6500	Ra 80
FOB80200v0-ds	-	1510	33 / 50	3700 / 5500	112 / 110	3000	Ra 80
FOB80200v0-ds	711821/MM11821	1510	33 / 50	4000 / 6000	121 / 120	4000	Ra 80
FOB80200v0-ds	-	1510	33 / 50	4000 / 6000	121 / 120	6500	Ra 80

FOB80200v1-ds	711803/MM11803	1510	33 / 50	4200 / 6500	127 / 130	3000	Ra 80
FOB80200v1-ds	711804/MM11804	1510	33 / 50	4600 / 7000	139 / 140	4000	Ra 80
FOB80200v1-ds	711805/MM11805	1510	33 / 50	4600 / 7000	139 / 140	6500	Ra 80
FOB80200v2-ds	-	1510	50 / 70	5500 / 7700	110 / 113	3000	Ra 80
FOB80200v2-ds	711850/MM11850	1510	50 / 70	6000 / 8400	120 / 120	4000	Ra 80
FOB80200v2-ds	-	1510	50 / 70	6000 / 8400	120 / 120	6500	Ra 80
FOB80200v3-ds	711806/MM11806	1510	50 / 70	6500 / 9200	130 / 131	3000	Ra 80
FOB80200v3-ds	711807/MM11807	1510	50 / 70	7000 / 10000	140 / 143	4000	Ra 80
FOB80200v3-ds	711808/MM11808	1510	50 / 70	7000 / 10000	140 / 143	6500	Ra 80

DALI 2.0 version

Model No.	MM Code	Length mm	Power W	Luminous Flux lm	Luminous Efficacy lm/W	Color Temp. K	CRI
FOB80000v0-da	-	610	17	2000	118	4000	Ra 80
FOB80000v1-da	711809/MM11809	610	17	2400	141	4000	Ra 80
FOB80100v0-da	-	1210	33	4000	121	4000	Ra 80
FOB80100v1-da	711810/MM11810	1210	33	4600	139	4000	Ra 80
FOB80200v0-da	-	1510	50	6000	120	4000	Ra 80
FOB80200v1-da	711811/MM11811	1510	50	7000	140	4000	Ra 80
FOB80200v2-da	-	1510	70	8400	120	4000	Ra 80
FOB80200v3-da	711812/MM11812	1510	70	10000	143	4000	Ra 80
FOB80000v1-da/r9	712057/MM12057	610	17	2000	118	4000	Ra 90
FOB80100v1-da/r9	712058/MM12058	1210	33	4000	121	4000	Ra 90
FOB80200v1-da/r9	712059/MM12059	1510	50	6000	120	4000	Ra 90

Included accessories



OPTIONAL ACCESSORIES

Model No.	MM Code	Description
LA11155+LA11197	711519/MM11519	PIR Sensor Module Kit for HAGON / HAGON 2
LA11156+LA11197	711519/MM11520	Emergency Kit for HAGON / HAGON 2



LA11155+LA11197




LA11156+LA11197




WIRING DIAGRAM





HAGON 2 loop-in / loop-out installation (ON/OFF connection)

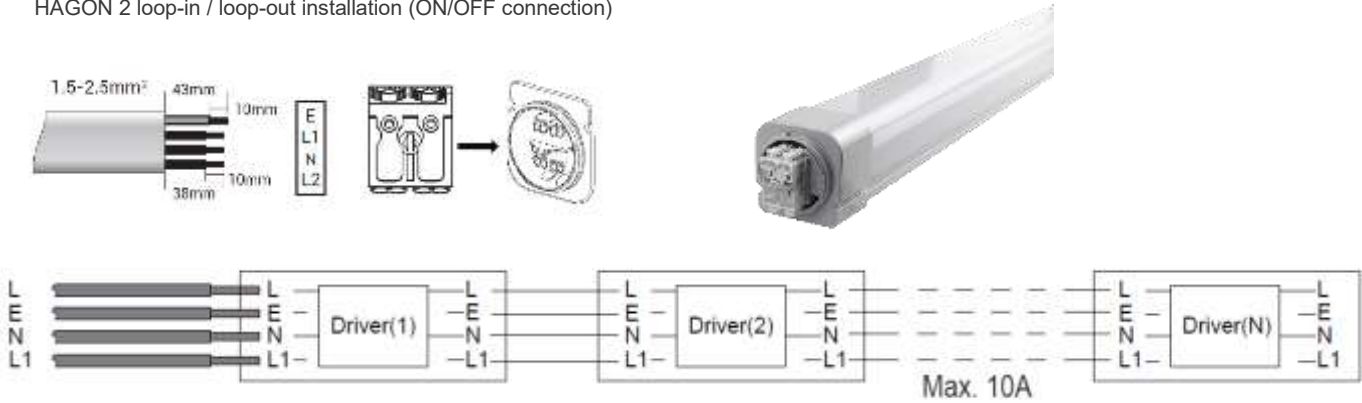

HAGON 2 loop-in / loop-out installation (DALI connection)

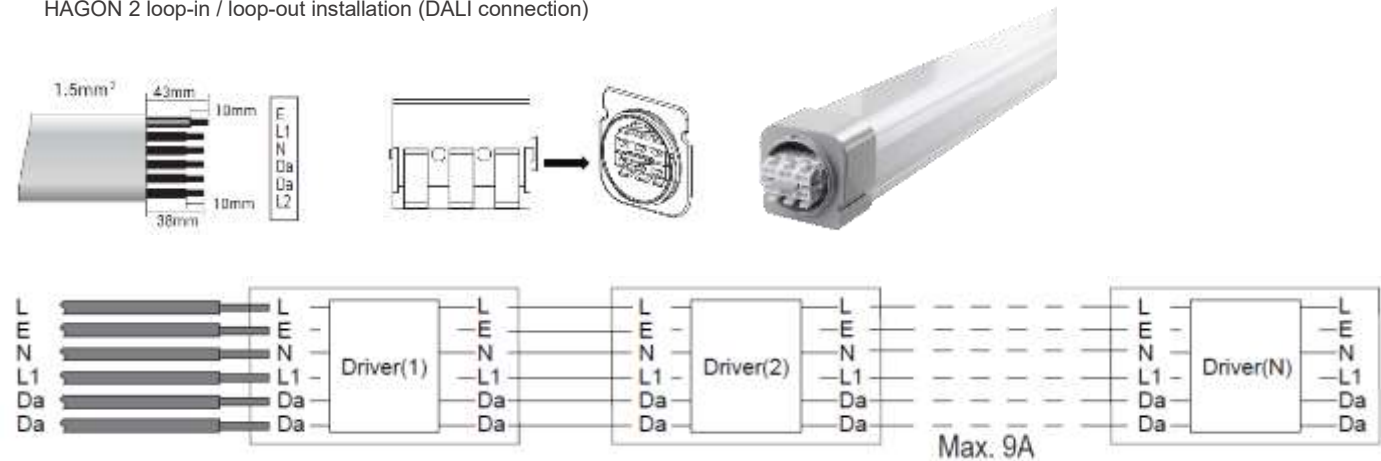

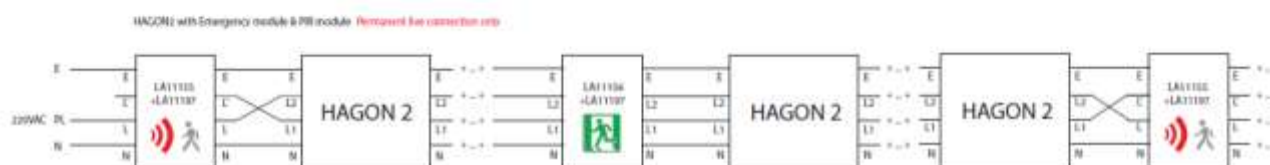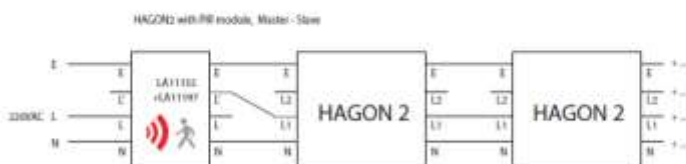

Model No.	Inrush Current	Inrush Duration	Max. No. of Luminaire Connection on MCB			
	A	µs	B10	B16	C10	C16
FOB80000v0-ds	21.9	64.4	26	41	42	69
FOB80000v1-ds	21.9	64.4	26	41	42	69
FOB80100v0-ds	22.3	61.2	25	40	41	68
FOB80100v1-ds	22.3	61.2	25	40	41	68
FOB80200v0-ds	22.9	59.2	24	39	40	66
FOB80200v1-ds	22.9	59.2	24	39	40	66
FOB80200v2-ds	29.8	53.6	19	30	31	51
FOB80200v3-ds	29.8	53.6	19	30	31	51

DIMENSIONS & WEIGHT

/Model No.	L Mm	W mm	H mm	Weight g
FOB80000v0-ds	610	55	55	500
FOB80000v1-ds	610	55	55	500
FOB80100v0-ds	1210	55	55	900
FOB80100v0-da	1210	55	55	1090
FOB80100v1-ds	1210	55	55	900
FOB80100v1-da	1210	55	55	1090
FOB80100v2-da	1210	55	55	1090
FOB80200v0-ds	1510	55	55	1080
FOB80200v0-da	1510	55	55	1290
FOB80200v1-ds	1510	55	55	1080
FOB80200v1-da	1510	55	55	1290
FOB80200v2-da	1510	55	55	1290
FOB80200v3-ds	1510	55	55	1160

