

MILENALITE 2

LED downlight

MEGAMAN®

PRODUCT DATASHEET



PRODUCT FEATURES

- No external driver required which facilitates easy installation and maintenance
- Delivers uniform light distribution
- Slim design suitable for limited ceiling depths

APPLICATIONS

- Retails
- Bathrooms
- Hotels
- Kitchens
- Offices
- Restaurants




GENERAL INFORMATION

Input Voltage / Frequency	220-240 VAC / 50-60Hz
Power Supply Unit	Integrated
Dimmable	No
CRI	≥ 80
Beam Angle	36°
Colour Consistency	SDCM ≤ 6
Lifetime	15 000hrs L70 B50 at 25°C
Number of Switching Cycles	> 100 000
IP	20
IK	N/A
Protection Class	II
Glow Wire	650°C
Photobiological Safety Group	RG 0
Flicker percentage	≤ 3% at 100Hz
Working Temperature	-20°C to +40°C
Material & Colour	Acrylonitrile Butadiene Styrene housing, Polycarbonate diffuser, Matt White WH12
Installation	Recessed Mounted
Approvals	EN60598-1, EN60598-2-1, EN62493, EN62471, EN55015, EN61547, EN61000-3-2, EN61000-3-3

PRODUCT INFORMATION

Model No.	MM Code	POWER W	Luminous Flux lm	Luminous Efficacy lm / W	Power Factor (λ)	Pack
FDS74000v0	712737 / MM12737	3.5	390 [3000K]	110 [3000K]	> 0.45	1 pc
	712738 / MM12738					3 pcs


WIRING



Model No.	Inrush Current A	Inrush Duration µs	Max. no. of Luminaire Connection on MCB			
			B10	B16	C10	C16
FDS74000v0	0.37	176	51	51	51	51

DIMENSIONS & WEIGHT

Model No.	Ø mm	H mm	Cut out Mm	Weight g
FDS74000v0	90	32	70-80	32

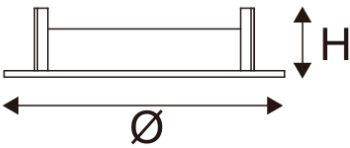


MILENALITE 2

LED downlight



PRODUCT DATASHEET

PHOTOMETRIC DIAGRAM

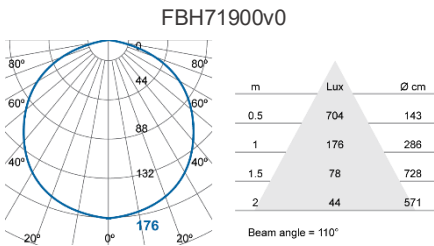

LOGISTIC INFORMATION

Model No.	Packaging Unit	Outer Box Dimensions			Gross Weight per Outer Box
		L	W	H	
	pcs/unit	mm	mm	mm	kg
FDS74000v0 (1pc pack)	60	430	296	205	3.60
FDS74000v0 (3pcs pack)	60	430	230	330	3.50

DISCLAIMER

Subject to change without notice. Errors and omissions excepted. Always ensure you are using the most recent release.