
Creating LED and LCD Solutions Together™

PART NUMBER	LDQ-M516RI	REV.	В
DATE	E.C.N. NUMBER AND REVISION COMMENTS		REV.
04.22.98	E.C.N. #10BRDR, #10383, #10387, REDRAWN./		Α
01.09.14	E.C.N. #10BRDR.		В

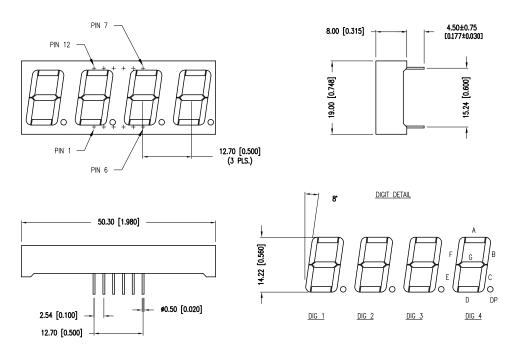

COMMON ANODE DIG 1: PIN NO.

DIG 2: PIN NO. DIG 3: PIN NO.

DIG 4: PIN NO.

В С D Ε

7 4 12

8

G

10

ELECTRO-OPTICAL	CHARACTERIST	ICS TA = 25°C	$I_f = 10 \text{mA}$		
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		660		nm	
FORWARD VOLTAGE	1.8	2.0	2.4	V_{f}	
REVERSE VOLTAGE	5.0			v_r	I _r =100uA
AXIAL INTENSITY	8000	15000		μcd	I _f =10mA
EMITTED COLOR:	RED				
FONT COLOR:	GREY				
SEGMENT COLOR:	MILKY	WHITE DIFFUS	ED		

LIMITS OF SAFE OPERATION AT 25°C	PER CHIP	
PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	100	mA
STEADY CURRENT	25	mA
POWER DISSIPATION	60	mW
DERATE FROM 25°C	-1.2	mW/*C
OPERATING TEMP.	-35 TO +85	•C
STORAGE TEMP.	-35 TO +85	•C
SOLDERING TEMP.	+260	•C
2.0mm FROM BODY		3 SEC. MAX

* t<10uS

RELIABILITY NOTE:

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE

FAILURE. PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION UNCONTROLLED DOCUMENT 290 E. HELEN ROAD 0.56" 4 DIGIT, 7 SGMT DISPLAY, 660nm RED, GREY FONT/WHITE SEGMENTS, MULTIPLEXED, COMMON ANODE. PALATINE, IL 60067-6976 PHONE: +1.847.359.2790

FAX: +1.847.359.6538

WEB: WWW.LUMEX.COM

THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.

CONFIDENTIAL INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. SECEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEP ALL INFORMATION CONTAINED HEREIN COMFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMMATION TO ALL THIRD PARTIES.

DATE: 01.09.14 DRAWN BY: MA PAGE: OF 1 CHKD BY: DT SCALE: N/A APRVD BY: DT UNIT: mm [INCH] (Pb)