

I2C_LCD_Example_PSoC4 Example Project

1.0

Features

- Communicate on 2-wire I2C bus
- Support of NXP PCF2119x command format

General Description

This example project demonstrates functionality on the I2C LCD component. In this example project the I2C LCD component is used to display a custom character set of the NXP PCF2119x compatible LCD module. It also demonstrates the example of usage of address macros and custom commands.

Development Kit Configuration

This example project is designed to run on PSoC 4 processor module CY8CKIT-038 with CY8CKIT-001 kit from Cypress Semiconductor. A full description of the kit, along with more example programs and ordering information, can be found at <http://www.cypress.com/go/cy8ckit-001> and <http://www.cypress.com/go/cy8ckit-038>.

The project requires configuration settings changes to run on other kits from Cypress Semiconductor. Table 1 is the list of the supported kits. To switch from CY8CKIT-001 to any other kit, change the project's device with the help of Device Selector called from the project's context menu.

Table 1. Development Kits vs Parts

Development Kit	Device
CY8CKIT-038 + CY8CKIT-001	CY8C4245AXI-483
CY8CKIT-041	CY8C4045AZI-S413 / CY8C4146AZI-S433
CY8CKIT-042	CY8C4245AXI-483
CY8CKIT-042-BLE	CY8C4247LQI-BL483
CY8CKIT-044	CY8C4247AZI-M485
CY8CKIT-046	CY8C4248BZI-L489
CY8CKIT-048	CY8C4A45LQI-483

The pin assignments for the supported kits are in Table 2.

Table 2. Pin Assignment

Pin Name	Development Kit						
	CY8CKIT-038 + CY8CKIT-001	CY8CKIT-041	CY8CKIT-042	CY8CKIT-042-BLE	CY8CKIT-044	CY8CKIT-046	CY8CKIT-048
I2C_M:scl	P4[0]	P3[0]	P4[0]	P3[5]	P4[0]	P4[0]	P4[0]
I2C_M:sda	P4[1]	P3[1]	P4[1]	P3[4]	P4[1]	P4[1]	P4[1]
Button	P0[7]*	P0[7]	P0[7]	P2[7]	P0[7]	P0[7]	P0[3]
LCD_RST	P3[5]	P2[6]	P3[5]	P2[4]	P2[6]	P2[6]	P1[0]


* Connect P0[7] (Button) to P14 (SW2).

Project Description

The project requires the following configuration settings changes in order to run on the supported kit (Table 1) from Cypress Semiconductor:

1. Make sure kit is in its default configuration.
2. Mount the CY8CKIT-038 processor module kit on the CY8CKIT-001 and go to the step 4.
3. For the rest supported kits do next steps:
 - a. Connect R1-R4 resistors as it is shown on Figure 1.
 - b. Connect SDA pin and SCL pin to pin 4 and 5 of the LCD module.
 - c. Connect pins 1-3, 6 and 7 of LCD module as it is shown on Figure 1.
4. Build the project and program the hex file into the target device.
5. Wait and observe the two lines output of the custom character set.
6. Press the button SW2 and observe the LCD output flip.
7. Press the button SW2 again and observe LCD output get back to its normal state.

Figure 1 Example Project Design Schematic

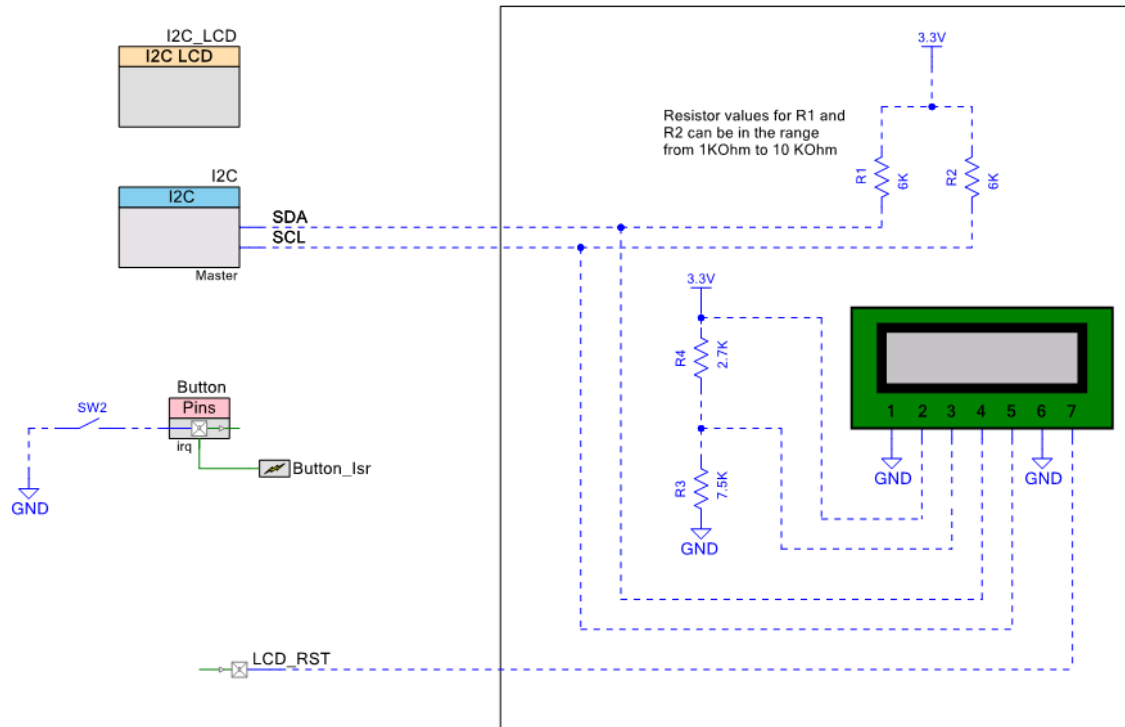

Expected Results

The expected result is printed strings on the LCD module, "CYPRESS!" in the first row and "Cypress!" in the second row. The displayed output is flipped top to bottom on the button press.

	Original strings	Flipped strings
First row	CYPRESS!	ɹǝʌɹɹɹ!
Second row	Cypress!	ɹɹɹɹɹɹɹ!



Cypress Semiconductor
198 Champion Court
San Jose, CA 95134-1709

Phone : 408-943-2600
Fax : 408-943-4730
Website : www.cypress.com

© Cypress Semiconductor Corporation, 2013-2015. The information contained herein is subject to change without notice. Cypress Semiconductor Corporation assumes no responsibility for the use of any circuitry other than circuitry embodied in a Cypress product. Nor does it convey or imply any license under patent or other rights. Cypress products are not warranted nor intended to be used for medical, life support, life saving, critical control or safety applications, unless pursuant to an express written agreement with Cypress. Furthermore, Cypress does not authorize its products for use as critical components in life-support systems where a malfunction or failure may reasonably be expected to result in significant injury to the user. The inclusion of Cypress products in life-support systems application implies that the manufacturer assumes all risk of such use and in doing so indemnifies Cypress against all charges. PSoC® is a registered trademark, and PSoC Creator™ and Programmable System-on-Chip™ are trademarks of Cypress Semiconductor Corp. All other trademarks or registered trademarks referenced herein are property of the respective corporations.

This Source Code (software and/or firmware) is owned by Cypress Semiconductor Corporation (Cypress) and is protected by and subject to worldwide patent protection (United States and foreign), United States copyright laws and international treaty provisions. Cypress hereby grants to licensee a personal, non-exclusive, non-transferable license to copy, use, modify, create derivative works of, and compile the Cypress Source Code and derivative works for the sole purpose of creating custom software and or firmware in support of licensee product to be used only in conjunction with a Cypress integrated circuit as specified in the applicable agreement. Any reproduction, modification, translation, compilation, or representation of this Source Code except as specified above is prohibited without the express written permission of Cypress.

Disclaimer: CYPRESS MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARD TO THIS MATERIAL, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Cypress reserves the right to make changes without further notice to the materials described herein. Cypress does not assume any liability arising out of the application or use of any product or circuit described herein. Cypress does not authorize its products for use as critical components in life-support systems where a malfunction or failure may reasonably be expected to result in significant injury to the user. The inclusion of Cypress' product in a life-support systems application implies that the manufacturer assumes all risk of such use and in doing so indemnifies Cypress against all charges.

Use may be limited by and subject to the applicable Cypress software license agreement.

