



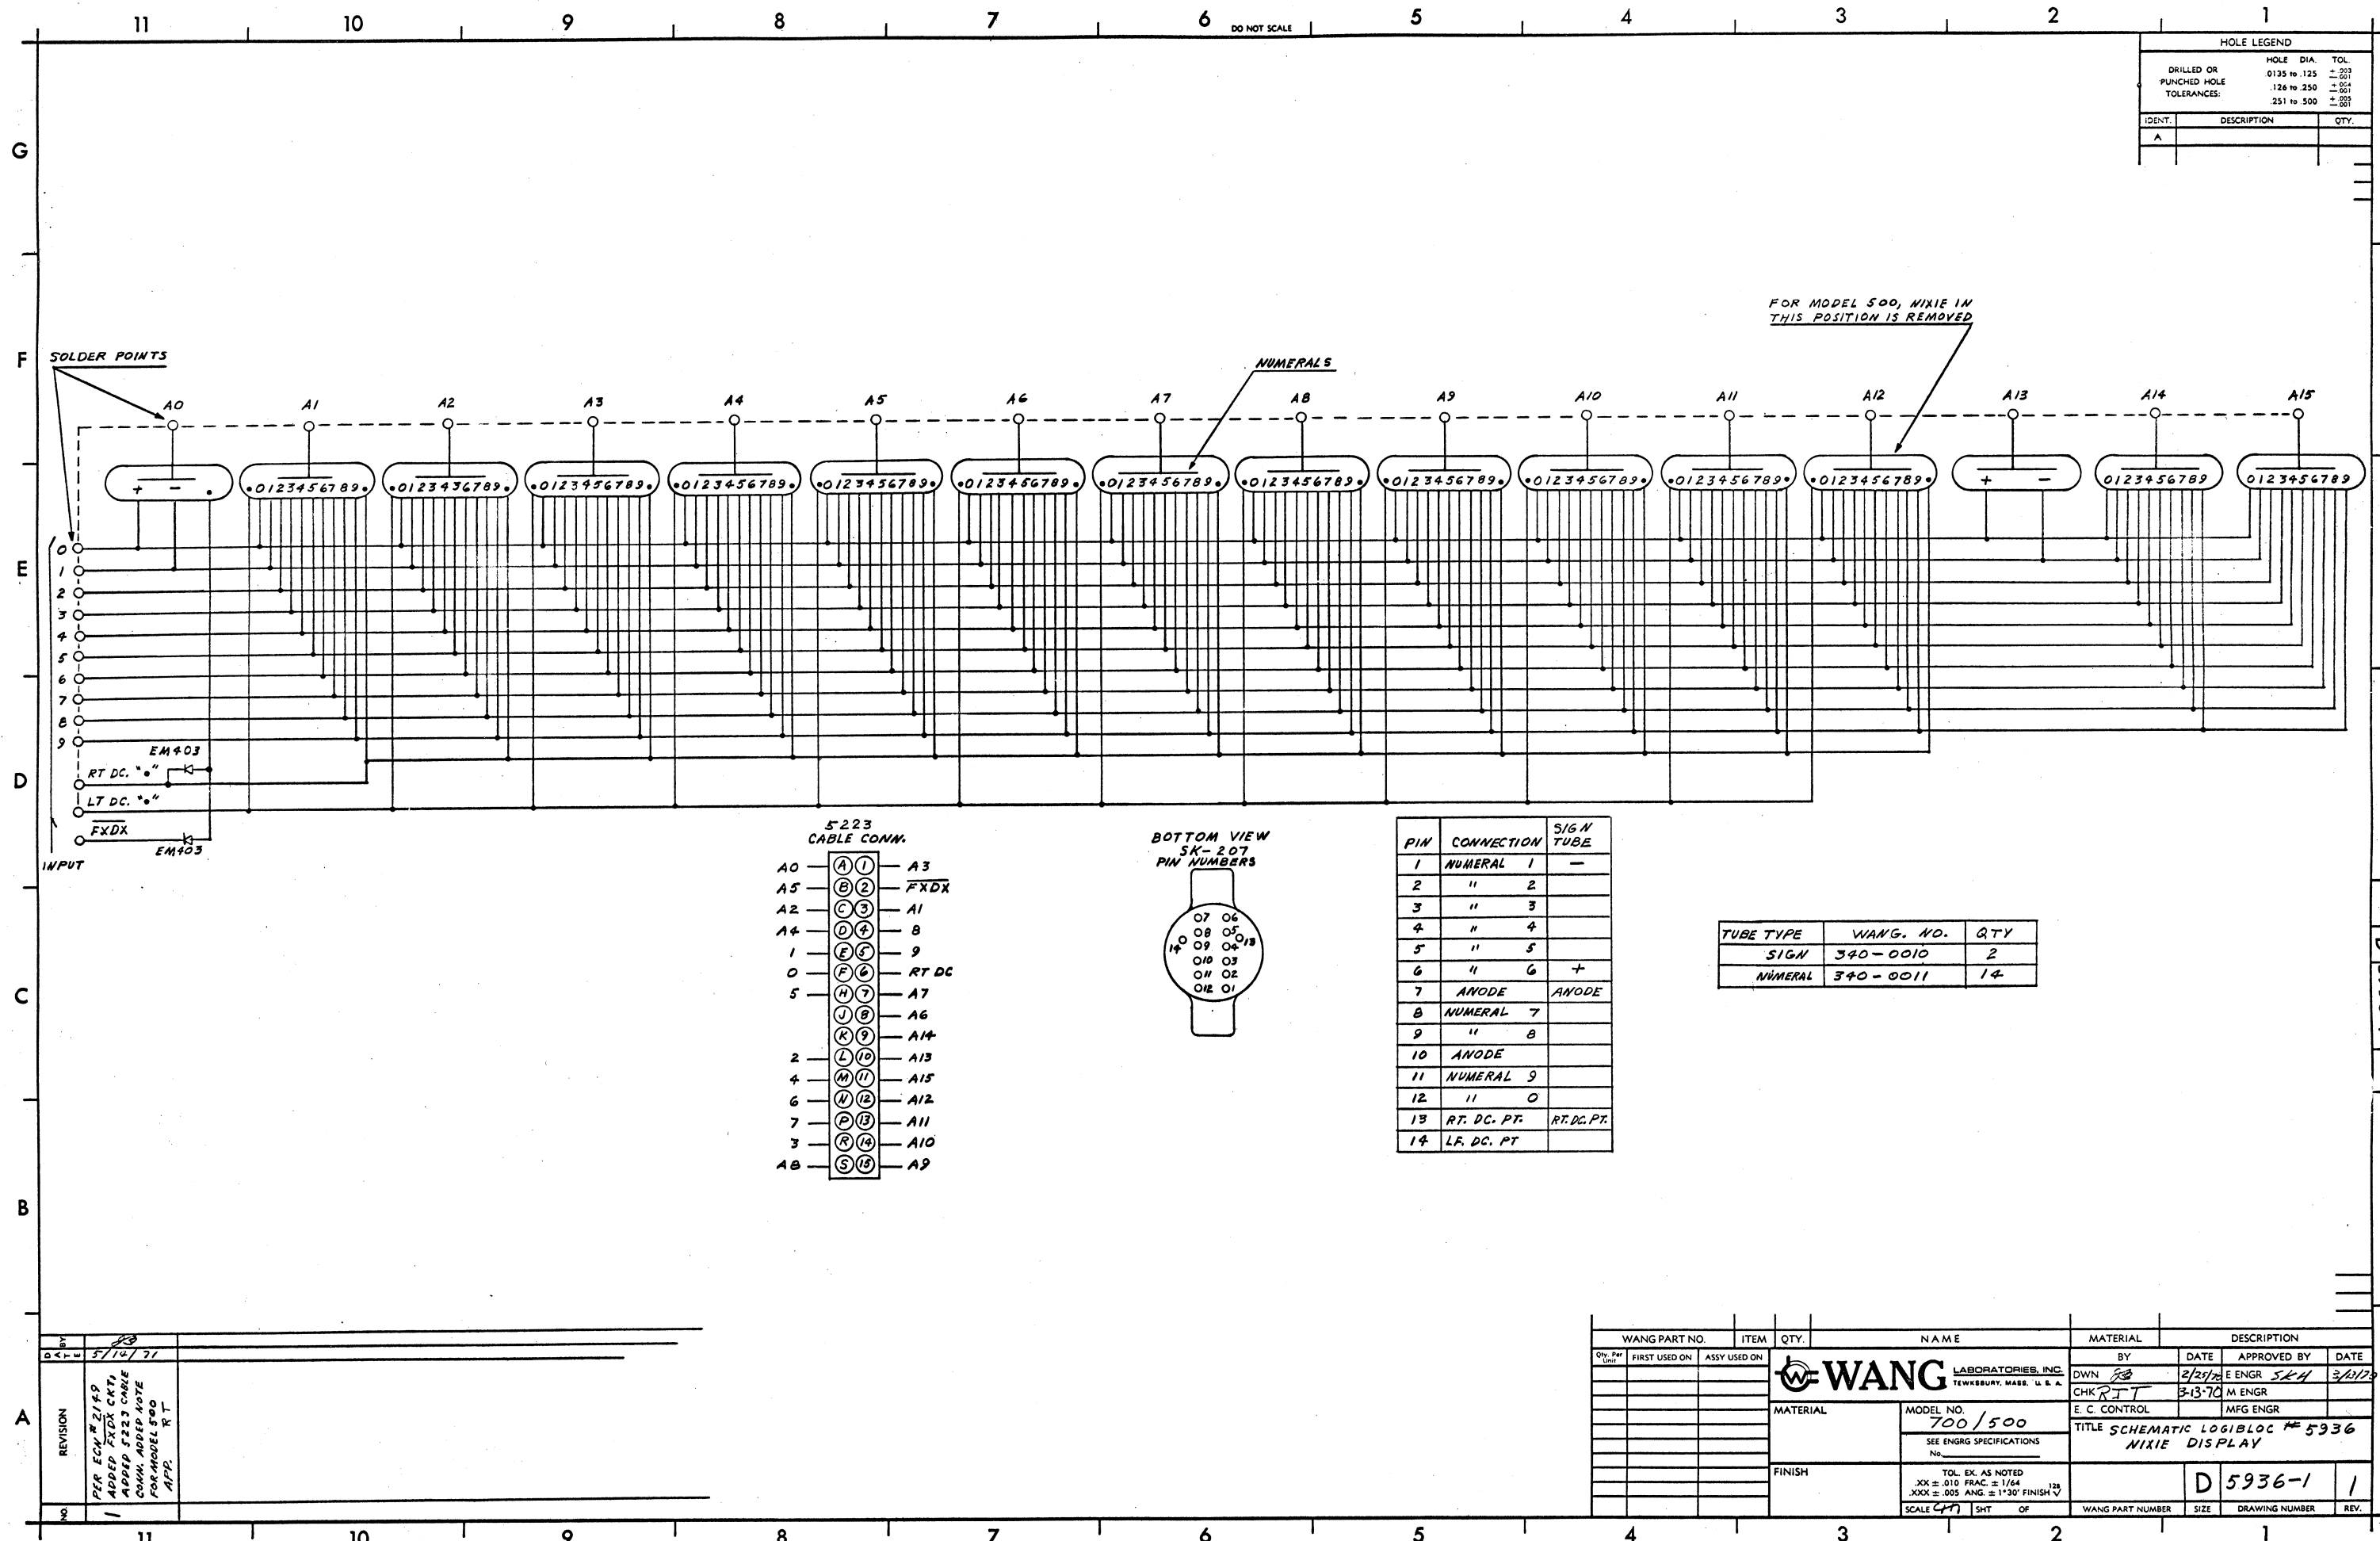

HOLE LEGEND		
DRILLED OR PUNCHED	HOLE DIA.	TOL.
DRILLED OR PUNCHED	.0135 to .125	± .003
TOLERANCES:	.126 to .250	± .001
	.251 to .500	± .002
IDENT.	DESCRIPTION	QTY.
A		

FOR MODEL 500, NIXIE IN THIS POSITION IS REMOVED

5223 CABLE CONN.		
A0	(A) 1	A3
A5	(B) 2	FXDX
A2	(C) 3	A1
A4	(D) 4	B
1	(E) 5	9
0	(F) 6	RT DC
5	(H) 7	A7
	(J) 8	A6
2	(L) 10	A13
4	(M) 11	A15
6	(N) 12	A12
7	(P) 13	A11
3	(R) 14	A10
A8	(S) 15	A9



PIN	CONNECTION	SIGN TUBE
1	NUMERAL 1	-
2	"	2
3	"	3
4	"	4
5	"	5
6	"	6 +
7	ANODE	ANODE
8	NUMERAL 7	
9	"	8
10	ANODE	
11	NUMERAL 9	
12	"	0
13	RT. DC. PT.	RT. DC. PT.
14	LT. DC. PT.	

TUBE TYPE	WANG. NO.	QTY
SIGN	340-0010	2
NUMERAL	340-0011	14

REVISION	DATE	BY	DESCRIPTION
1	5/10/71	RT	PER EQU 2149 ADDED FXDX CKT. ADDED 5223 CABLE CONN. ADDED NOTE FOR MODEL 500 APP. RT

WANG PART NO.	ITEM	QTY.	N A M E	MATERIAL	DESCRIPTION
QTY. PER UNIT	FIRST USED ON	ASSY USED ON	BY	DATE	APPROVED BY
			WANG	2/25/71	ENGR SKH
			LABORATORIES, INC.	3-13-70	M ENGR
			TEWKSBURY, MASS. U. S. A.	E. C. CONTROL	MFG ENGR
			MATERIAL	MODEL NO.	TITLE SCHEMATIC LOGIBLOC #5936
				700/500	NIXIE DISPLAY
			FINISH	SEE ENGRG SPECIFICATIONS	
				TOL. EX. AS NOTED	
				.XX ± .010 FRAC. ± 1/64	
				.XXX ± .005 ANG. ± 1°30' FINISH V	
			SCALE 4/11	SHT	OF
			WANG PART NUMBER	SIZE	DRAWING NUMBER
					REV.