


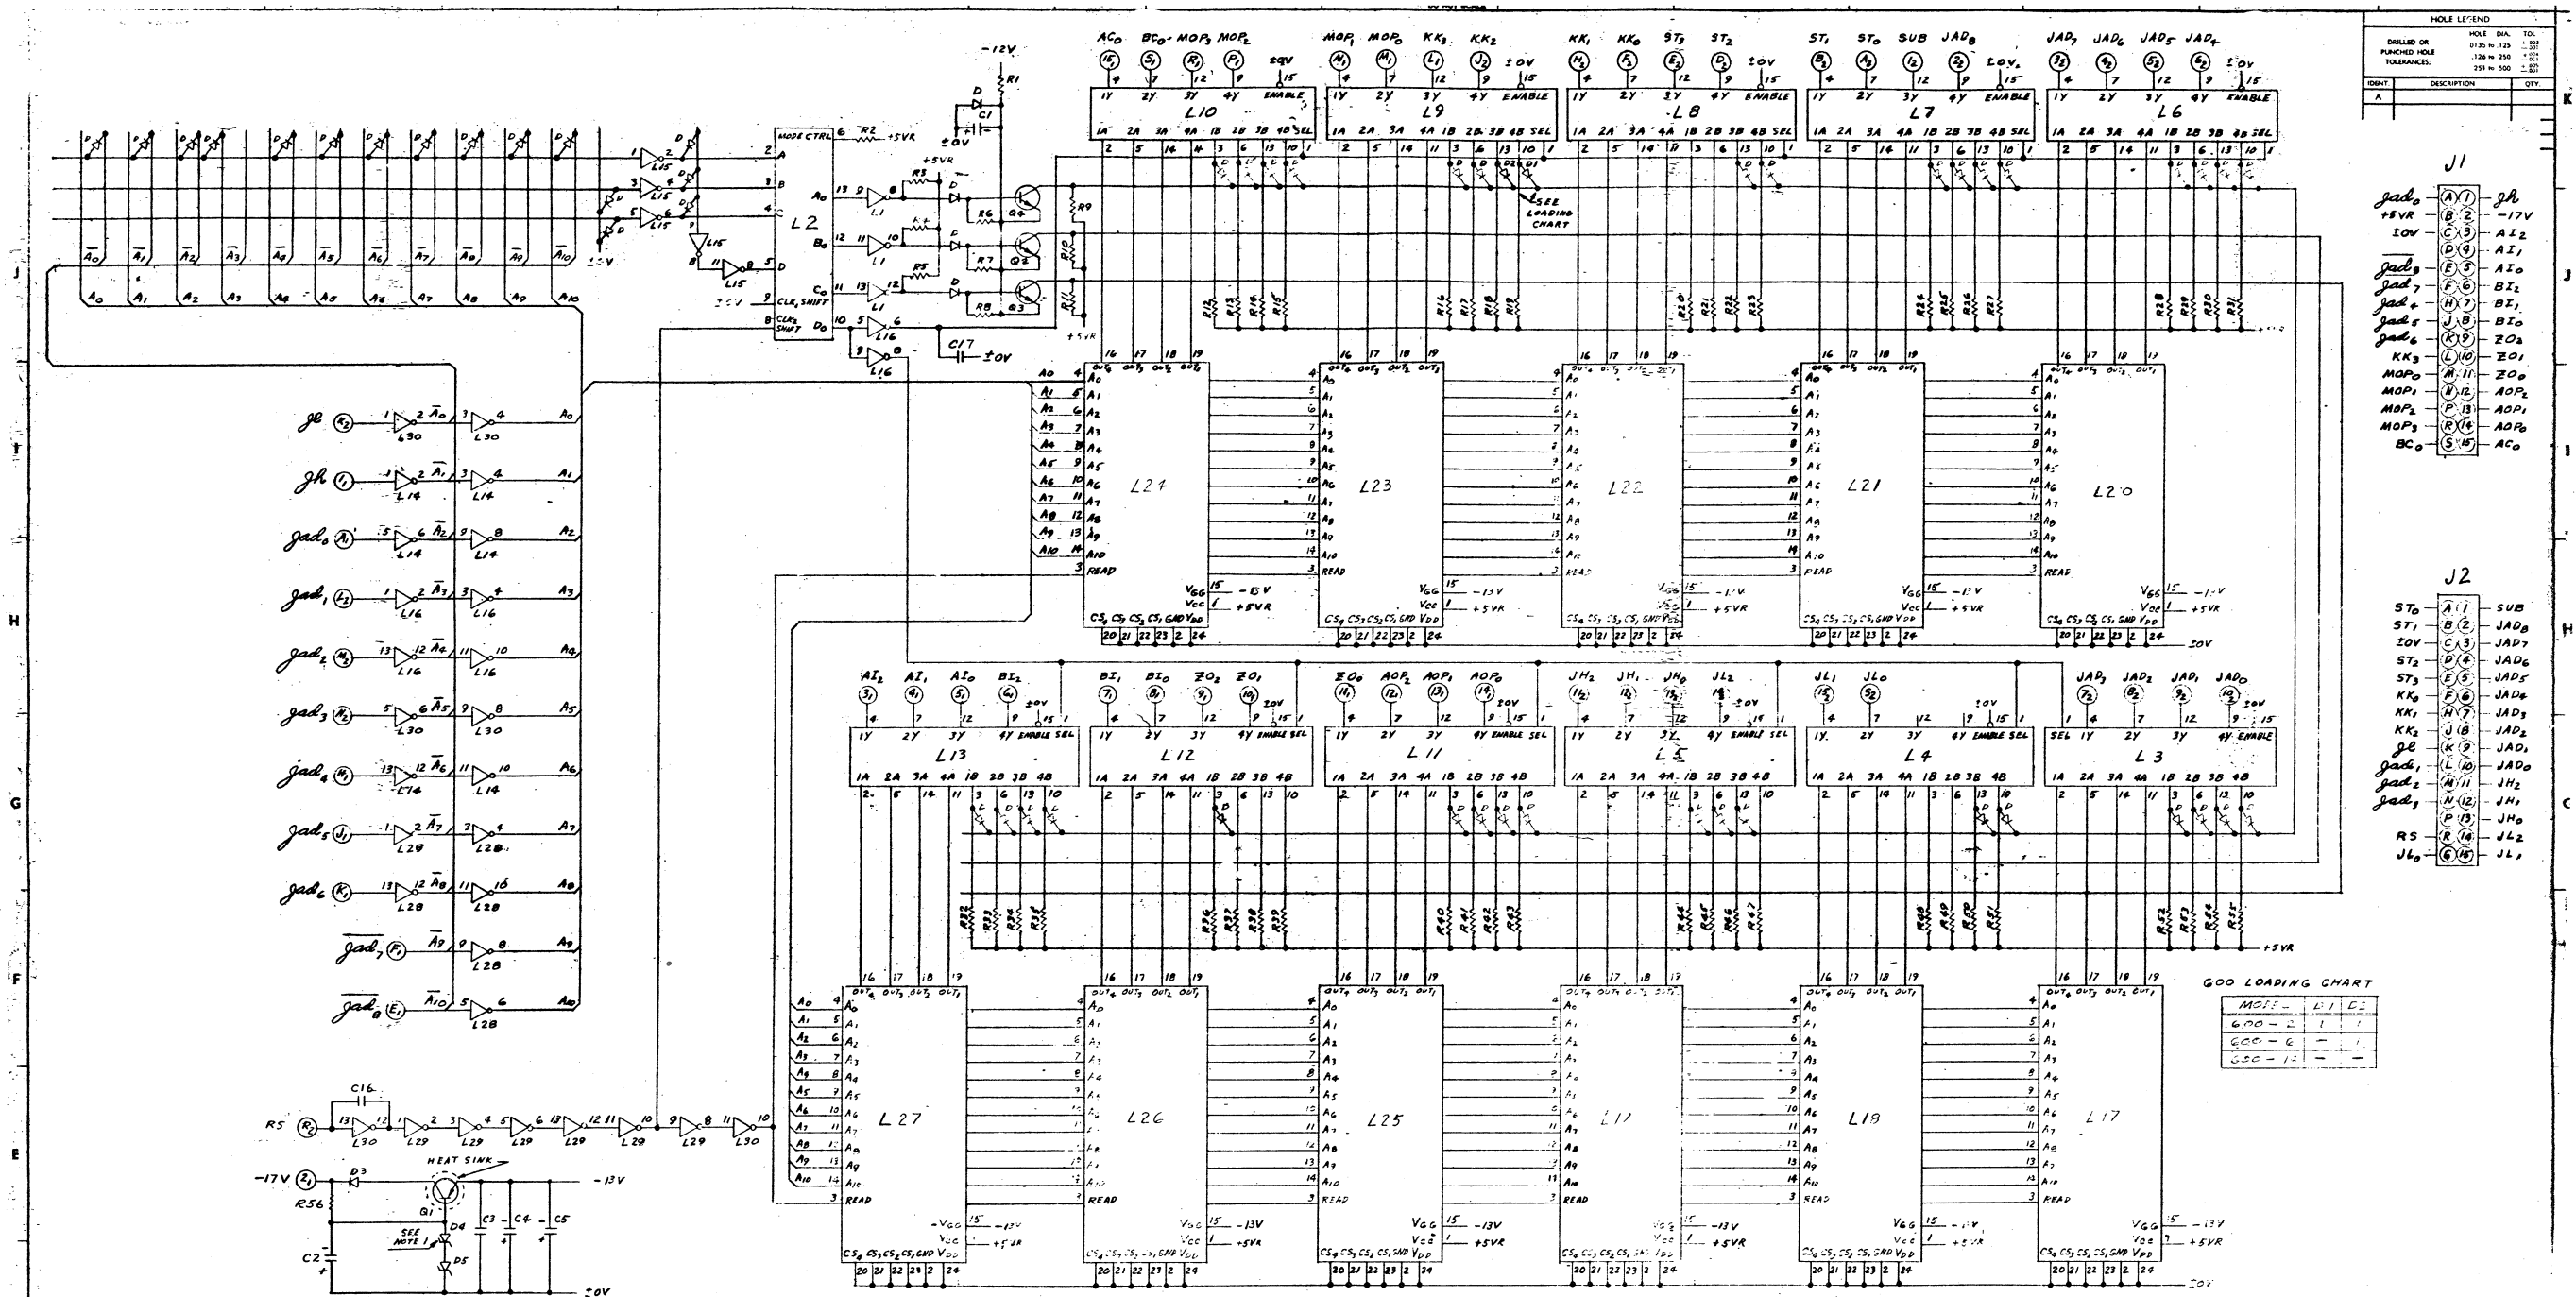

HOLE LEGEND		
DRILLED OR PUNCHED HOLE	HOLE DIA.	TOL.
1/8" DIA.	.125	.003
1/16" DIA.	.0625	.002
1/32" DIA.	.03125	.001

IDENT	DESCRIPTION	QTY
A		

J1


JAD ₀	(A)1	gh
JAD ₁	(B)2	-17V
JAD ₂	(C)3	AI ₂
JAD ₃	(D)4	AI ₁
JAD ₄	(E)5	AI ₀
JAD ₅	(F)6	BI ₂
JAD ₆	(G)7	BI ₁
JAD ₇	(H)8	BI ₀
JAD ₈	(I)9	ZO ₃
JAD ₉	(J)10	ZO ₁
JAD ₁₀	(K)11	ZO ₀
JAD ₁₁	(L)12	AOP ₁
JAD ₁₂	(M)13	AOP ₂
JAD ₁₃	(N)14	AOP ₃
JAD ₁₄	(O)15	AC ₀

J2

ST ₀	(A)1	SUB
ST ₁	(B)2	JAD ₀
ST ₂	(C)3	JAD ₁
ST ₃	(D)4	JAD ₂
ST ₄	(E)5	JAD ₃
ST ₅	(F)6	JAD ₄
ST ₆	(G)7	JAD ₅
ST ₇	(H)8	JAD ₆
ST ₈	(I)9	JAD ₇
ST ₉	(J)10	JAD ₈
ST ₁₀	(K)11	JAD ₉
ST ₁₁	(L)12	JAD ₁₀
ST ₁₂	(M)13	JH ₂
ST ₁₃	(N)14	JH ₁
ST ₁₄	(O)15	JH ₀
ST ₁₅	(P)16	JL ₂
ST ₁₆	(Q)17	JL ₁
ST ₁₇	(R)18	JL ₀

GOOD LOADING CHART

MODE	L1	L2
600-2	1	1
600-6	1	1
650-12	1	1

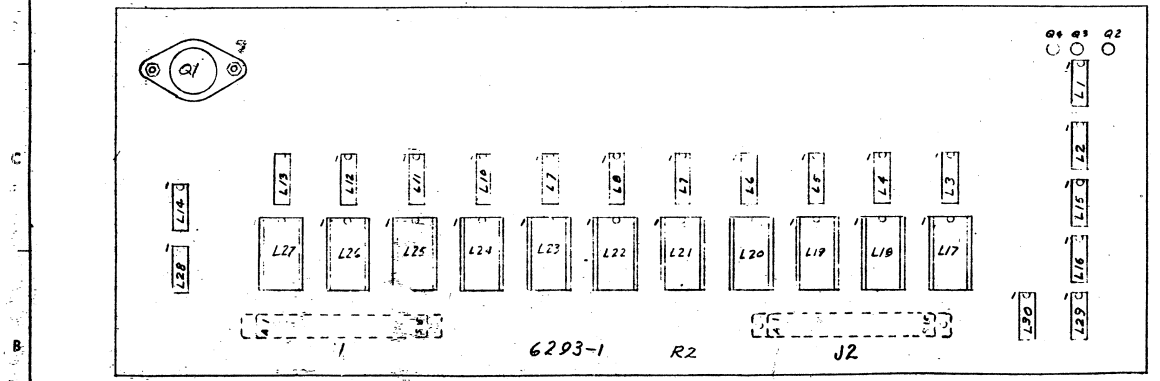

COMPONENT	SIZE/TYPE	W.L. PART NO.	QTY
R1	120A 2W	337-2012	1
R2, 12 THRU 55	10K 1/4W	330-4010	45
R3, 4, 5	680-2 1/4W	330-2068	3
R6, 7, 8	1K 1/4W	330-3010	3
R9, 10, 11	4.7K 1/4W	330-3047	3
R56	120A 1/2W	331-2012	1
C16	47pF CER.	300-1047	1
C1	33MFD 35V TANT	300-4039	1
C2	10MFD 35V ELECT	300-3033	1
C3	.02MFD CER	300-1904	1
C4, 5	10MFD 35V TANT	300-1032	2
C6, 15	15MFD 35V TANT	300-4022	1
C7, 8, 9, 10, 11, 12, 13	.05MFD CER	300-1900	9
C17	330pF CER	300-1390	1
D1, D2	DIODE SIL	380-1001	56
D3	EM 403	380-4000	1
D4	1N755A 7.5V	380-2075	1
D5	1N754A 6.8V	380-2068	1
Q1	2N4246	375-1029	1
Q2, 3, 4	2N3014	375-0017	3
J1, 2	CINCH JONES CMM	850-4118	2
L17 THRU L27	24 PIN SOCKET	376-9003	11

LOCATION	TYPE	W.L. PART NO.	TERMINAL NO.	TERMINAL NO.	QTY
L1	5N7406N	376-0055	7	14	1
L2	5N7495N	376-0059	7	14	1
L3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13	5N7495N	376-0059	8	14	11
L14, 15, 16, 17, 18, 19, 20	5N7495N	376-0010	7	14	5
L15	9935	376-0043	7	14	1
L17	5N7495N	377-0125	2	1	2
L18	5N7495N	377-0126	2	1	2
L19	5N7495N	377-0127	2	1	2
L20	5N7495N	377-0128	2	1	2
L21	5N7495N	377-0129	2	1	2
L22	5N7495N	377-0130	2	1	2
L23	5N7495N	377-0131	2	1	2
L24	5N7495N	377-0132	2	1	2
L25	5N7495N	377-0133	2	1	2
L26	5N7495N	377-0134	2	1	2
L27	5N7495N	377-0135	2	1	2

NOTE:
1. ADJUST THE D4 DIODE FOR AN OUTPUT OF -12.8 VOLTS MINIMUM TO -13.4 VOLTS MAXIMUM ON THE -13V BUSS

REVISION	DATE	BY	DESCRIPTION
1	10-1-72	W.F.	REVISED FOR 6293-1
2	10-1-72	W.F.	REVISED FOR 6293-1
3	10-1-72	W.F.	REVISED FOR 6293-1
4	10-1-72	W.F.	REVISED FOR 6293-1
5	10-1-72	W.F.	REVISED FOR 6293-1
6	10-1-72	W.F.	REVISED FOR 6293-1
7	10-1-72	W.F.	REVISED FOR 6293-1
8	10-1-72	W.F.	REVISED FOR 6293-1
9	10-1-72	W.F.	REVISED FOR 6293-1
10	10-1-72	W.F.	REVISED FOR 6293-1

WANG PART NO.	ITEM	QTY	NAME	MATERIAL	DESCRIPTION
6293-1	1	1	WANG	600	SCHEMATIC LOGIC 6293-1
6293-1	2	1	WANG	600	SOLID STATE R.O.M.
6293-1	3	1	WANG	600	6293-1