
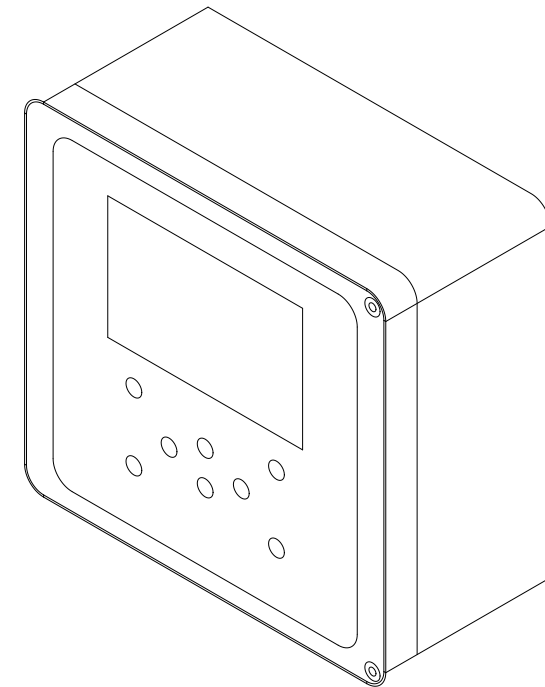


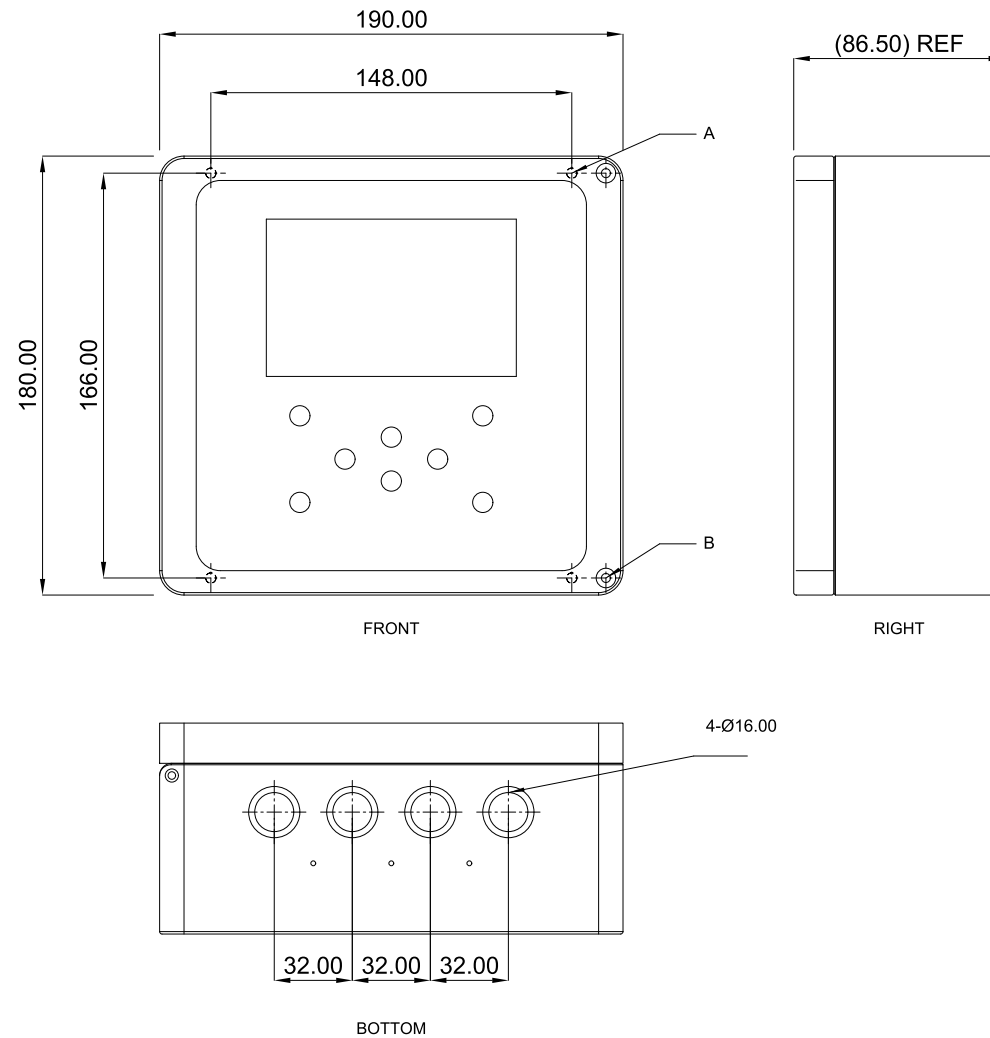

ISOMETRIC (REFERENCE)


A WALL MOUNT: 4-DIA 4.20 / SCREW DIA 4
HOLE CENTRES 148.00 x 166.00
B LID FASTENING: 2-DIA 3.70 / SEAT DIA 8.00
DEPTH 86.50 = BODY 70.00 + COVER 16.50 (REF)
SIDE, BOTTOM AND ISOMETRIC VIEWS: REFERENCE.
CABLE GLANDS AND BUTTON CAPS NOT SHOWN.

ENCLOSURE
190 x 180 mm

WALL MOUNTING
148 x 166 mm

WALL HOLES
4 x DIA 4.2 mm

86.50 mm depth is REF (not an as-built measurement). Glands and button caps are not included.

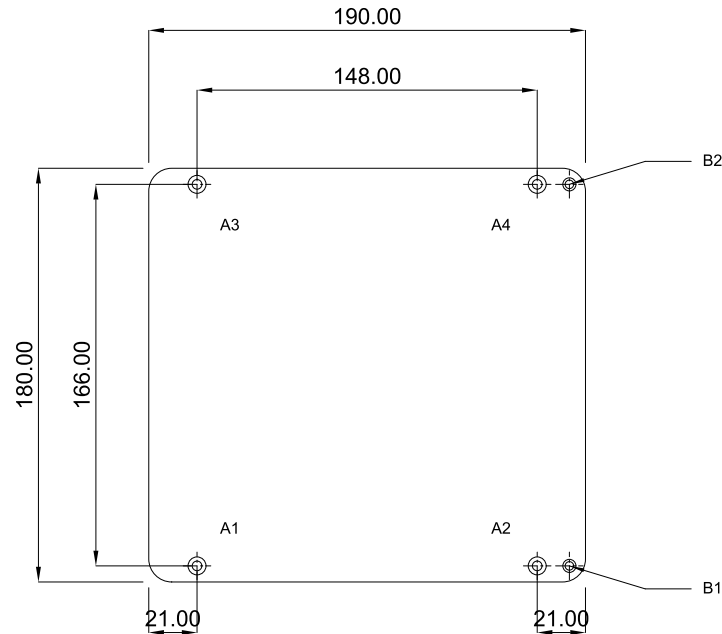

WALL MOUNTING HOLES
COVER OPEN / FRONT VIEW


WALL HOLES A: 148.00 x 166.00, 4 POSITIONS
21.00 FROM SIDES / 7.00 FROM TOP AND BOTTOM
HOLE DIA 4.20 / SCREW DIA 4

LID HOLES B: UPPER / LOWER RIGHT, 2 POSITIONS
7.00 FROM RIGHT / 7.00 FROM TOP AND BOTTOM
HOLE DIA 3.70 / SEAT DIA 8.00
FASTENERS: REFER TO SUPPLIED ASSEMBLY.

HOLE CENTRE COORDINATES (mm)

ID	X	Y	DIA	FUNCTION
A1	21.00	7.00	Ø4.20	WALL MOUNT
A2	169.00	7.00	Ø4.20	WALL MOUNT
A3	21.00	173.00	Ø4.20	WALL MOUNT
A4	169.00	173.00	Ø4.20	WALL MOUNT
B1	183.00	7.00	Ø3.70	LID / LOWER
B2	183.00	173.00	Ø3.70	LID / UPPER

ORIGIN: LOWER LEFT OF ENCLOSURE (X=0, Y=0)

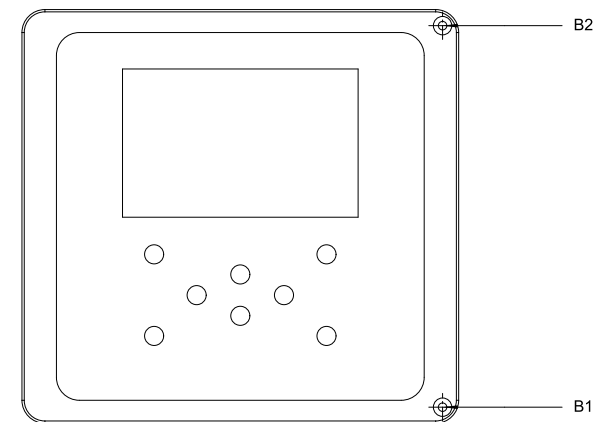

COVER FRONT VIEW

ENCLOSURE
190 x 180 mm

WALL MOUNTING
148 x 166 mm

WALL HOLES
4 x DIA 4.2 mm

86.50 mm depth is REF (not an as-built measurement). Glands and button caps are not included.