# CE 3305 – Fluid Mechanics Exam 1

## Purpose

Demonstrate ability to apply fluid mechanics and **problem solving principles** covering topics such as: Fluid properties, viscosity, vapor pressure, fluid statics and pressure.

## Instructions

1. Put your name on each sheet you submit.
2. Begin each problem on a separate page.
3. Use the problem solving protocol in the class notes.
4. Label answers, be sure to include units.

ANY PAGE MISSING NAME (-1) PT.

## Allowed Resources

1. Your notes
2. The textbook
3. The mighty Internet
4. **You may not communicate with other people during the exam**

---

Use these

RAW PTS

p1 24 ~ 29 pts

p2 26 ~ 31 pts

p3 33 ~ 40 pts

83

GRADE USING RAW PTS. AS SHOWN; ADD BELOW

p1 +5

p2 +5

p3 +7

24 pts - problem 1

 Name: NAME +1 P. olar Bear

1. Argon gas is used as a sheilding gas for welding for fabrication of metal objects. A 200-liter tank has an empty ~~weight~~ mass of 50 kg.

   Determine:

   (a) The total weight of the 200-liter tank of argon at a pressure of 3,500 psia at a temperature of 313$^o$K.

   (b) The argon pressure if the tank is submersed in the North Sea to repair an underwater pipeline, where the ambient water temperature is 6$^o$C

   (c) The additional ballast (~~weight~~ mass) required for the tank to be neutrally bouyant in seawater ($\rho_{sw} = 1025 \frac{kg}{m^3}$)

---

SKETCH

+1 FOR "SKETCH"



200L $\quad p = 3500\,psia$

$m_T = 50\,kg \quad T = 313K$

$m_g = ?$

KNOWNS

+3 FOR "KNOWN" SECTION + 2 KNOWN VALUES

$\forall = 200L$

$m_T = 50\,kg$ (given)

UNKOWNS

+4 FOR "UNKNOWN" SECTION + 3 UNKNOWNS (BALLAST)

$m_g = ?$ $\qquad m_B = ?$ so. $W_T + W_G + W_B = F_B$

$p(@T = 6^\circ c)$

## GOVERNING EQUATIONS

+4 "GOVERN..." SECTI AND ID NEEDED VALUES

P.O.B

$$p\forall = \frac{m_g}{M} RT$$

$M_{argon} = 39.96$ (IUPAC website)

$$R = 0.0821 \frac{L \cdot atm}{K \cdot mol}$$

## SOLUTION

+

(a)

$\forall = 200 L$

$T = 313 K$

$$p = 3500\,psia * \frac{1\,atm}{14.75\,psia} = 237.28\,atm$$

$M = 39.96$

Solve for $m$

+1 Formula & algebra

$$m_g = \frac{p\forall M}{RT} = \frac{(237.28\,\cancel{atm})(200\,\cancel{L})(39.96\,g/mol)}{0.0821 \frac{\cancel{L} \cdot \cancel{atm}}{\cancel{K} \cdot \cancel{mol}}\ 313\,\cancel{K}}$$

$$m_g = 73{,}797.9\,g$$

$$= 73.8\,kg$$

$$W_{TOTAL} = m_g g + m_T g = (73.8\,kg + 50\,kg)\,9.8\,m/s^2$$

$$= (123.797\,kg)(9.8\,m/s^2) = \underline{\underline{1213.22\,N}}$$

+2 value & units

b) T reduced to 6°C = 279K P.O.B

$$p = \frac{73.8\cdot 10^3 \, g}{39.96 \, g}\left(0.0821 \frac{L\cdot atm}{K\cdot mol}\right)(279K) \Big/ 200L$$

$$= 211.52 \, atm \, \frac{14.75 \, psia}{1 \, atm} = \underline{\underline{3119.84 \, psia}}$$

+3 value & unit, must identify absolute or gage

c) Neutral Bouyant Mass

+1 Formula

$$F_B = W_{TOTAL} = W_{TANK} + W_{BALLAST}$$

$$F_B = \left(1025 \frac{kg}{m^3}\right)\left(9.8 \, m/s^2\right)(200L)\left(\frac{1 \, m^3}{1000 \, L}\right)$$

+1 arithmetic

$$F_B = 2009N$$

$$W_T = 1213.22N$$

$\therefore$ NEED 795.78N of ballast

$$m_{BALLAST} = \frac{795.78N}{9.8 \, m/s^2} = \underline{\underline{81.2 \, kg}}$$

+2 value & unit

DISCUSSION

+1 "ANY DISCUSSION" even just the word!

Application of IGL and definition of bouyant force.

~ 26 pts



2. The figure below is a schematic of a sliding plate viscometer used to measure the viscosity of a fluid. The top plate is moving to the right with a constant velocity in response to a force of 3 Newtons.

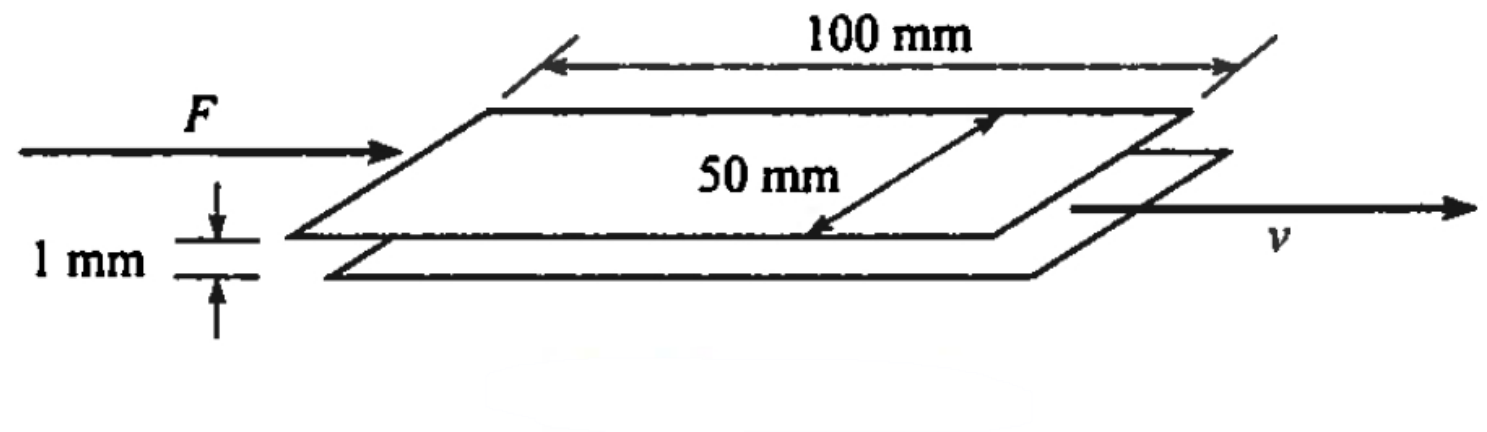


Figure 1:

Determine:

(a) The speed of the plate if the viscosity is $\mu = 5 \times 10^{-2}\ \frac{N \cdot s}{m^2}$

(b) The speed of the plate if the viscosity is $\mu = 7 \times 10^{-2}\ \frac{N \cdot s}{m^2}$

(c) The viscosity if the speed of the plate is $10.001\ \frac{m}{s}$

---

<u>SKETCH</u>

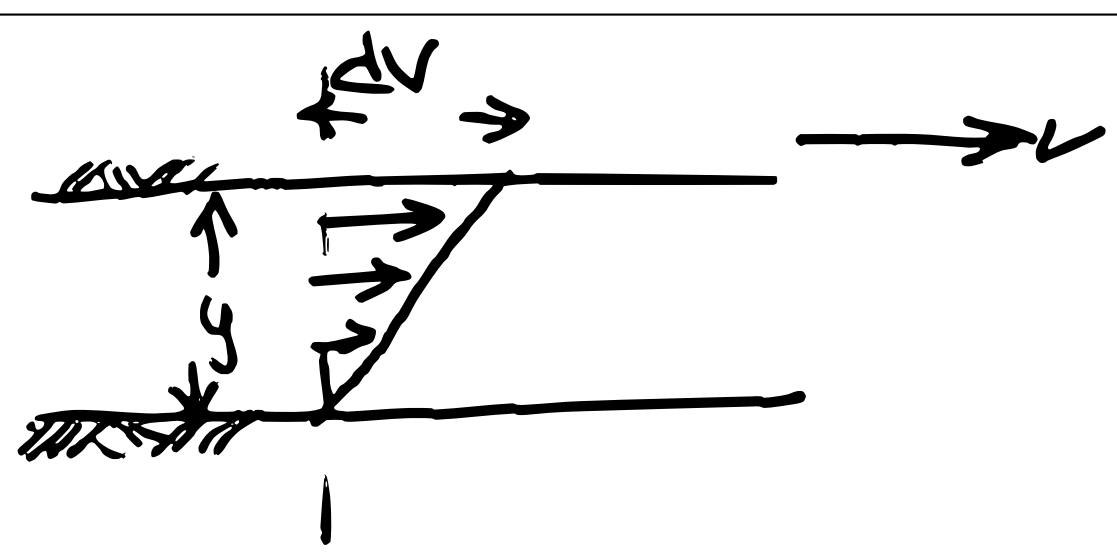


(+3) sketch
i.d. y axis
i.d. velocity profile

<u>KNOWN</u>

$\mu = 5 \cdot 10^{-2} \frac{Ns}{m^2}$ ; $7 \cdot 10^{-2} \frac{Ns}{m^2}$ (given)

$y = 0.001\,m$ (given); $F = 3N$ (given)

$A = 50 \times 100\,mm^2 \cdot \frac{1\,m^2}{(1000m)^2} = 0.005\,m^2$

(+6) known + 5 values

## UNKNOWNS

$dV$ (Top plate velocity)

(+2) "UNKNOWN + 1 velocity seek"

## GOVERNING EQUATIONS

(+3) - Defn $\tau$ force
Defn $\tau$ slope $du/dy$

Defn. Viscosity $\tau = \mu \frac{dV}{dy}$  $\tau = F/A$

## SOLUTION

$$\tau = \frac{F}{A} = \frac{3N}{0.005 m^2} = 600 N/m^2$$

(+2) value + UNIT

$$\tau = \mu \frac{dV}{dy}; \quad dV = \frac{\tau dy}{\mu}$$

a) $$dv = \frac{(600 \cancel{N}/\cancel{m^2})(0.001 m)}{5 \cdot 10^{-2} \frac{\cancel{N} \cdot s}{\cancel{m^2}}}$$

(+1) arithmetic

$$= 1.2 \cdot 10^1 m/s = \underline{\underline{12 m/s}}$$

(+2) value & unit

b) $$dV = \frac{(600 N/m^2)(0.001 m)}{7 \cdot 10^{-2} \frac{N \cdot s}{m^2}}$$

(+1) arithmetic

$$= \underline{\underline{8.57 m/s}}$$

(+2) value & unit

c)

c) VISCOSITY TO PRODUCE

$dV = 10.001 \text{ m/s}$

$$\mu = \tau \frac{dy}{dV}$$

$$\mu = \left(\frac{600N}{m^2}\right)\frac{(0.001m)}{(10.001 m/s)}$$

$$= \underline{\underline{5.99 \cdot 10^{-2} \frac{N \cdot s}{m^2}}}$$

+1 arithmetic

+2 value & unit

DISCUSSION:

- VARIOUS APPLICATION DEFN. VISCOSITY. NEED SHEAR STRESS AND IMPLICIT ASSUME LINEAR VELOCITY PROFILE IN FLUID

+1 word "discussion"

ANY discussion as EC, but rest needs to be right.

~33pts

 Name: P. Olar. Bear

3. A large atmospheric tank used for quenching rocket motors is filled with a Class A auto-foaming fire supressant liquid (specific weight 7595 N/m$^3$). The supressant is restrained by a circular gate as shown.[1]

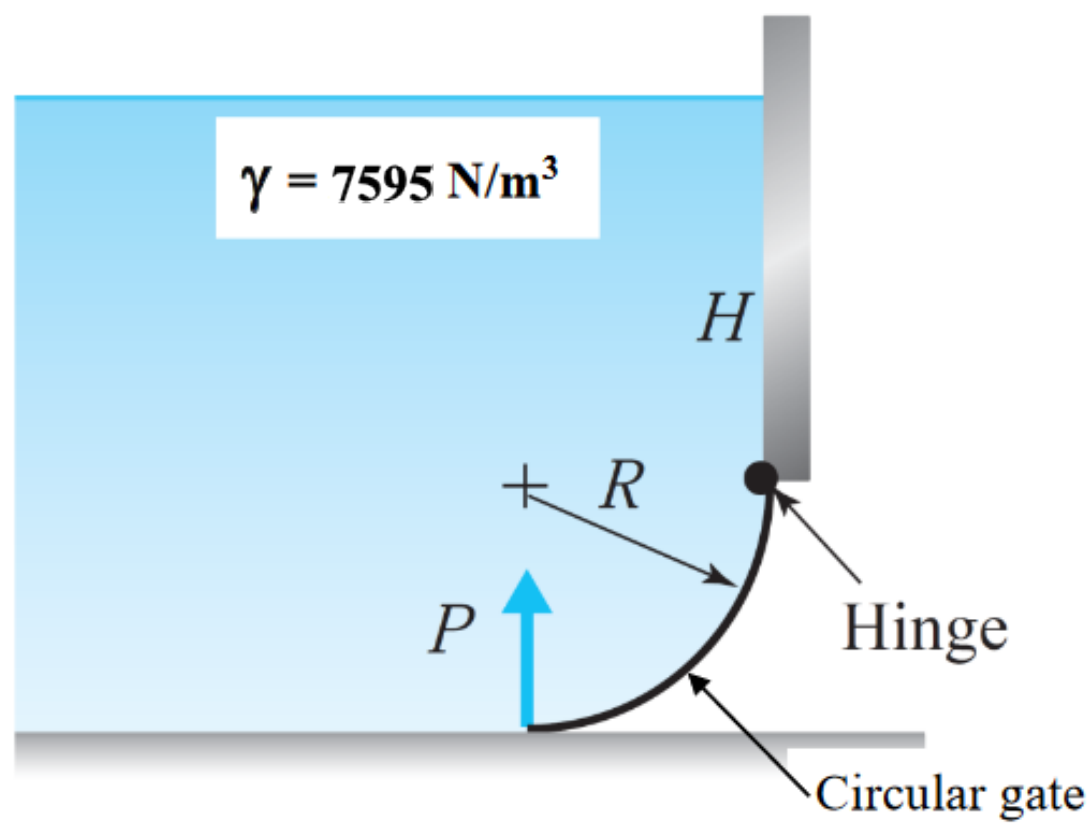


Figure 2:

The dimensions of interest are: R = 1.5 m, H = 6 m, Gate width (into the plane of the image) b = 3 m.

Determine:

(a) The liquid pressure at the hinge.

(b) The liquid pressure at the bottom of the gate

(c) The horizontal and vertical force of the liquid acting on the circular gate

---

SKETCH

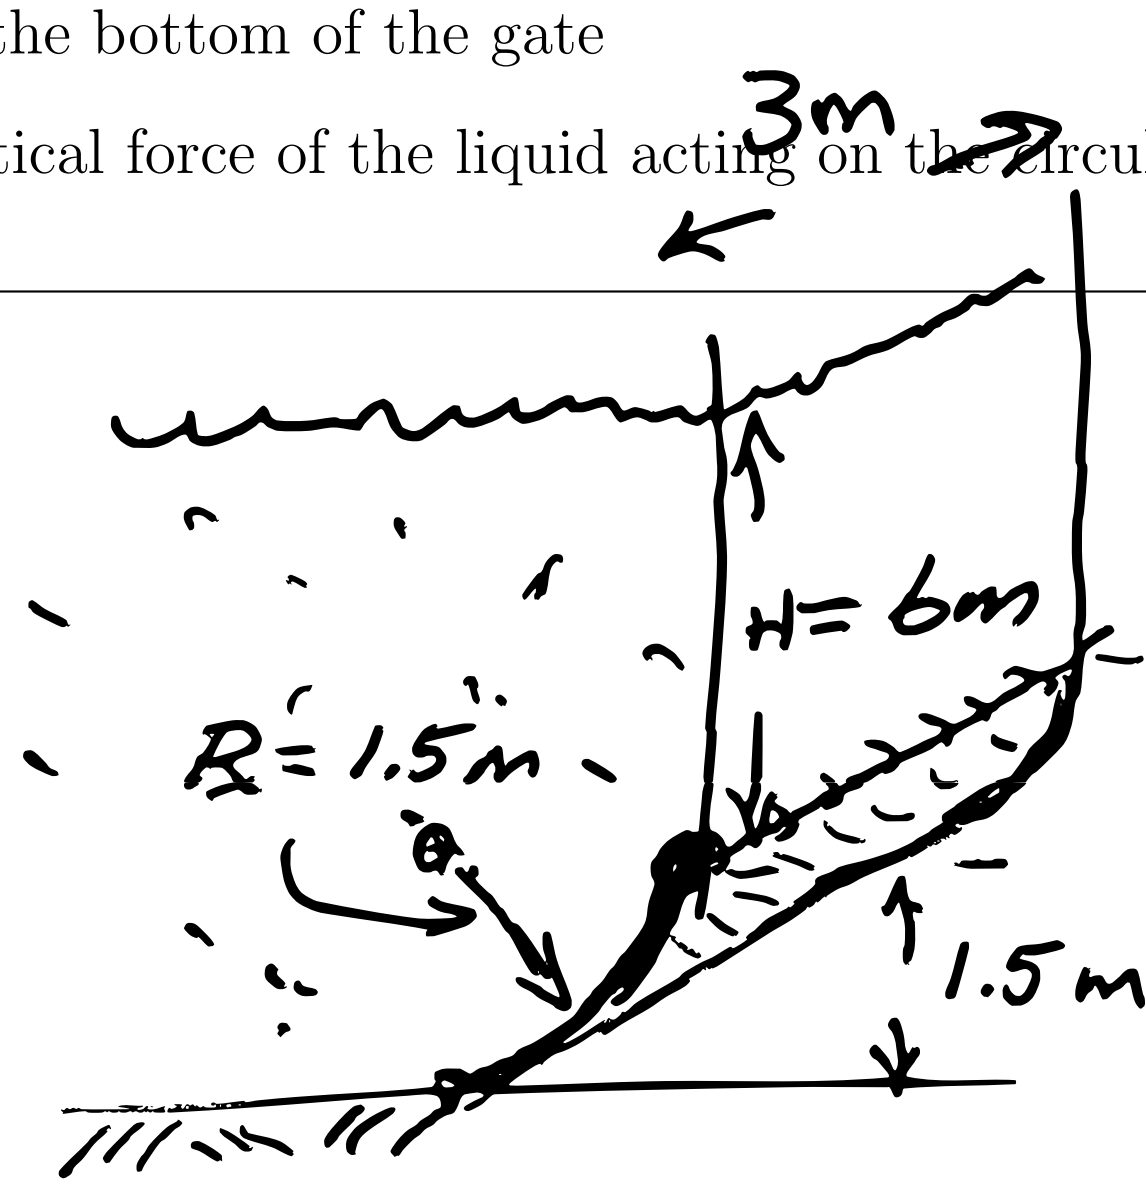


+3 Dimensions & sketch

[1] When a rocket motor quench is needed, the gate is lifted and the suppressant rapidly flows over the test area.

Name

## KNOWN

$H = 6\,m$ $\qquad W = 3\,m$

$R = 1.5\,m$

$\gamma = 7595 \frac{N}{m^3}$

+5 "KNOWN" + 4 knowns.

## UNKNOWN

$p_{@HINGE}$, $R_x$, $R_y$ (and line of action)

+3 "UNKNOWN" + 3 SOUGHT VALUES
DRAWING OPTIONAL

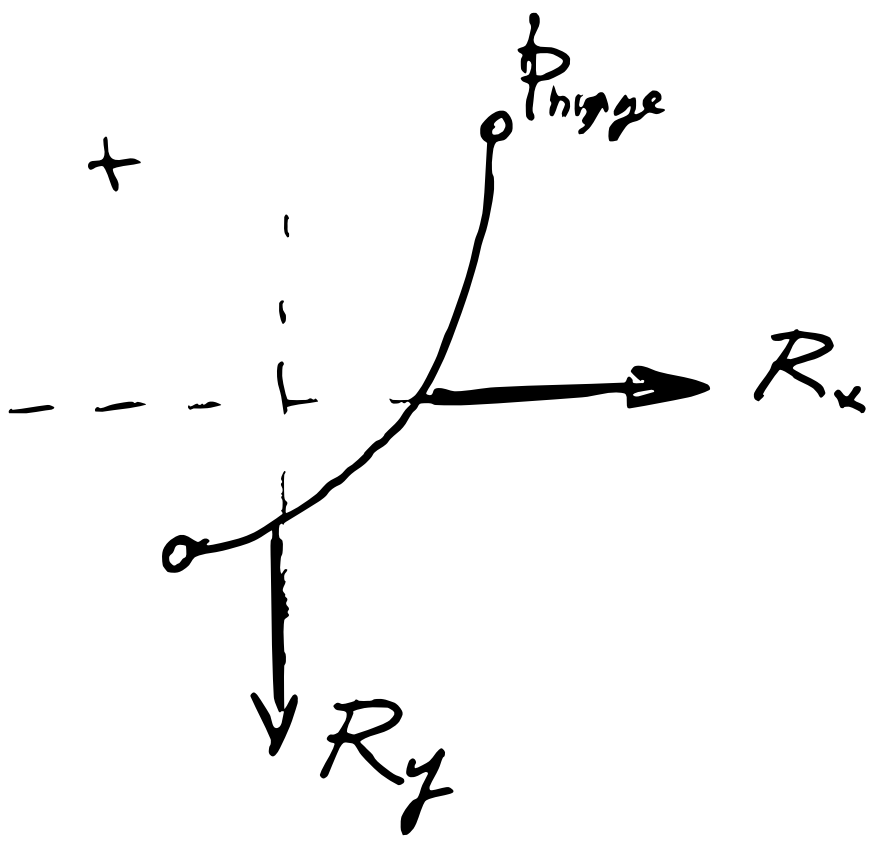


## GOVERNING EQUATION

$p = p_0 + \rho g h$ (HYDROSTATIC EQUATION)

$F_V = \rho g \forall_{\text{above surface}}$

$F_H = \int_{z_1}^{z_2} p(z)\, w(z)\, dz$




+7 "GOVERNING ...."
AND THREE PRINCIPLES,
NARRATIVE OK; DRAWING OPTIONAL

SOLUTION

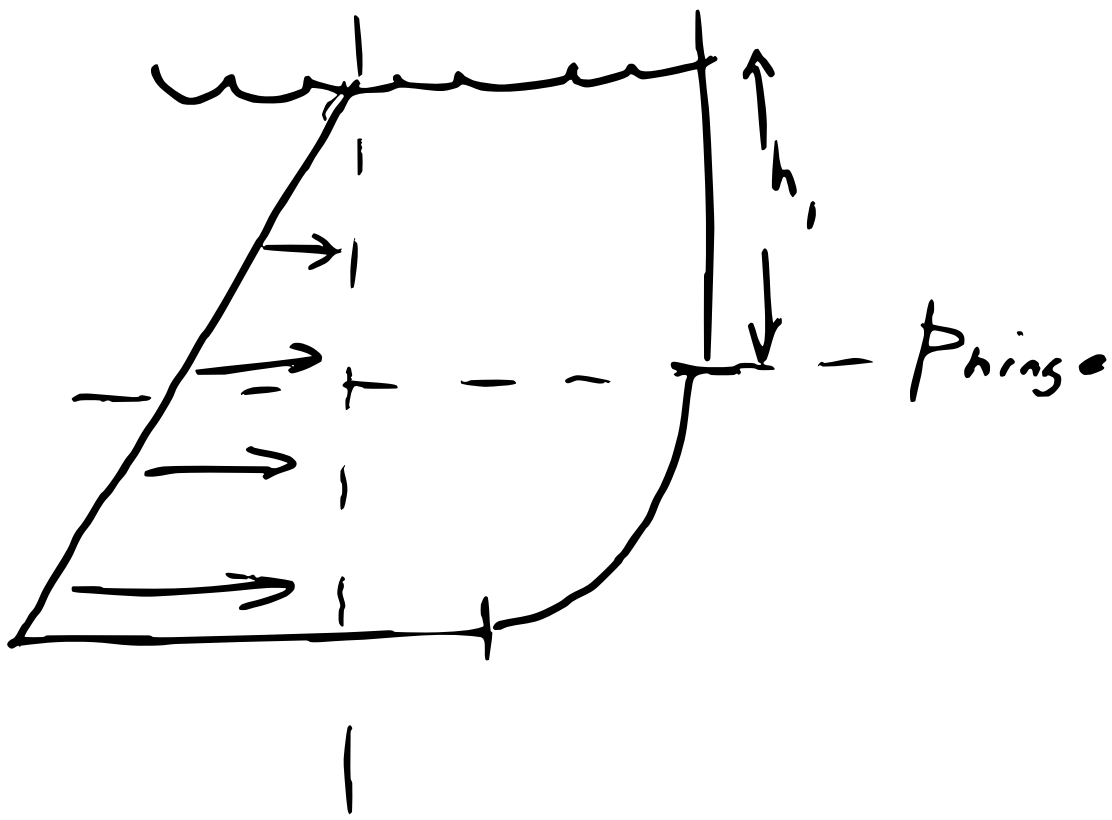


FORMULA & ARITHMETIC +2

$$p_{hinge} = p_0 + \rho g h_1$$

$$p_{hinge} = p_0 + 7595\frac{N}{m^3} \cdot 6m$$

$$p_{hinge} = 0 + 45570\frac{N}{m^2}$$

$\sim 45.5\ kPa$

VALUE & UNIT +2

$$p_{bottom} = p_{hinge} + \rho g R$$

$$= 45570\frac{N}{m^2} + 7595(1.5)$$

$$= 45570 + 11392.5\frac{N}{m^2}$$

$$= 56962.5\ Pa$$

$\sim 56.9\ kPa$

FORMULA & ARTHMETIC +2

VALUE & UNIT +2

Applied Pressure



## Applied Pressure



45.5kPa 11.39kPa




FORMULA & ARITHMETIC

+3

$$F_H = pA = 45570(1.5)(3) + 11392.5(1.5)(3)\left(\tfrac{1}{2}\right)$$

TRIANGLE PRISM PRESSURE

OK IF USE $F = \gamma \bar{h} A$

$= 205065\,N$

$+ 25633.125\,N$

$= 230698.13\,N$

$\sim 230.7\,kN$

+2

VALUE & UNIT

$F_V$ = weight of water over gate

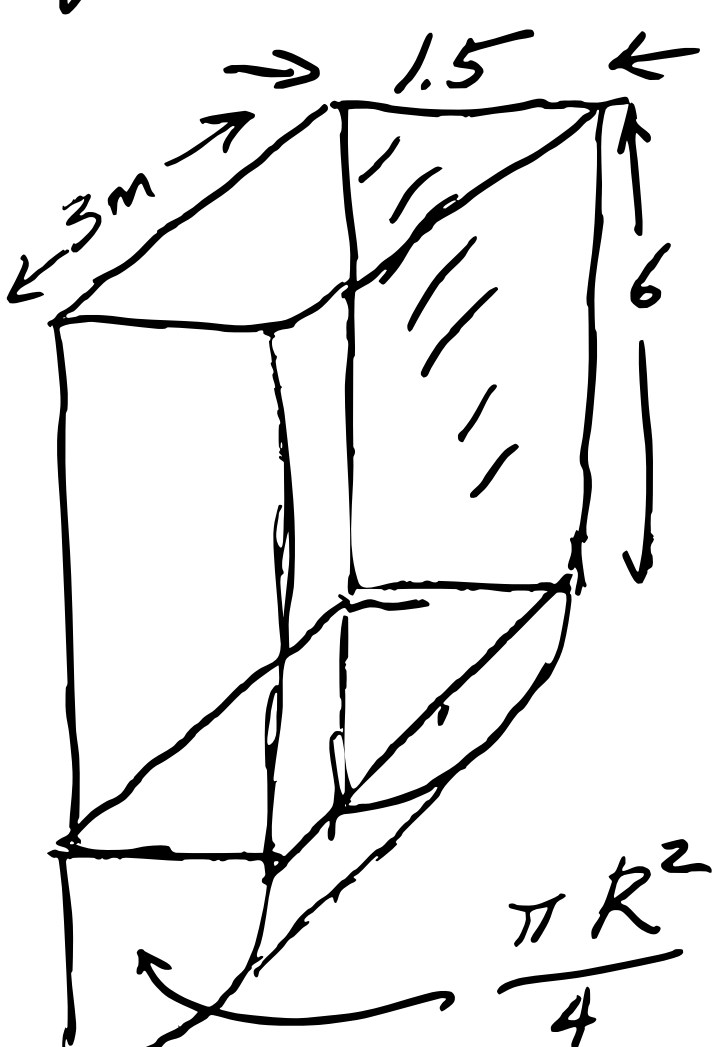


$$\forall = (3)(1.5)(6) + (3)\left(\frac{\pi}{4}\right)(1.5)^2$$

$= 32.301\ m^3$

FORMULA & ARITHMETIC

+3

SKETCH OPTIONAL

$$F_V = 7595\,\frac{N}{m^3}\; 32.301\,m^3 =$$

$245{,}329.42\,N$

$\sim 245\,kN$

+2 VALUE + UNIT

SOLUTION SUMMARY

a) PRESSURE AT HINGE

$p_H = 45.5$ kPa

b) PRESSURE AT BOTTOM

$p_B = 56.9$ kPa

c) $F_H = 230.7$ kN

d) $F_V = 245$ kN

DISCUSSION

i) Applied hydrostatic eqn. for pressures. defn of force as $p * A$ for forces

ii) LINE OF ACTION NOT EXPLICITLY REQUESTED!