Cleveland
13sep16

1/17

1a)

$$Q = 1.318\, C_h\, A R^{0.63} S^{0.54}$$

$$S = h_f / L \qquad R = \frac{D}{4} \quad \text{(Pipe is full)}$$

$$Q = 1.318\, C_h \left(\frac{\pi D^2}{4}\right)\left(\frac{D}{4}\right)^{0.63}\left(\frac{h_f}{L}\right)^{0.54}$$

ALGEBRA

$$Q\,(1.318)^{-1} C_h^{-1} \left(\frac{\pi D^2}{4}\right)^{-1}\left(\frac{D}{4}\right)^{-0.63} = \left(\frac{h_f}{L}\right)^{0.54}$$

MORE ALGEBRA

$$Q\,(1.318)^{-1}(C_h)^{-1}\left(\frac{\pi D^2}{4}\right)^{-1}\left(\frac{D}{4}\right)^{-0.63} L^{0.54} = h_f^{0.54}$$

NOW RAISE BOTH SIDES BY $\frac{1}{0.54}$

$$Q^{\frac{1}{0.54}}(1.318)^{\frac{-1}{0.54}}(C_h)^{\frac{-1}{0.54}}\left(\frac{\pi D^2}{4}\right)^{\frac{-1}{0.54}}\left(\frac{D}{4}\right)^{\frac{-0.63}{0.54}} L = h_f$$

NOW DEAL (EVALUATE) WITH EXPONENTS

$$\frac{1}{0.54} = 1.8518519 \approx 1.852$$

$$Q^{1.852}(1.318)^{-1.852}(C_h)^{-1.852}\left(\frac{\pi D^2}{4}\right)^{-1.852}\left(\frac{D}{4}\right)^{-1.1667} L = h_f$$

ALGEBRA

$$Q^{1.852}(1.318)^{-1.852}(C_h)^{-1.852}\left(\frac{4}{\pi D^2}\right)^{1.852}\left(\frac{4}{D}\right)^{1.1667} L = h_f$$

$4^{1.852} = 12.553$

$4^{1.1667} = \cancel{10.084}\ 5.0399171$

$\pi^{1.852} = 8.3315$

COLLAPSE CONSTANTS

$$Q^{1.852} (1.318)^{-1.852} (C_h)^{-1.852} \cdot 7.883 \left(\frac{1}{D^2}\right)^{1.852} \left(\frac{1}{D}\right)^{1.1667} L = h_f$$

ALGEBRA

$$\cancel{Q^{1.852}} \, \cancel{(1.318)^{-1.852}} \, \cancel{(C_h)^{-1.852}} \, \cancel{7.883} \, \frac{1}{D^{4.8707}} L = h_f$$

NOW COLLAPSE AGAIN

$$h_f = \frac{7.883}{(1.318)^{1.852}} \cdot \left(\frac{Q}{C_h}\right)^{1.852} \frac{L}{D^{4.8707}}$$

CHECK INTERNET; THIS IS THE U.S. CUSTOMARY CONSTANT

SI CONSTANT IS 0.849

USE ABOVE TO BUILD CALCULATOR

(WILL ALSO DO BY-HAND NEXT SHEET)

13 sep 16 3/17

1b) $C_h = 145$

From (http:\\ncrpb.nic.in/NCRBP%20ADB-TA%207055/repository/pdf/clause/table6.1.pdf)

1c)

$$h_f = \underbrace{\frac{7.883}{(1.318)^{1.852}}}_{=} \cdot \underbrace{\left(\frac{295}{145}\right)^{1.852}}_{=} \cdot \underbrace{\frac{(10{,}000)}{(5)^{4.8707}}}_{=}$$

$$= 4.7273 \quad * \; 3.7261 \quad * \; 3.9403$$

$$= 69.4 \text{ feet.}$$

(ALSO IS HAZEN-WILLIAMS CALCULATOR THAT IMPLEMENTS ABOVE EQUATION)

Checked 4/17
13 Sep 16

Table 6.1 Hazen - Williams coefficients

Pipe Material	Recommended C Value New Pipes@	Design Purpose
Unlined Metallic Pipes		
Cast Iron, Ductile Iron	130	100
Mild Steel	140	100
Galvanized Iron above 50 mm dia. #	120	100
Galvanized Iron 50 mm dia and below used for house service connections. #	120	55
Centrifugally Lined Metallic		
Cast Iron, Ductile Iron and Mild Steel Pipes lined with cement mortar or Epoxy		
Upto 12000 mm dia	140	140
Above 1200	145	145
Projection Methose Cement Mortar Lined Metallic Pipes		
Car Cast Iron, Ductile Iron and Mild Steel Pipes	130*	110**
Non Metallic Pipes		
RCC Spun Concrete		
Prestressed Concrete		
Up to 1200 mm dia	140	140
Above 1200 mm dia	145	145
Asbestos Cement	150	140
PVC, GRP and other Plastic Pipes.	150	145

Notes:

@ The C values for new pipes included in the Table 6.1 are for determining the acceptability of surface finish of new pipelines. The user agency may specify that flow test may be consucted for determining the C value of laid pipelines.

The quality of galvanizing should be in accordance with the relevant standards to ensure resistance to corrosion through out its design life.

* For pipes of diameter 500 mm and above; the range of C values may be from 90 to 125 for pipes less than 500 mm.

** In the absence of specific data, this value is recommended. However, in case authentic field data is available, higher values upto 130 may be adopted.

Checked 5/17
13 Sep 16

	A	B	C	D	E	F	G	H
1	Hazen-Williams Head Loss Calculator							
2		INPUTS						
3	Unit System	US	<= Pull Down Menu					
4	Loss Coefficient	145	Table Lookup =>	http://www.engineeringtoolbox.com/hazen-williams-coefficients-d_798.html				
5	Diameter	5	feet					
6	Length	10000	feet					
7	Discharge	295	cubic feet per second					
8		INTERMEDIATE CALCULATIONS						
9	k-units	1.318						
10	OUTPUTS							
11	Head Loss	69.41	feet					

Cleveland
13Sep16

2a) USE ON-LINE TOOL

http://cleveland1.ddns.net/cgi-bin/WaterPropertiesUS/WaterPropertiesUS.py (ATTACHED)

$\nu = 1.41 \cdot 10^{-5} \; ft^2/s$

2b) $k_s = 0.0002$ inches

http://engineersedge.com/fluid_flow/pipe_roughness.htm
(ATTACHED)

$$k_s = \frac{0.0002 \text{ inches}}{12 \text{ inches}} = 0.0000167 \text{ ft}$$

$$= 0.0167 \cdot 10^{-3} \text{ ft}$$

$$= 16.7 \cdot 10^{-6} \text{ ft} \quad (16.7 \text{ millifeet})$$

2c)



FIND h

$$p = \frac{20 \, lbf}{in^2} \cdot \frac{144 \, in^2}{1 \, ft^2} = 2880 \, lbf/ft^2$$

$$h = \frac{2880 \frac{lbf}{ft^2}}{62.4 \frac{lbf}{ft^3}} = 46.154 \text{ ft}$$

Cleveland
13 Sep 16

7/17

On-Line Water Property Database (US Customary)

Select Water Temperature (Degrees F)

50 degrees F Submit

Water Properties (US Customary)
adapted from Table A5 in Elger, Crowe, Roberson 2013. Engineering Fluid Mechanics. Wiley&Sons.

Run Date : Tue Sep 13 16:58:42 2016
------ INPUT VALUES ------
Temperature = 50.0 (degrees F)
------ LOOKUP VALUES -----
Density = 1.94 (slugs/ft^3)
Specific Weight = 62.4 (lbf/ft^3)
Dynamic Viscosity = 2.73e-05 (lbf-s/ft^2)
Kinematic Viscosity = 1.41e-05 (ft^2/s)
Vapor Pressure = 0.178 (lbf/in^2) - absolute

Clearled 13 Sep 16

8/17

ENGINEERS EDGE

Pipe Roughness Coefficients Table Charts

Fluid Flow Table of Contents
Hydraulic and Pneumatic Knowledge
Fluid Power Equipment

This table lists the roughness Coefficients of Specific roughness, Hazen-Williams Coefficient and Manning Factor.

Pipe Material Roughness Coefficients

Pipe Material	Specific Roughness Factor, • , mm (in)	Hazen-Williams Coefficient, C	Manning Factor, n
Steel, welded and seamless	0.061 (0.0002)	140	-
Ductile Iron	0.061 (0.0002)	130	-
Ductile Iron, asphalt coated	0.12 (0.0004)	130	0.013
Copper and Brass	0.61 (0.002)	140	0.010
Glass	0.0015 (0.000005)	140	-
Thermoplastics	0.0015 (0.000005)	140	-
Drawn Tubing	0.0015 (0.000005)	-	-

Sources:
Hydraulic Institute, Engineering Data Book.
Various vendor data compiled by SAIC, 1998.

Related Resources:

- Kinematic Viscosity Equation Application
- Pressure Drop Along Pipe Length
- Fluid Characteristics Chart Table, Density, Vapor Pressure and Kinematic Viscosity
- Hazen-Williams Coefficients Table
- Hazen-Williams Water Pressure Drop
- Head loss in a Pipe (Darcy - Weisback Equation) Calculator

- Home
- Engineering Book Store
- Engineering Forum
- Engineering News
- Engineering Videos
- Engineering Calculators
- Engineering Toolbox Directory
- Engineering Jobs
- GD&T Training Geometric Dimensioning Tolerancing
- DFM DFA Training
- Training Online Engineering PDH
- Advertising Center

G+1 0

Print Webpage

- Copyright Notice

13 Sep16 9/17

2d)

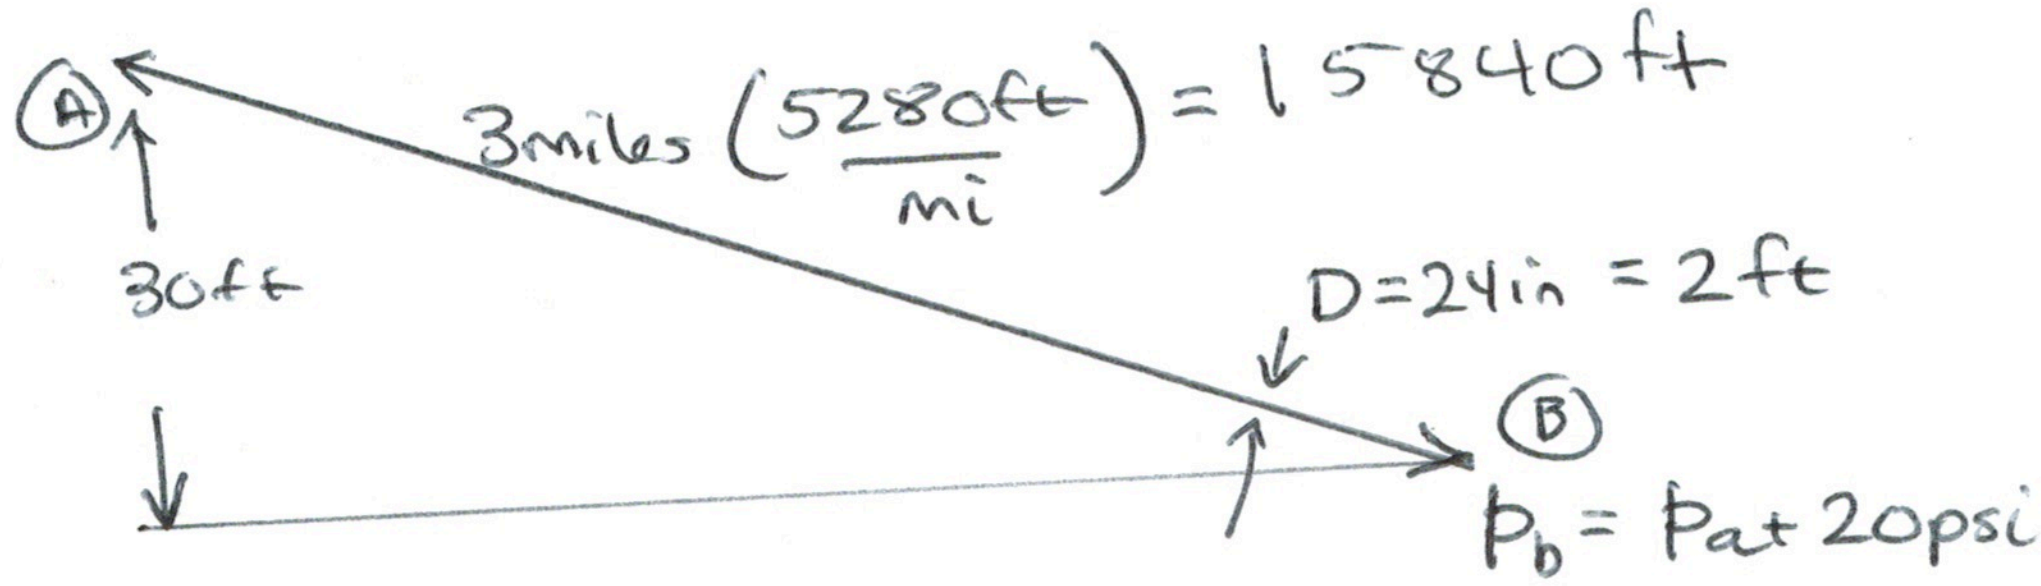

ENERGY A → B

$$\frac{p_a}{\gamma} + \cancel{\frac{V_a^2}{2g}} + z_a = \frac{p_b}{\gamma} + \cancel{\frac{V_b^2}{2g}} + \cancel{z_b}_{0} + h_L$$

$$\frac{p_a}{\gamma} - \frac{p_b}{\gamma} + z_a = h_L$$

$$\cancel{\frac{p_a - p_a - 20psi}{\gamma}} + z_a = h_L$$

$$z_a - \frac{20psi}{\gamma} = h_L$$

$$z_a = 30\,ft$$

$$30ft - 46.154ft = -16.154ft$$

PROBABLY FLOWING UPHILL!

IF UPHILL:

$$\frac{p_b}{\gamma} + \cancel{\frac{V_b^2}{2g}} + z_b = \frac{p_a}{\gamma} + \cancel{\frac{V_a^2}{2g}} + z_a + h_L$$

$$\frac{p_a + 20psi}{\gamma} + 0 = \frac{p_a}{\gamma} + 30ft + h_L$$

$$\frac{p_a + 20psi}{\gamma} - \frac{p_a}{\gamma} - 30ft = h_L = 16.154$$

∴ WATER FLOWING RIGHT-TO-LEFT

13 Sep 16

USE SWAMEE JAIN TO ESTIMATE Q

$$Q = -2.22\, D^{5/2} \cdot \sqrt{\frac{g h_f}{L}} \left[\log_{10}\left(\frac{k_s}{3.7D} + \frac{1.78\nu}{D^{3/2}\sqrt{\frac{g h_f}{L}}} \right) \right.$$

$$\sqrt{\frac{g h_f}{L}} = \sqrt{\frac{32.2\,\mathrm{ft/s^2}(16.154\,\mathrm{ft})}{15840\,\mathrm{ft}}} = 0.1812134$$

$$D^{5/2} = (2)^{5/2} = 5.6568543$$

$$D^{3/2} = (2)^{3/2} = 2.8284271$$

$$\frac{k_s}{3.7D} = \frac{16.7 \cdot 10^{-6}}{3.7(2)} = 2.2568 \cdot 10^{-6}$$

$$1.78\nu = 1.78(1.41 \cdot 10^{-5}) = 2.5098 \cdot 10^{-5}$$

$$\log_{10}\left(2.2568 \cdot 10^{-6} + 4.8967 \cdot 10^{-5}\right) = -4.2905$$

$$D^{5/2}\sqrt{\frac{g h_f}{L}} \log_{10}(\text{—}) = (5.6568543)(0.1812134)(-4.2905)$$
$$= -4.3982$$

$$Q = -2.22(-4.3982) = 9.764\ \mathrm{ft^3/sec}$$

—ONLINE CALCULATOR (ATTACHED)

$Q = 9.77\ ft^3/s$

— SPREADSHEET CALCULATOR (ATTACHED)

$Q = 9.77\ ft^3/s$

Discharge in Pressure Conduit Given Head Loss

Computes Discharge given Diameter, Material, and Head Loss using Swamee Jain (1976)

$$Q = -0.965 D^2 \sqrt{\frac{gDh_f}{L}} ln(\frac{k_s}{3.7D} + \frac{1.78\nu}{D\sqrt{\frac{gDh_f}{L}}})$$

D = Pipe diameter (in feet or meters)
g = Gravitational acceleration constant (32.2 ft/s^2 or 9.8 m/s^2)
hl = Head loss (in feet or meters)
L = Pipe length (feet or meters)
ks = Equivalent sand roughness height (a material property; in feet or meters)
v = Kinematic viscosity (in feet^2/second or meter^2/second)

Notes:
Swamee and Jain, A. K., 1976. Explicit equations for pipe-flow problems.
ASCE J. of Hyd. Div., 102(HY5) pp. 657-664

Enter Value for Diameter (D in feet or meters) :
2
Enter Value for Gravitational acceleration (g in feet/s^2 or meters/s^2) :
32.2
Enter Value for Head loss (hl in feet or meters) :
16.154
Enter Value for Pipe Length (L in feet or meters) :
15840
Enter Value for Roughness height (ks in feet or meters):
16.7e-6
Enter Value for Kinematic viscosity (v in feet^2/second or meter^2/second):
1.41e-5
Submit

PRESS "SUBMIT"

GET THIS

Friction Factor using Jain (1976) using Python

Run Date : Tue Sep 13 17:19:28 2016
------ INPUT VALUES ------
-- USE CONSISTENT UNITS --
Diameter = 2.0 [L]
g = 32.2 [L]/[T]^2
Head Loss = 16.154 [L]
Pipe Length = 15840.0 [L]
Roughness = 1.67e-05 [L]
Kinematic Viscosity = 1.41e-05 [L]^2/[T]
------ COMPUTED DISCHARGE -----
Roughness Ratio = 8.35e-06
Discharge = 9.77068045167 [L]^3/[T]

Cleveland
13 Sep 16

	A	B	C	D	E	F	G	H	I
1	Discharge in a Pressure Pipe (SI Units)								
2									
3	INPUTS	VALUE	UNITS						
4	Diameter	2	feet						
5	Gravity	32.2	feet/second^2						
6	Head Loss	16.154	feet						
7	Length	15840	feet						
8	Roughness	1.67E-05	feet						
9	Viscosity	1.41E-05	feet^2/second						
10									
11	RESULT	VALUE	UNITS						
12	Discharge	9.7728	feets^3/second						
13									
14	EXTERNAL DATA SOURCES								
15	http://cleveland1.ddns.net/mytoolbox-server/WaterPropertiesUS/WaterPropertiesUS.html								

=Jain(B4,B7,B8,B5,B9,B6)

SAME AS CLASS,
EXCEPT CHANGED g TO US
AND CHANGED UNITS LABELS

Cleveland
13 Sep 16

14/17

3a) VISCOSITY AT 60°F

(USE SAME SOURCE

http://cleveland1.ddns.net/cgi-bin/WaterPropertiesUS/WaterProperties.html

$\nu = 1.22 \cdot 10^{-5}\ ft^2/s$

b) https://www.engineersedge.com/fluid_flow/pipe-roughness.htm

$k_s = 0.0002\ in * \frac{1\ ft}{12\ in} = 16.7 \cdot 10^{-6}\ ft$

c) TOTAL HEAD AVAILABLE IS 20 ft $\therefore h_f = 20\ ft$

LENGTH = $5280 * 2 = 10560\ ft$

$k_s/D = ?$

$Q = 10\ ft^3/s$

APPLY SWAMME JAIN FOR D.

$$D = 0.66\left[k_s^{1.25} \cdot \left(\frac{LQ^2}{gh_f}\right)^{4.75} + \nu Q^{9.4} \cdot \left(\frac{L}{gh_f}\right)^{5.2}\right]^{0.04}$$

NOW EVALUATE PARTS:

$$\frac{LQ^2}{gh_f} = \frac{(10560)(10)^2}{(32.2)(20)} = 1639.7516$$

$$\left(\frac{LQ^2}{gh_f}\right)^{4.75} = (1639.7516)^{4.75} = 1.8625 \cdot 10^{15}$$

$$\left(\frac{L}{gh_f}\right)^{5.2} = \left[\frac{10560}{(32.2)(20)}\right]^{5.2} = 2074177.2$$

$$\nu Q^{9.4} = (1.22 \cdot 10^{-5}\ ft^2/s)(10)^{9.4} = 3.0645 \cdot 10^{4}$$

$$k_s^{1.25} = (16.7 \cdot 10^{-6})^{1.25} = 1.0676 \cdot 10^{-6}$$

$$D = 0.66\left[1.0676 \cdot 10^{-6} \times 1.8625 \cdot 10^{15} \times 1 + 3.0645 \cdot 10^{4} \times 2074177.2\right]^{0.04}$$

$$= 1.787\ ft$$

CHECK USING ON-LINE TOOL AT

http://cleveland1.ddns.net/mytoolbox-server/DiameterGivenDischarge/DGivenQ.html

On-Line Water Property Database (US Customary)

Select Water Temperature (Degrees F)

60 degrees F Submit —PRESS / GET

Water Properties (US Customary)
adapted from Table A5 in Elger, Crowe, Roberson 2013. Engineering Fluid Mechanics. Wiley&Sons.

Run Date : Tue Sep 13 17:54:35 2016
------ INPUT VALUES ------
Temperature = 60.0 (degrees F)
------ LOOKUP VALUES -----
Density = 1.94 (slugs/ft^3)
Specific Weight = 62.37 (lbf/ft^3)
Dynamic Viscosity = 2.36e-05 (lbf-s/ft^2)
Kinematic Viscosity = 1.22e-05 (ft^2/s)
Vapor Pressure = 0.256 (lbf/in^2) - absolute

Cleveland
13 Sep 16

17/17

Diameter Given Discharge in a Pressure Pipe

Computes Diameter given Discharge, Material, and Head Loss using Swamee Jain (1976)

$$D = 0.66[k_s^{1.25}(\frac{LQ^2}{gh_f})^{4.75} + \nu Q^{9.4}(\frac{L}{gh_f})^{5.2}]^{0.04}$$

D = Pipe diameter (in feet or meters)
Q = Discharge (in ft^3/sec or m^3/sec)
g = Gravitational acceleration constant (32.2 ft/s^2 or 9.8 m/s^2)
hl = Head loss (in feet or meters)
L = Pipe length (feet or meters)
ks = Equivalent sand roughness height (a material property; in feet or meters)
v = Kinematic viscosity (in feet^2/second or meter^2/second)

Notes:
Swamee and Jain, A. K., 1976. Explicit equations for pipe-flow problems.
ASCE J. of Hyd. Div., 102(HY5) pp. 657-664

Enter Value for Discharge (Q in feet^3/sec or meters^3/sec) :
10
Enter Value for Gravitational acceleration (g in feet/s^2 or meters/s^2) :
32.2
Enter Value for Head loss (hl in feet or meters) :
20
Enter Value for Pipe Length (L in feet or meters) :
10560
Enter Value for Roughness height (ks in feet or meters):
16.7e-6
Enter Value for Kinematic viscosity (v in feet^2/second or meter^2/second):
1.22e-5
Submit

= PRESS

GET

Diameter using Jain (1976) via Python

Run Date : Tue Sep 13 18:05:37 2016
------ INPUT VALUES ------
-- USE CONSISTENT UNITS --
Discharge = 10.0 [L]^3/[T]
g = 32.2 [L]/[T]^2
Head Loss = 20.0 [L]
Pipe Length = 10560.0 [L]
Roughness = 1.67e-05 [L]
Kinematic Viscosity = 1.22e-05 [L]^2/[T]
------ COMPUTED DIAMETER -----
Diameter = 1.78734080911 [L]