

CE 3372 Water Systems Design
Exam 2
Spring 2025

1. (46 Points) Consider the pipe network portion shown in Figure 1.

The reservoir has a pool elevation of 310 meters

Node 1 elevation is 200.0 meters; Node 2 elevation is 150.0 meters

Node 3 elevation is 150.0 meters; Node 4 elevation is 100.0 meters


Node 5 elevation is 100.0 meters; Node 6 elevation is 50.0 meters

P1 roughness is $e = 0.045$ mm; P2 roughness is $e = 0.045$ mm

P3 roughness is $e = 0.045$ mm; P4 roughness is $e = 0.090$ mm

P5 roughness is $e = 0.045$ mm; P6 roughness is $e = 0.045$ mm

P7 roughness is $e = 0.045$ mm; P8 roughness is $e = 0.045$ mm

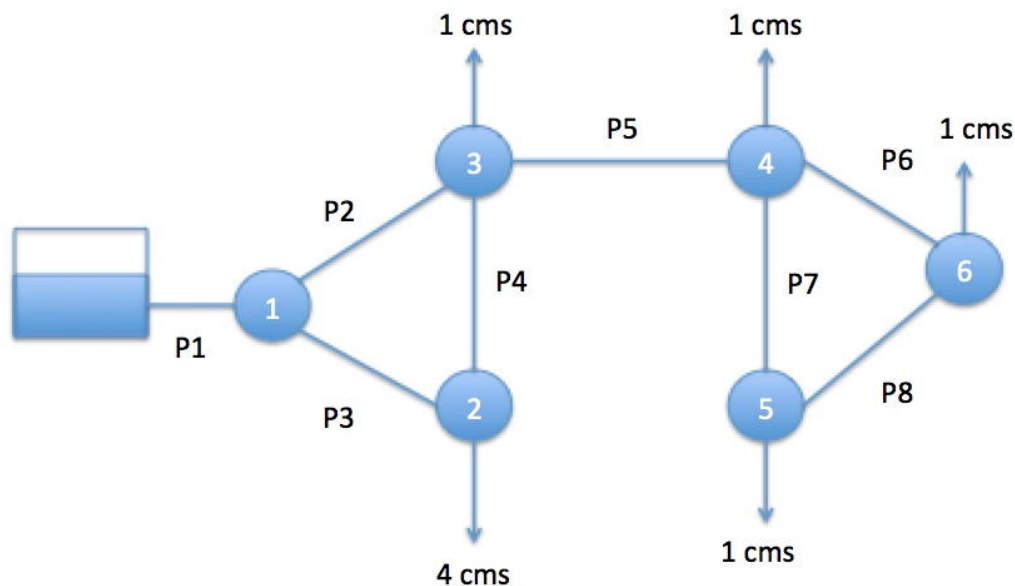

Pipe P1 is 1000 meters long, 1.0 meters diameter

All other pipes are 1000 meters long, 0.5 meters diameter

Demands (shown) are in cubic meters per second

Figure 1. Pipe Network.

- a) Use EPANET to determine the discharge, velocity, and head loss in each pipe and populate Table 1

Table 1. Estimated Q, V , and Δh in each pipe in Figure 1

Pipe ID	Discharge (m^3/s)	Velocity (m/s)	Head Loss (m)
1			
2			
3			
4			
5			
6			
7			
8			

- b) Use EPANET to determine the total head and pressure at each node and populate Table 2 below.

Table 2. TDH , z , and P at each node in Figure 1

Node ID	Total Head (m)	Elevation (m)	Pressure (kPa)
Reservoir	310	N/A	0
1		200	
2		150	
3		150	
4		100	
5		100	
6		50	

- i) Attach a **screen capture** of your EPANET simulation here

- ii) Attach the EPANET **summary report** here

2. (1 points) The hydraulic radius in a conduit containing a flowing liquid is
- (A) the mean radius from the center of flow to the wetted side of the conduit
 - (B) the ratio of the cross-sectional area of the conduit and the wetted perimeter
 - (C) the ratio of the wetted perimeter and the cross-sectional area of the conduit
 - (D) **the ratio of the cross-sectional area of flow and the wetted perimeter**

The screenshot shows the Oxford Reference website interface. At the top, the 'Oxford Reference' logo is on the left, and a search bar is on the right. Below the logo, there are tabs for 'Subject' and 'Reference Type'. On the right side of the header, there are links for 'My Content (1)' and 'My Searches (0)'. Below the header, there are icons for editing, printing, sharing, and email. The main content area is titled 'hydraulic radius'. On the left side of the main area, there is a sidebar with the text 'Signed in as: Texas Tech University Libraries' and 'AUTOMATICALLY SIGNED IN'. Below this, there is a button 'Sign in to an additional subscriber account'. Further down, there is a section 'Related Content'. The main content area has a heading 'hydraulic radius' and a section 'QUICK REFERENCE' which contains the definition: 'Ratio between the cross-sectional area of a stream channel and the length of the water-channel contact at that cross-section (the wetted perimeter). It is a measure of channel efficiency: the higher the ratio, the more efficient is the channel in transmitting water.'

hydraulic radius

QUICK REFERENCE

Ratio between the cross-sectional area of a stream channel and the length of the water-channel contact at that cross-section (the wetted perimeter). It is a measure of channel efficiency: the higher the ratio, the more efficient is the channel in transmitting water.

3. (4 points) The rational runoff coefficient for a 14.81 acre parcel property is 0.35. The rainfall intensity is 4.56 inches per hour. Determine the anticipated peak discharge from this property

4. (4 points) The rational runoff coefficient for a 300X200-meter property with a slope of 3% is 0.35. The rainfall intensity is 116 mm/hr. Determine the anticipated peak discharge from this property

5. (5 points) A storm sewer (reinforced concrete pipe) is 400-feet long and 30-inches in diameter. The sewer flows from a junction box (invert elevation 101.00 feet) to a lift station sump (invert elevation 100.00 feet). Assuming Manning's roughness coefficient is 0.013 for all flow depths, determine the maximum sewer flow capacity without surcharge

6. (5 points) The storm sewer in the question above is flowing at $\frac{3}{4}$ full. What is the discharge in the sewer?

7. (5 points) A pipe with a diameter of 2.4 meters is depicted in Figure 2. The pipe is flowing partially full.

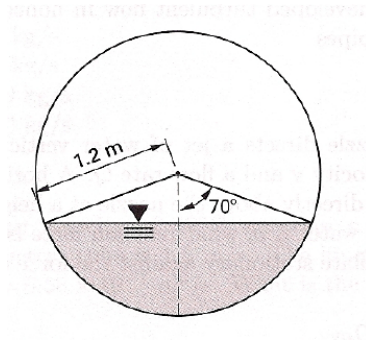


Figure 2. Circular channel flowing partially full..

Determine the hydraulic radius of flow in the circular section.

8. (5 points) A smooth concrete channel is depicted in Figure 3. The channel's dimensionless slope in the direction of flow is 0.005. The flow width at the surface is 2-meters.

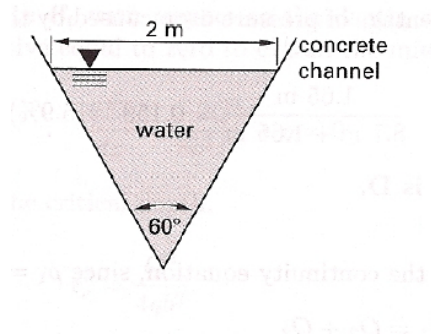


Figure 3. Triangular channel..

Determine the flow rate in the channel.

9. (10 points) A 24-inch diameter sewer pipe, with Manning's n of 0.015 is laid on slope $S_0 = 0.01$ as shown in Figure 4.

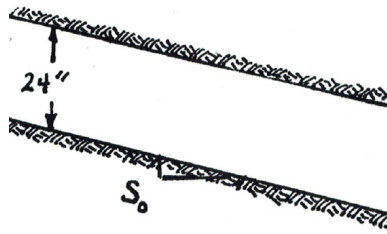


Figure 4. Sewer pipe sketch.

Use Manning's equation and the depth-area, and the depth-perimeter equations to complete Table 3.

Table 3. Depth-Area, Depth-Perimeter, Depth-Hyd. Radius, and Discharge for Circular Sewer.

y (ft)	A (ft ²)	P_w (ft)	R_h (ft)	Q (ft ³ /sec)
1.00				
2.00				

10. (15 points) Consider the drainage area depicted in Figure 5. The 6.0 acre drainage area has a runoff coefficient of 0.65, and an inlet time (time of concentration to the inlet depicted in the figure) of 17 minutes. The pipes are concrete (Manning's $n = 0.013$). The initial invert elevations for the junction boxes (MH-1, MH-2, MH-3) are 323.2, 321.1, and 319.0 feet, respectively.

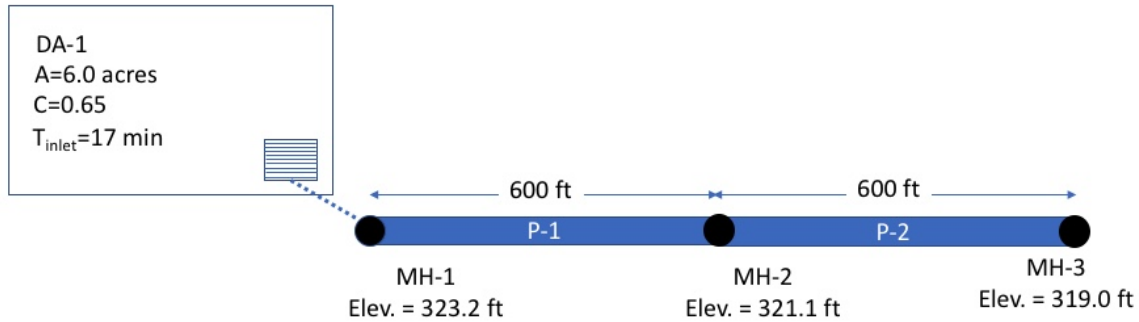


Figure 5. Drainage System Layout.

Equation 1 is the 10-year ARI intensity equation for the area, where I is intensity in inches-per-hour, and T_c is the characteristic time, in minutes.

$$I = \frac{56.6}{(T_c + 8.6)^{0.823}} \quad (1)$$

- What is the dimensionless slope of the pipe run P1 (connecting MH-1 and MH-2)?
- What is the dimensionless slope of the pipe run P2 (connecting MH-2 and MH-3)?
- What is the CA value for drainage area DA-1?
- What is the $\sum CA$ value (sum of the upstream products of runoff coefficients and contributing areas) at junction MH-1?
- What is the $\sum CA$ value (sum of the upstream products of runoff coefficients and contributing areas) at junction MH-2?

- f) What is the time of concentration to be used to compute the discharge leaving MH-1?
- g) What is the rainfall intensity for this time of concentration?
- h) What is the value of peak discharge leaving MH-1?
- i) What is the pipe diameter for pipe P-1 required to carry the design flow at full pipe depth?
- j) What is the flow velocity in pipe P-1?
- k) What is the pipe travel time for pipe P-1?
- l) What is the value of peak discharge leaving MH-2? (Explain your reasoning)
- m) What is the pipe diameter for pipe P-2 required to carry the design flow at full pipe depth?
- n) What is the flow velocity in pipe P-2?
- o) What is the pipe travel time for pipe P-2?