

Technical drawing of a rectangular frame structure, showing front, side, and detail views.

Front View (Top):

- Overall width: 647
- Overall height: 644
- Top flange thickness: 3
- Bottom flange thickness: 74
- Side flange thickness: 15
- Internal width: 584
- Internal height: 187
- Vertical spacing between internal features: 193, 193, 193
- Horizontal spacing between internal features: 74
- Labels: 3x单面孔 (3x single face hole), Ø5通孔 (Ø5 through hole), A (section line), B (detail callout), C (detail callout).

Side View (Left):


- Overall width: 15
- Overall height: 647
- Top flange thickness: 15
- Bottom flange thickness: 73
- Internal width: 85
- Internal height: 88
- Vertical spacing between internal features: 193, 193
- Horizontal spacing between internal features: 7,5
- Labels: 3x单面孔 (3x single face hole), Ø5通孔 (Ø5 through hole), B (detail callout).

Detail B (Scale 1:1):

- Overall width: 15
- Overall height: 15
- Top flange thickness: 2,5
- Bottom flange thickness: 0,6
- Internal width: 4,8
- Internal height: 7
- Vertical spacing between internal features: 10
- Horizontal spacing between internal features: 7,7

Detail C (Scale 1:1):

- Overall width: 15
- Overall height: 11
- Top flange thickness: 3,5
- Bottom flange thickness: 5,5
- Internal width: 8
- Internal height: 5,8
- Vertical spacing between internal features: 8
- Horizontal spacing between internal features: 3,5

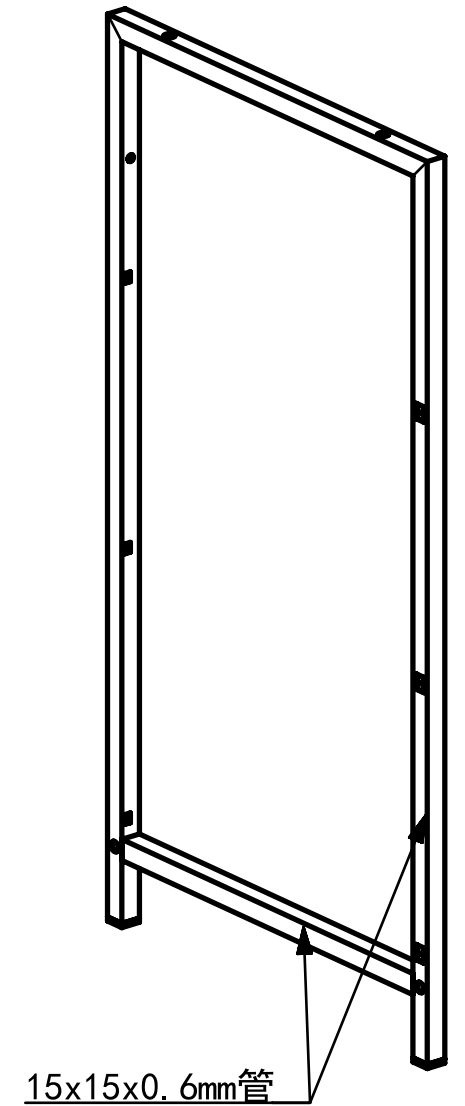

部件编号	E			金汰家具		
物料名称	LGS043-S-右侧框					
规格型号	647x335x15mm			人 员	签 名	日 期
材 质	Q195	单 位	mm	设 计	俞俊安	
颜 色	黑砂纹	比 例	1:5	校 对	赵刚	
设计重量	KG	投 影		审 核	赵刚	
品 牌	SONGMICS	公差标准	SS-ISO-2768-1 m	批 准	杨荆平	