


HEAVY METAL

"THE EVIL ONE"

FULL PULL
300 FT

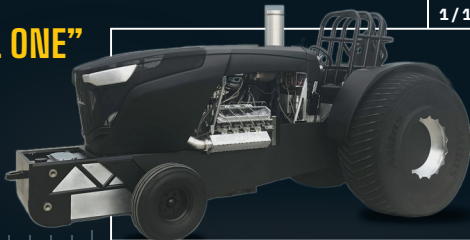

1 / 1

HEAVY METAL card, FRONT. HEAVY METAL business card, "THE EVIL ONE". Trim 3.5 x 2 in, bleed 0.125 in, safe 0.25 in. CMYK builds by the designer: ground C30 K100 (two-plate cool black so every knockout registers on 2 plates); rules and ruler ticks C30 K75 (same plates as the ground, cannot misregister); bone type and logo = paper (knockout); yellow M22 Y100, spread trap 0.1 mm; QR modules K100 only on a paper tile (29 modules, 140 px = 0.47 in, 0.41 mm per module, quiet zone 4.8+ modules); photo sRGB to GRACoL 2006 Coated, relative colorimetric + BPC, TAC 300 max, 300 ppi. Smallest type 6 pt Plex Mono Bold, paper white. Stock: 32 pt black-core triplex or 16 pt uncoated with soft-touch, corners die-cut 1/8 in radius. Hard proof on the chosen stock before the run.

HEAVY METAL

PROSTOCK TRACTOR PULLING
WATERLOO, WISCONSIN

"THE EVIL ONE"

CAT V8
3208

WEIGHT
10,000 LB

REAR TIRES
24.5-32

FULL PULL
300 FT

NOMBRE APELLIDO

TEAM OWNER • DRIVER

TEL (000) 000-0000

MAIL heavymetalevil72@gmail.com

WEB heavymetalprostock.com



SHOP THE GEAR

HEAVY METAL card, BACK. HEAVY METAL business card, "THE EVIL ONE". Trim 3.5 x 2 in, bleed 0.125 in, safe 0.25 in. CMYK builds by the designer: ground C30 K100 (two-plate cool black so every knockout registers on 2 plates); rules and ruler ticks C30 K75 (same plates as the ground, cannot misregister); bone type and logo = paper (knockout); yellow M22 Y100, spread trap 0.1 mm; QR modules K100 only on a paper tile (29 modules, 140 px = 0.47 in, 0.41 mm per module, quiet zone 4.8+ modules); photo sRGB to GRACoL 2006 Coated, relative colorimetric + BPC, TAC 300 max, 300 ppi. Smallest type 6 pt Plex Mono Bold, paper white. Stock: 32 pt black-core triplex or 16 pt uncoated with soft-touch, corners die-cut 1/8 in radius. Hard proof on the chosen stock before the run.