

N-BIOTEK Remote Roller NB204MR



N-BIOTEK Remote Roller NB204MR is highly flexible in facilitating its operation not only incubator inside but also elsewhere on work table. Remote control box can be attached to the incubator surface and flat cable needs no particular measures such as access port. Its operation capacity is 2000ml bottle x 4ea at one time. Speed range 2rpm to 30rpm helps user utilize adherent cell culture performance.




Features

- Steel reinforced Polyurethane timing belts
- Brushless DC “maintenance free” Motor
- Powder coated aluminum for durability and cleanliness
- Non – slip rubber material for the best performance of rolling
- Designed for no idle roller by drive – belt



N-BIOTEK Remote Roller NB204MR

Product size Information

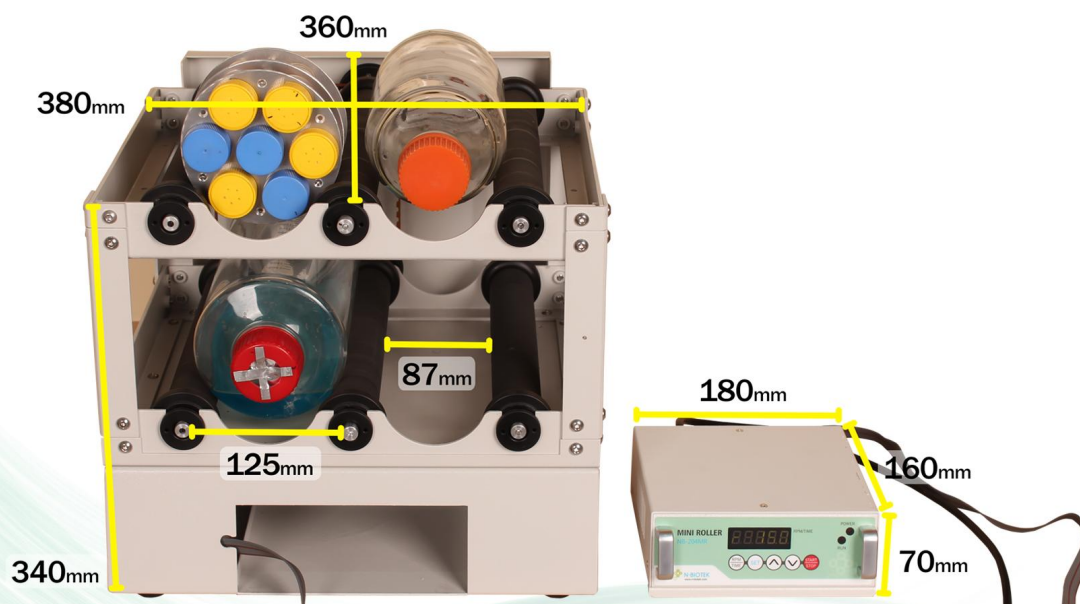

Specification

Items	Unit	NB-204MR
RPM Range	rpm	Variable 2 to 30
Accuracy	rpm	1rpm
Increment	rpm	0.1rpm
Control		Microprocessor digital PID
Time Range	Hour, Min.	Continuous or up to 99h 59min
Accuracy	%	± 1%
Display		LED Display
Motor type		Brushless DC motor
Standard roller bottle	mm, ea	110mm to 120mm, 4ea
Roller deck dimension	mm	362(W) x 299(D) x 212(H)mm
Overall dimension	mm	375(W) x 370(D) x 345(H)mm
Power	V, Hz, W	AC 90 to 264V, 50/60Hz, 10 W
Weight	Kg	12.5 Kg



CO₂ INCUBATORS
IR CONCENTRATORS
LIVE CELL STATIONS
SHAKERS & WATER BATHS
WORK STATIONS
BIO MEDICAL EQUIPMENT
BIO CLEAN ROOM
STEMCELL ACTIVATION COSMETIC

Techno-Park 402-803, Pyeongcheon-ro 655
Wonmi-Gu, Bucheon-Si Gyeong-GI Province,
Republic of Korea (zip 14502)
E-MAIL : export@n-biotek.com
Tel : +82-32-321-2100
Fax : +82-32-328-2372

- ALL information contained in this catalogue and the accompanying products are copyrighted and all reserved by N-BIOTEK corporation.
- N-BIOTEK corporation reserves the right to make periodic design changes without obligation to notify any person or entity of such change