
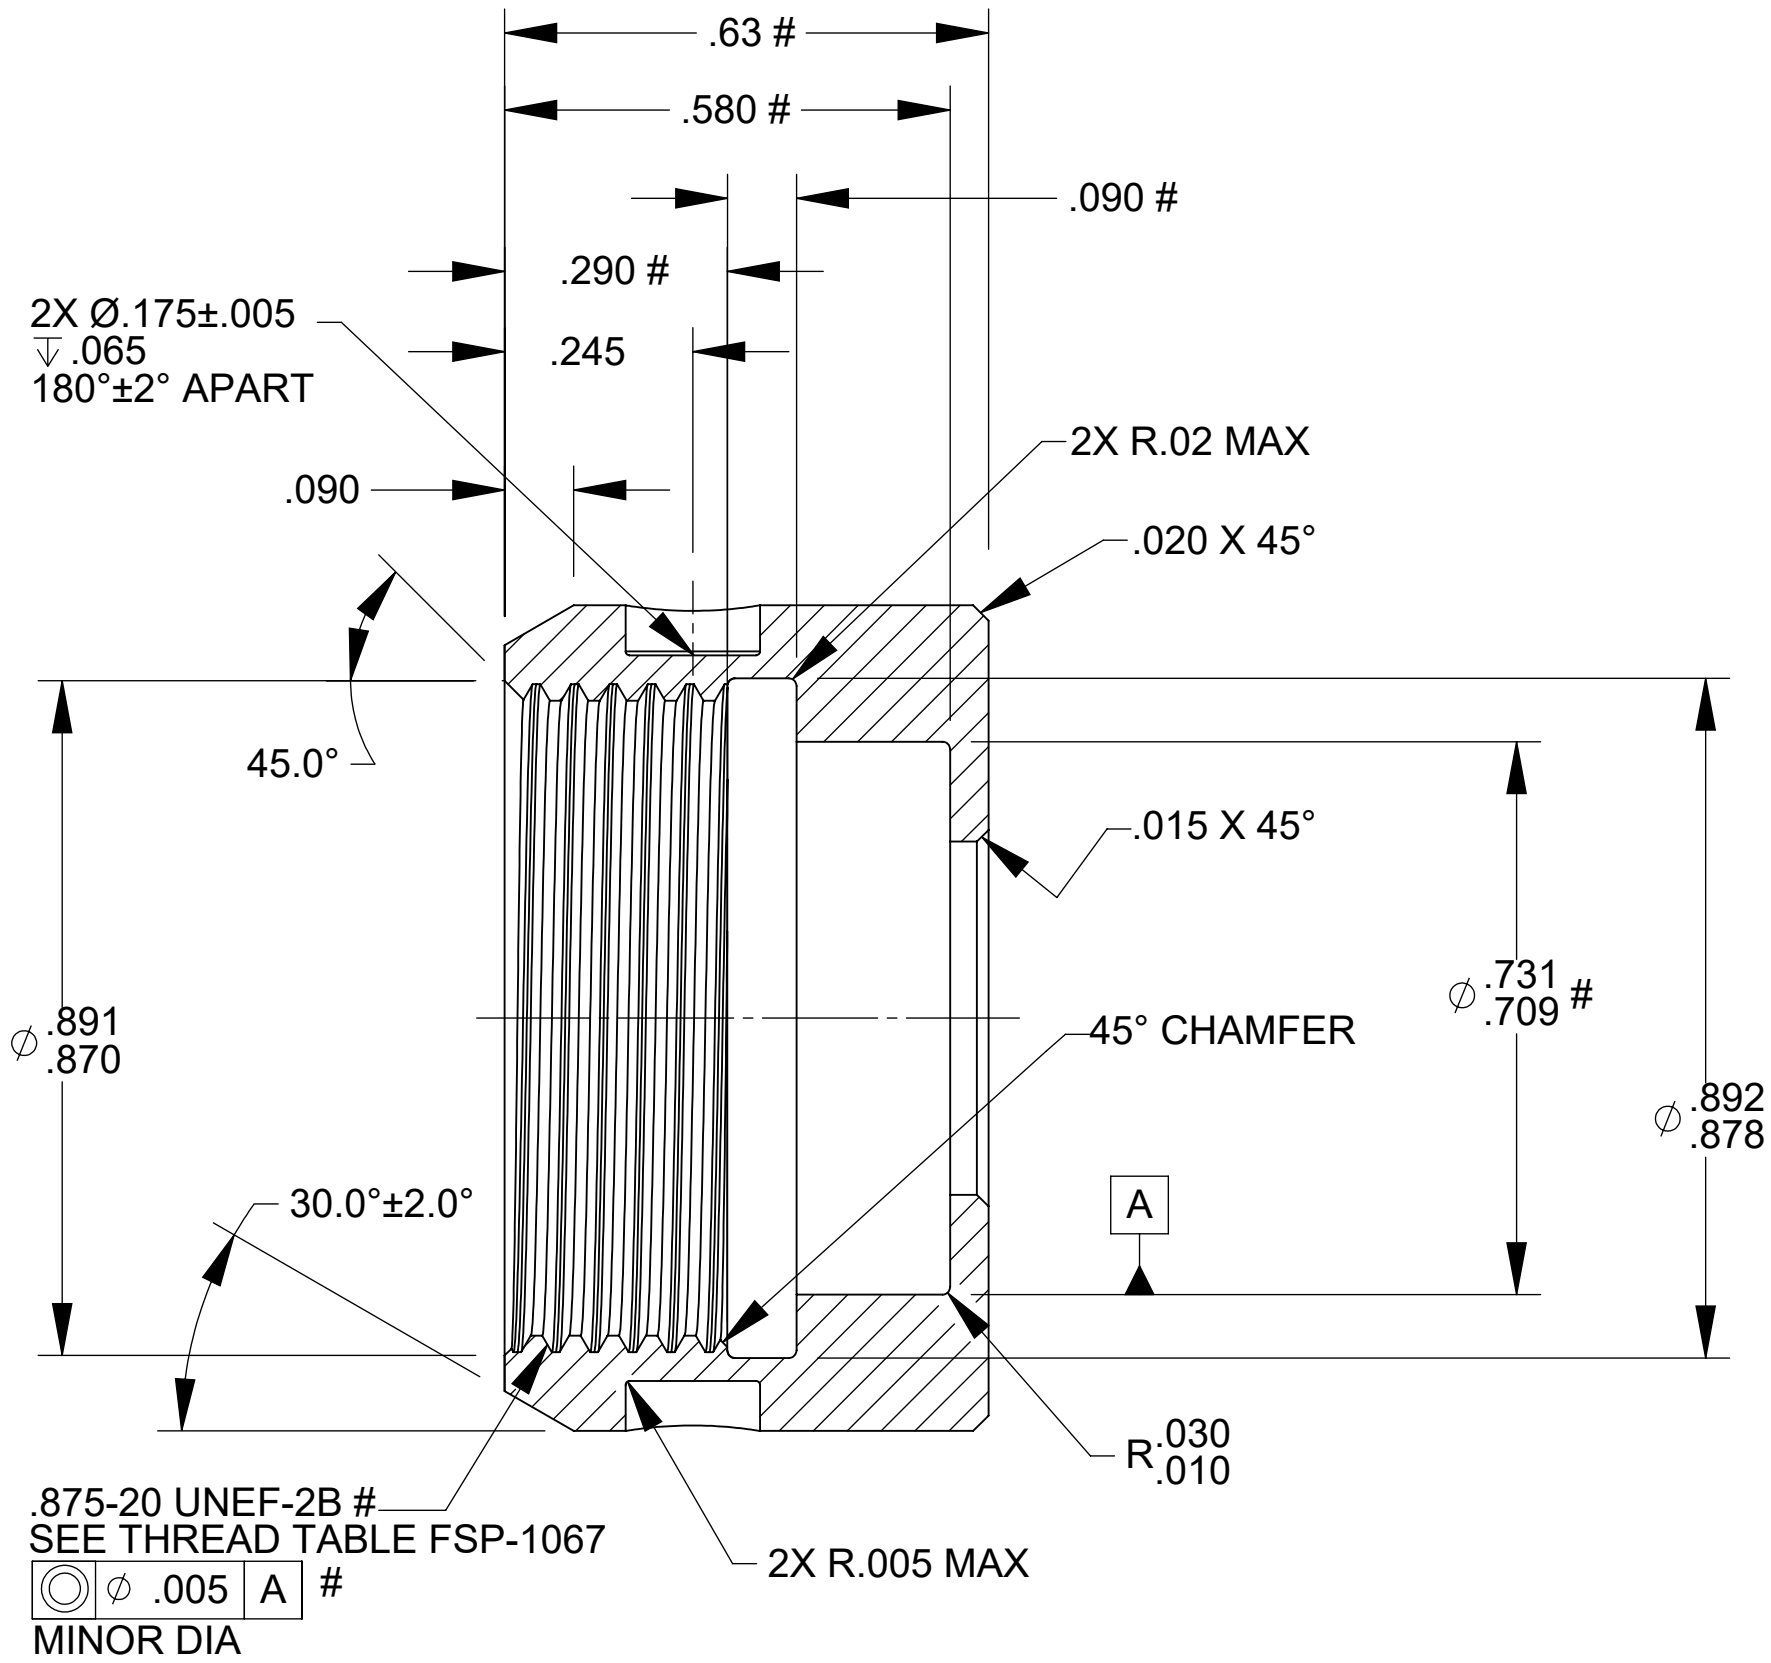


- NOTES: UNLESS OTHERWISE SPECIFIED
1. REMOVE ALL BURRS AND BREAK SHARP EDGES .010 MAX.
 2. INSIDE CORNER RADII .010 MAX.
 3. ALL SURFACES TO BE 64 MICROFINISH OR BETTER.
 4. DIMENSIONAL LIMITS APPLY AFTER FINISH.
 - 5 PART NUMBER DEFINITION: SEE AFSI DOCUMENT FSP-1066 FOR MATERIAL & FINISHING
 6. REDRAWN FROM 119-102

REVISION HISTORY - ALL SHEETS ARE THE SAME REVISION

REV	DESCRIPTION	DATE	APPROVED
	ENGINEERING RELEASE		
A	DM: (1) REMOVE LINE ABOVE THREAD; (2) UPDATE CHAMFER CALLOUT	2021/01/22	JW
	FORMAL RELEASE		
B	ECN 210310-1135 DM: REMOVE "3X" FROM R.030/.010 CALLOUT	2021/03/10	JW
C	ECN 221020-1210 DM: ADD NOTE 6	2022/10/24	BCull
D	ECN 221121-1336 DM: ZN B4 ADD +.006/-.003 TO .460	2022/11/30	BCull
E	ECN 230323-1001 DM: (1) ADD "MINOR DIA" TO THD CONTROL FRAME; (2) UPDATE TITLE	2023/03/27	BCull

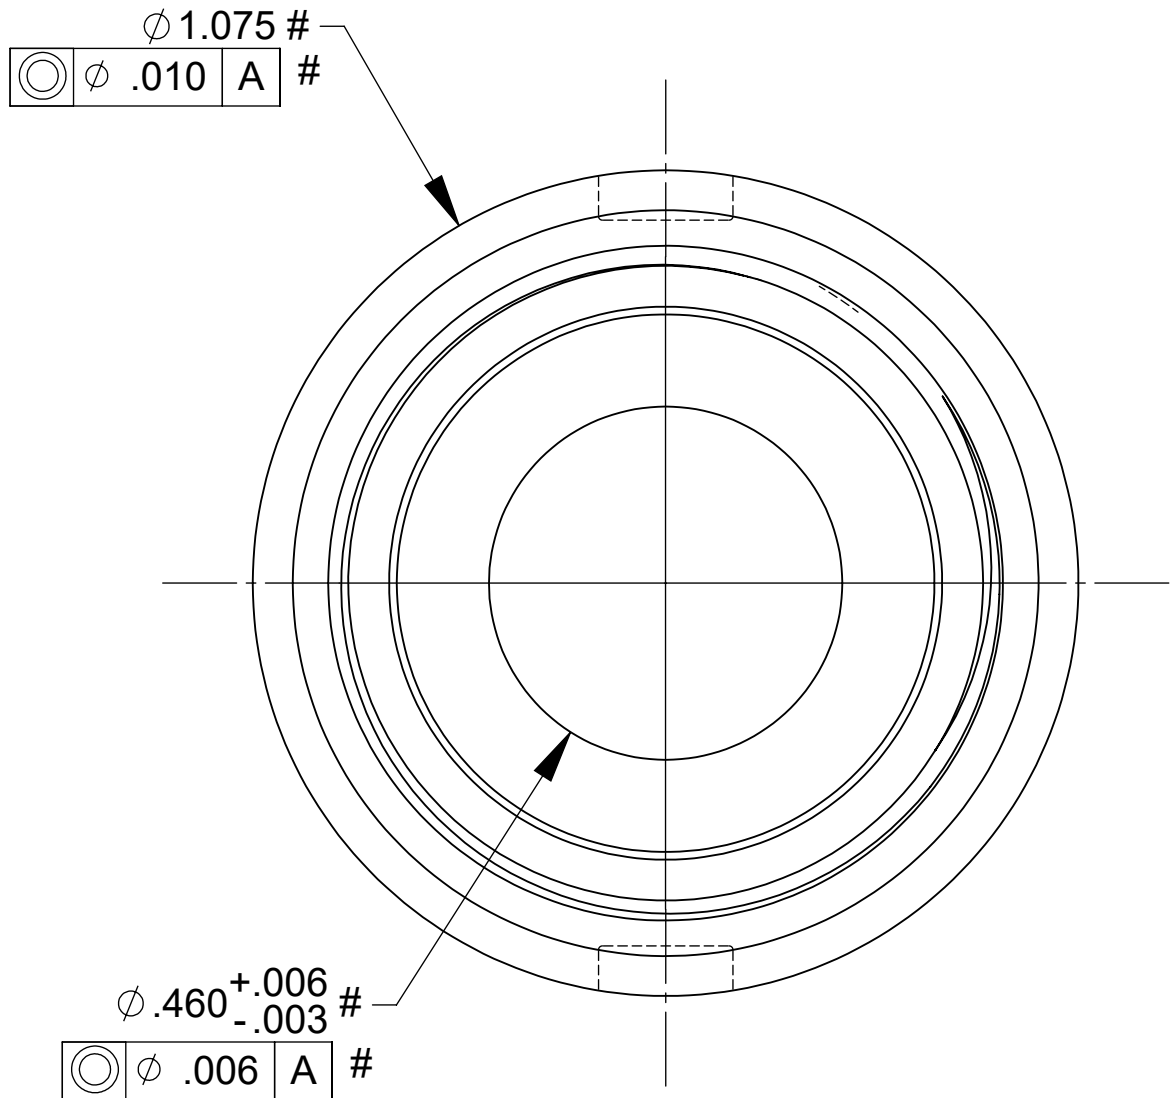

217-102 - 0
5 MATERIAL/FINISH ALLOWANCE OR MATERIAL/FINISH W/O DRY FILM LUBE

		MATERIAL	DFT DM 2020/07/27	AmphenolFSI		
		SEE NOTES	CHK BC 2020/09/21			
			MFG PK 2022/10/24			
		DRILLED HOLE DIAMETER TOLERANCE	ENG DM 2020/07/27			
		Φ.000 TO Φ.125 +.004 -.001	Φ.251 TO Φ.500 +.006 -.001	APP JW 2021/03/10	TITLE INSERT RETAINING NUT, SH13, M28	
		Φ.126 TO Φ.250 +.005 -.001	Φ.501 TO Φ.750 +.008 -.001			
217-103	28876	DO NOT SCALE DRAWING UNLESS OTHERWISE SPECIFIED DIM ARE IN INCHES TOL ON ANGLES ±3° 1 PL ±.1 2 PL ±.02 3 PL ±.010 INTERPRET DIM AND TOL PER ASME Y14.5-1994	This Document contains proprietary information and such information is prohibited from disclosure to others, publication or duplication in whole or in part without written permission from Amphenol Fiber Systems International. Copyright © 2018 Amphenol Fiber Systems International. Nonpublished work. All rights reserved.			
NEXT ASSY	USED ON					SIZE C ØYPM2
APPLICATION						DWG NO 217-102
						REV E
						SCALE 4:1
						SHEET 1 OF 1