

D

C

B

A

- NOTES: UNLESS OTHERWISE SPECIFIED
1. REMOVE ALL BURRS AND BREAK SHARP EDGES .010 MAX
 2. MAX INSIDE CORNER RADII .010
 3. ALL SURFACES TO BE 64 MICROFINISH OR BETTER
 4. DIMENSIONS TO BE EFFECTIVE AFTER PLATING
 5. THREAD, SPLINE, AND KEYING PROJECTIONS SHALL BE GAGE CHECKED FOR DIMENSIONAL CONFORMANCE AND FREEDOM FROM BURRS
 6. PLATING SURFACE AREA ESTIMATE = 9.6 IN²
 7. UNIVERSAL PLUG KEYING OPTION HAS MASTER KEY ONLY ALLOWING RECEPTACLE ASSEMBLY WITH ANY KEYING OPTION
 8. PART NUMBER DEFINITION: SEE AFSI DOCUMENT FSP-1066 FOR MATERIAL & FINISHING
 9. FINISH AG & AH: CAD PLATE MUST EXTEND INTO I.D. OF PART TO EDGE OF GROOVE
 10. BROACH MARKS PERMISSIBLE IN RELIEF
 11. REDRAWN FROM 119-140
 12. THIS PART IS SOURCE CONTROLLED. DLA MUST APPROVE ALL SOURCES OF SUPPLY PRIOR TO USE. APPROVED SOURCES OF SUPPLY:
 1. AMPHENOL FIBER SYSTEMS INTERNATIONAL
 2. AMPHENOL IMS DIVISION INDIA
 3. MIMFORMS, LLC


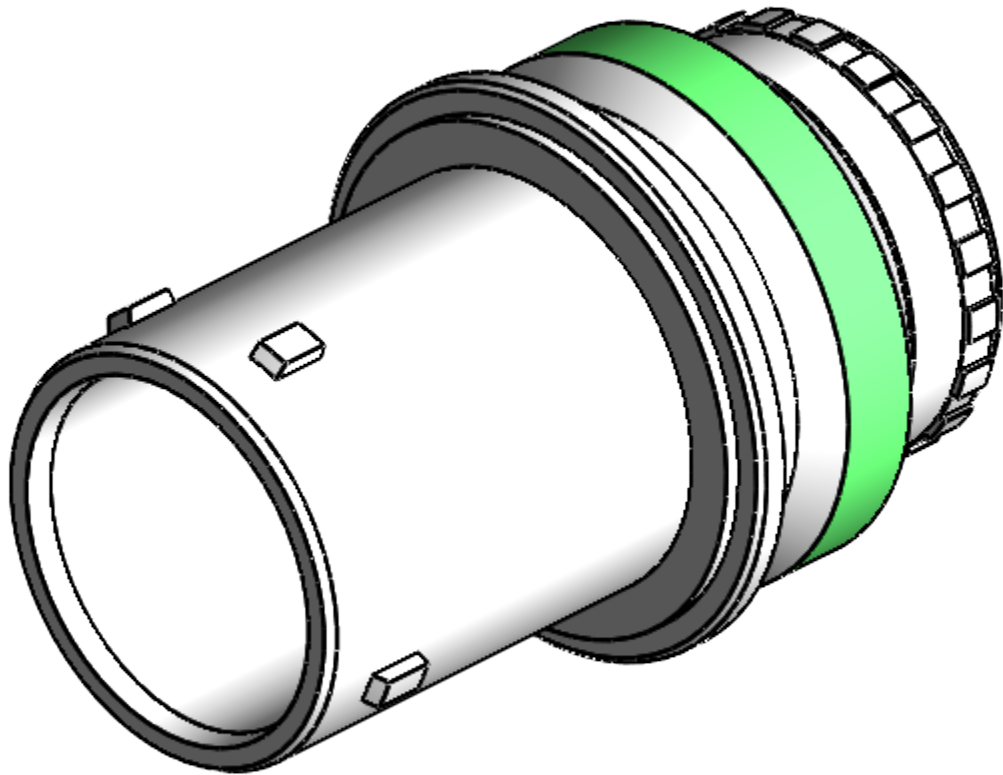


TABLE II - KEYING OPTIONS


KEYING POSITION OPTION	ANGLE AP° BSC	ANGLE BP° BSC	ANGLE CP° BSC	ANGLE DP° BSC	QPL/COTS
OPTION 1	80°	142°	196°	293°	MIL-SPEC REQUIREMENT
OPTION 2	135°	170°	200°	310°	
OPTION 3	49°	169°	200°	244°	
OPTION 4	66°	140°	200°	257°	
OPTION 5	62°	145°	180°	280°	
OPTION 6	79°	153°	197°	272°	
OPTION 7	30°	120°	225°	300°	COTS
OPTION 8	40°	100°	190°	325°	
OPTION 9	55°	90°	215°	285°	
OPTION 10	73°	161°	236°	318°	
OPTION 11	85°	128°	208°	305°	
OPTION 12	44°	110°	185°	305°	
OPTION "U"	ALL EXTERNAL KEY LIP REMOVED EXCEPT MASTER KEY				

REVISION HISTORY - ALL SHEETS ARE THE SAME REVISION


REV	DESCRIPTION	DATE	APPROVED
ENGINEERING RELEASE			
A	DM: SH3 ADD ±.002	2021/02/02	JW
FORMAL RELEASE			
B	ECN 210217-1356 DM: (1) ADD "#" TO CRIT DIMS; (2) SH2: MOVE/SPLIT 45°& ADD TOL	2021/02/18	JW
C	ECN 210420-1508 DM: ADD NOTE 10 & ADD TO INTERNAL GROOVE DIMS	2021/04/21	JW
D	ECN 221025-1012 DM: (1) ADD "#" TO CRIT DIMS & GD&T; (2) ADD NOTE 11; (3) SH2: UPDATE LEADER LINES; (4) SH2 ZN C3: ADD "2X" TO .793	2022/10/26	BCull
E	ECN 221228-1359 DM: SH2 ZN B3: (1) ADD GD&T TO THD; (2) UPDATE TITLE; (3) ADD "#" TO O-RING DIMS; (4) SH2 ZN C1: ADD CONCENTRIC TO REAR SURFACE	2023/03/29	BCull
F	ECN 240212-0914 DM: SH1 ADD SOURCE CONTROL NOTE	2024/02/19	BCull

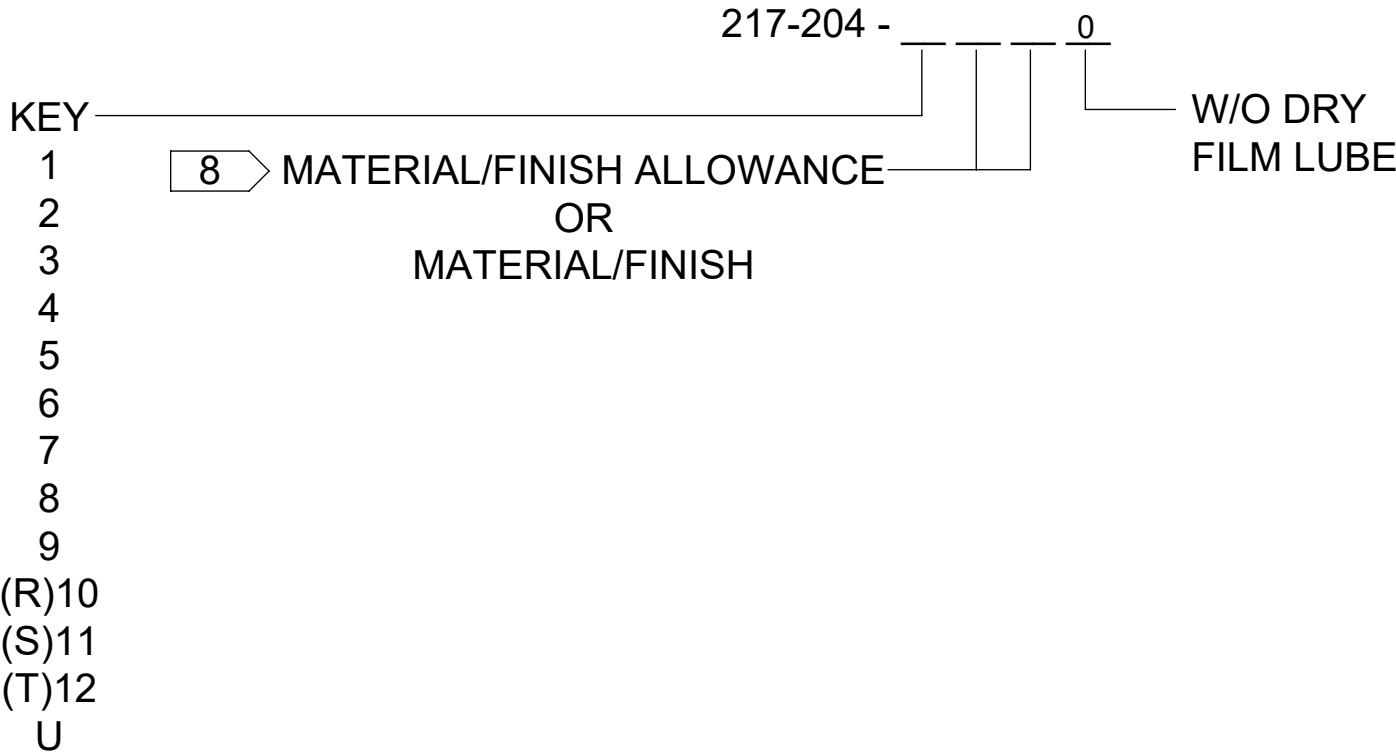

		MATERIAL	SEE NOTES	DFT	DM	2020/07/28	AmphenolFSI						
				CHK	BC	2020/09/21							
				MFG	PK	2022/10/25							
				DRILLED HOLE DIAMETER TOLERANCE		ENG	DM	2020/07/28	TITLE				
		$\phi .000 \text{ TO } \phi .125 \begin{smallmatrix} +.004 \\ -.001 \end{smallmatrix}$		$\phi .251 \text{ TO } \phi .500 \begin{smallmatrix} +.006 \\ -.001 \end{smallmatrix}$		APP	JW	2021/02/18	PLUG BODY, SH15, M28				
		$\phi .126 \text{ TO } \phi .250 \begin{smallmatrix} +.005 \\ -.001 \end{smallmatrix}$		$\phi .501 \text{ TO } \phi .750 \begin{smallmatrix} +.008 \\ -.001 \end{smallmatrix}$									
217-219	28876	DO NOT SCALE DRAWING UNLESS OTHERWISE SPECIFIED DIM ARE IN INCHES TOL ON ANGLES ±3°				This Document contains proprietary information and such information is prohibited from disclosure to others, publication or duplication in whole or in part without written permission from Amphenol Fiber Systems International. Copyright © 2018 Amphenol Fiber Systems International. Nonpublished work. All rights reserved.							
NEXT ASSY	USED ON	1 PL ±.1 2 PL ±.02 3 PL ±.010 INTERPRET DIM AND TOL PER ASME Y14.5–1994											
APPLICATION													
				SIZE	CAGE CODE		DWG NO		REV				
				C	ØYPM2		217-204		F				
				SCALE		3:1		SHEET		1 OF 3			

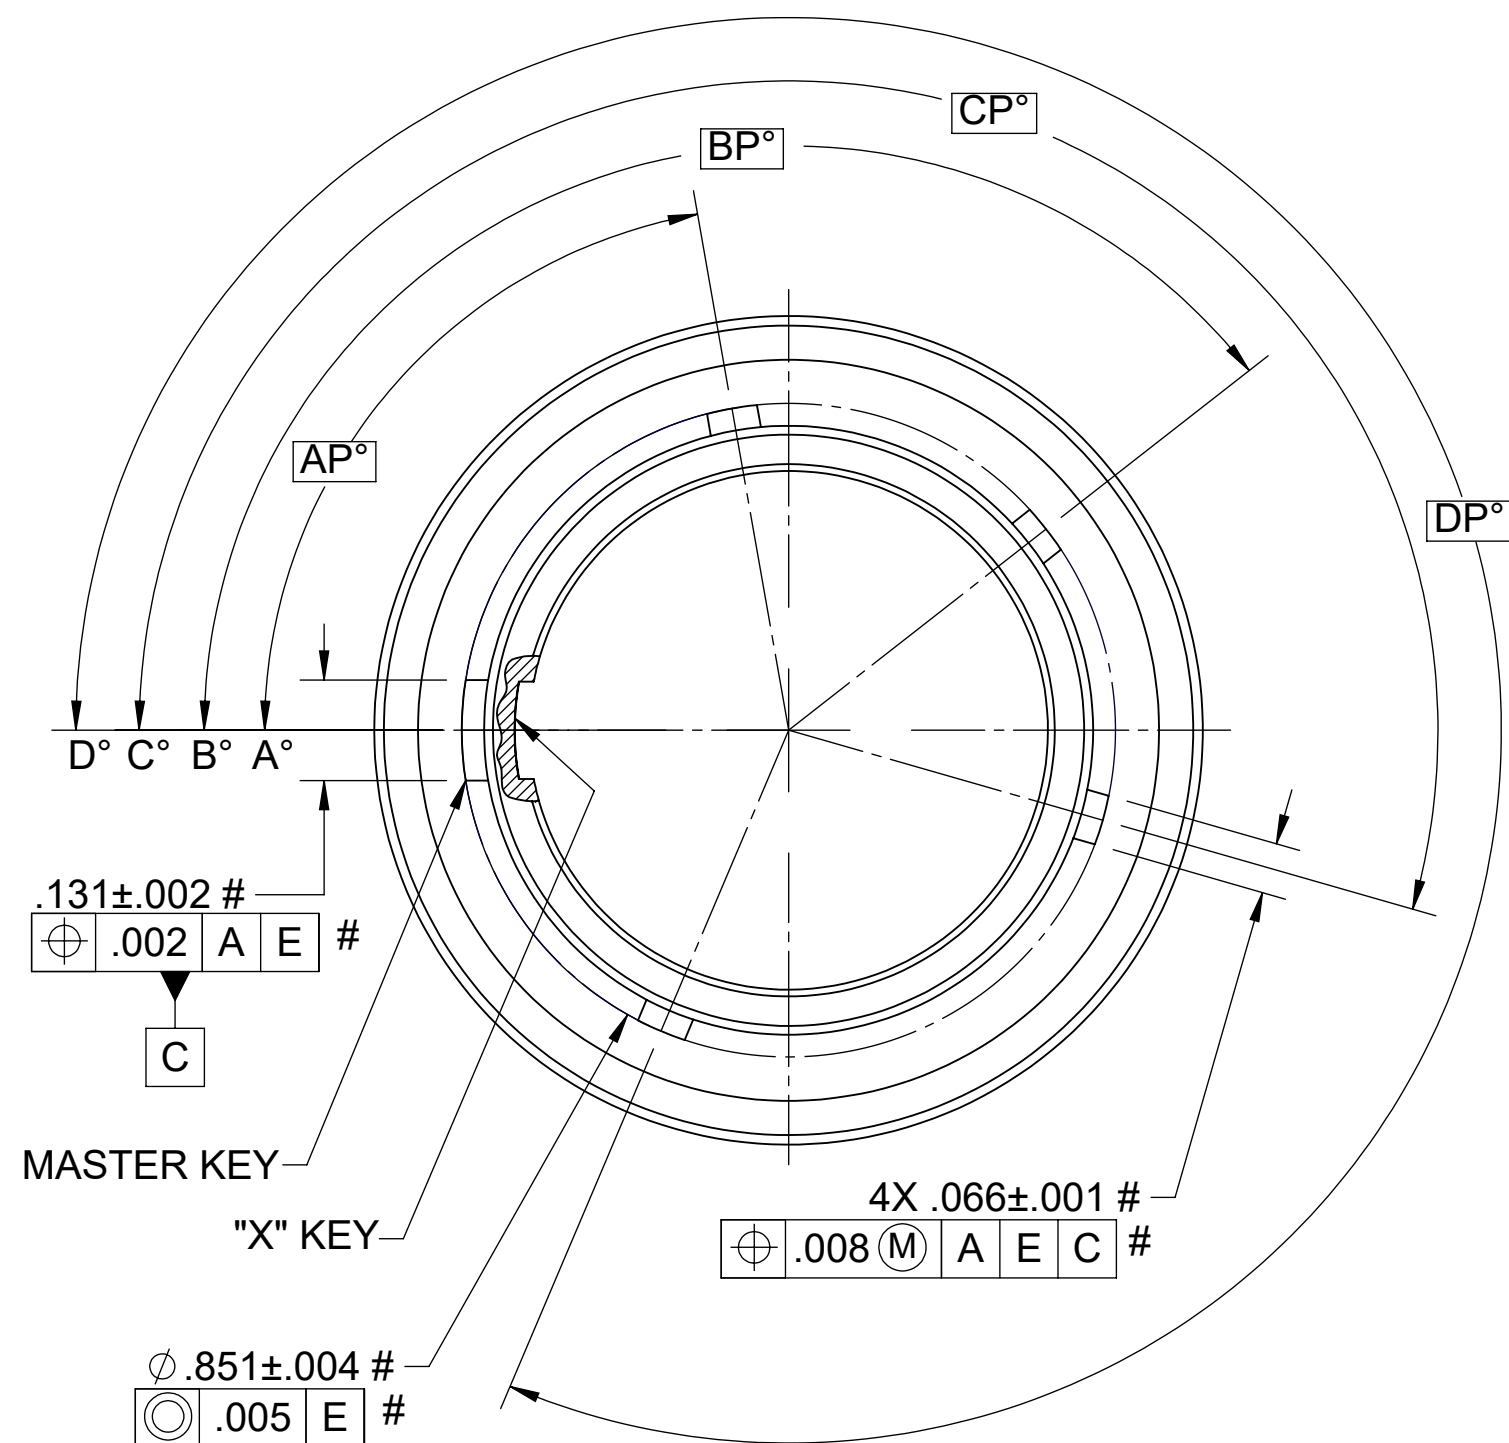

KEYING VIEW

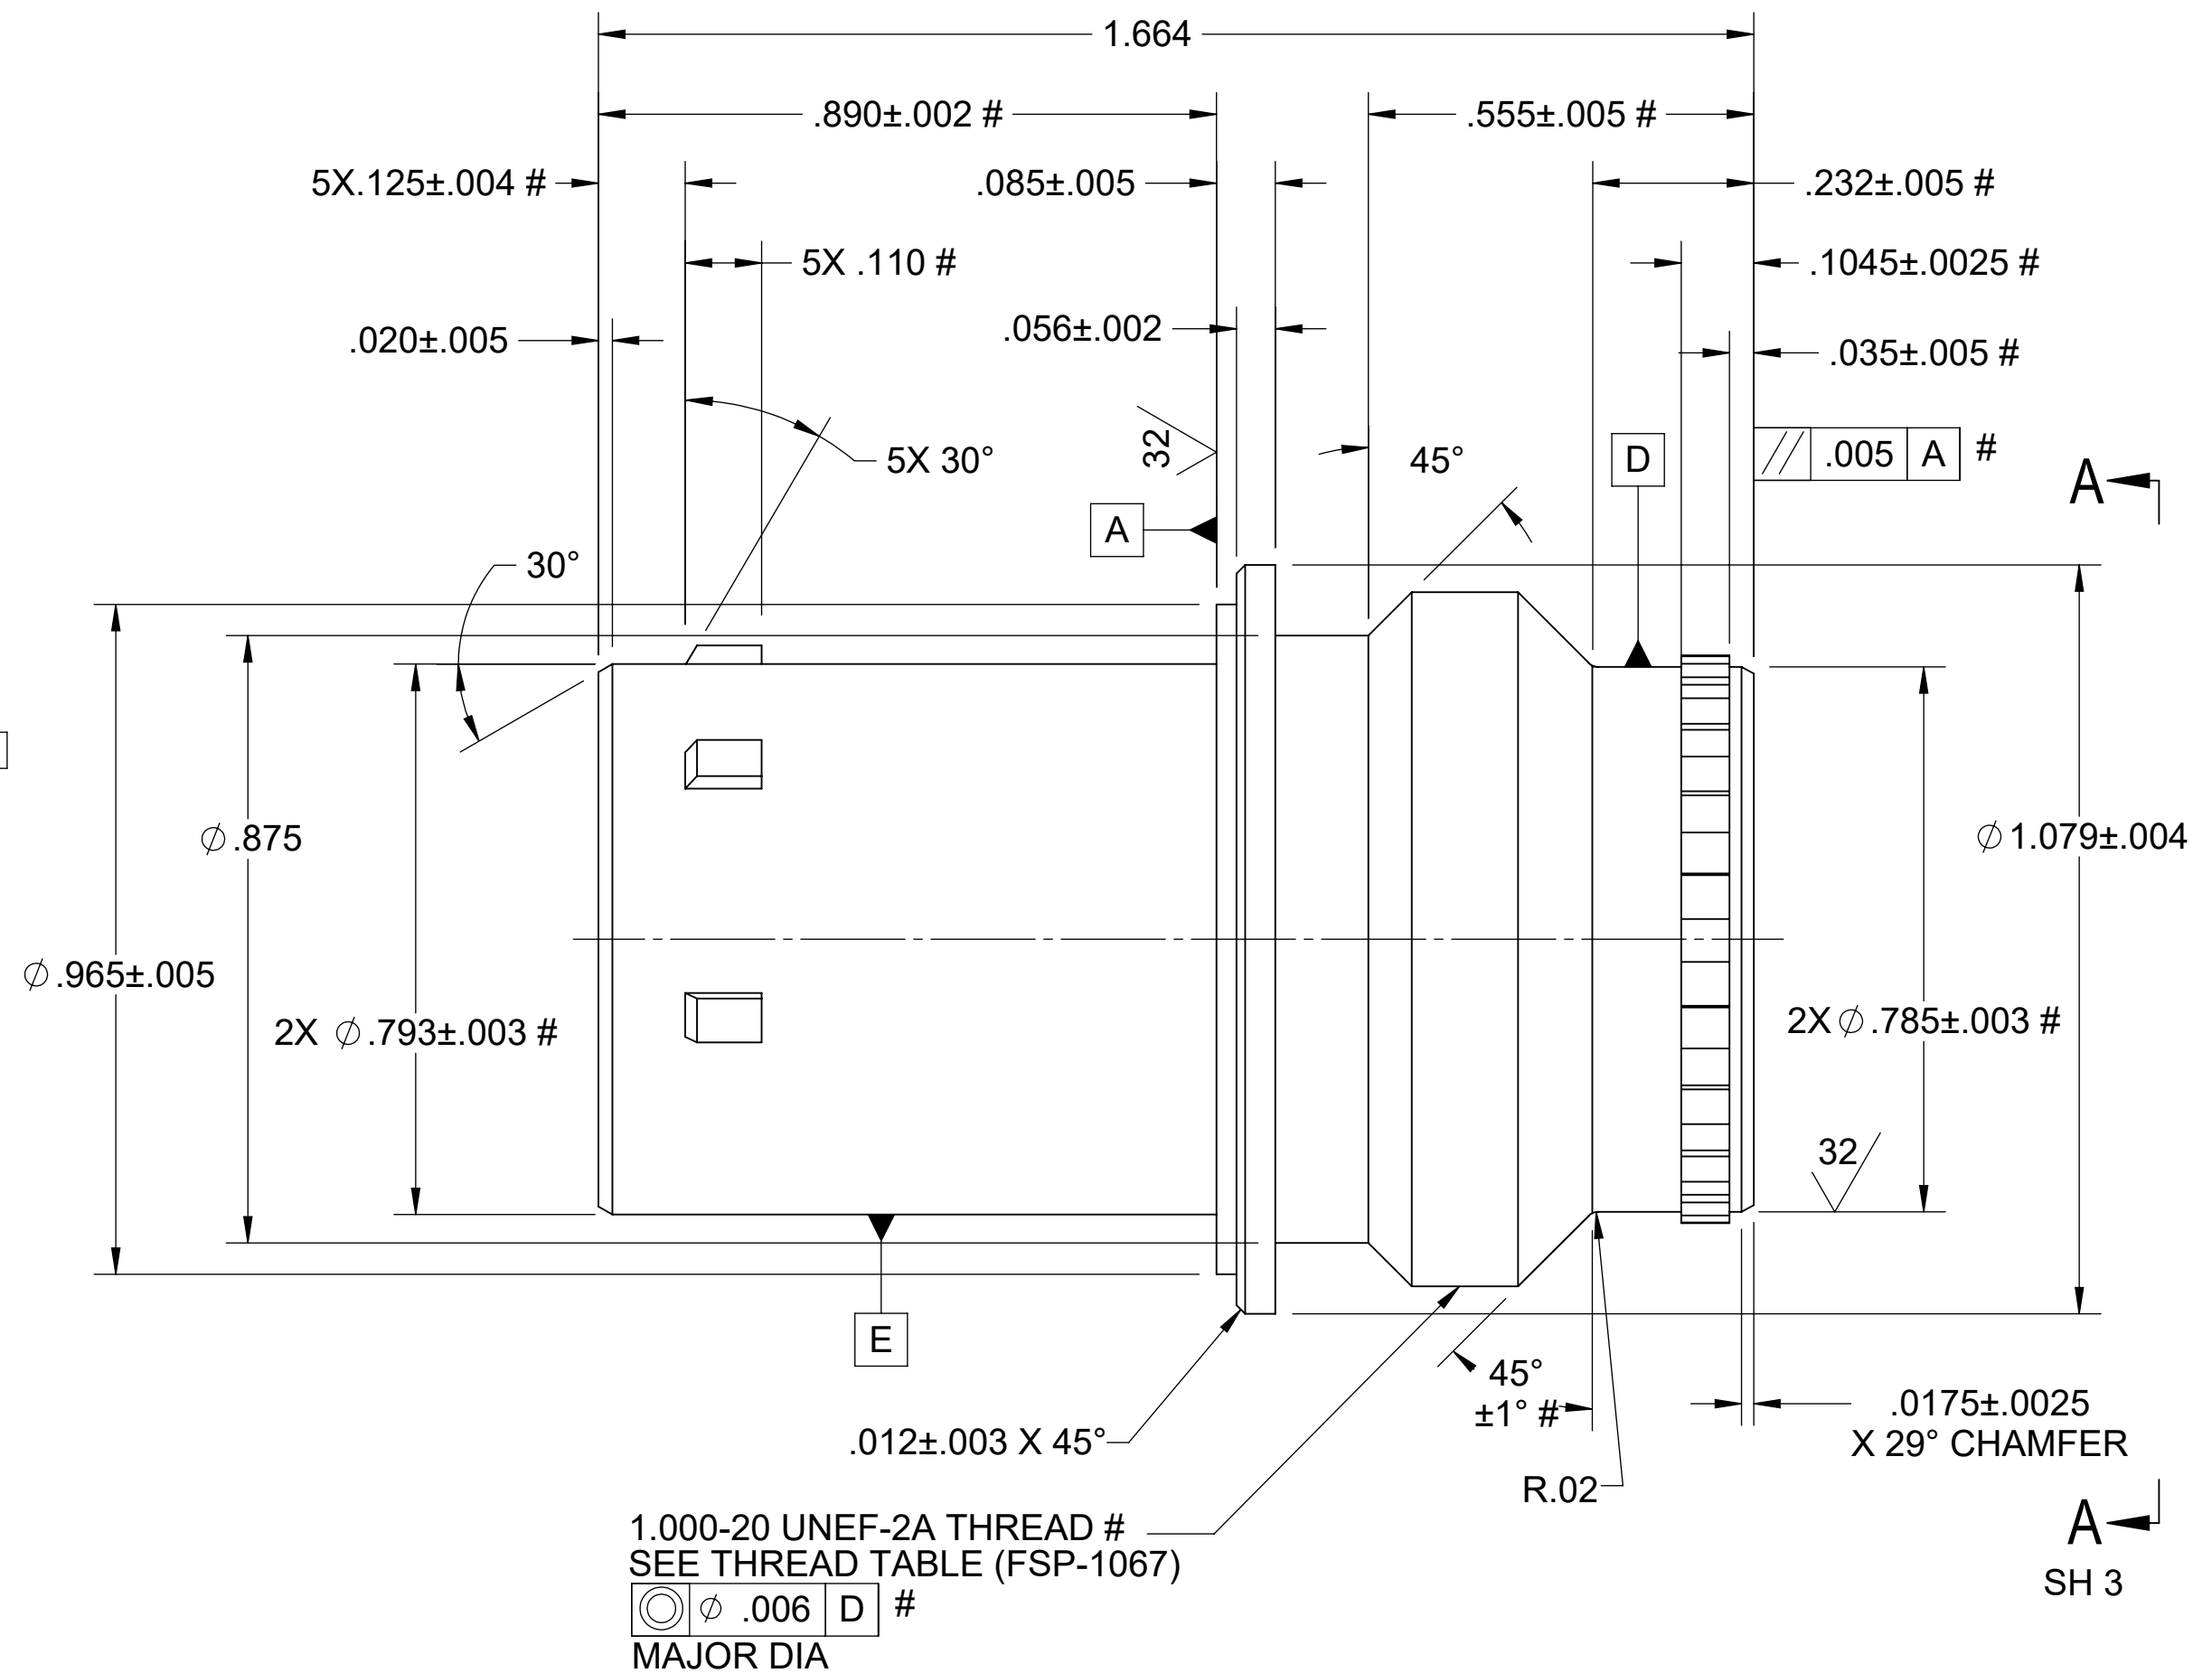

SIZE C	CAGE CODE ØYPM2	DWG NO 217-204	REV F
SCALE 4:1			SHEET 2 OF 3

D

C

B



A

D


C

B

A

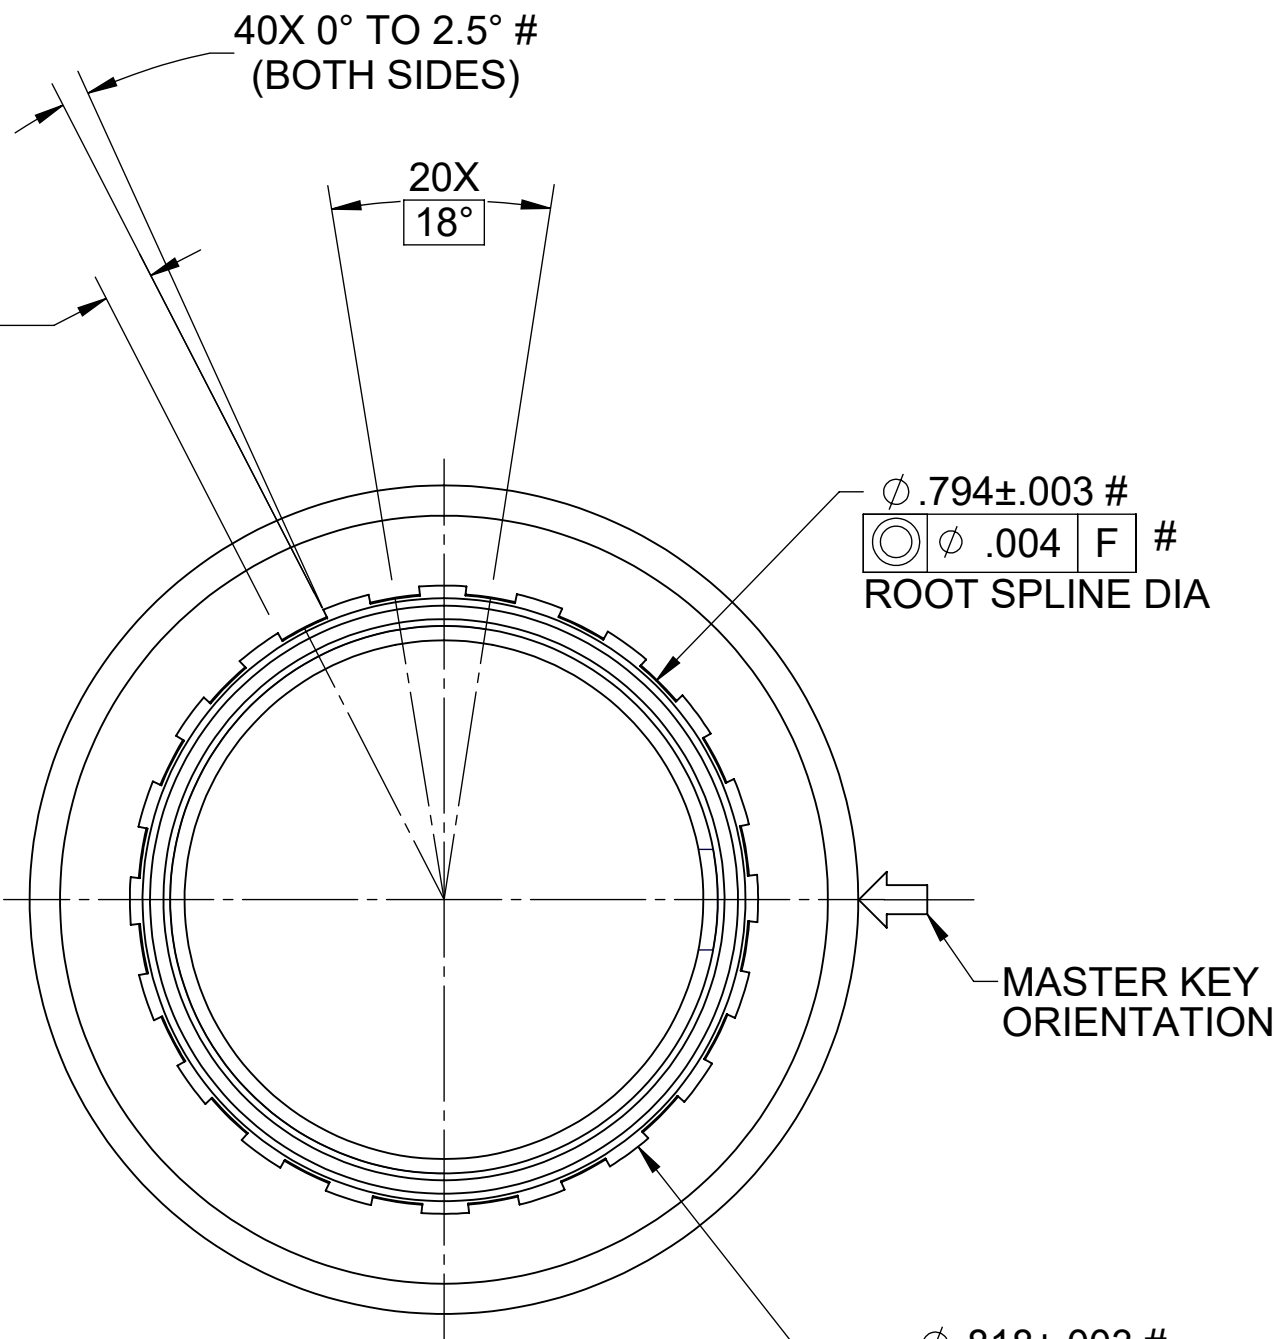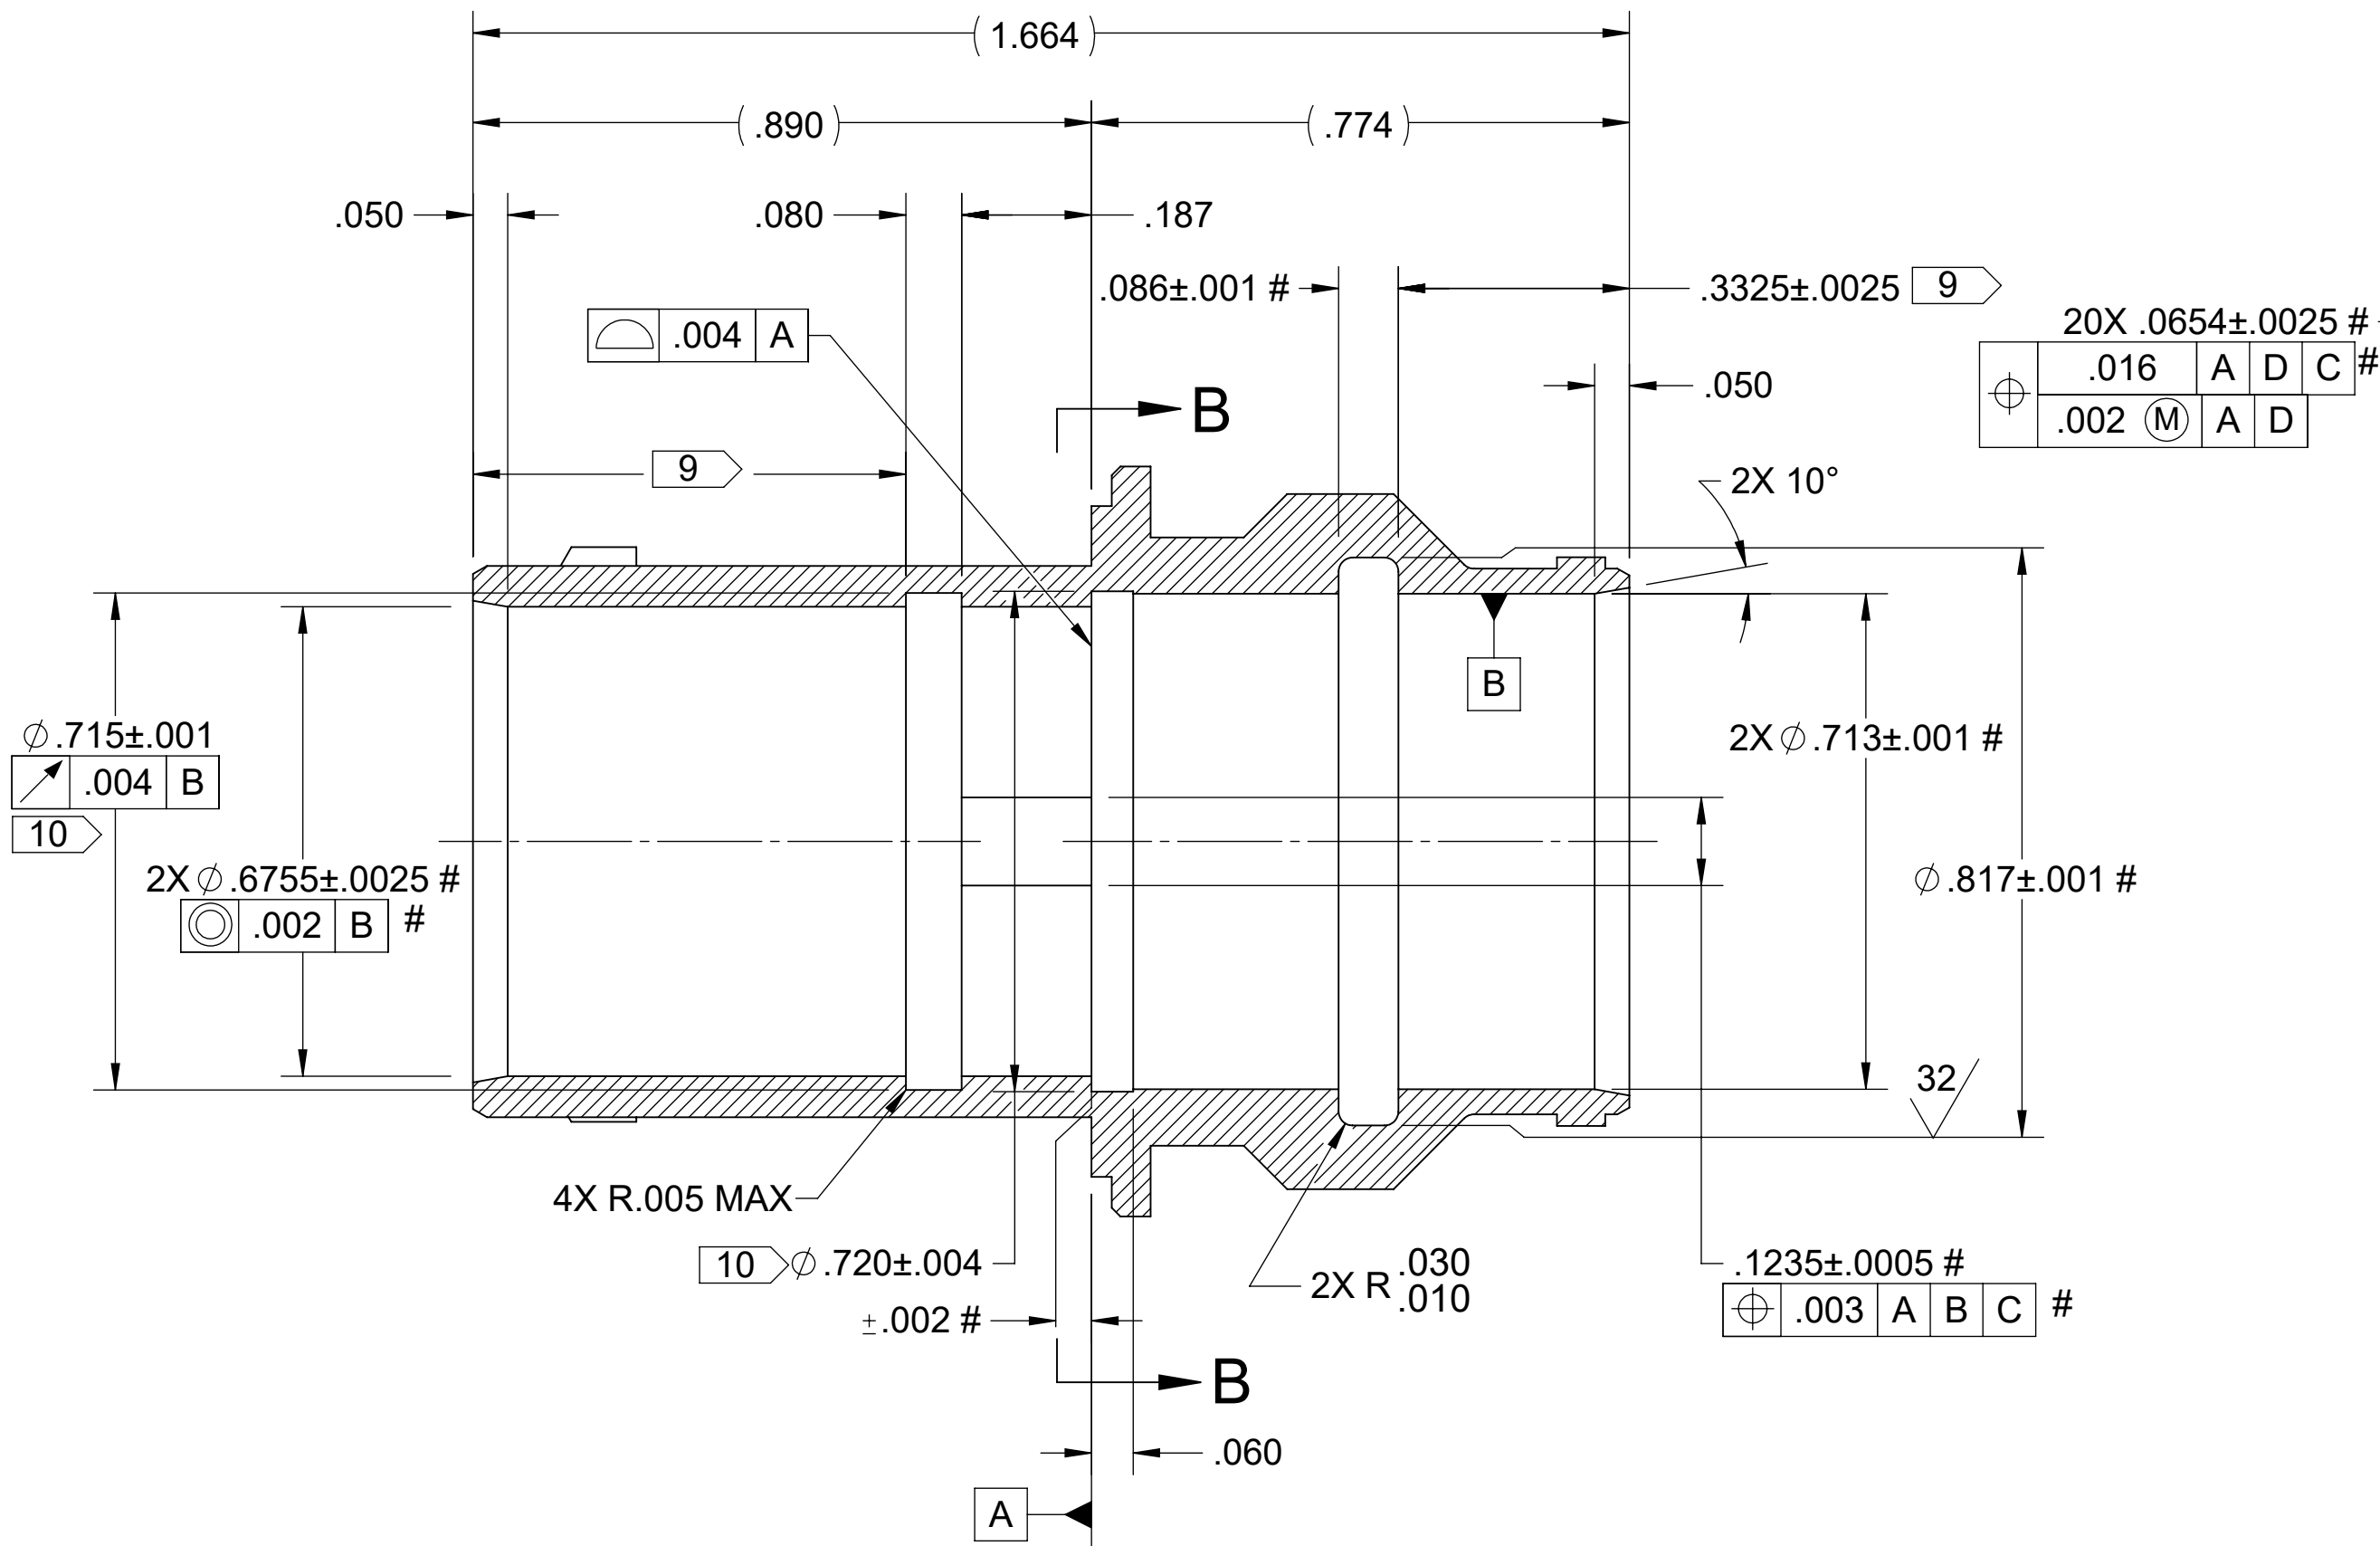

VIEW A-A
FROM SHEET 2

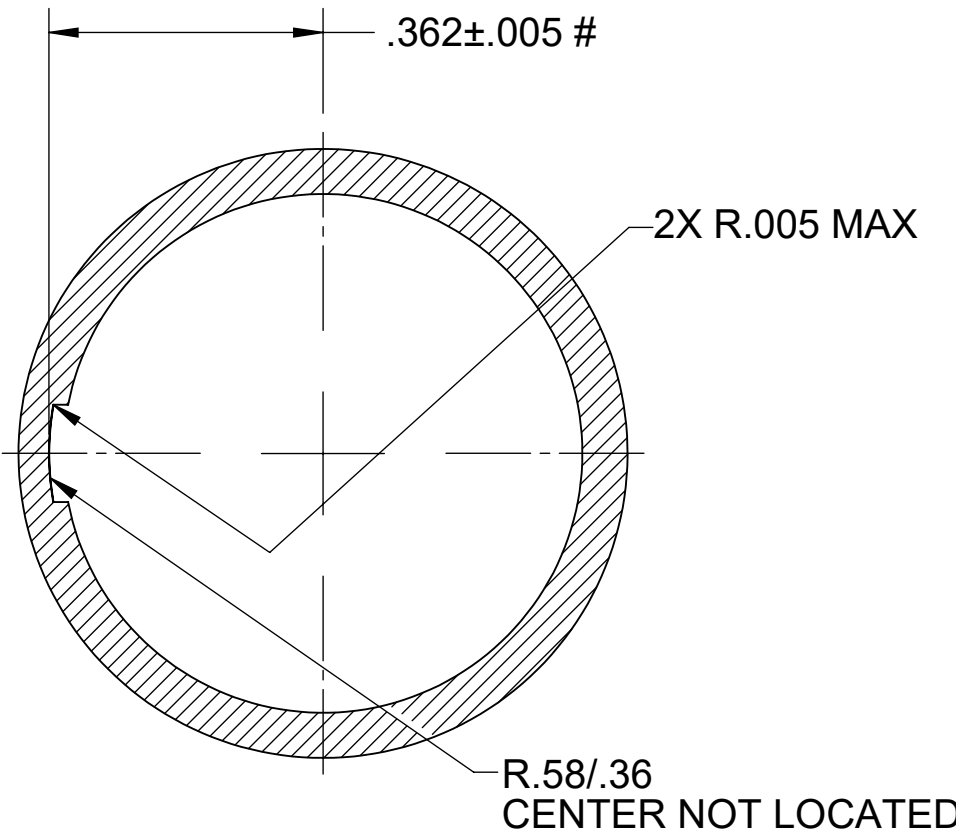

SECTION B-B

SIZE	CAGE CODE	DWG NO	REV
C	ØYPM2	217-204	F
SCALE	4:1	SHEET	3 OF 3