


- NOTES: UNLESS OTHERWISE SPECIFIED
1. REMOVE ALL BURRS AND BREAK SHARP EDGES .010 MAX
 2. ALL SURFACES TO BE 64 MICROFINISH OR BETTER
 3. DIMENSIONAL LIMITS APPLY AFTER FINISH
 4. ALL INTERNAL FILLET RADII .005 MAX UNLESS NOTED
 5. THREAD, SPLINE, AND KEYING PROJECTIONS MAY BE GAGE CHECKED FOR DIMENSIONAL CONFORMANCE AND FREEDOM FROM BURRS.
 6. PLATING SURFACE AREA ESTIMATE = 20.8 IN²
 7. FINISH AG & AH: CAD PLATE MUST EXTEND INTO I.D. OF PART TO EDGE OF GROOVES
 8. PART NUMBER DEFINITION: SEE AFSI DOCUMENT FSP-1066 FOR MATERIAL & FINISHING
 9. REDRAWN FROM FS3M-660-00-001
 10. THIS PART IS SOURCE CONTROLLED. DLA MUST APPROVE ALL SOURCES OF SUPPLY PRIOR TO USE. APPROVED SOURCES OF SUPPLY:
 1. AMPHENOL FIBER SYSTEMS INTERNATIONAL

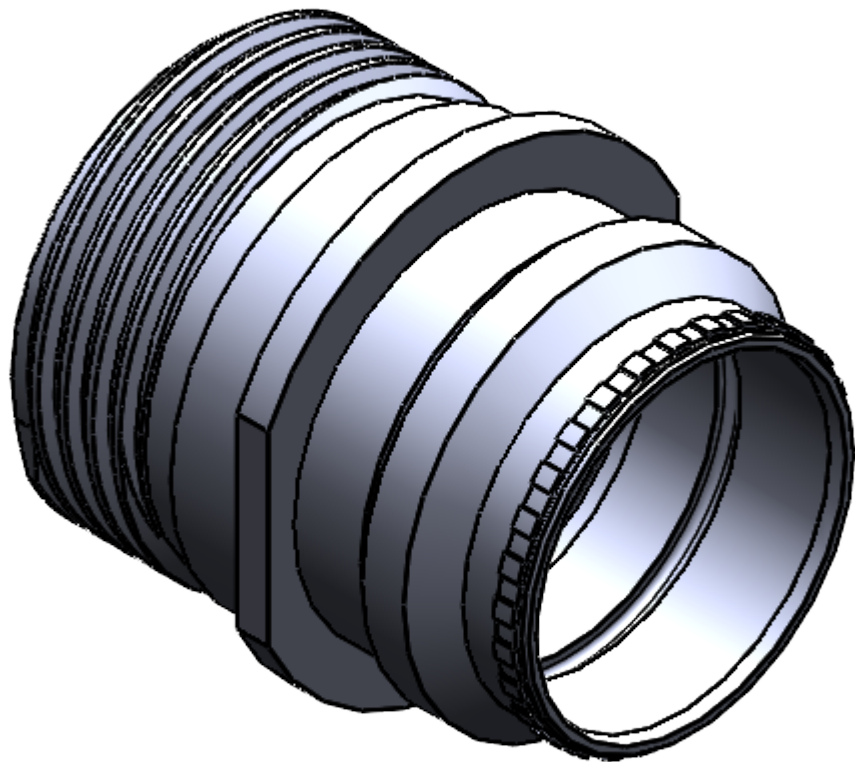

REVISION HISTORY - ALL SHEETS ARE THE SAME REVISION

REV	DESCRIPTION	DATE	APPROVED
	ENGINEERING RELEASE		
A	DM: (1) ADD # TO CRIT DIMS; (2) SH2: ADD ±1° TO 45°; (3) SH2: 1.490 WAS 1.500/1.488; (4) SH2: ADD 1.656 & 1.508 DIMS	2021/02/11	JW
	FORMAL RELEASE		
B	ECN 210510-1108 DM: (1) SH3 UPDATE UNIVERSAL KEY OPTION "U"; (2) SH2 RENAME KEYING TABLE; (3) SH2 KEYING CHART ADD OPTION M; (4) P/N DESIGNATOR: ADD M, W, 7 & 8 TO KEY OPTIONS; (5) SH3: ADD MASTER KEY VIEW; (6) SH3 ADD UNIVERSAL KEY VIEW OPTION "W"; (7) SH2 KEYING CHART ADD OPTION W; (8) SH3 ZN C3: ADD "X" TO X-KEY	2021/05/12	JW
C	ECN 210630-0814 DM: UNIVERSAL KEY: ADD .047±.005 DIM	2021/06/30	JC
D	ECN 210819-1504 DM: SH3 ZN D4 .740 WAS .754	2021/08/20	JW
E	ECN 211101-1411 DM: SH2 ZN B3: ADD CONTROL FRAME TO 1.508 DIM	2021/11/02	JC
F	ECN 220216-1710 DM: SH2 ZN B3: ROTATE FLATS 90°	2022/02/17	BC
G	ECN 221026-1000 DM: (1) ADD "#" TO CRIT DIMS & GD&T; (2) SH2: UPDATE LEADER LINES; (3) ADD NOTE 9; (4) SH2 ZN B3: ADD GD&T TO 1.656	2022/10/31	BC
H	ECN 221201-1322 DM: (1) ADD "#" TO CRIT DIMS; (2) ADD GD&T TO THDS; (3) UPDATE HIGBEE CUT; (4) ADD PARALLEL TO REAR SURFACE; (5) UPDATE TITLE; (6) ADD DAT.C TO CONTROL FRAME OF FLATS	2023/04/03	BC
J	ECN 240212-0914 DM: SH1 ADD SOURCE CONTROL NOTE	2024/02/20	BC

217-324 - 0

KEY

1 MATERIAL/FINISH ALLOWANCE

2 OR

3 MATERIAL/FINISH

4 8

5

6

7

8

U

W

M

W/O DRY FILM LUBE

		MATERIAL SEE NOTES DRILLED HOLE DIAMETER TOLERANCE Ø .000 TO Ø .125 ^{+.004} _{-.001} Ø .251 TO Ø .500 ^{+.006} _{-.001} Ø .126 TO Ø .250 ^{+.005} _{-.001} Ø .501 TO Ø .750 ^{+.008} _{-.001} DO NOT SCALE DRAWING UNLESS OTHERWISE SPECIFIED DIM ARE IN INCHES TOL ON ANGLES ±3° 1 PL ±.1 2 PL ±.02 3 PL ±.010 INTERPRET DIM AND TOL PER ASME Y14.5-1994	DFT DM 2020/07/30	AmphenolFSI			
			CHK BC 2020/10/01				
			MFG PK 2020/11/02	TITLE INLINE RECEPTACLE BODY, SH23, M28			
			ENG DM 2020/07/30				
			APP JW 2021/05/12	SIZE	CAGE CODE	DWG NO	REV
217-325	28876			C	ØYPM2	217-324	J
NEXT ASSY	USED ON			SCALE 1:1		SHEET 1 OF 3	
APPLICATION							

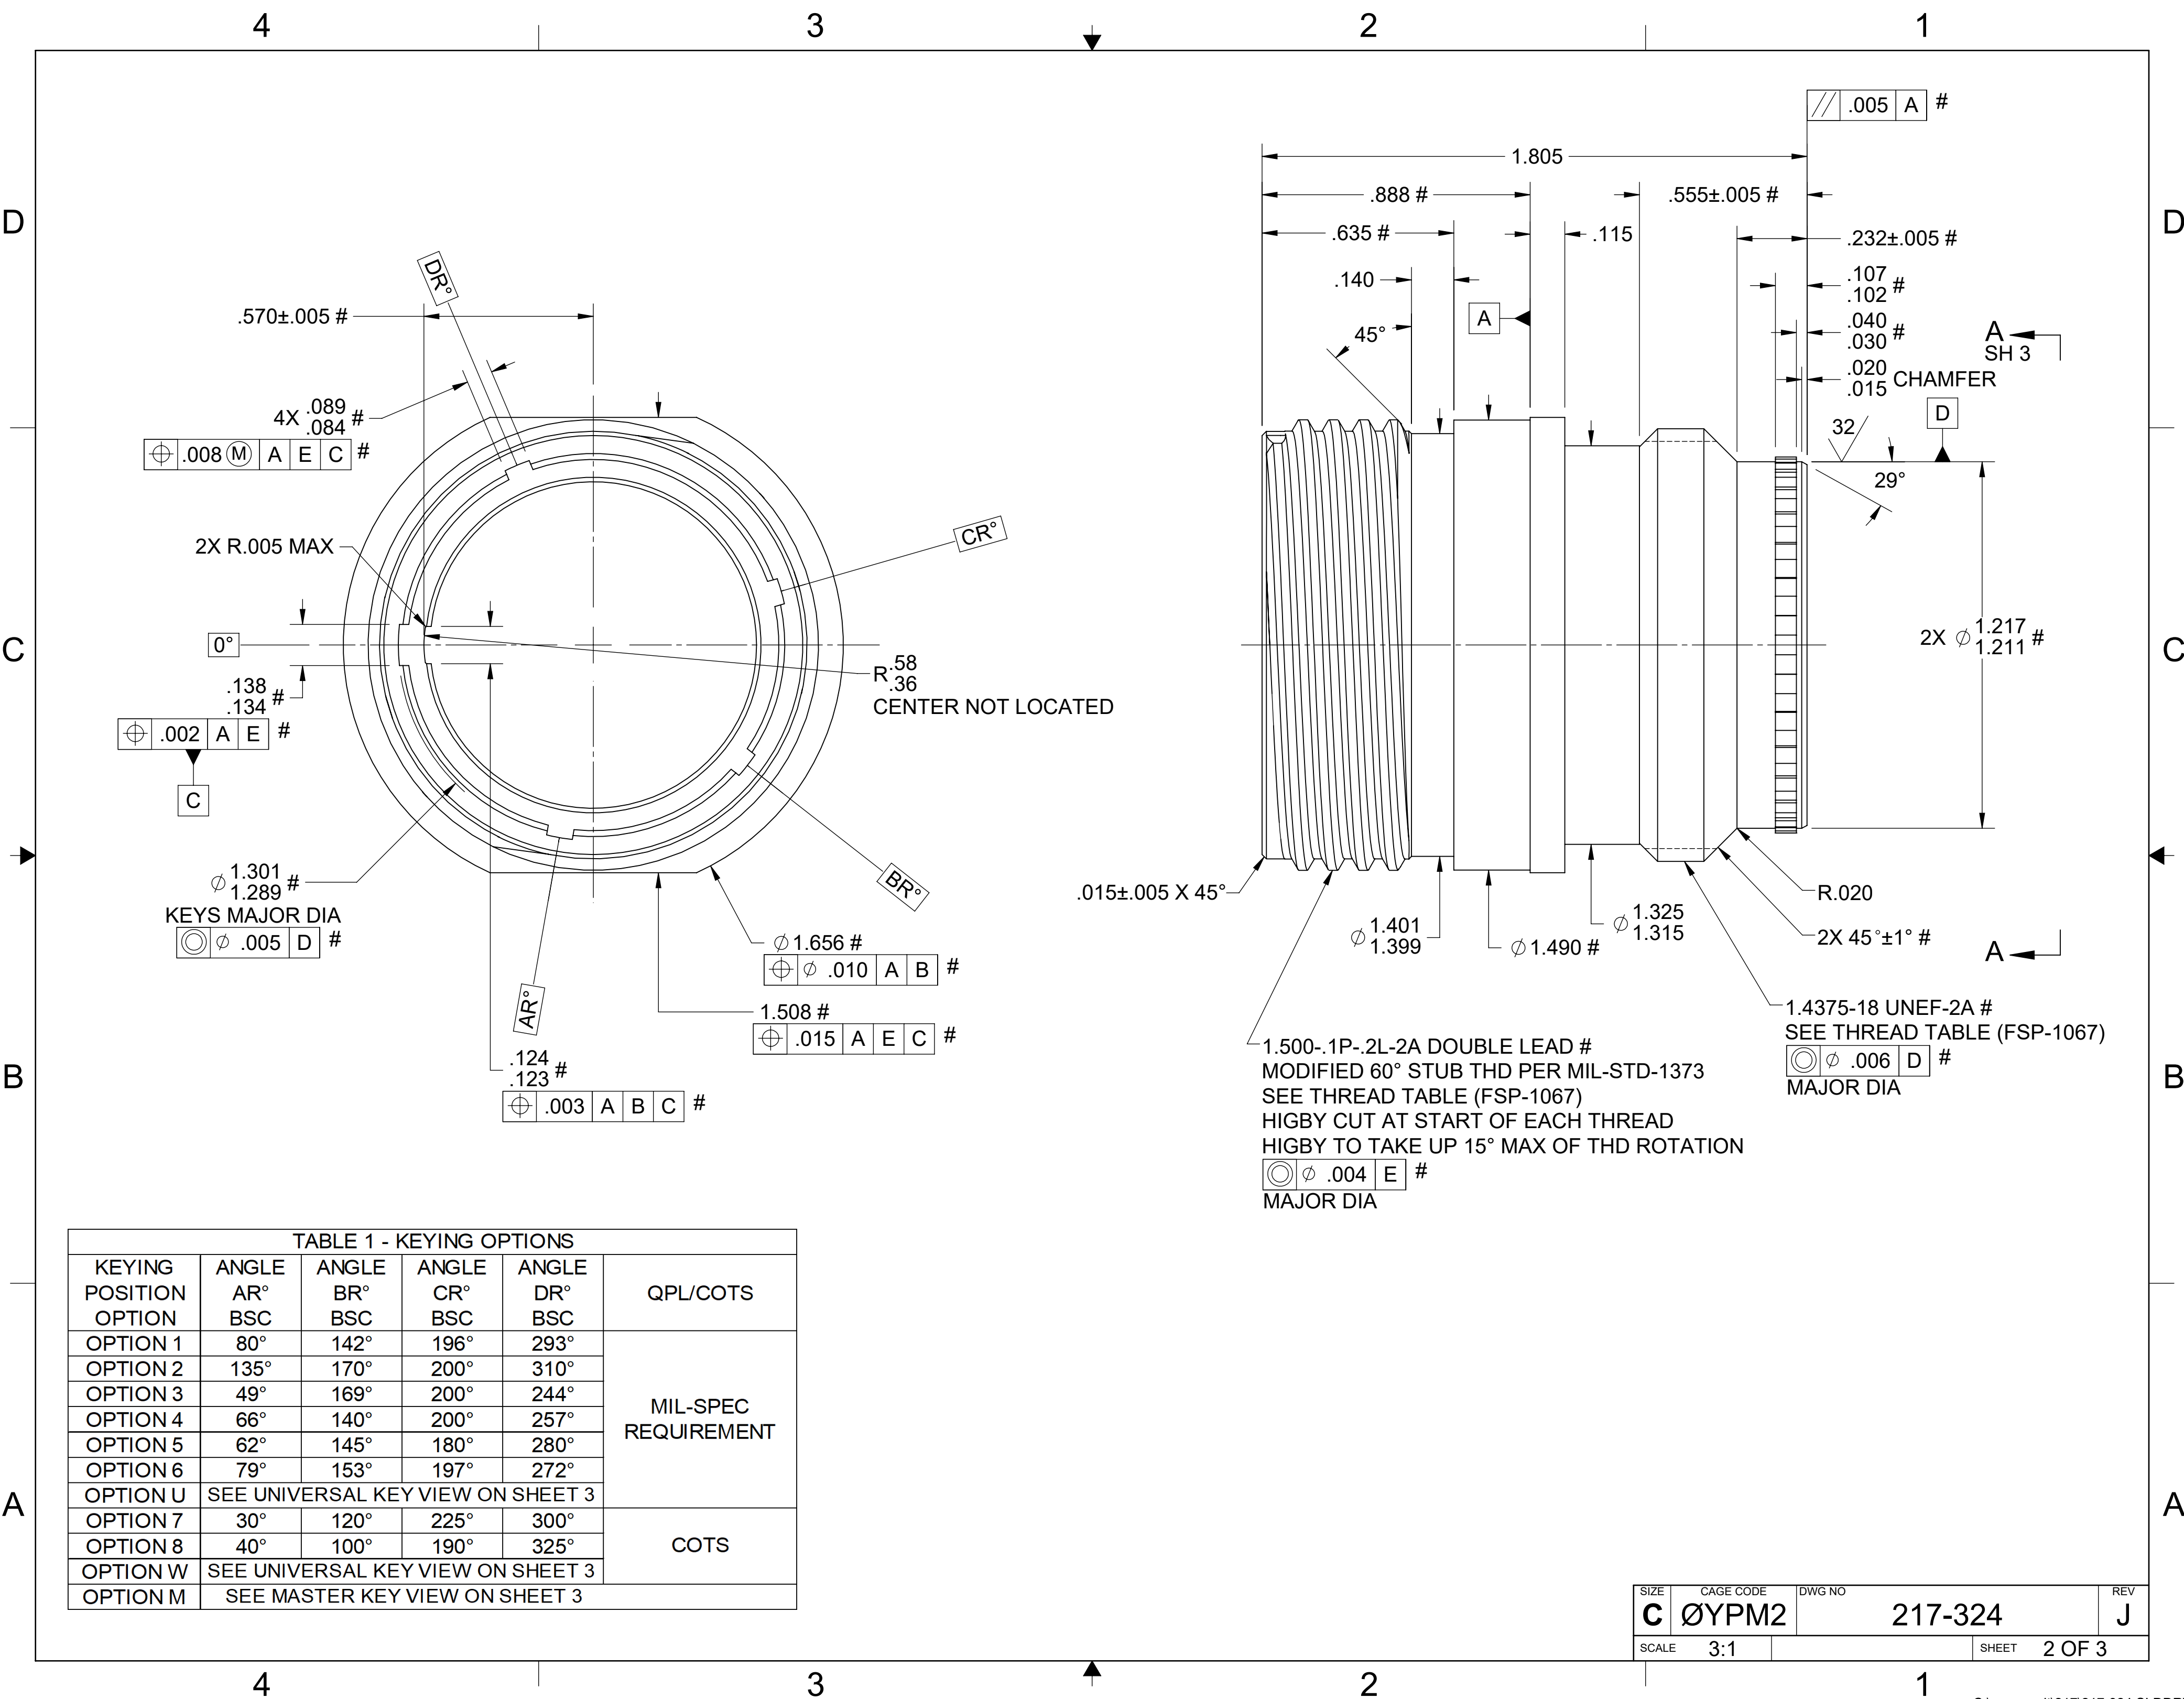


TABLE 1 - KEYING OPTIONS					
KEYING POSITION OPTION	ANGLE AR° BSC	ANGLE BR° BSC	ANGLE CR° BSC	ANGLE DR° BSC	QPL/COTS
OPTION 1	80°	142°	196°	293°	MIL-SPEC REQUIREMENT
OPTION 2	135°	170°	200°	310°	
OPTION 3	49°	169°	200°	244°	
OPTION 4	66°	140°	200°	257°	
OPTION 5	62°	145°	180°	280°	
OPTION 6	79°	153°	197°	272°	
OPTION U	SEE UNIVERSAL KEY VIEW ON SHEET 3				
OPTION 7	30°	120°	225°	300°	COTS
OPTION 8	40°	100°	190°	325°	
OPTION W	SEE UNIVERSAL KEY VIEW ON SHEET 3				
OPTION M	SEE MASTER KEY VIEW ON SHEET 3				

SIZE	CAGE CODE	DWG NO	REV
C	ØYPM2	217-324	J
SCALE	SHEET		
3:1	2 OF 3		

4

3

2

1

D

D

C





C

B


B

A

A

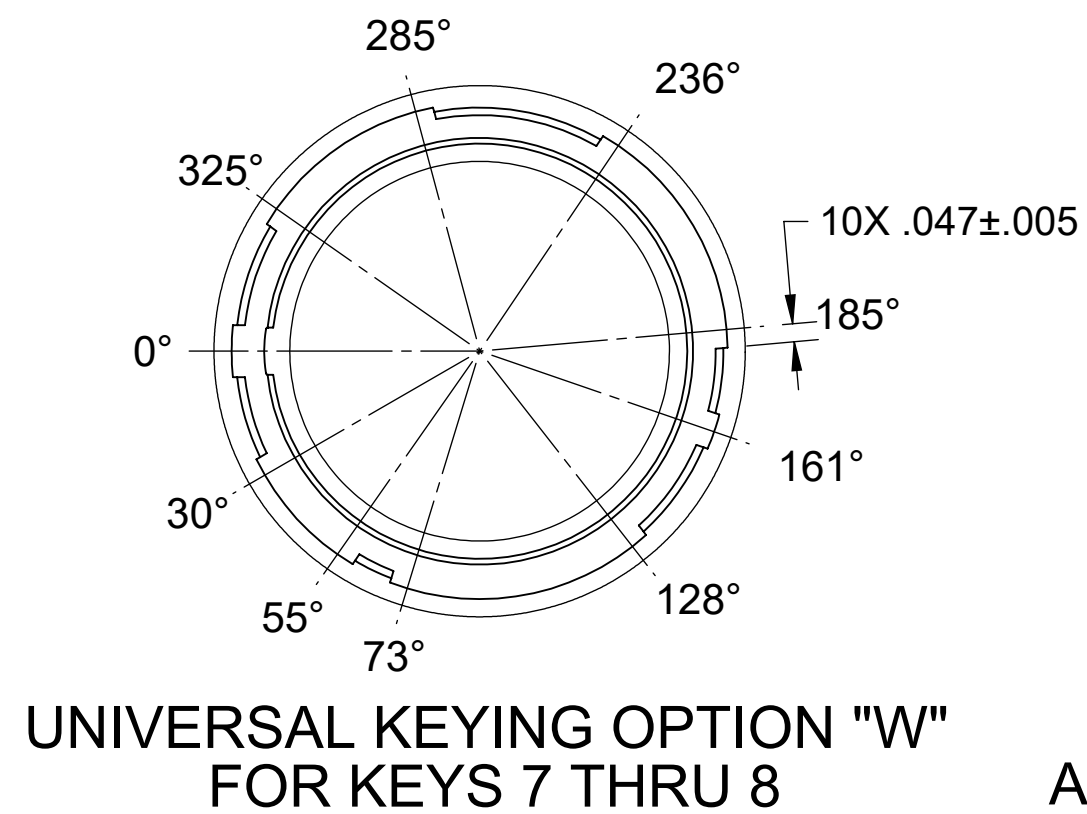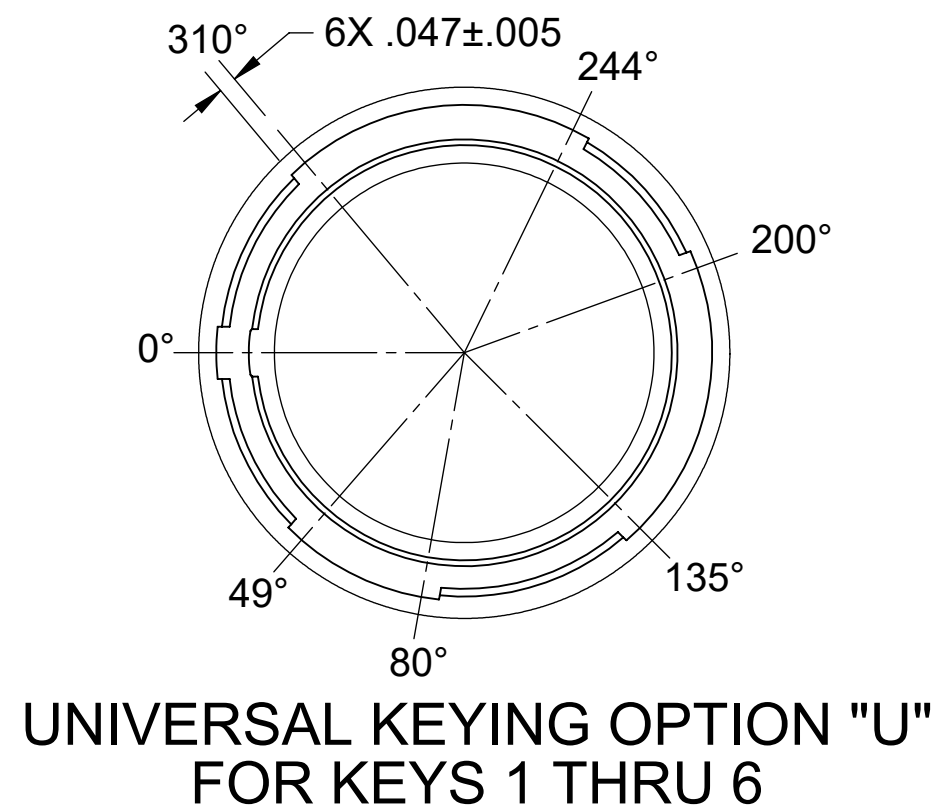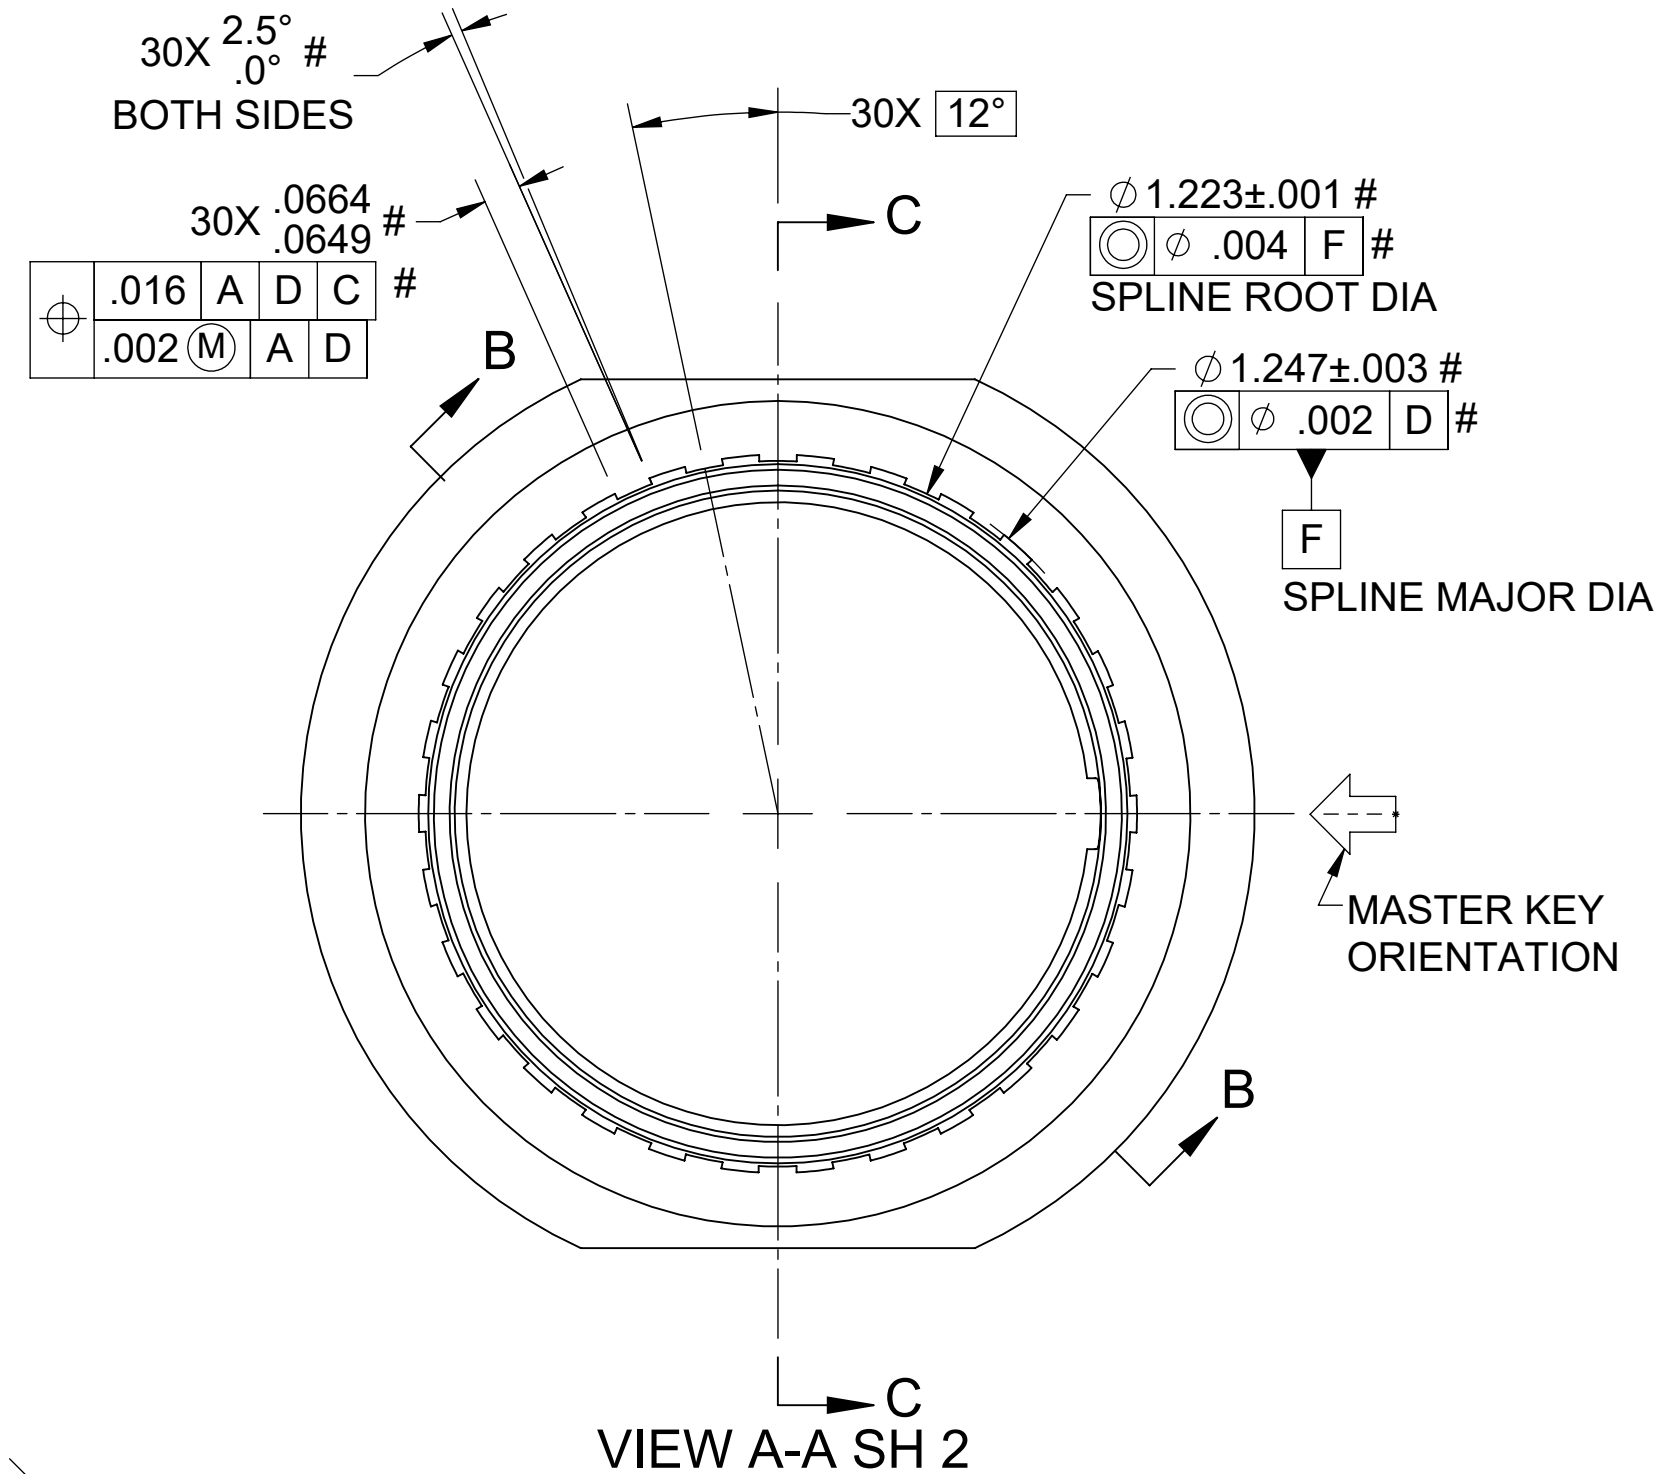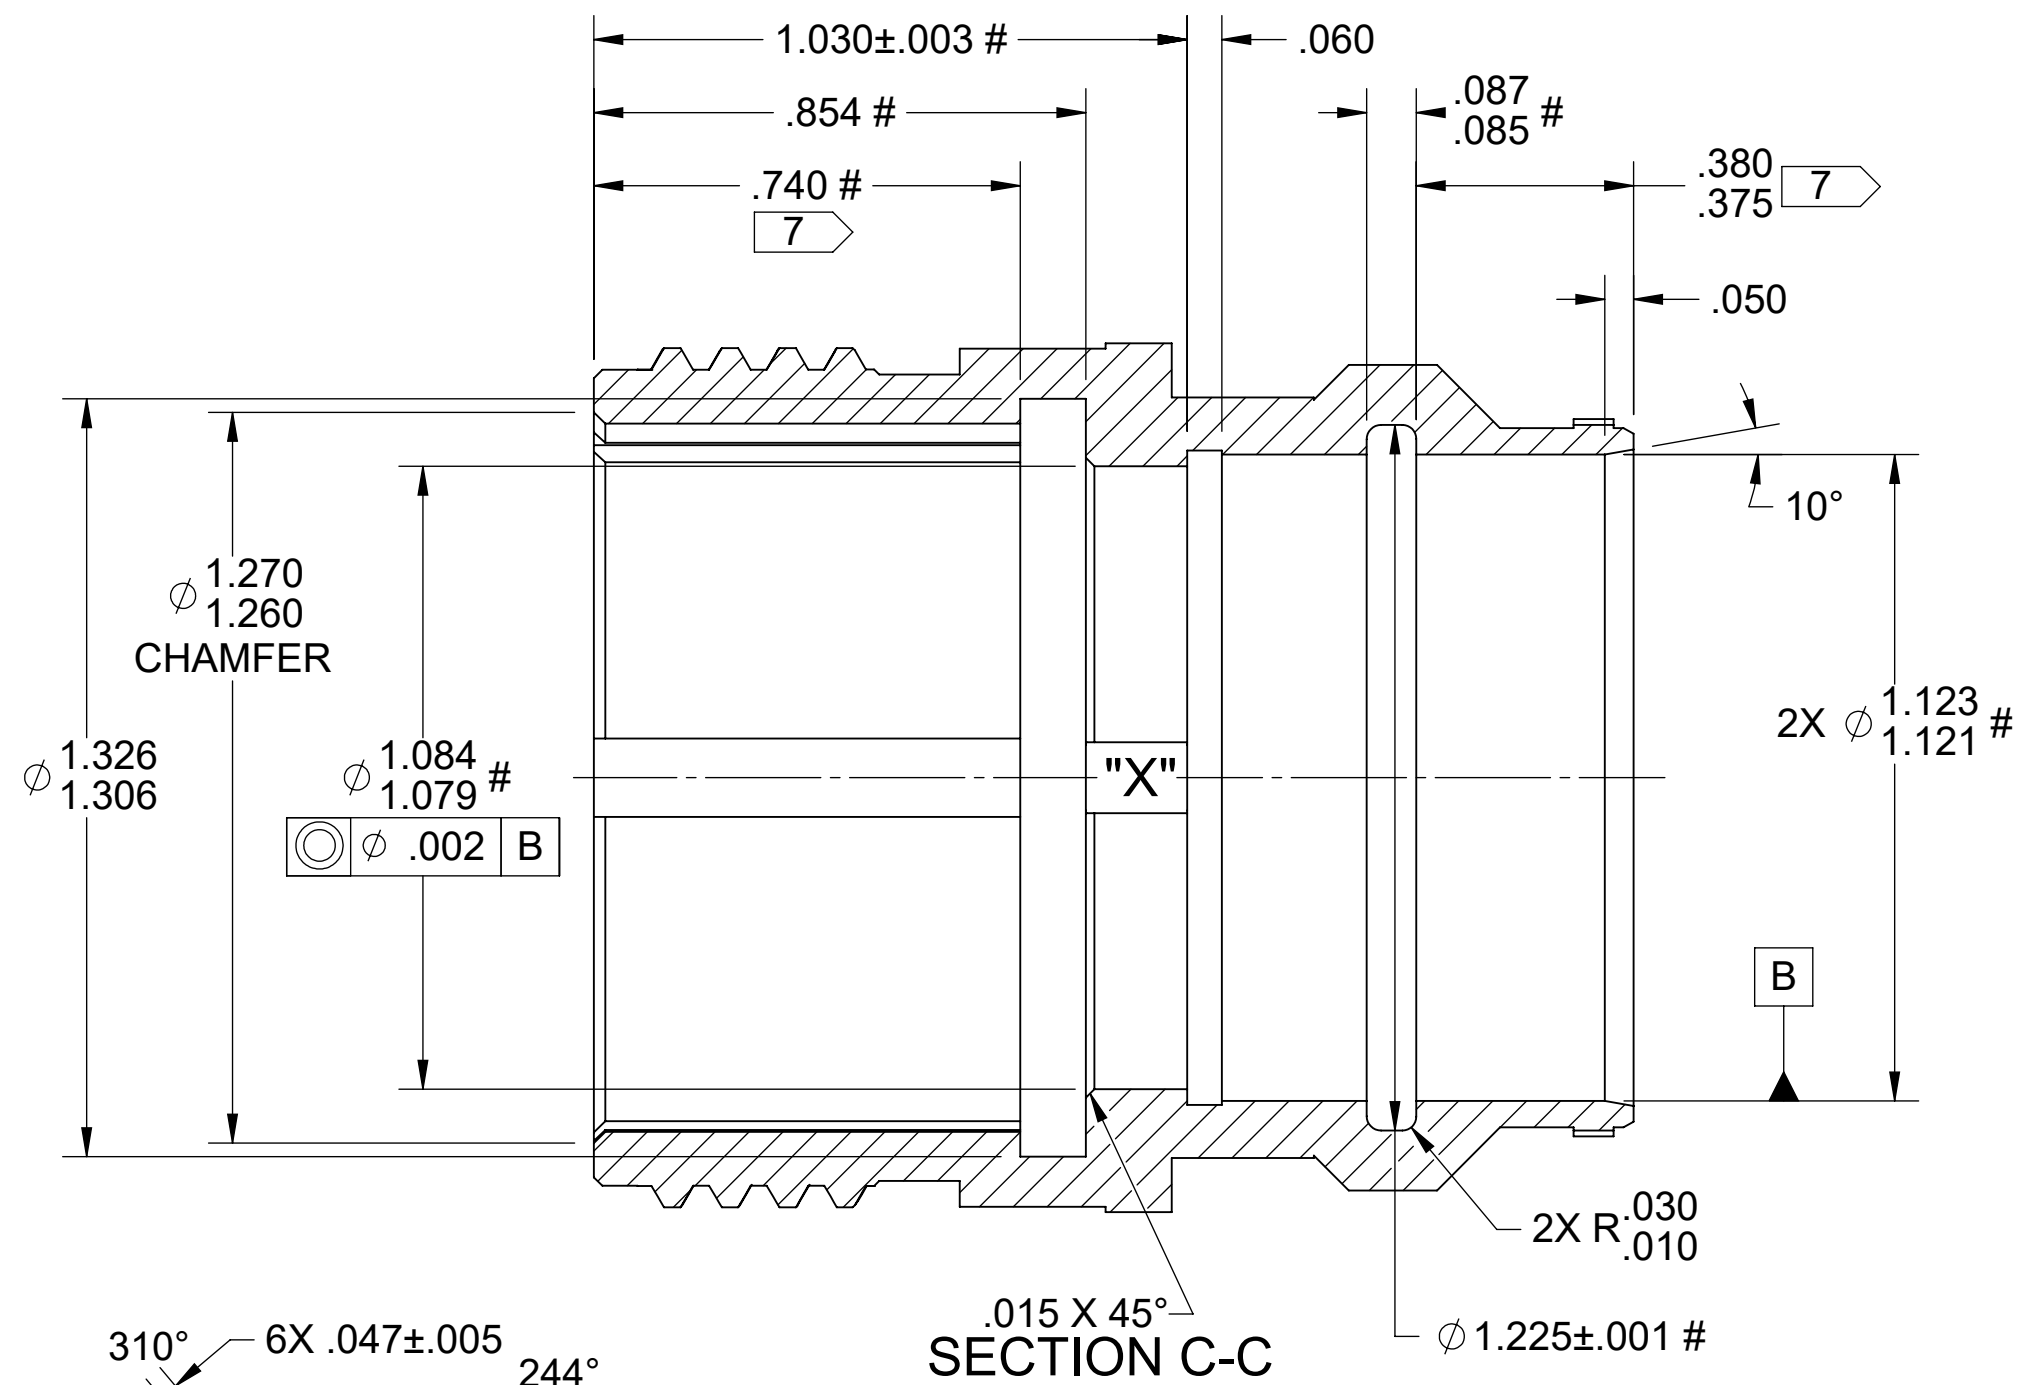

MASTER KEY OPTION "M"
X-KEY & MASTER KEY ALIGNED
ALL OTHER INTERNAL KEYS REMOVED

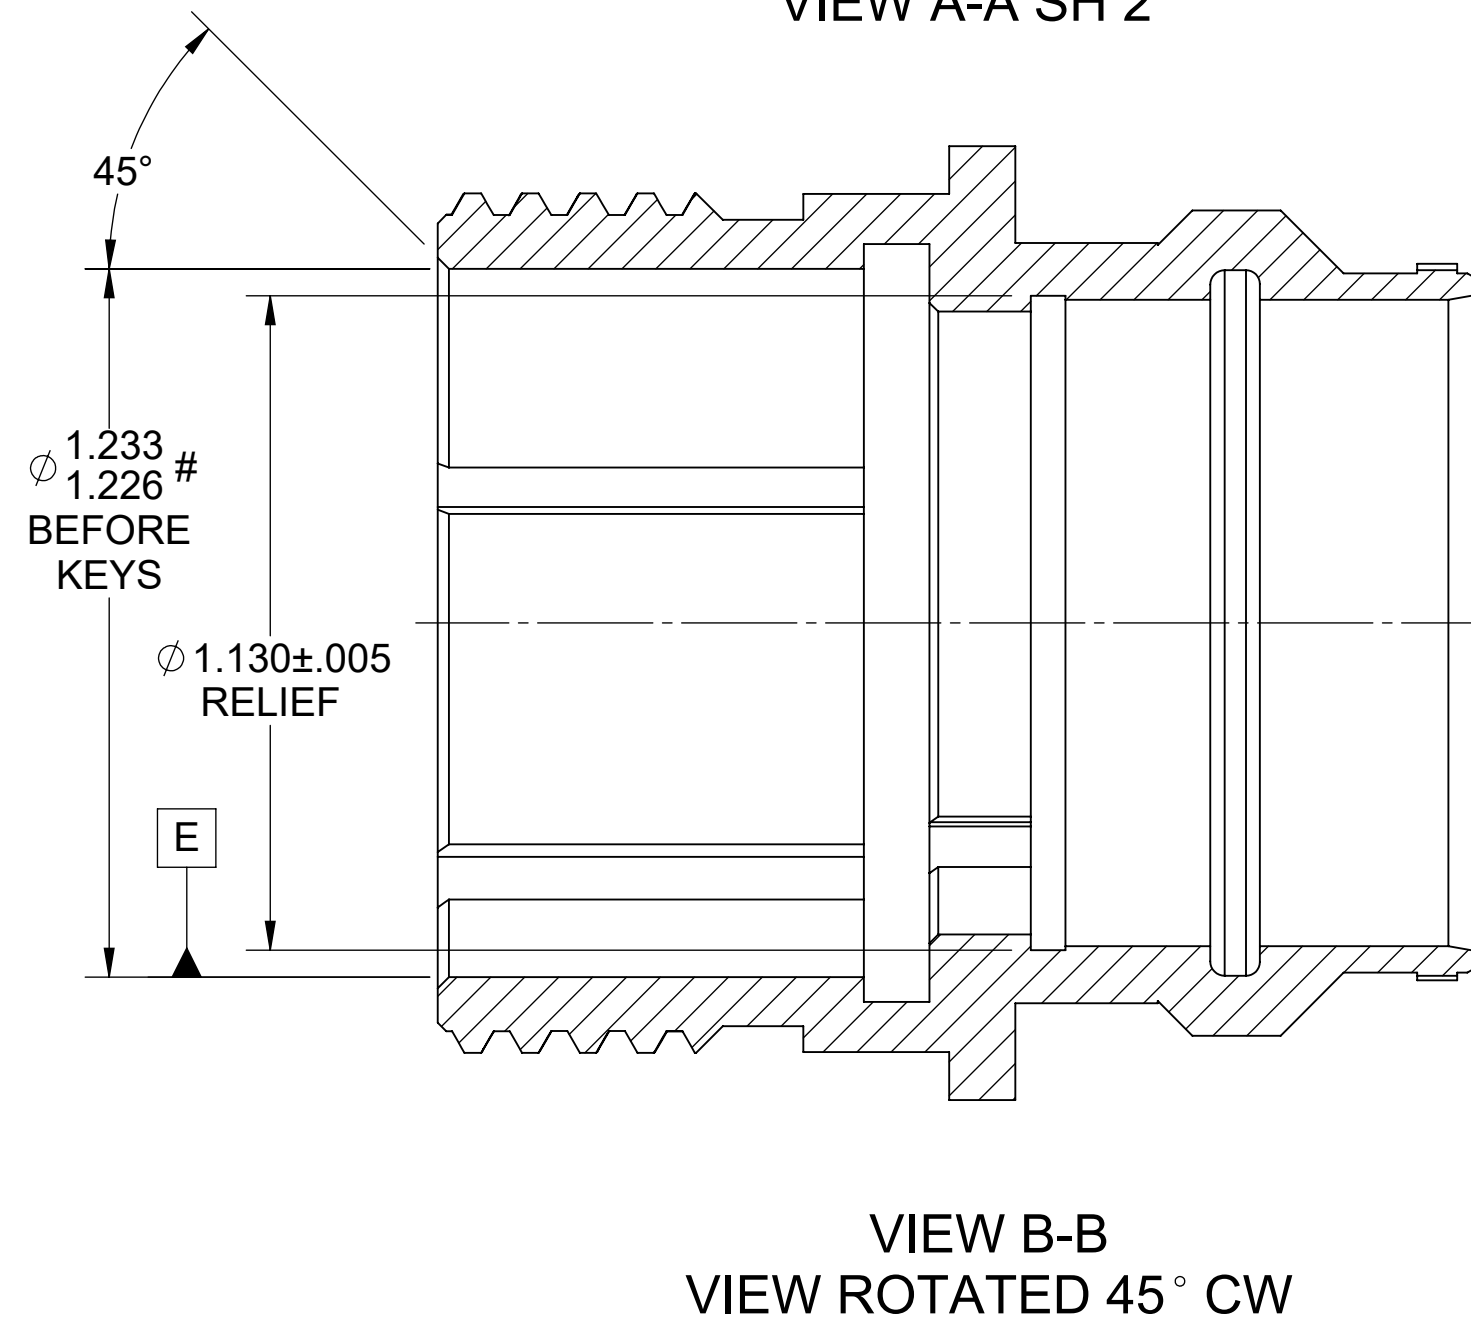

SIZE	CAGE CODE	DWG NO	REV
C	ØYPM2	217-324	J
SCALE	3:1		SHEET 3 OF 3