

NOTES: UNLESS OTHERWISE SPECIFIED


1. REMOVE ALL BURRS AND BREAK SHARP EDGES .010 MAX
2. MAX INSIDE CORNER RADII .010
3. ALL SURFACES TO BE 64 MICROFINISH OR BETTER
4. DIMENSIONS TO BE EFFECTIVE AFTER PLATING
5. ALL INTERNAL FILLET RADII .005 MAX UNLESS NOTED
6. THREAD, SPLINE, AND KEYING GROOVES MAY BE GAGE CHECKED FOR DIMENSIONAL CONFORMANCE AND FREEDOM FROM BURRS

7 BROACH MARKS PERMISSIBLE IN RELIEF

8 PART NUMBER DEFINITION: SEE AFSI DOCUMENT FSP-1066 FOR MATERIAL & FINISHING

9 FINISH AG & AH: CAD PLATE MUST EXTEND INTO I.D. OF PART TO EDGE OF GROOVE

10. REDRAWN FROM 119-104
11. THIS PART IS SOURCE CONTROLLED. DLA MUST APPROVE ALL SOURCES OF SUPPLY PRIOR TO USE. APPROVED SOURCES OF SUPPLY:
1. AMPHENOL FIBER SYSTEMS INTERNATIONAL
 2. AMPHENOL IMS DIVISION INDIA

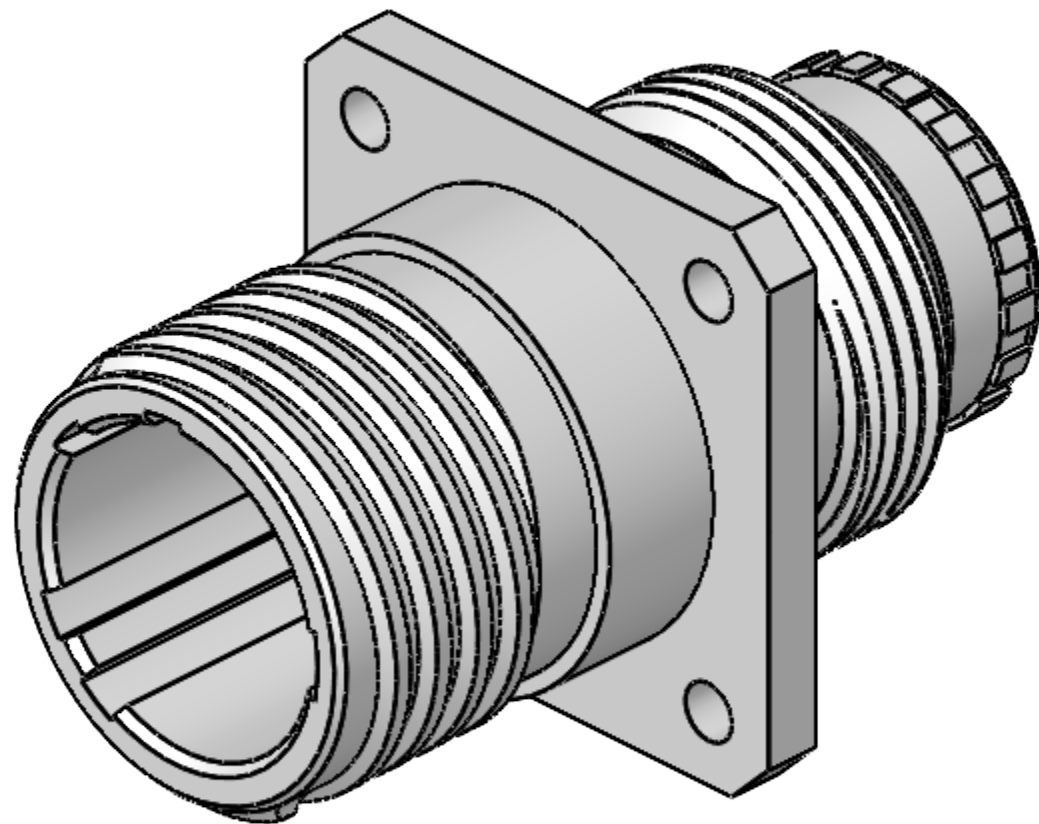

KEYING OPTIONS CHART

KEYING POSITION OPTION	ANGLE A° BASIC	ANGLE B° BASIC	ANGLE C° BASIC	ANGLE D° BASIC
OPTION 1	95°	141°	208°	236°
OPTION 2	113°	156°	182°	292°
OPTION 3	90°	145°	195°	252°
OPTION 4	53°	156°	220°	255°
OPTION 5	119°	146°	176°	298°
OPTION 6	51°	141°	184°	242°
OPTION "U" (UNIVERSAL)	SEE SHEET 2 FOR UNIVERSAL KEY			
OPTION "M" (MASTER)	SEE SHEET 2 FOR MASTER KEY			

REVISION HISTORY - ALL SHEETS ARE THE SAME REVISION

REV	DESCRIPTION	DATE	APPROVED
	ENGINEERING RELEASE		
A	DM: SH2: REPLACE .740 WITH .100 DIM	2020/10/28	BCull
	FORMAL RELEASE		
B	ECN 210211-1314 DM: (1) SH2: REPLACE .100 WITH .740; (2) ADD # TO CRIT DIMS; (3) SH2: .865 WAS .875; (4) SH2: ADD $\pm 1^\circ$ TO 45° ; (5) SH2: MAKE 20° BASIC TOL	2021/02/11	JW
C	ECN 210310-1106 DM: SH2 ZN B4 UPDATE KEY POSITION NOTE	2021/03/10	JW
D	ECN 210422-1058 DM: (1) KEYING CHART ADD OPTION M; (2) SH2 ADD UNIVERSAL KEY VIEW; (3) KEYING OPTIONS CHART REWORD OPTION U; (4) SH2 ADD MASTER KEY VIEW; (5) SH2 ZN A3: ADD "X" TO X-KEY; (6) SH2 RESCALE VIEW C; (7) SH2 ZN A3: UPDATE X-KEY VISUAL	2021/05/13	JW
E	ECN 210630-0814 DM: UNIVERSAL KEY: ADD .047 $\pm$.005 DIM	2021/06/30	JC
F	ECN 221025-0820 DM: (1) ADD "#" TO CRIT DIMS & GD&T; (2) SH2: UPDATE LEADER LINES; (3) ADD NOTE 10	2022/10/25	BCull
G	ECN 221122-0815 DM: (1) SH2 ZN C4: MOVE DATUM C TO .134/.138 DIM; (2) ADD "#" TO CRIT DIMS; (3) SH2: ADD GD&T TO .875 THDS; (4) SH2: ADD PARALLEL TO REAR SURFACE; (5) UPDATE TITLE	2023/03/27	BCull
H	ECN 240212-0914 DM: SH1 ADD SOURCE CONTROL NOTE	2024/02/19	BCull

217-104 - 0

KEY _____

1

2 MATERIAL/FINISH ALLOWANCE _____

3 OR

4 MATERIAL/FINISH 8

5

6

U

M

W/O DRY
FILM LUBE

		MATERIAL SEE NOTES	DFT	DM	2020/07/27	AmphenolFSI			
			CHK	BC	2020/09/21				
			MFG	PK	2022/10/25				
		DRILLED HOLE DIAMETER TOLERANCE	ENG	DM	2020/07/27	TITLE WALL MOUNT RECEPTACLE BODY, SH13, M28			
		Φ.000 TO Φ.125 ⁺⁰⁰⁴ ₋₀₀₁ Φ.251 TO Φ.500 ⁺⁰⁰⁶ ₋₀₀₁ Φ.126 TO Φ.250 ⁺⁰⁰⁵ ₋₀₀₁ Φ.501 TO Φ.750 ⁺⁰⁰⁸ ₋₀₀₁	APP	JW	2021/02/11				
217-105	28876	DO NOT SCALE DRAWING UNLESS OTHERWISE SPECIFIED DIM ARE IN INCHES TOL ON ANGLES ±3° 1 PL ±.1 2 PL ±.02 3 PL ±.010 INTERPRET DIM AND TOL PER ASME Y14.5-1994	This Document contains proprietary information and such information is prohibited from disclosure to others, publication or duplication in whole or in part without written permission from Amphenol Fiber Systems International. Copyright © 2018 Amphenol Fiber Systems International. Nonpublished work. All rights reserved.			SIZE	CAGE CODE	DWG NO	REV
NEXT ASSY	USED ON					C ØYPM2	217-104	H	
APPLICATION			SCALE		3:1	SHEET		1 OF 2	

4

3

2

1

D

D

C

C

B

B

A

A

