


1

- 1> ASSEMBLE UNPLATED COMPONENTS PRIOR TO PLATING
- 2> PRESS SLEEVE PROTRUSION WHEN PRESS SLEEVE IS FULLY SEATED AT ASSEMBLY
3. USE FSTF0114 TOOL TO INSTALL PRESS SLEEVE INTO HOUSING AND FSTF0824 TOOL TO REMOVE PRESS SLEEVE FROM HOUSING
4. USE FSTF0823 SUPPORT TOOL TO HOLD HOUSING DURING ASSEMBLY
- 5> PART NUMBER DEFINITION: SEE AFSI DOCUMENT FSP-1066 FOR MATERIAL & FINISHING

REVISION HISTORY - ALL SHEETS ARE THE SAME REVISION			
REV	DESCRIPTION	DATE	APPROVED
	ENGINEERING RELEASE		
A	DM: DELETE NOTE 2 & RENUMBER NOTES	2020/01/06	BC
B	DM: (1) UPDATED P/N DESIGNATOR; (2) UPDATE NOTE 1	2021/02/09	JW
	FORMAL RELEASE		
C	ECN 240118-1311 DM: UPDATE ITEM 1 DESCRIPTION	2024/01/22	JC

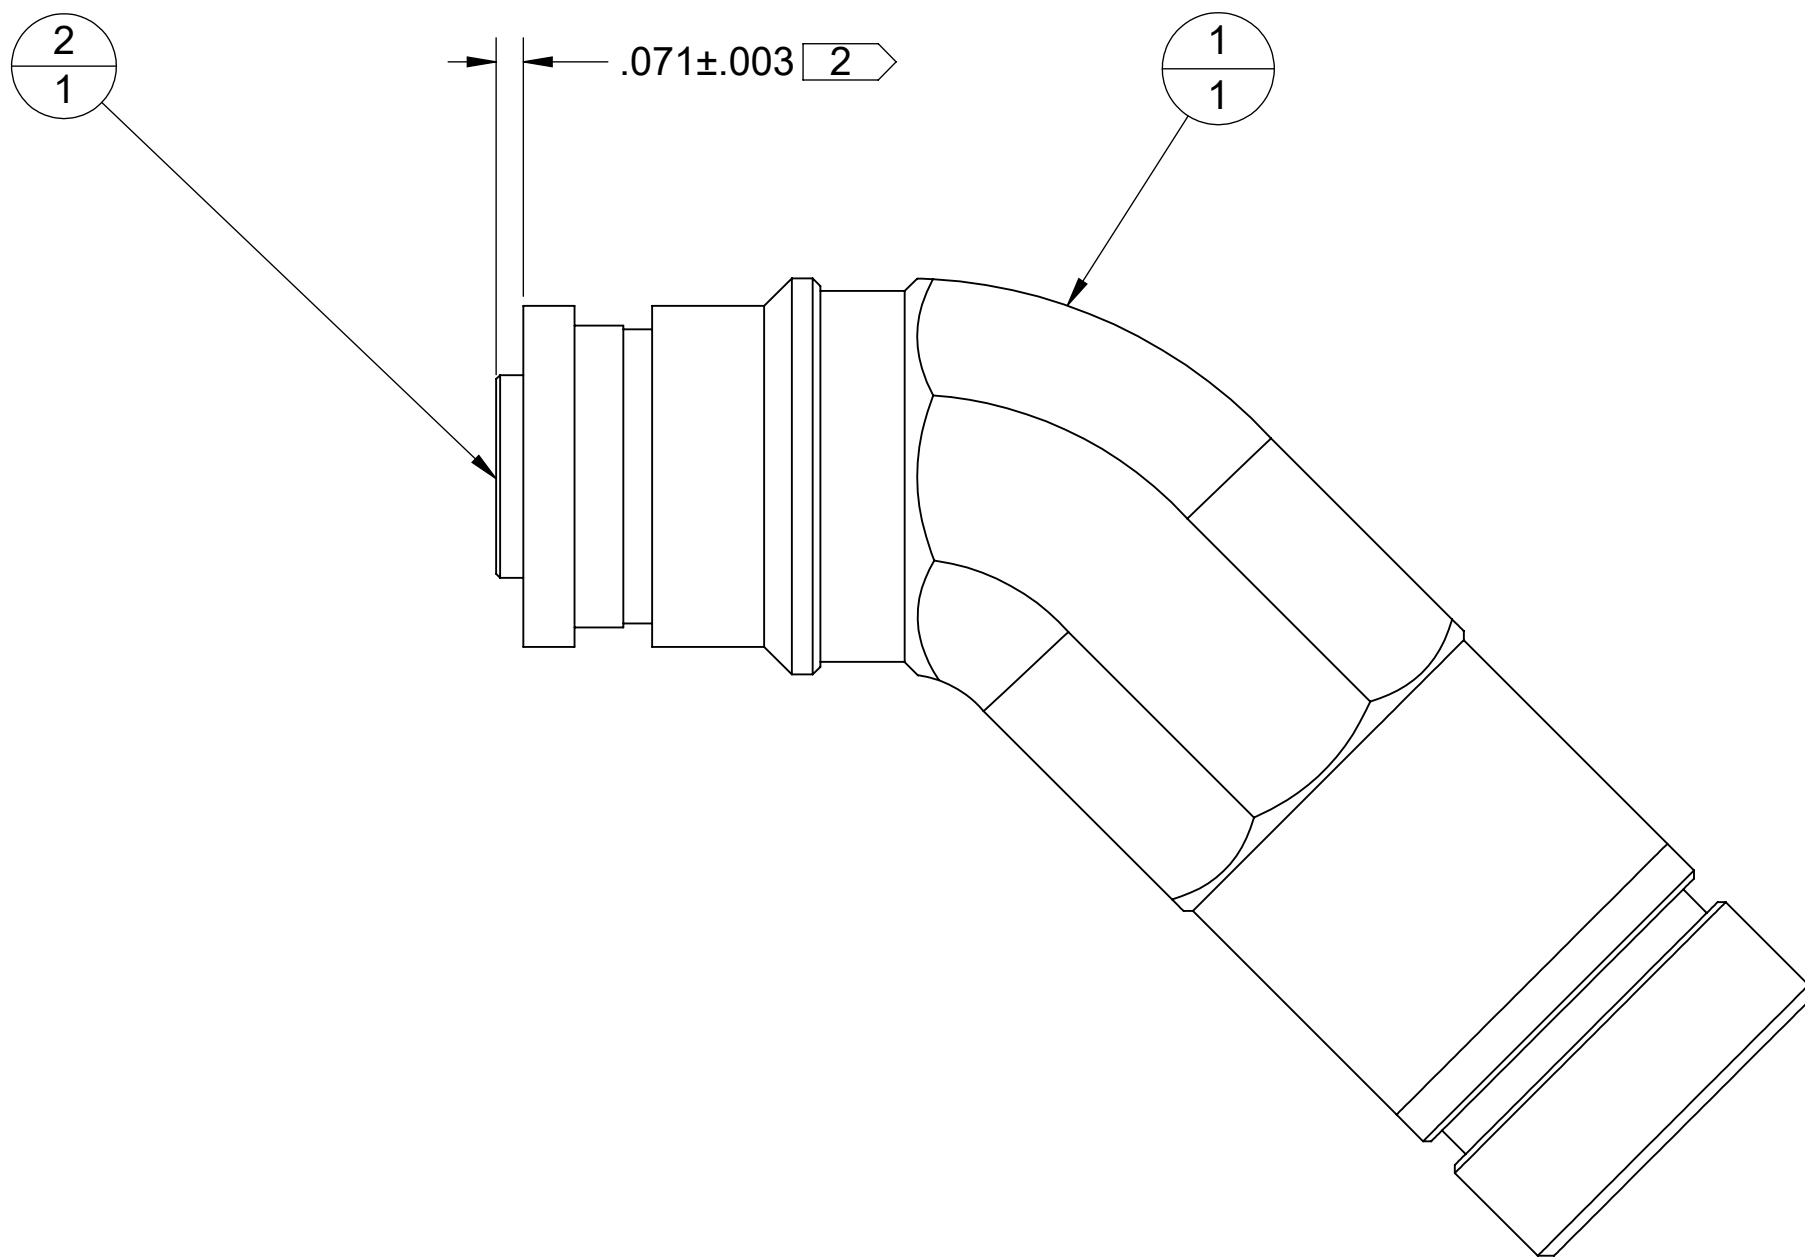

5 MATERIAL/FINISH ALLOWANCE OR MATERIAL/FINISH 217-117- 0 NO DRY FILM LUBE

1	1	2	217-130-##0	PRESS SLEEVE, BACKSHELL, SHELL 13				SEE NOTES	
1	1	1	217-116-##0	BACKSHELL BODY, 45°, 4CH, SIZE 13				SEE NOTES	
QTY		ITEM NO	PART NUMBER	DESCRIPTION				MATERIAL	
				MATERIAL		DFT DM 2020/07/27		AmphenolFSI TITLE 45° BACKSHELL/PRESS SLEEVE ASSY, 4CH, SIZE 13	
						CHK BC 2020/09/28			
						MFG - -			
				DRILLED HOLE DIAMETER TOLERANCE		ENG DM 2020/07/27			
				Φ.000 TO Φ.125 +.004 - .001		Φ.251 TO Φ.500 +.006 - .001		SIZE C CAGE CODE ØYPM2 DWG NO 217-117 REVIEW C	
				Φ.126 TO Φ.250 +.005 - .001		Φ.501 TO Φ.750 +.008 - .001			
217-118		28876		DO NOT SCALE DRAWING UNLESS OTHERWISE SPECIFIED DIM ARE IN INCHES TOL ON ANGLES ±3° 1 PL ±.1 2 PL ±.02 3 PL ±.010 INTERPRET DIM AND TOL PER ASME Y14.5-1994		This Document contains proprietary information and such information is prohibited from disclosure to others, publication or duplication in whole or in part without written permission from Amphenol Fiber Systems International. Copyright © 2018 Amphenol Fiber Systems International. Nonpublished work. All rights reserved.			
NEXT ASSY		USED ON							
APPLICATION									