


- NOTES: UNLESS OTHERWISE SPECIFIED
1. REMOVE ALL BURRS AND BREAK SHARP EDGES .010 MAX
 2. MAX INSIDE CORNER RADII .010
 3. ALL SURFACES TO BE 64 MICROFINISH OR BETTER
 4. DIMENSIONS TO BE EFFECTIVE AFTER FINISH
 5. ALL INTERNAL FILLET RADII .005 MAX UNLESS NOTED
 6. THREAD, SPLINE, AND KEYING PROJECTIONS MAY BE GAGE CHECKED FOR DIMENSIONAL CONFORMANCE AND FREEDOM FROM BURRS.
 7. DELETED
 8. PLATING SURFACE AREA ESTIMATE = 20.8 IN²
 9. PART NUMBER DEFINITION: SEE AFSI DOCUMENT FSP-1066 FOR MATERIAL & FINISHING
 10. FINISH AG & AH: CAD PLATE MUST EXTEND INTO I.D. OF PART TO EDGE OF GROOVE
 11. REDRAWN FROM 119-116
 12. THIS PART IS SOURCE CONTROLLED. DLA MUST APPROVE ALL SOURCES OF SUPPLY PRIOR TO USE.
- APPROVED SOURCES OF SUPPLY:
1. AMPHENOL FIBER SYSTEMS INTERNATIONAL

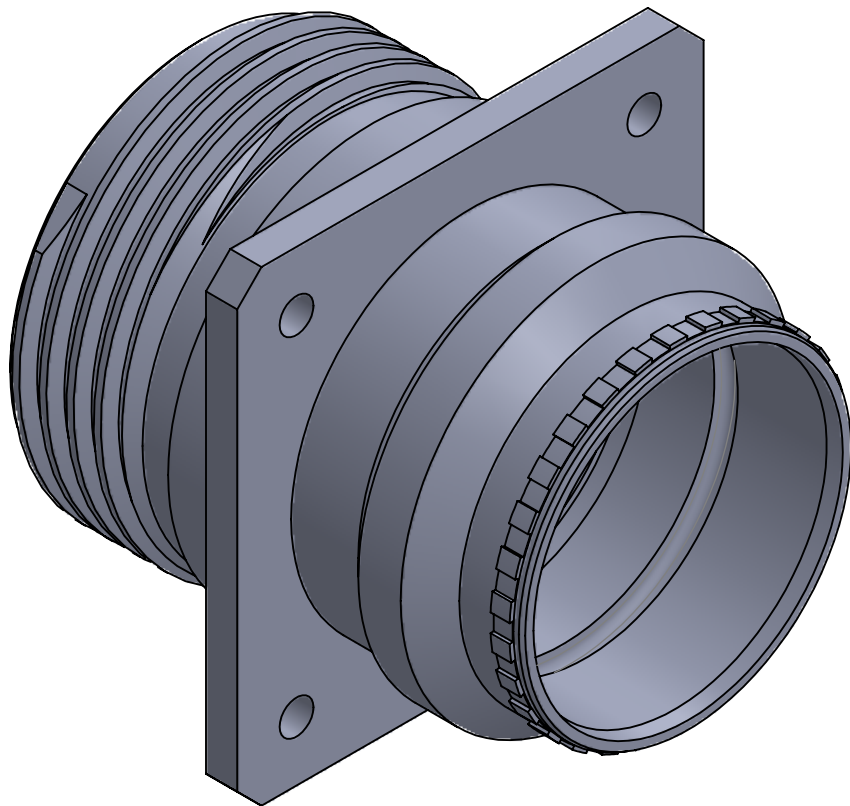

REVISION HISTORY - ALL SHEETS ARE THE SAME REVISION

REV	DESCRIPTION	DATE	APPROVED
ENGINEERING RELEASE			
A	DM: SH3 ZN D3: REPLACE .740 DIM WITH .100	2021/01/07	BC
B	DM: (1) ADD # TO CRIT DIMS; (2) SH3: REPLACE .100 WITH .740; (3) SH2: ADD ±1° TO 45°; (4) SH2: 1.490 WAS 1.498	2021/02/11	JW
FORMAL RELEASE			
C	ECN 210429-1445 DM: (1) DELETE NOTE 7; (2) SH2: ADD VIEWS FOR KEY OPTIONS U, W & M; (3) P/N DESIGNATOR: ADD "M" & "W" TO KEY OPTIONS; (4) SH3 KEYING CHART REWORD OPTION U; (5) SH3 KEYING CHART ADD OPTION W; (6) SH3 KEYING CHART ADD OPTION M; (7) SH3 ZN C3: ADD "X" TO X-KEY	2021/05/12	JW
D	ECN 210630-0814 DM: UNIVERSAL KEY: ADD .047±.005 DIM	2021/06/30	JC
E	ECN 221025-0742 DM: (1) ADD "#" TO CRIT DIMS & GD&T; (2) SH2/SH3: UPDATE LEADER LINES; (3) ADD NOTE 11	2022/10/25	BC
F	ECN 221122-0911 DM: (1) ADD "#" TO CRIT DIMS; (2) ADD GD&T TO THDS; (3) UPDATE TITLE; (4) SH2 ZN D1: ADD PARALLEL TO REAR SURFACE	2023/03/30	BC
G	ECN 240212-0914 DM: SH1 ADD SOURCE CONTROL NOTE	2024/02/19	BC

KEY

1
2
3
4
5
6
7
8
U
W
M

217-305 - 0

MATERIAL/FINISH ALLOWANCE
OR
MATERIAL/FINISH


9

W/O DRY
FILM LUBE

		MATERIAL	SEE NOTES	DFT	DM	2020/07/29	AmphenolFSI					
				CHK	BC	2020/09/21						
				MFG	PK	2022/10/25						
		DRILLED HOLE DIAMETER TOLERANCE	ENG	DM	2020/07/29	TITLE						
		Ø.000 TO Ø.125 ⁺⁰⁰⁴ _{-.001} Ø.126 TO Ø.250 ⁺⁰⁰⁵ _{-.001}		APP	JW	2021/05/12	WALL MOUNT RECEPTACLE BODY, SH23, M28					
		Ø.251 TO Ø.500 ⁺⁰⁰⁶ _{-.001} Ø.501 TO Ø.750 ⁺⁰⁰⁸ _{-.001}										
217-304	28876	DO NOT SCALE DRAWING UNLESS OTHERWISE SPECIFIED DIM ARE IN INCHES TOL ON ANGLES ±3° 1 PL ±.1 2 PL ±.02 3 PL ±.010 INTERPRET DIM AND TOL PER ASME Y14.5–1994			This Document contains proprietary information and such information is prohibited from disclosure to others, publication or duplication in whole or in part without written permission from Amphenol Fiber Systems International. Copyright © 2018 Amphenol Fiber Systems International. Nonpublished work. All rights reserved.			SIZE	CAGE CODE	DWG NO	REV	
NEXT ASSY	USED ON							C	ØYPM2	217-305	G	
APPLICATION								SCALE 1:1		SHEET 1 OF 3		

DO NOT SCALE DRAWING
UNLESS OTHERWISE SPECIFIED
DIM ARE IN INCHES
TOL ON ANGLES ±3°
1 PL ±.1 2 PL ±.02 3 PL ±.010
INTERPRET DIM AND TOL PER
ASME Y14.5-1994

This Document contains proprietary information
and such information is prohibited from disclosure
to others, publication or duplication in whole or in
part without written permission from Amphenol
Fiber Systems International.
Copyright © 2018 Amphenol Fiber Systems
International. Nonpublished work. All rights
reserved.

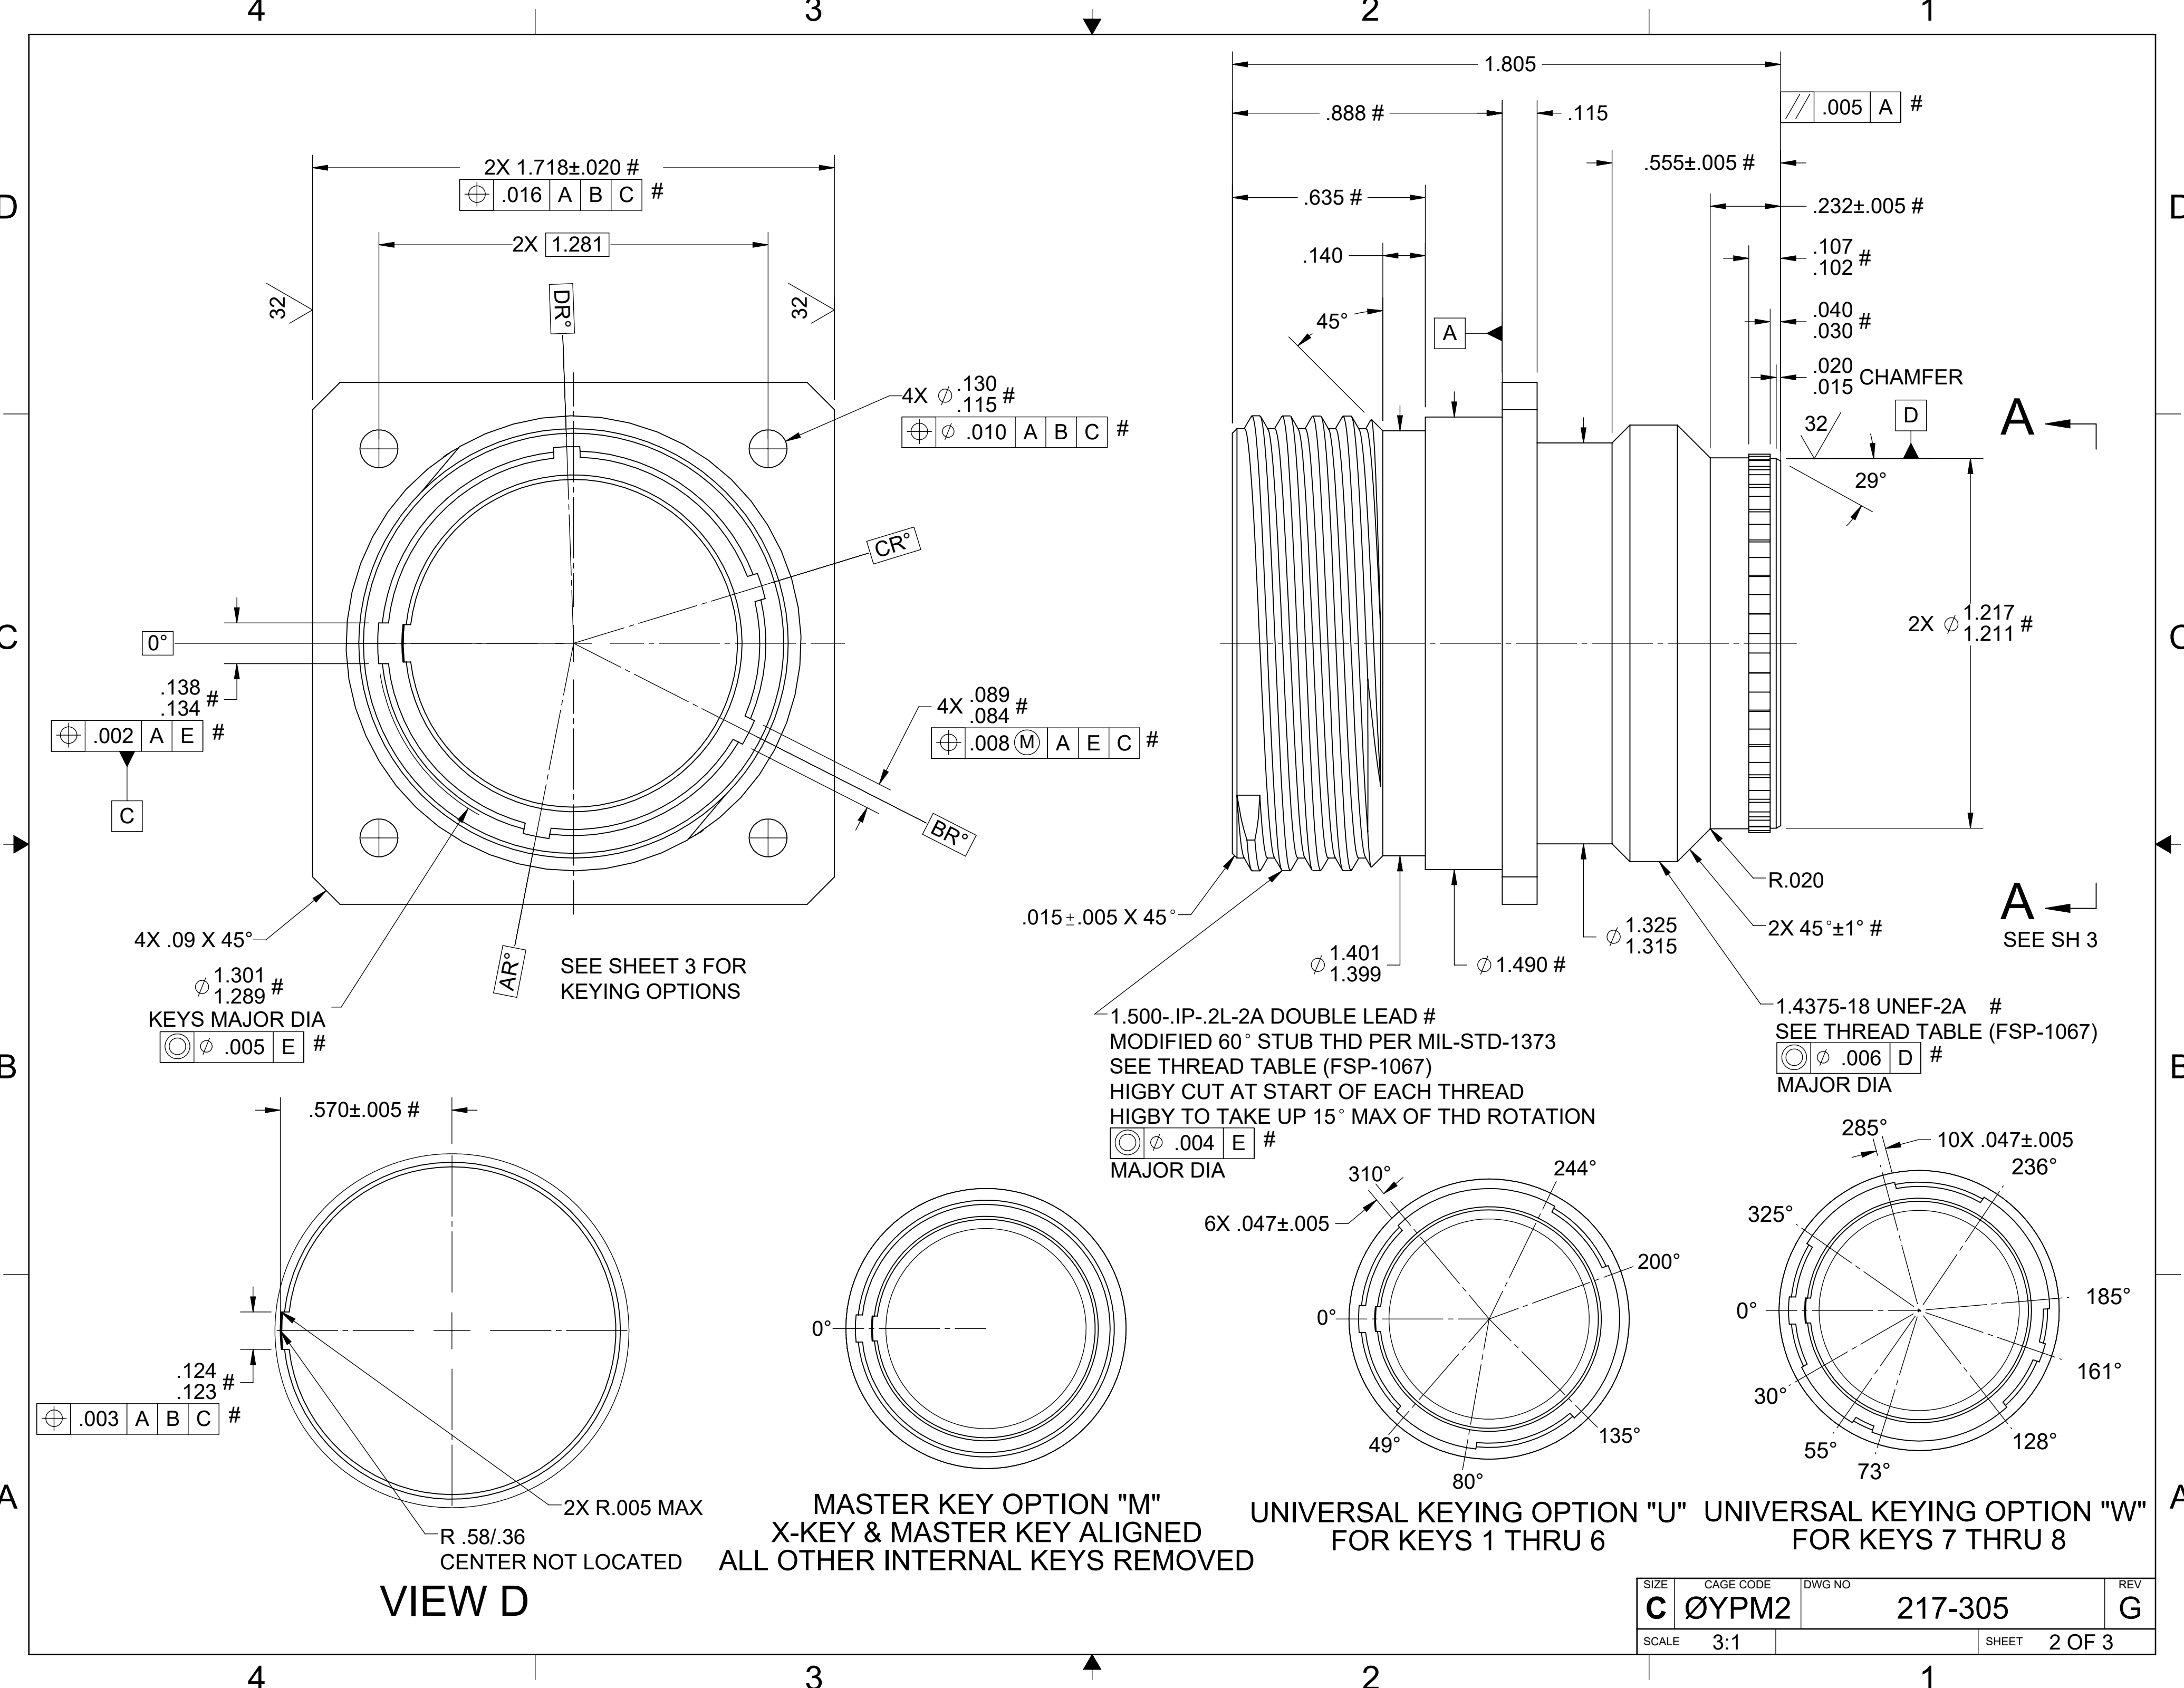

2X 1.718±.020 #
⊕ .016 A B C #
2X 1.281
32°
DR°
4X .130
.115 #
⊕ ∅ .010 A B C #
CR°
4X .09 X 45°
0°
⊕ .002 A E #
C
.138
.134 #
1.301 #
1.289 #
KEYS MAJOR DIA
⊕ ∅ .005 E #
AR°
SEE SHEET 3 FOR KEYING OPTIONS
4X .089
.084 #
⊕ .008 M A E C #
BR°

1.805
.888 #
.115
.555±.005 #
.232±.005 #
.107
.102 #
.040
.030 #
.020
.015 CHAMFER
32°
29°
2X ∅ 1.217
1.211 #
A
A
SEE SH 3
R.020
2X 45°±1° #
1.4375-18 UNEF-2A #
SEE THREAD TABLE (FSP-1067)
⊕ ∅ .006 D #
MAJOR DIA
1.500-.IP-.2L-2A DOUBLE LEAD #
MODIFIED 60° STUB THD PER MIL-STD-1373
SEE THREAD TABLE (FSP-1067)
HIGBY CUT AT START OF EACH THREAD
HIGBY TO TAKE UP 15° MAX OF THD ROTATION
⊕ ∅ .004 E #
MAJOR DIA
∅ 1.401
1.399
∅ 1.490 #
∅ 1.325
1.315
.015±.005 X 45°
1.401
1.399
∅ 1.490 #
∅ 1.325
1.315
2X 45°±1° #
1.4375-18 UNEF-2A #
SEE THREAD TABLE (FSP-1067)
⊕ ∅ .006 D #
MAJOR DIA

.570±.005 #
.124
.123 #
⊕ .003 A B C #
2X R.005 MAX
R .58/.36
CENTER NOT LOCATED
VIEW D

0°
MASTER KEY OPTION "M"
X-KEY & MASTER KEY ALIGNED
ALL OTHER INTERNAL KEYS REMOVED

310°
244°
200°
0°
49°
80°
135°
UNIVERSAL KEYING OPTION "U"
FOR KEYS 1 THRU 6

285°
236°
325°
0°
30°
55°
73°
128°
161°
185°
UNIVERSAL KEYING OPTION "W"
FOR KEYS 7 THRU 8

SIZE	CAGE CODE	DWG NO	REV
C	ØYPM2	217-305	G
SCALE	3:1	SHEET	2 OF 3

