



NOTE: We do not use LDO for power supply regulation.
ULP LDO has 3% error, may as well directly use battery
WARNING: Switch off cell when external 3.3V is connected

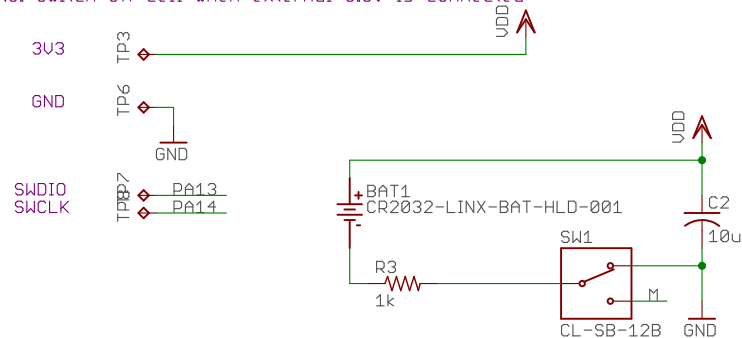

Display

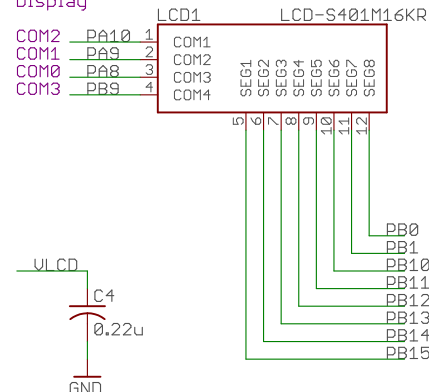

Inductors support 1812 and 1210 packages, plus THT
Recommend cap trimmer: Knowles JZ100.

Diodes in SOT-323 package,
recommend NSR0340.
For half-bridge rectifier,
populate either D1 & D3 or D2 & D4.
Connect TP10 & TP2 to TP15 & TP16.

