
GuitarTap

Tap Tone Analysis Report

May 8, 2026
5:48 PM

Measurement Name:	Brace UMIK-1 python PC
Type:	Material (Brace)
Frequency Range:	30.0 Hz – 1.0 kHz
Microphone:	Microphone (Umik-1 Gain: 18dB) · calibrated (7108913)

Frequency Spectrum

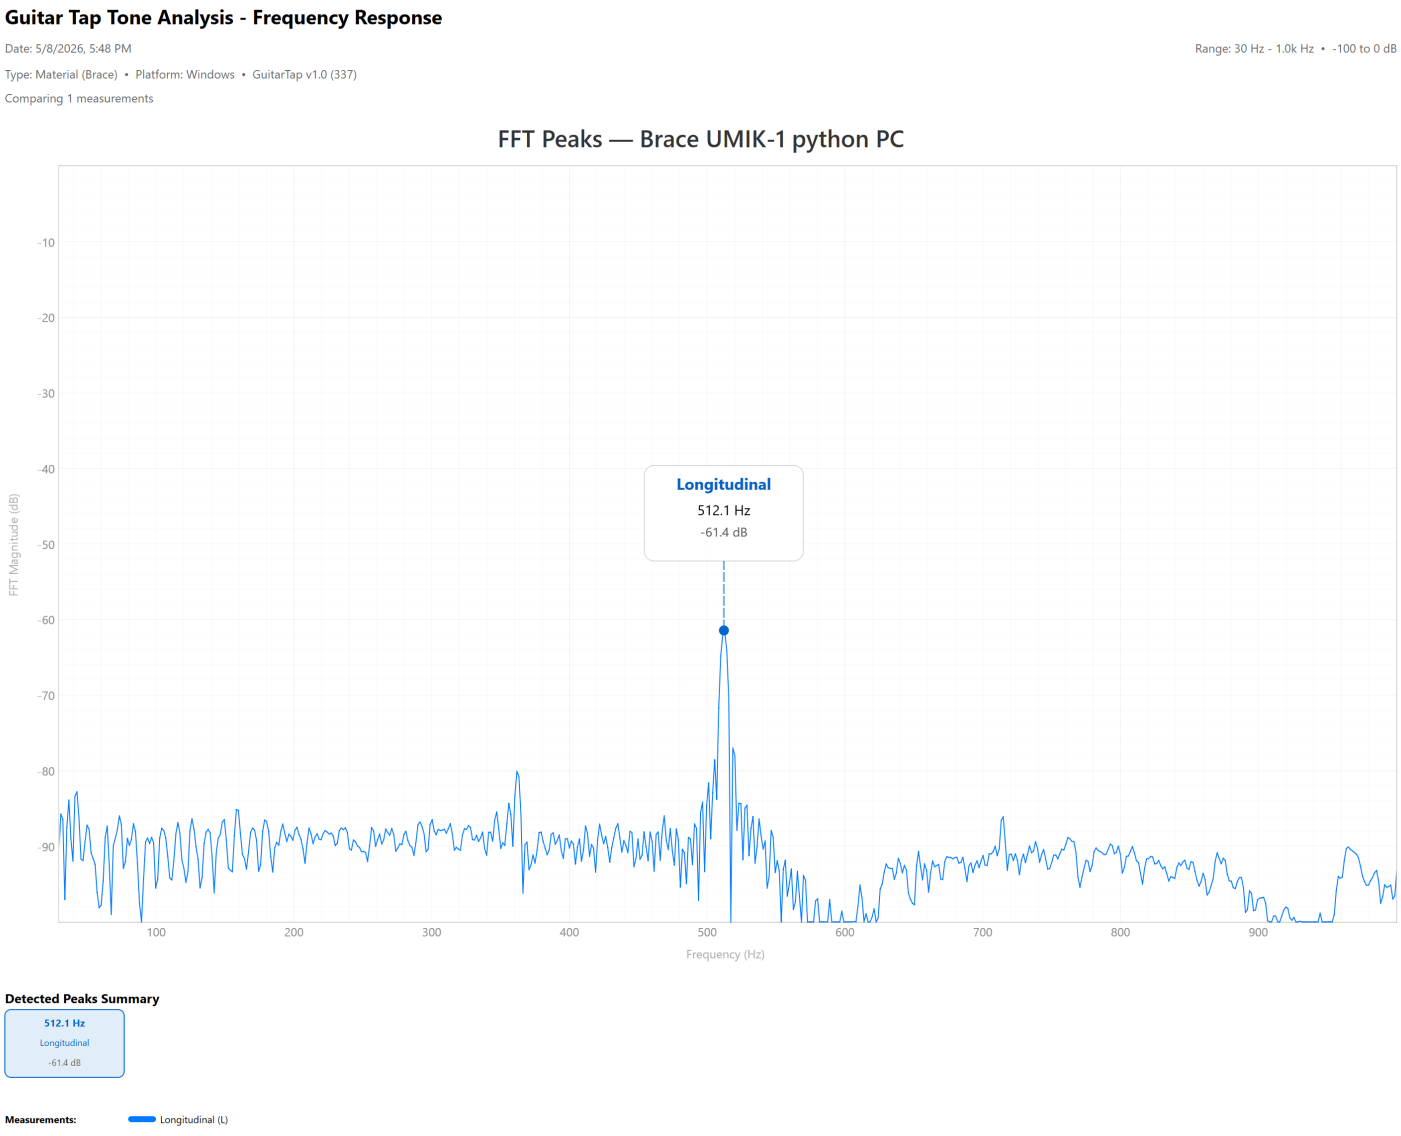

Detected Peaks

Frequency	Magnitude	Note	Q Factor	Role
512.1 Hz	-61.4 dB	C5	87.5	fL (Longitudinal)

Brace Properties

Sample Dimensions

Length: 556.0 mm	**Width:** 20.4 mm	**Thickness:** 29.40 mm
Mass: 128.0 g	**Density:** 0.384 g/cm³	

fL: 512.1 Hz

Speed of Sound: **5238 m/s**

Specific Modulus: **27.4** (Excellent)

Young's Modulus (E): **10.53 GPa**

Radiation Ratio: **13.6**

Overall Quality: Excellent

Single-Tap Measurement (fL only):

1. Longitudinal (fL) Tap Hold brace at 22% from one end along the length. Tap center.

The strongest peak is auto-selected.
