



1890 Swarthmore Avenue, PO Box 2020, Lakewood, NJ 08701
Phone: 800-526-3694, 732-363-4700, Fax: 732-364-8110
www.flamegard.com • www.componenthardware.com

PROJECT NAME: _____



LOCATION: _____

SPECIFIER ITEM NO. _____ **QTY:** _____

FLAME GARD PART NO. _____

Flame Gard® Recess Mount LED Light for Exhaust Canopy Hoods

LED-PL35-W

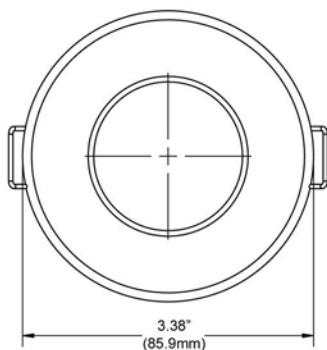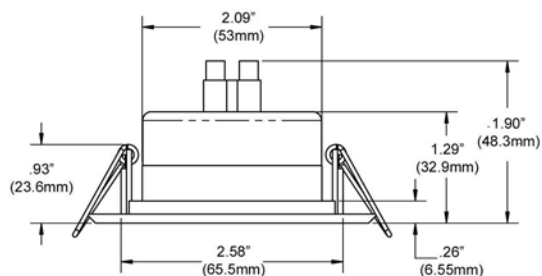

Dimensions shown in inches (mm) are for reference only and are subject to change.

Note: Supplied with 48" (1220mm) 18AWG wires
100 - 240 VAC, 50/60 Hz
Operating Temperatures: -4°F to 104°F (-20°C to 40°C)
Cut-out size required - 2.75" (70mm)

Warranty - 5 years

Perimeter light for supplemental lighting for canopy hoods

Energy Efficient LED Lights

- 4 Watt light produces 270 lumens
- 3000 Kelvins
- Satin finish bezel matches hood
- 120 degree beam angle floods the workspace with light
- HACCP Compliant – LED lighting runs cooler than old incandescent and fluorescent fixtures, helping you to better control food temperatures in your refrigerators/coolers/freezers. In addition, LED lights do not contain harmful mercury, like fluorescent fixtures, eliminating a potential chemical hazard in your workplace.

