



CMT X Series

Fast x Smart x Reliable



cMT X Series

모든 기능을 갖춘 스마트 HMI

cMT X Series는 우수한 하드웨어 성능과 다양한 소프트웨어 기능을 갖춘 스마트 HMI입니다. 데이터 통합, 모니터링, 클라우드 애플리케이션을 지원하여 작업 환경을 효율적으로 향상시키며, 스마트 환경을 보다 쉽고 빠르게 구축할 수 있습니다.

- ✓ **Performance**
Quad-core CPU
- ✓ **Display**
178° Wide Viewing Angle
- ✓ **Capacity**
4GB Flash / 1GB RAM
- ✓ **Connectivity**
400+ Communication Drivers



Premium Protection⁺



Power Isolation



PCB Coating



NEMA4/ IP66



CE / UL Certification

01

다양한 소프트웨어 기능

EasyBuilder Pro p.03

02

데이터 통합

OPC UA / Database / MQTT p.05

03

모바일 모니터링

WebView / cMT Viewer / VNC Viewer p.06

04

Weincloud

Dashboard p.07
EasyAccess 2.0 p.09

05

WiFi Expansion Module

cMT X Series+ M02 WiFi Module p.10

06

Large Size HMI

cMT3218XP p.11

07

Handheld HMI

cMT3106XM p.12

08

Headless HMI

cMT-FHDX / cMT-SVRX p.13

cMT X Series Model Types

p.14

Specifications and Dimensions


p.15

Solution 01

EasyBuilder Pro - 효율적인 HMI 편집 소프트웨어

EasyBuilder Pro를 무료로 다운로드하고 나만의 HMI 인터페이스를 쉽고 빠르게 만들어보세요.

직관적이고 깔끔한 UI, 풍부한 디자인 리소스, 다양한 고급 기능을 제공하여 누구나 효율적으로 HMI 프로젝트를 구현할 수 있습니다.

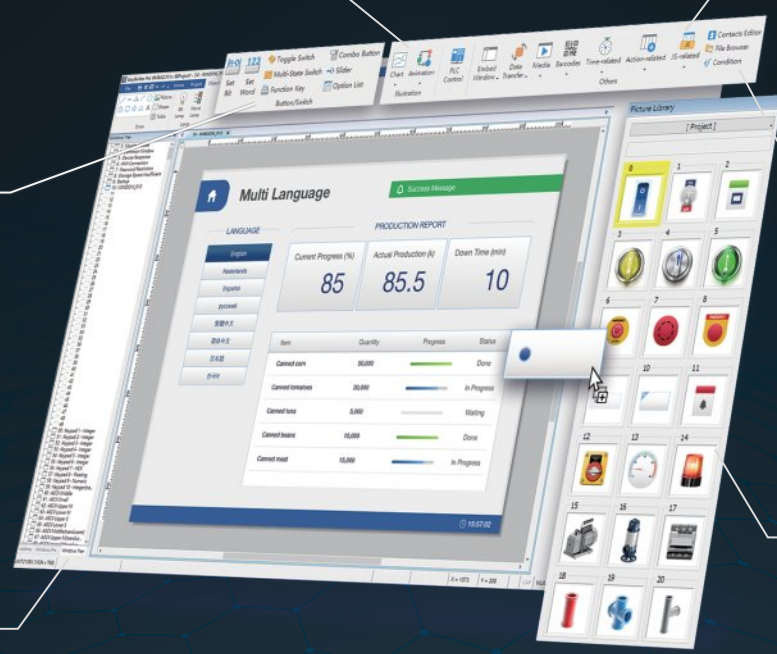

Ribbon Style
직관적이고 깔끔한 사용자 인터페이스

Combo Button
한 번의 클릭으로 다중 동작 설정 및 트리거 실행

Window Tree
레이어드 뷰를 통한 명확한 프로젝트 관리

JS 기능
JavaScript 오브젝트 및 Web API 연동 지원

if 트리거 조건
HMI 주소를 통한 If / Else 조건 설정

2000+ 그림 라이브러리
다양한 스타일의 리소스로 깔끔하고 직관적인 프로젝트 디자인 구성

EasyBuilder Pro는 램프, 버튼, 수치, 기본 차트, 레시피 등 필수적인 HMI 편집 기능뿐만 아니라, 다양한 고급 기능을 제공하여 HMI의 성능을 더욱 향상시킵니다.

고급 보안 모드
RFID 및 지문 인식을 통한 로그인으로 접근 보안을 강화합니다.

멀티미디어 지원
IP/USB 카메라 피드를 HMI에서 실시간으로 모니터링하거나, 미디어 플레이어를 사용해 HMI에서 고화질 영상을 재생할 수 있습니다.

빠른 디스플레이 모드
오브젝트가 데이터를 캐시하여 창 전환 후 빠르게 디스플레이됩니다.

데이터 처리
데이터 로그, 이벤트 로그, 운전 기록의 이력 데이터를 외부 데이터베이스에 동기화하여 데이터의 무결성을 보장합니다.

파일 전송 및 액세스
FTP 서버 액세스를 통해 HMI의 다양한 파일 및 스크린샷을 서버로 전송하거나, 서버에서 PDF파일, 이미지, 동영상을 다운로드하여 HMI에서 볼 수 있습니다.

웹 브라우저
HMI에서 PLC, 컨트롤러 또는 임베디드 장치의 웹 페이지를 열어 시스템 파라미터를 설정하거나 상태를 모니터링할 수 있습니다.

Solution 02

데이터 통합 - 다양한 산업 프로토콜 지원

cMT X Series는 400개 이상의 PLC 드라이버와 IIoT 프로토콜을 지원하여 현장 장비 데이터를 원활하게 통합하고 효율적으로 연동할 수 있습니다.



산업용 프로토콜 통합

프로토콜 호환성을 강화하여 데이터 교환 효율성을 향상시킵니다.

cMT X 시리즈 지원 프로토콜:
 OPC UA protocol
 Modbus TCP/IP protocol
 BACnet protocol



MQTT 클라우드 통합

경량 프로토콜 MQTT를 지원하여 IIoT 장치와의 빠른 연결을 제공합니다.

EasyBuilder Pro를 다운로드하여
 아래 클라우드 플랫폼과 연결 가능:
 AWS Cloud Platform
 Azure Cloud Platform



데이터베이스 통합

데이터베이스 연동을 지원하여 필드 데이터를 IT 시스템과 효율적으로 연결할 수 있습니다.

호환 가능한 데이터베이스:
 MySQL
 MS SQL
 MariaDB
 Azure SQL

Solution 03

모바일 모니터링 - 언제 어디서나 실시간 상태 확인

Weintek은 cMT Viewer, WebView, VNC Viewer 세 가지 모니터링 방식을 제공하여, 사용자가 필요에 맞는 도구를 선택해 장치 상태를 효율적으로 모니터링할 수 있도록 합니다.



VNC Viewer

- 화면 미러링
- VNC Client 앱 사용



WebView



- 화면 미러링
- Chrome, Safari 등 웹 브라우저 사용



cMT Viewer App

- 다중 화면 동시 제어
- PC, 스마트폰, 태블릿을 이용한 cMT Viewer 앱 접속
- 최대 50대 장치 모니터링 및 다수 사용자의 동시 접속 지원
- HMI 독점 제어 기능 지원

세 가지 모바일 모니터링 방법

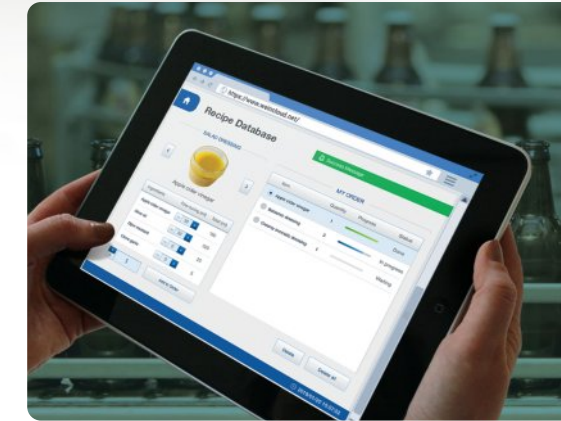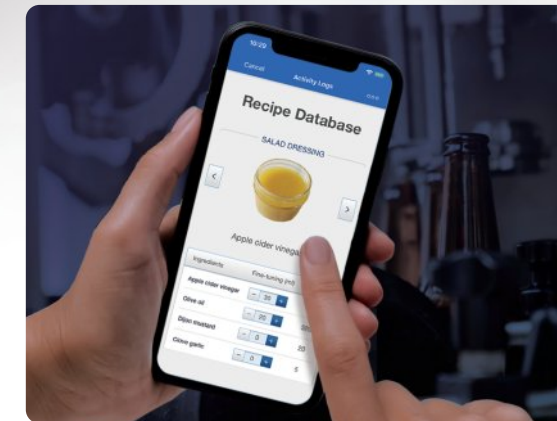

Solution 04-1

Weincloud - Dashboard

Weincloud는 클라우드 서비스인 Dashboard와 원격 접속 도구인 EasyAccess 2.0을 통해, 언제 어디서나 현장 장비 상태를 원격으로 모니터링하고 유지 관리할 수 있습니다.

시각화된 데이터 제공

- 여러 HMI에서 데이터를 통합
- 생산 프로세스를 명확하게 시각화
- 데이터 기반의 효율적인 의사 결정 지원

직관적인 사용자 인터페이스

- 드래그 앤 드롭 기능을 활용하여 다양한 위젯으로 맞춤형 대시보드를 빠르게 생성

실시간 데이터 디스플레이

- 실시간 생산 현황 제공
- 문제 해결을 더욱 빠르고 효율적으로 지원



Dashboard

대시보드는 현장 데이터를 한눈에 볼 수 있는 인터페이스를 제공하며, 관리자는 웹 브라우저 또는 모바일 앱을 통해 언제 어디서나 실시간으로 현장 상태를 모니터링할 수 있습니다.



간편한 도입을 위한 최적화된 솔루션

별도의 장비 설치 없이 손쉽게 구축할 수 있으며, 시스템 통합 작업을 최소화하여 효율적인 운영이 가능합니다.



데이터 암호화

SSL/TLS 암호화를 적용하여 모든 데이터 전송을 안전하게 보호합니다.



데이터 백업 및 동기화

데이터 캐싱 기능을 지원하여 데이터 손실을 방지하고 안정적인 운영을 보장합니다.

Solution 04-2

Weincloud -
EasyAccess 2.0


현장에 있지 않아도 언제 어디서나 HMI의 프로그램을
원격으로 모니터링하고 문제를 해결할 수 있습니다.

 **EasyAccess2.0**

PLC Pass-through



P2P Technology

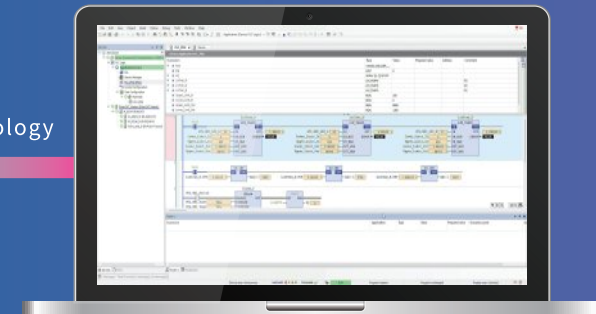

원격 HMI/PLC pass-through 통신으로
실시간 동기화 및 조정 가능

Messenger, Telegram, WeChat,
EasyAccess2.0을 통한 푸시 알림




Solution 05

WiFi 확장 모듈
- 무선 네트워크 솔루션

WiFi 모듈은 유연한 네트워크 연결 옵션을 제공하여,
모바일 장비 및 배선이 어려운 환경에 이상적인 솔루션을 제공합니다.



cMT X Series + M02 WiFi Module

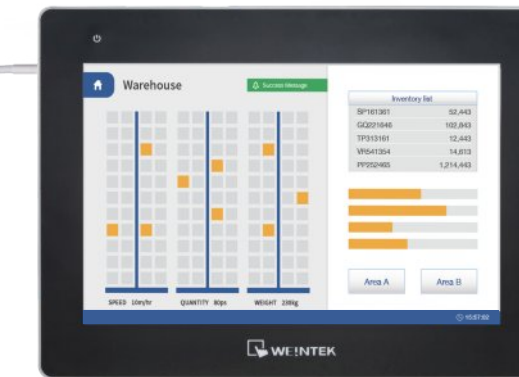

*지원 모델은 사양 표 참조



마그네틱 외장 안테나
최적의 신호 수신을 위해
원하는 위치에 설치 가능



컴팩트한 디자인
HMI 장착 시 돌출을 최소화하여
제어반 내 설치 공간 절약



WiFi 지원
IEEE 802.11b/g/n
WiFi 표준 지원



모듈 디자인
HMI에 무선 네트워크 기능을
추가하여 배선 문제 해결

Solution 06

Large-Size HMI

한 화면에 더 많은 정보를 선명하게 표시해
현장 상황을 한눈에 파악할 수 있어 업무 효율이 높아집니다.

1920×1080 해상도의 고화질 디스플레이와
프리미엄 알루미늄 하우징을 적용해
안정적인 하드웨어 성능과 완성도 높은 소프트웨어 환경을 제공합니다.



21.5-inch HMI



Portable Operation

케이블 범위 내(6, 10, 20 m*)에서
제어 명령을 즉시 조정할 수 있습니다.



Safety Mechanism

3개의 내장 스위치로
운영 안정성을 강화했습니다.



Flexible Mounting

표준형 및 콤팩트형 연결 박스를 제공해
다양한 설치 환경에 대응합니다.

*1 20 m 케이블은 옵션 사양이며, 자세한 내용은 본사로 문의주시기 바랍니다.

Solution 07

Handheld HMI

다수의 스테이션을 운영하는 대규모 산업 현장을 위해 설계된 솔루션입니다.
각 스테이션에 연결 박스를 설치한 후 핸디형 HMI를 연결해
필요한 장비를 언제든지 제어할 수 있습니다.

Connection Box



Handheld HMI



Solution 08

Headless HMI

컨트롤 박스에 쉽게 설치할 수 있는 컴팩트한 HMI로, 본체에 화면이 없어 태블릿, 휴대폰, PC 등 다양한 기기에서 cMT Viewer를 통해 모니터링할 수 있습니다.

cMT-FHDX-820

HDMI 출력으로 다양한 크기의 모니터에서 사용할 수 있으며, cMT X Advanced 시리즈의 소프트웨어 기능을 제공합니다.



cMT-SVRX-820/822

cMT X 구조를 완벽하게 구현한 서버형 HMI로, cMT Viewer App을 통해 모바일에서 손쉽게 모니터링할 수 있습니다.

* Other wireless models: cMT-SVR-200 / cMT-SVR-202

cMT X Series Model Types

Standard

스마트 애플리케이션을 위한 HMI

HMI의 모든 기본 기능과 비디오 스트리밍, 모바일 모니터링을 지원해 다양한 애플리케이션 환경에서 유연하고 효율적인 운영이 가능합니다.

Advanced

올인원 스마트 HMI

SQL 데이터 연결 및 OPC UA 서버 등 다양한 IIoT 프로토콜을 지원해 플랫폼 간 데이터를 원활하게 통합하며, 산업 현장에 최적화된 솔루션을 제공합니다.

Handheld HMI

자유로운 이동이 가능한 핸디형 HMI

고정된 설치 환경에서 벗어나 케이블 범위 내에서 자유롭게 이동하며 현장 파라미터 조정이 가능해 멀티 스테이션 모니터링 환경에 적합합니다.


Headless HMI

크기의 제한을 받지 않는 모듈형 HMI

화면이 없는 모듈형 HMI로, HDMI 출력 또는 APP을 통해 다양한 크기의 외부 모니터에서 실시간 모니터링이 가능합니다.



Naming Convention

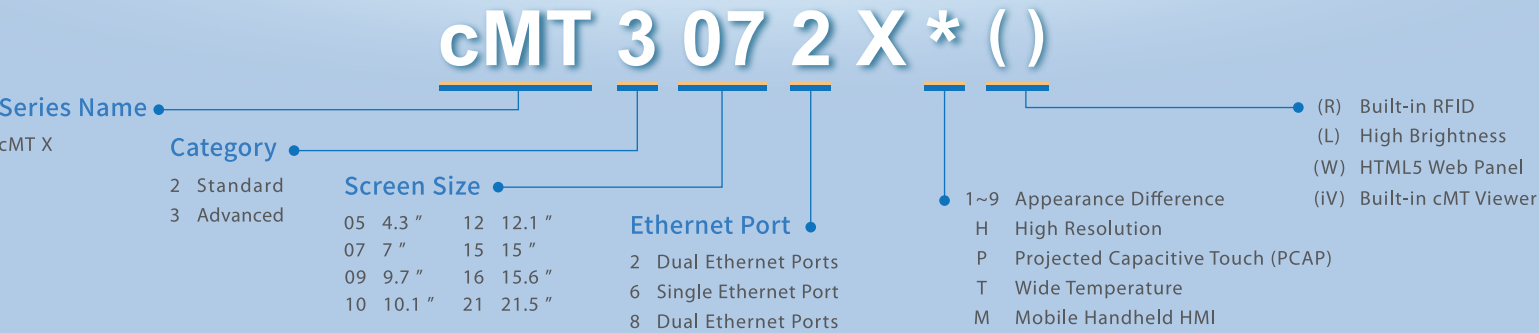

Advanced Model Specifications



Model		cMT3072XH2	cMT3072XHT	cMT3072XP	cMT3092X
Display	Display	7" WVA	7" WVA	7" WVA	9.7" WVA
	Resolution	1024 x 600	1024 x 600	1024 x 600	1024 x 768
	Brightness (cd/ m ²)	450	450	450	350
	Contrast Ratio	800:1	800:1	800:1	900:1
	Backlight Type	LED	LED	LED	LED
	Backlight Life Time	>30,000 hrs.	>30,000 hrs.	>30,000 hrs.	>30,000 hrs.
	Colors	16.7M	16.7M	16.7M	16.2M
	LCD Viewing Angle (T/B/L/R)	85/85/85/85	85/85/85/85	85/85/85/85	89/89/89/89
	Pixel Pitch (mm)	0.1506(H) x 0.1432(V)	0.1506(H) x 0.1432(V)	0.1506(H) x 0.1432(V)	0.192(H) x 0.192(V)
Touch Panel	Type	4-wire Resistive Type	4-wire Resistive Type	Tempered Glass, Capacitive Type Hardness Scale 7H	4-wire Resistive Type
	Accuracy	Active Area Length(X)±2%, Width(Y)±2%	Active Area Length(X)±2%, Width(Y)±2%	N/A	Active Area Length(X)±2%, Width(Y)±2%
Memory	Flash	4 GB	4 GB	4 GB	4 GB
	RAM	1 GB	1 GB	1 GB	1 GB
Processor		Quad-core RISC	Quad-core RISC	Quad-core RISC	Quad-core RISC
I/O Port	USB Host	USB 2.0 x 1	USB 2.0 x 1	USB 2.0 x 1	USB 2.0 x 1
	Ethernet	LAN 1: 10/100 Base-T x 1 LAN 2: 10/100 Base-T x 1	LAN 1: 10/100 Base-T x 1 LAN 2: 10/100 Base-T x 1	LAN 1: 10/100 Base-T x 1 LAN 2: 10/100 Base-T x 1	LAN 1: 10/100/1000 Base-T x 1 LAN 2: 10/100 Base-T x 1
	COM Port	Con.A: COM2 RS-485 2W/4W, COM3 RS-485 2W, CAN Bus Con.B: COM1 RS-232 4W, COM3 RS-232 2W*	Con.A: COM2 RS-485 2W/4W, COM3 RS-485 2W, CAN Bus Con.B: COM1 RS-232 4W, COM3 RS-232 2W*	Con.A: COM2 RS-485 2W/4W, COM3 RS-485 2W, CAN Bus Con.B: COM1 RS-232 4W, COM3 RS-232 2W*	Con.A: COM2 RS-485 2W/4W, COM3 RS-485 2W Con.B: COM1 RS-232 4W, COM3 RS-232 2W*
	CAN Bus	Yes	Yes	Yes	N/A
	Audio Output	N/A	N/A	N/A	Built-in Mono Speaker
RTC		Built-in	Built-in	Built-in	Built-in
Power	Input Power	24±20%VDC	24±20%VDC	24±20%VDC	24±20%VDC
	Power Isolation	Built-in	Built-in	Built-in	Built-in
	Power Consumption	820mA@24VDC	820mA@24VDC	820mA@24VDC	1A@24VDC
	Voltage Resistance	500VAC (1 min.)	500VAC (1 min.)	500VAC (1 min.)	500VAC (1 min.)
	Isolation Resistance	Exceed 50MΩ @ 500VDC	Exceed 50MΩ @ 500VDC	Exceed 50MΩ @ 500VDC	Exceed 50MΩ @ 500VDC
Specification	PCB Coating	Yes	Yes	Yes	Yes
	Enclosure	Plastic	Aluminum	Plastic	Plastic
	Dimensions WxHxD	200.3 x 146.3 x 35.0 mm	200.4 x 146.5 x 36.0 mm	200.3 x 146.3 x 36.9 mm	260.6 x 203.1 x 44.5 mm
	Panel Cutout	192 x 138 mm	192 x 138 mm	192 x 138 mm	250 x 192 mm
	Weight	Approx. 0.6 kg	Approx. 0.8 kg	Approx. 0.7 kg	Approx. 1 kg
	Mount	Panel mount	Panel mount	Panel mount	Panel mount, VESA mount 75 x 75 mm
Environment	Protection Structure	UL Type 4X (indoor use only) / NEMA4 / IP66 Compliant Front Panel	UL Type 4X (indoor use only) / NEMA4 / IP66 Compliant Front Panel	UL Type 4X (indoor use only) / NEMA4 / IP66 Compliant Front Panel	UL Type 4X (indoor use only) / NEMA4 / IP66 Compliant Front Panel
	Storage Temperature	-20° ~ 60° C (-4° ~ 140° F)	-20° ~ 60° C (-4° ~ 140° F)	-20° ~ 60° C (-4° ~ 140° F)	-20° ~ 60° C (-4° ~ 140° F)
	Operating Temperature	0° ~ 55° C (32° ~ 131° F)	-20° ~ 55° C (-4° ~ 131° F)	0° ~ 55° C (32° ~ 131° F)	0° ~ 50° C (32° ~ 122° F)
	Relative Humidity	10% ~ 90% (non-condensing)	10% ~ 90% (non-condensing)	10% ~ 90% (non-condensing)	10% ~ 90% (non-condensing)
	Altitude	3,000 m	3,000 m	3,000 m	3,000 m
	Vibration Endurance	10 to 25Hz (X, Y, Z direction 2G 30 minutes)	10 to 25Hz (X, Y, Z direction 2G 30 minutes)	10 to 25Hz (X, Y, Z direction 2G 30 minutes)	10 to 25Hz (X, Y, Z direction 2G 30 minutes)
Certificate	CE	CE marked	CE marked	CE marked	CE marked
	UL	cULus Listed	cULus Listed	cULus Listed	cULus Listed
Software	Weincloud	EasyAccess 2.0 (Optional) Dashboard (Optional)	EasyAccess 2.0 (Optional) Dashboard (Optional)	EasyAccess 2.0 (Optional) Dashboard (Optional)	EasyAccess 2.0 (Optional) Dashboard (Optional)
	CODESYS	Optional	Optional	Optional	Optional

*Only Tx & Rx (no RTS/CTS) may be used for COM1 RS-232 when COM3 RS-232 is also used.




Capacitive Type




Wide Viewing Angle


cMT3072XH2	cMT3072XHT	cMT3072XP	cMT3092X
------------	------------	-----------	----------




Front View




Front View




Front View




Front View




Rear View




Rear View




Rear View




Rear View




Bottom View




Bottom View




Bottom View




Bottom View




Cutout Dimensions



Cutout Dimensions



Cutout Dimensions



Cutout Dimensions

Advanced Model

Specifications



Model		cMT3102X / cMT3102X (R)		cMT3108XH		cMT3108XP		cMT3162X	
Display	Display	10.1" WVA		10.1" WVA		10.1" WVA		15.6" WVA	
	Resolution	1024 x 600		1280 x 800		1280 x 800		1920 x 1080	
	Brightness (cd/ m')	350		500		425		300	
	Contrast Ratio	1000:1		800:1		800:1		800:1	
	Backlight Type	LED		LED		LED		LED	
	Backlight Life Time	>50,000 hrs.		>50,000 hrs.		>50,000 hrs.		>30,000 hrs.	
	Colors	16.7M		16.7M		16.7M		16.2M	
	LCD Viewing Angle (T/B/L/R)	89/89/89/89		89/89/89/89		89/89/89/89		89/89/89/89	
	Pixel Pitch (mm)	0.2175(H) x 0.2088(V)		0.1695(H) x 0.1695(V)		0.1695(H) x 0.1695(V)		0.17925(H) x 0.17925(V)	
Touch Panel	Type	4-wire Resistive Type		4-wire Resistive Type		Tempered Glass, Capacitive Type		Tempered Glass, Capacitive Type	
	Accuracy	Active Area Length(X)±2%, Width(Y)±2%		Active Area Length(X)±2%, Width(Y)±2%		N/A		N/A	
Memory	Flash	4 GB		4 GB		4 GB		4 GB	
	RAM	1 GB		1 GB		1 GB		1 GB	
Processor		Quad-core RISC		Quad-core RISC		Quad-core RISC		Quad-core RISC	
I/O Port	USB Host	USB 2.0 x 1		USB 2.0 x 1		USB 2.0 x 1		USB 2.0 x 1	
	Ethernet	LAN 1: 10/100/1000 Base-T x 1 LAN 2: 10/100 Base-T x 1		LAN 1: 10/100/1000 Base-T x 1 LAN 2: 10/100 Base-T x 1		LAN 1: 10/100/1000 Base-T x 1 LAN 2: 10/100 Base-T x 1		LAN 1: 10/100/1000 Base-T x 1 LAN 2: 10/100 Base-T x 1	
	WiFi	M02 WiFi Expansion Module (Optional)		M02 WiFi Expansion Module (Optional)		M02 WiFi Expansion Module (Optional)		N/A	
	COM Port	Con.A: COM2 RS-485 2W/4W, COM3 RS-485 2W, CAN Bus Con.B: COM1 RS-232 4W, COM3 RS-232 2W*		Con.A: COM2 RS-485 2W/4W, COM3 RS-485 2W, CAN Bus Con.B: COM1 RS-232 4W, COM3 RS-232 2W*		Con.A: COM2 RS-485 2W/4W, COM3 RS-485 2W, CAN Bus Con.B: COM1 RS-232 4W, COM3 RS-232 2W*		Con.A: COM1 RS-485 2W/4W, COM3 RS-485 2W, CAN Bus Con.B: COM1 RS-232 4W, COM3 RS-232 2W*	
	CAN Bus	Yes		Yes		Yes		Yes	
	Audio Output	N/A		Built-in Mono Speaker		Built-in Mono Speaker		Built-in Mono Speaker	
RFID	Compatibility Standard	N/A	ISO/IEC 14443 Type A/B, Frequency: 13.56 MHz	N/A		N/A		N/A	
	Reading Distance	N/A	Max. 4 cm*	N/A		N/A		N/A	
RTC		Built-in		Built-in		Built-in		Built-in	
Power	Input Power	24±20%VDC		24±20%VDC		24±20%VDC		24±20%VDC	
	Power Isolation	Built-in		Built-in		Built-in		Built-in	
	Power Consumption	1A@24VDC		700mA@24VDC		700mA@24VDC		1.3A@24VDC	
	Voltage Resistance	500VAC (1 min.)		500VAC (1 min.)		500VAC (1 min.)		500VAC (1 min.)	
	Isolation Resistance	Exceed 50MΩ @ 500VDC		Exceed 50MΩ @ 500VDC		Exceed 50MΩ @ 500VDC		Exceed 50MΩ @ 500VDC	
Specification	PCB Coating	Yes		Yes		Yes		Yes	
	Enclosure	Plastic		Plastic		Plastic		Front bezel: Plastic, Rear Enclosure: Aluminum	
	Dimensions WxHxD	271 x 213 x 38 mm		266 x 196 x 40 mm		266 x 196 x 42.7 mm		400 x 263 x 27.6 mm	
	Panel Cutout	260 x 202 mm		255 x 185 mm		255 x 185 mm		384 x 247 mm	
	Weight	Approx. 1.2 kg		Approx. 1.1 kg		Approx. 1.1 kg		Approx. 1.6 kg	
	Mount	Panel mount, VESA mount 75 x 75 mm		Panel mount, VESA mount 75 x 75 mm		Panel mount, VESA mount 75 x 75 mm		Panel mount, VESA mount 100 x 100 mm	
Environment	Protection Structure	UL Type 4X (indoor use only) / NEMA4 / IP66 Compliant Front Panel		UL Type 4X (indoor use only) / NEMA4 / IP66 Compliant Front Panel		UL Type 4X (indoor use only) / NEMA4 / IP66 Compliant Front Panel		NEMA4 / IP66 Compliant Front Panel	
	Storage Temperature	-20° ~ 60° C (-4° ~ 140° F)		-20° ~ 60° C (-4° ~ 140° F)		-20° ~ 60° C (-4° ~ 140° F)		-20° ~ 60° C (-4° ~ 140° F)	
	Operating Temperature	0° ~ 50° C (32° ~ 122° F)		0° ~ 55° C (32° ~ 131° F)		0° ~ 55° C (32° ~ 131° F)		0° ~ 50° C (32° ~ 122° F)	
	Relative Humidity	10% ~ 90% (non-condensing)		10% ~ 90% (non-condensing)		10% ~ 90% (non-condensing)		10% ~ 90% (non-condensing)	
	Altitude	3,000 m		3,000 m		3,000 m		3,000 m	
	Vibration Endurance	10 to 25Hz (X, Y, Z direction 2G 30 minutes)		10 to 25Hz (X, Y, Z direction 2G 30 minutes)		10 to 25Hz (X, Y, Z direction 2G 30 minutes)		10 to 25Hz (X, Y, Z direction 2G 30 minutes)	
Certificate	CE	CE marked		CE marked		CE marked		CE marked	
	UL	cULus Listed		cULus Listed		cULus Listed		cULus Listed	
	ATEX	ATEX Zone 2/22 Category 3 G/D		ATEX Zone 2/22 Category 3 G/D		ATEX Zone 2/22 Category 3 G/D		N/A	
Software	Weincloud	EasyAccess 2.0 (Optional) Dashboard (Optional)		EasyAccess 2.0 (Optional) Dashboard (Optional)		EasyAccess 2.0 (Optional) Dashboard (Optional)		EasyAccess 2.0 (Optional) Dashboard (Optional)	
	CODESYS	Optional		Optional		Optional		Optional	


*Only Tx & Rx (no RTS/CTS) may be used for COM1 RS-232 when COM3 RS-232 is also used.

*RFID reading distance depends on tag size and antenna design.



Advanced Model
Dimensions

cMT3102X / cMT3102X (R)	cMT3108XH	cMT3108XP	cMT3162X
-------------------------	-----------	-----------	----------

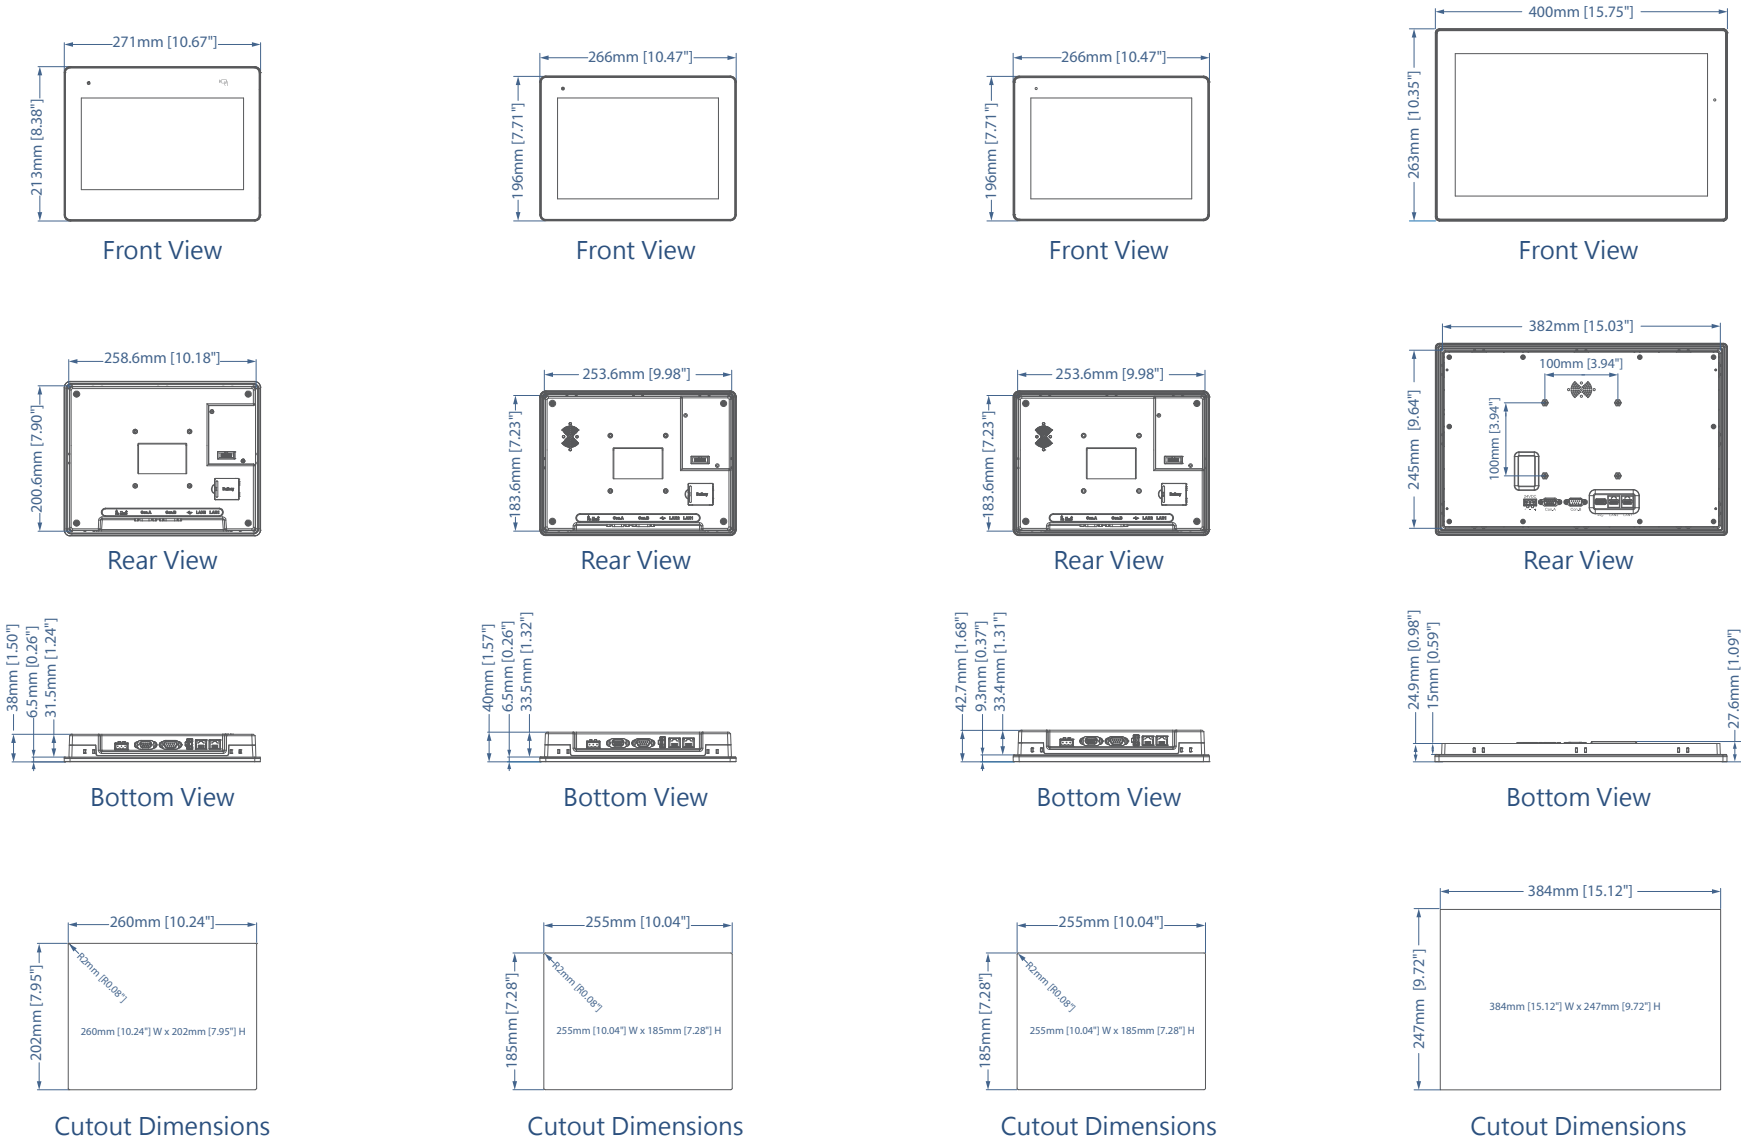

*Shown with cMT3102X (R).

Advanced Model

Specifications



Model		cMT3218XP
Display	Display	21.5" WVA
	Resolution	1920 x 1080
	Brightness (cd/ m ²)	500
	Contrast Ratio	1000:1
	Backlight Type	LED
	Backlight Life Time	>30,000 hrs.
	Colors	16.7M
	LCD Viewing Angle (T/B/L/R)	89/89/89/89
	Pixel Pitch (mm)	0.24795(H) x 0.24795(V)
Touch Panel	Type	Tempered Glass, Capacitive Type Hardness Scale ≥ 6H
Memory	Flash	4 GB
	RAM	2 GB
Processor		Quad-core RISC
I/O Port	USB Host	USB 2.0 x 2
	Ethernet	LAN 1: 10/100/1000 Base-T x 1 LAN 2: 10/100 Base-T x 1
	COM Port	Con.A: COM2 RS-485 2W/4W, COM3 RS-485 2W, CAN Bus Con.B: COM1 RS-232 4W, COM3 RS-232 2W*
	CAN Bus	Yes
	Audio Output	Built-in Mono Speaker
	RTC	Built-in
Power	Input Power	24±20%VDC
	Power Isolation	Built-in
	Power Consumption	1.8A@24VDC
	Voltage Resistance	500VAC (1 min.)
	Isolation Resistance	Exceed 50MΩ @ 500VDC
Specification	PCB Coating	Yes
	Enclosure	Aluminum
	Dimensions WxHxD	546 x 354 x 47.5 mm
	Panel Cutout	532 x 340 mm
	Weight	Approx. 5.5 kg
	Mount	Panel mount, VESA mount 100 x 100 mm
Environment	Protection Structure	NEMA4 / IP66 Compliant Front Panel
	Storage Temperature	-20° ~ 60° C (-4° ~ 140° F)
	Operating Temperature	0° ~ 50° C (32° ~ 122° F)
	Relative Humidity	10% ~ 90% (non-condensing)
	Vibration Endurance	10 to 25Hz (X, Y, Z direction 2G 30 minutes)
Certificate	CE	CE marked
	Software	EasyAccess 2.0 (Optional) Dashboard (Optional)
Software	Weincloud	Optional
	CODESYS	Optional

Standard Model

Specifications



Model		cMT2058XH	cMT2078X	cMT2102X
Display	Display	4.3" WVA	7" TFT	10.1" WVA
	Resolution	800 x 480	800 x 480	1024 x 600
	Brightness (cd/ m ²)	530	400	400
	Contrast Ratio	800:1	800:1	500:1
	Backlight Type	LED	LED	LED
	Backlight Life Time	>30,000 hrs.	>30,000 hrs.	>30,000 hrs.
	Colors	16.7M	16.7M	16.7M
	LCD Viewing Angle (T/B/L/R)	80/80/80/80	80/60/80/80	85/85/85/85
	Pixel Pitch (mm)	0.1188(H) x 0.1122(V)	0.1926(H) x 0.179(V)	0.2175(H) x 0.2088(V)
Touch Panel	Type	4-wire Resistive Type	4-wire Resistive Type	4-wire Resistive Type
	Accuracy	Active Area Length(X)±2%, Width(Y)±2%	Active Area Length(X)±2%, Width(Y)±2%	Active Area Length(X)±2%, Width(Y)±2%
Memory	Flash	4 GB	4 GB	4 GB
	RAM	1 GB	1 GB	1 GB
Processor		Quad-core RISC	Quad-core RISC	Quad-core RISC
I/O Port	USB Host	USB 2.0 x 1	USB 2.0 x 1	USB 2.0 x 1
	Ethernet	LAN 1: 10/100/1000 Base-T x 1 LAN 2: 10/100 Base-T x 1	LAN 1: 10/100 Base-T x 1 LAN 2: 10/100 Base-T x 1	10/100 Base-T x 2
	WiFi	N/A	N/A	M02 WiFi Expansion Module (Optional)
	COM Port	COM1: RS-232/RS-485 2W/4W, COM3 RS-485 2W	Con.A: COM2 RS-485 2W/4W, COM3 RS-485 2W Con.B: COM1 RS-232 4W, COM3 RS-232 2W*	Con.A: COM2 RS-485 2W/4W, COM3 RS-485 2W Con.B: COM1 RS-232 4W, COM3 RS-232 2W*
	RTC	Built-in	Built-in	Built-in
	Power	Input Power 24±20%VDC Power Isolation Built-in Power Consumption 510mA@24VDC Voltage Resistance 500VAC (1 min.) Isolation Resistance Exceed 50MΩ @ 500VDC	Input Power 24±20%VDC Power Isolation Built-in Power Consumption 820mA@24VDC Voltage Resistance 500VAC (1 min.) Isolation Resistance Exceed 50MΩ @ 500VDC	Input Power 24±20%VDC Power Isolation Built-in Power Consumption 420mA@24VDC Voltage Resistance 500VAC (1 min.) Isolation Resistance Exceed 50MΩ @ 500VDC
Specification	PCB Coating	Yes	Yes	Yes
	Enclosure	Plastic	Plastic	Plastic
	Dimensions WxHxD	128 x 102 x 32 mm	200.3 x 146.3 x 35.0 mm	271 x 213 x 38 mm
	Panel Cutout	119 x 93 mm	192 x 138 mm	260 x 202 mm
	Weight	Approx. 0.27 kg	Approx. 0.6 kg	Approx. 1.2 kg
	Mount	Panel mount	Panel mount	Panel mount, VESA mount 75 x 75 mm
Environment	Protection Structure	UL Type 4X (indoor use only) / NEMA4 / IP66 Compliant Front Panel	UL Type 4X (indoor use only) / NEMA4 / IP66 Compliant Front Panel	NEMA4 / IP66 Compliant Front Panel
	Storage Temperature	-20° ~ 60° C (-4° ~ 140° F)	-20° ~ 60° C (-4° ~ 140° F)	-20° ~ 60° C (-4° ~ 140° F)
	Operating Temperature	0° ~ 50° C (32° ~ 122° F)	0° ~ 55° C (32° ~ 131° F)	0° ~ 55° C (32° ~ 131° F)
	Relative Humidity	10% ~ 90% (non-condensing)	10% ~ 90% (non-condensing)	10% ~ 90% (non-condensing)
	Altitude	3,000 m	3,000 m	3,000 m
	Vibration Endurance	10 to 25Hz (X, Y, Z direction 2G 30 minutes)	10 to 25Hz (X, Y, Z direction 2G 30 minutes)	10 to 25Hz (X, Y, Z direction 2G 30 minutes)
Certificate	CE	CE marked	CE marked	CE marked
	UL	cULus Listed	cULus Listed	N/A
Software	Weincloud	EasyAccess 2.0 (Optional) Dashboard (Optional)	EasyAccess 2.0 (Optional) Dashboard (Optional)	EasyAccess 2.0 (Optional) Dashboard (Optional)
	CODESYS	Optional	Optional	Optional

*Only Tx & Rx (no RTS/CTS) may be used for COM1 RS-232 when COM3 RS-232 is also used.




Capacitive Type




Wide Viewing Angle

Advanced Model
Dimensions


cMT3218XP




Front View



Rear View




Bottom View

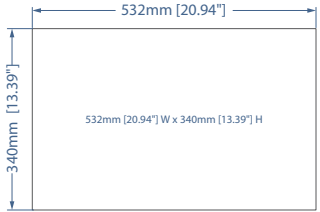


Cutout Dimensions

Standard Model
Dimensions


cMT2058XH cMT2078X cMT2102X




Front View




Rear View




Bottom View




Cutout Dimensions




Front View




Rear View




Bottom View




Cutout Dimensions




Front View



Rear View



Bottom View



Cutout Dimensions

Standard Model

Specifications



Model		cMT2108X2	cMT2128X	cMT2158X	cMT2166X	cMT2168X
Display	Display	10.1" WVA	12.1" WVA	15" WVA	15.6" WVA	15.6" WVA
	Resolution	1024 x 600	1024 x 768	1024 x 768	1920 x 1080	1920 x 1080
	Brightness (cd/ m ²)	350	600	350	300	500
	Contrast Ratio	1000:1	1000:1	2500:1	800:1	1500:1
	Backlight Type	LED	LED	LED	LED	LED
	Backlight Life Time	> 50,000 hrs.	> 30,000 hrs.	> 70,000 hrs.	> 30,000 hrs.	> 50,000 hrs.
	Colors	16.7M	16.7M	16.2M	16.2M	16.2M
	LCD Viewing Angle (T/B/L/R)	89/89/89/89	89/89/89/89	88/88/88/88	89/89/89/89	85/85/85/85
	Pixel Pitch (mm)	0.2175(H) x 0.2088(V)	0.240(H) x 0.240(V)	0.297(H) x 0.297(V)	0.17925(H) x 0.17925(V)	0.17925(H) x 0.17925(V)
Touch Panel	Type	4-wire Resistive Type	4-wire Resistive Type	4-wire Resistive Type	Tempered Glass, Capacitive Type Hardness Scale 7H	4-wire Resistive Type
	Accuracy	Active Area Length(X)±2%, Width(Y)±2%	Active Area Length(X)±2%, Width(Y)±2%	Active Area Length(X)±2%, Width(Y)±2%	N/A	Active Area Length(X)±2%, Width(Y)±2%
Memory	Flash	4 GB	4 GB	4 GB	4 GB	4 GB
	RAM	1 GB	1 GB	1 GB	1 GB	1 GB
Processor		Quad-core RISC	Quad-core RISC	Quad-core RISC	Quad-core RISC	Quad-core RISC
I/O Port	SD Card Slot	N/A	microSD x 1	SD/SDHC	N/A	N/A
	USB Host	USB 2.0 x 1	USB 2.0 x 1	USB 2.0 x 1	USB 2.0 x 1	USB 2.0 x 1
	Ethernet	LAN 1: 10/100/1000 Base-T x 1 LAN 2: 10/100 Base-T x 1	LAN 1: 10/100/1000 Base-T x 1 LAN 2: 10/100 Base-T x 1	LAN 1: 10/100/1000 Base-T x 1 LAN 2: 10/100 Base-T x 1	10/100 Base-T x 1	LAN 1: 10/100/1000 Base-T x 1 LAN 2: 10/100 Base-T x 1
	WiFi	M02 WiFi Expansion Module (Optional)	N/A	N/A	N/A	N/A
	COM Port	Con.A: COM2 RS-485 2W/4W, COM3 RS-485 2W Con.B: COM1 RS-232 4W, COM3 RS-232 2W*	Con.A: COM2 RS-485 2W/4W, COM3 RS-485 2W Con.B: COM1 RS-232 4W, COM3 RS-232 2W*	Con.A: COM1 RS-485 2W/4W, COM3 RS-485 2W Con.B: COM1 RS-232 4W, COM3 RS-232 2W*	Con.A: COM1 RS-485 2W/4W, COM3 RS-485 2W Con.B: COM1 RS-232 4W, COM3 RS-232 2W*	Con.A: COM1 RS-485 2W/4W, COM3 RS-485 2W Con.B: COM1 RS-232 4W, COM3 RS-232 2W*
	RS-485 Dual Isolation	N/A	Yes	N/A	N/A	N/A
	Audio Output	N/A	N/A	Built-in Mono Speaker Audio Line Out - 3.5 mm jack x 1	Built-in Mono Speaker	Built-in Mono Speaker
	RTC	Built-in	Built-in	Built-in	Built-in	Built-in
Power	Input Power	24±20%VDC	24±20%VDC	24±20%VDC	24±20%VDC	24±20%VDC
	Power Isolation	Built-in	Built-in	Built-in	Built-in	Built-in
	Power Consumption	1A@24VDC	1.2A@24VDC	1.3A@24VDC	0.9A@24VDC	900mA@24VDC
	Voltage Resistance	500VAC (1 min.)	500VAC (1 min.)	500VAC (1 min.)	500VAC (1 min.)	500VAC (1 min.)
	Isolation Resistance	Exceed 50MΩ @ 500VDC	Exceed 50MΩ @ 500VDC	Exceed 50MΩ @ 500VDC	Exceed 50MΩ @ 500VDC	Exceed 50MΩ @ 500VDC
Specification	PCB Coating	Yes	Yes	Yes	Yes	Yes
	Enclosure	Plastic	Plastic	Aluminum	Front bezel: Plastic, Rear Enclosure: Alu- minum	Aluminum
	Dimensions WxHxD	271 x 213 x 38 mm	317 x 243 x 41 mm	366 x 293 x 48.2mm	400 x 263 x 27.6 mm	400 x 263 x 31.3 mm
	Panel Cutout	260 x 202 mm	305 x 231 mm	352 x 279 mm	384 x 247 mm	384 x 247 mm
	Weight	Approx. 1.2 kg	Approx. 1.7 kg	Approx. 2.74 kg	Approx. 1.6 kg	Approx. 2.1 kg
Environment	Mount	Panel mount, VESA mount 75 x 75 mm	Panel mount, VESA mount 75 x 75 mm	Panel mount, VESA mount 75 x 75 mm	Panel mount, VESA mount 100 x 100 mm	Panel mount, VESA mount 100 x 100 mm
	Protection Structure	UL Type 4X (indoor use only) / NEMA4 / IP66 Compliant Front Panel	UL Type 4X (indoor use only) / NEMA4 / IP66 Compliant Front Panel	UL Type 4X (indoor use only) / NEMA4 / IP66 Compliant Front Panel	NEMA4 / IP66 Compliant Front Panel	NEMA4 / IP66 Compliant Front Panel
	Storage Temperature	-20° ~ 60° C (-4° ~ 140° F)	-20° ~ 60° C (-4° ~ 140° F)	-20° ~ 60° C (-4° ~ 140° F)	-20° ~ 60° C (-4° ~ 140° F)	-20° ~ 60° C (-4° ~ 140° F)
	Operating Temperature	0° ~ 50° C (32° ~ 122° F)	0° ~ 55° C (32° ~ 131° F)	0° ~ 50° C (32° ~ 122° F)	0° ~ 50° C (32° ~ 122° F)	0° ~ 55° C (32° ~ 131° F)
	Relative Humidity	10% ~ 90% (non-condensing)	10% ~ 90% (non-condensing)	10% ~ 90% (non-condensing)	10% ~ 90% (non-condensing)	10% ~ 90% (non-condensing)
Certificate	Altitude	3,000 m	3,000 m	3,000 m	3,000 m	3,000 m
	Vibration Endurance	10 to 25Hz (X, Y, Z direction 2G 30 minutes)	10 to 25Hz (X, Y, Z direction 2G 30 minutes)	10 to 25Hz (X, Y, Z direction 2G 30 minutes)	10 to 25Hz (X, Y, Z direction 2G 30 minutes)	10 to 25Hz (X, Y, Z direction 2G 30 minutes)
	CE	CE marked	CE marked	CE marked	CE marked	CE marked
Software	UL	cULus Listed	cULus Listed	cULus Listed	N/A	N/A
	Weincloud	EasyAccess 2.0 (Optional) Dashboard (Optional)	EasyAccess 2.0 (Optional) Dashboard (Optional)	EasyAccess 2.0 (Optional) Dashboard (Optional)	EasyAccess 2.0 (Optional) Dashboard (Optional)	EasyAccess 2.0 (Optional) Dashboard (Optional)
	CODESYS	Optional	Optional	Optional	N/A	Optional


















*Only Tx & Rx (no RTS/CTS) may be used for COM1 RS-232 when COM3 RS-232 is also used.

*The cMT2108X2 (V2) / cMT2158X (V2) product label indicates MPI support, while the original cMT2108X2 / cMT2158X label does not.



Standard Model

Dimensions

cMT2108X2	cMT2128X	cMT2158X	cMT2166X	cMT2168X
 271mm [10.67"] 213mm [8.38"]	 317mm [12.49"] 243mm [9.57"]	 366mm [14.41"] 293mm [11.54"]	 400mm [15.75"] 263mm [10.35"]	 400mm [15.75"] 263mm [10.35"]
Front View	Front View	Front View	Front View	Front View
 258.6mm [10.18"] 200.6mm [7.90"]	 303mm [11.92"] 229mm [9.01"]	 350mm [13.78"] 277mm [10.91"]	 382mm [15.03"] 245mm [9.64"] 100mm [3.94"] 100mm [3.94"]	 382mm [15.03"] 245mm [9.64"] 100mm [3.94"] 100mm [3.94"]
Rear View	Rear View	Rear View	Rear View	Rear View
 38mm [1.50"] 6.5mm [0.26"] 31.5mm [1.24"]	 41mm [1.62"] 7.5mm [0.30"]	 48.2mm [1.90"] 24.2mm [0.95"] 6.7mm [0.26"]	 24.9mm [0.98"] 15mm [0.59"] 27.6mm [1.09"]	 28.5mm [1.12"] 22.5mm [0.88"] 31.3mm [1.23"]
Bottom View	Bottom View	Bottom View	Bottom View	Bottom View
 260mm [10.24"] 202mm [7.95"] 260mm [10.24"] W x 202mm [7.95"] H	 305mm [12.01"] 231mm [9.09"] 305mm [12.01"] W x 231mm [9.09"] H	 352mm [13.86"] 279mm [10.98"] 352mm [13.86"] W x 279mm [10.98"] H	 384mm [15.12"] 247mm [9.72"] 384mm [15.12"] W x 247mm [9.72"] H	 384mm [15.12"] 247mm [9.72"] 384mm [15.12"] W x 247mm [9.72"] H
Cutout Dimensions	Cutout Dimensions	Cutout Dimensions	Cutout Dimensions	Cutout Dimensions

Handheld HMI

Specifications



Model		cMT3106XM
Display	Display	10.1" WVA
	Resolution	1024 x 600
	Brightness (cd/ m²)	350
	Contrast Ratio	1000:1
	Backlight Type	LED
	Backlight Life Time	>50,000 hrs.
	Colors	16.7M
	LCD Viewing Angle (T/B/L/R)	89/89/89/89
	Pixel Pitch (mm)	0.2175(H) x 0.2088(V)
Touch Panel	Type	4-wire Resistive Type
	Accuracy	Active Area Length(X)±2%, Width(Y)±2%
Memory	Flash	4 GB
	RAM	1 GB
Processor		Quad-core RISC
I/O Port	SD Card Slot	SD/SDHC
	USB Host	USB 2.0 x 1
	Ethernet	10/100 Base-T x 1
	COM Port	COM2 RS-485 2W/4W
	Key Switch	Yes*
	Emergency Stop Switch	Yes*
	3-Position Enable Switch	Yes*
RTC		Built-in
Power	Input Power	24±20%VDC*
	Power Isolation	Built-in
	Power Consumption	480mA@24VDC
	Voltage Resistance	500VAC (1 min.)
	Isolation Resistance	Exceed 50MΩ @ 500VDC
Specification	PCB Coating	Yes
	Enclosure	Plastic
	Dimensions WxHxD	302.7 x 240 x 116.8 mm
	Weight	Approx. 1.6 kg
	Mount	Wall Mounting Bracket
Environment	Protection Structure	IP65
	Storage Temperature	-20° ~ 60° C (-4° ~ 140° F)
	Operating Temperature	0° ~ 50° C (32° ~ 122° F)
	Relative Humidity	10% ~ 90% (non-condensing)
	Vibration Endurance	10 to 25Hz (X, Y, Z direction 2G 30 minutes)
	Max. Fall Height	1.2 m
Certificate	CE	CE marked
Software	Weincloud	EasyAccess 2.0 (Optional) Dashboard (Optional)

Connection Box

Specifications




Model		cMT-XMBS	cMT-XMBC
I/O Port	Cable Connector	1	1
	Wiring Terminal	2	2
Specification	Enclosure	Plastic	Plastic
	Dimensions WxHxD	181.1 x 101.1 x 70 mm	157.9 x 75.9 x 55.2 mm
	Panel Cutout	N/A	119.4 x 29.95 mm
	Weight	Approx. 0.4 kg	Approx. 0.2 kg
	Mount	Use four M4 screws, mounting hole size is 4.6 mm	Use six M4 screws, mounting hole size is 4.6mm
Environment	Protection Structure	IP66	IP66 Compliant Front Side
	Storage Temperature	-20° ~ 60° C (-4° ~ 140° F)	-20° ~ 60° C (-4° ~ 140° F)
	Operating Temperature	0° ~ 55° C (32° ~ 131° F)	0° ~ 55° C (32° ~ 131° F)
	Relative Humidity	10% ~ 90% (non-condensing)	10% ~ 90% (non-condensing)
	Vibration Endurance	10 to 25Hz (X, Y, Z direction 2G 30 minutes)	10 to 25Hz (X, Y, Z direction 2G 30 minutes)
Certificate		CE	CE marked
E-Stop Bypass Plug		Optional	Optional

*See the datasheet for more details.


*The Handheld HMI must be powered solely through the connection box.

Handheld HMI
Dimensions


cMT3106XM




Front View



Rear View




Top View




Mounting Brackets

Connection Box
Dimensions


cMT-XMBS cMT-XMBC




Front View




Connection




Bottom View

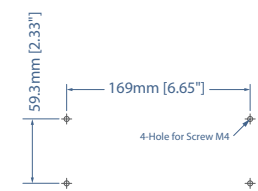


Screw Hole Dimensions




Front View



Connection



Bottom View

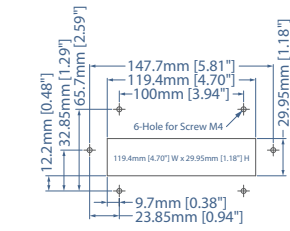

Cutout Dimensions

Headless HMI+Other Model

Specifications

					
Model		cMT-FHDX-820	cMT-SVRX-820 / 822	cMT-SVR-100 / 102	cMT-SVR-200 / 202
Memory	Flash	4 GB	4 GB	256 MB	256 MB
	RAM	1 GB	1 GB	256 MB	256 MB
Processor		Quad-core RISC	Quad-core RISC	Quad-core RISC	Quad-core RISC
I/O Port	SD Card Slot	microSD x1	microSD x1	microSD x1	microSD x1
	USB Host	USB 2.0 x 1	USB 2.0 x 1	USB 2.0 x 1	USB 2.0 x 1
	Ethernet	LAN 1: 10/100/1000 Base-T x 1	LAN 1: 10/100/1000 Base-T x 1	10/100 Base-T x 2	10/100 Base-T x 1
		LAN 2: 10/100 Base-T x 1	LAN 2: 10/100 Base-T x 1		
	WiFi	N/A	N/A	N/A	IEEE 802.11 b/g/n 802.11b: max 19.52 dBm 802.11g: max 15.35 dBm 802.11n: max 15.28 dBm
	COM Port	COM1: RS-232 2W COM2: RS-485 2W/4W COM3: RS-485 2W	COM1: RS-232 2W COM2: RS-485 2W/4W COM3: RS-485 2W	COM1: RS-232 2W COM2: RS-485 2W/4W COM3: RS-485 2W	COM1: RS-232 2W COM2: RS-485 2W/4W COM3: RS-485 2W
	HDMI Output	Customizable (max. resolution 1920 x 1080)	N/A	N/A	N/A
	Recommended Resolutions (Please use these recommended screen resolutions to avoid compatibility issues.)	720x480 / 720x576 / 800x600 / 1024x768 / 1280x720 / 1920x1080	N/A	N/A	N/A
	Audio Output	HDMI Audio Output	N/A	N/A	N/A
RTC		Built-in	Built-in	Built-in	Built-in
Power	Input Power	24±20%VDC	24±20%VDC	24±20%VDC	24±20%VDC
	Power Isolation	Built-in	Built-in	Built-in	Built-in
	Power Consumption	850mA@24VDC	850mA@24VDC	230mA@24VDC	450mA@24VDC
	Voltage Resistance	500VAC (1 min.)	500VAC (1 min.)	500VAC (1 min.)	500VAC (1 min.)
Specification	Isolation Resistance	Exceed 50MΩ @ 500VDC	Exceed 50MΩ @ 500VDC	Exceed 50MΩ @ 500VDC	Exceed 50MΩ @ 500VDC
	PCB Coating	Yes	Yes	Yes	Yes
	Enclosure	Plastic	Plastic	Plastic	Plastic
	Dimensions WxHxD	29.8 x 130 x 115 mm	29.8 x 130 x 115 mm	27 x 130 x 115 mm	27 x 130 x 115 mm
	Weight	Approx. 0.24 kg	Approx. 0.24 kg	Approx. 0.18 kg	Approx. 0.18 kg
Environment	Mount	35 mm DIN rail mounting	35 mm DIN rail mounting	35 mm DIN rail mounting	35 mm DIN rail mounting
	Protection Structure	IP20	IP20	IP20	IP20
	Storage Temperature	-20° ~ 60° C (-4° ~ 140° F)	-20° ~ 60° C (-4° ~ 140° F)	-20° ~ 70° C (-4° ~ 158° F)	-20° ~ 70° C (-4° ~ 158° F)
	Operating Temperature	0° ~ 50° C (32° ~ 122° F)	0° ~ 50° C (32° ~ 122° F)	-20° ~ 55° C (-4° ~ 131° F)	-20° ~ 55° C (-4° ~ 131° F)
	Relative Humidity	10% ~ 90% (non-condensing)	10% ~ 90% (non-condensing)	10% ~ 90% (non-condensing)	10% ~ 90% (non-condensing)
	Altitude	3,000 m	3,000 m	3,000 m	3,000 m
	Vibration Endurance	10 to 25Hz (X, Y, Z direction 2G 30 minutes)	10 to 25Hz (X, Y, Z direction 2G 30 minutes)	10 to 25Hz (X, Y, Z direction 2G 30 minutes)	10 to 25Hz (X, Y, Z direction 2G 30 minutes)
Certificate	CE	CE marked	CE marked	CE marked	CE marked
	UL	cULus Listed	cULus Listed	cULus Listed	cULus Listed
Software	Weincloud	EasyAccess 2.0 (Optional) Dashboard (Optional)	EasyAccess 2.0 (Optional) Dashboard (Optional) EasyAccess 2.0 (Built-in) Dashboard (Optional)	EasyAccess 2.0 (Optional)	EasyAccess 2.0 (Optional) EasyAccess 2.0 (Built-in)
	CODESYS	Optional	Optional	N/A	N/A

Accessories

Specifications


		
Model		M02
Network	WiFi	IEEE 802.11 b/g/n 802.11b: max 19.76 dBm 802.11g: max 19.93 dBm 802.11n: max 19.99 dBm
I/O Port	SMA Female Connector	1
	Male Connector to HMI	1
Power	Input Power	5VDC
	Power Consumption	900mA@5VDC (powered by HMI)
	Voltage Resistance	500VAC (1min.)
	Isolation Resistance	Exceed 50MΩ @ 500VDC
Specification	PCB Coating	N/A
	Enclosure	Plastic
	Dimensions WxHxD	54.5 x 80 x 24.1 mm
	Weight	Approx. 80 g
	Mount	HMI connector + diagonal screw fastening
Environment	Protection Structure	M02: IP20 Compliant Antenna: IP66 Compliant
	Storage Temperature	-20° ~ 60° C (-4° ~ 140° F)
	Operating Temperature	0° ~ 55° C (32° ~ 131° F)
	Relative Humidity	10% ~ 90% (non-condensing)
	Altitude	3,000 meters
	Vibration Endurance	10 to 25Hz (X, Y, Z direction 2G 30 minutes)
Certificate	CE	CE marked
	UL	cULus Listed

*Only Tx & Rx (no RTS/CTS) may be used for COM1 RS-232 when COM3 RS-232 is also used.


Headless HMI+Other Model

Dimensions

cMT-FHDX-820	cMT-SVRX-820 / 822	cMT-SVR-100 / 102	cMT-SVR-200 / 202
--------------	--------------------	-------------------	-------------------



Front View




Front View




Front View




Front View




Side View



Side View



Side View



Side View



Top View



Top View



Top View



Top View



Bottom View




Bottom View




Bottom View





Bottom View



Front View



Side View



Antenna

Accessories

Dimensions

M02



이지뷰 주식회사

www.easyview.kr

서울 본사 & A/S센터 서울시 금천구 가산디지털 1로 2, 우림라이온스밸리 2차 718호

Tel: 02-2066-8121 | A/S 02-2038-8177 | Fax: 02-2066-8127

대구 지사 대구광역시 북구 유통단지25, 전자상가 5동 111호

Tel: 053-593-8121 | Fax: 02-2066-8127

정기 교육 교육 장소: 서울 본사 및 대구 지사에서 진행 (상세 일정은 홈페이지 참조)

WEINTEK and the WEINTEK logos are trademarks or registered trademarks of Weintek Labs., Inc. in many countries.
© 2025 All rights reserved.