



MT8052iP



MT8072iP



MT8106iP

Performance, Design, and Versatility

MT8000iP Series

Specification




	Model	MT8052iP	MT8072iP	MT8106iP
Display	Display	4.3" TFT	7" TFT	10.1" WVA
	Resolution	480 x 272	800 x 480	1024 x 600
	Brightness (cd/ m ²)	400	450	350
	Contrast Ratio	500: 1	500: 1	1000: 1
	Backlight Type	LED	LED	LED
	Backlight Life Time	>30,000 hrs.	>30,000 hrs.	50,000 hrs.
	Colors	16.7M	16.7M	16.7M
	LCD Viewing Angle (T/B/L/R)	50/70/70/70	60/70/70/70	89/89/89/89
	Pixel Pitch (mm)	0.198(H) x 0.198(V)	0.1926(H) x 0.179(V)	0.2175(H) x 0.2088(V)
	Pixel Pitch (mm)	0.198(H) x 0.198(V)	0.1926(H) x 0.179(V)	0.2175(H) x 0.2088(V)
Touch Panel	Type	4-wire Resistive Type	4-wire Resistive Type	4-wire Resistive Type
	Accuracy	Active Area Length(X)±2%, Width(Y)±2%	Active Area Length(X)±2%, Width(Y)±2%	Active Area Length(X)±2%, Width(Y)±2%
Memory	Flash	256 MB	256 MB	256 MB
	RAM	128 MB	128 MB	128 MB
Processor		Dual-core RISC	Dual-core RISC	Quad-core RISC
I/O Port	USB Host	USB 2.0 x 1	USB 2.0 x 1	USB 2.0 x 1
	Ethernet	10/100 Base-T x 1	10/100 Base-T x 1	10/100 Base-T x 1
	COM Port	COM1: RS-232/RS-485 2W/4W COM3: RS-485 2W	COM1: RS-232 4W, COM2: RS-485 2W/4W	Con.A: COM2 RS-485 2W/4W, COM3 RS-485 2W Con.B: COM1 RS-232 4W, COM3 RS-232 2W*
RTC		Built-in	Built-in	Built-in
Power	Input Power	24±20%VDC	24±20% VDC	24±20%VDC
	Power Isolation	Built-in	Built-in	Built-in
	Power Consumption	350mA@24VDC	450mA@24VDC	400mA@24VDC
	Voltage Resistance	500VAC (1 min.)	500VAC (1 min.)	500VAC (1 min.)
	Isolation Resistance	Exceed 50MΩ @ 500VDC	Exceed 50MΩ @ 500VDC	Exceed 50MΩ @ 500VDC
Specification	PCB Coating	N/A	N/A	N/A
	Enclosure	Plastic	Plastic	Plastic
	Dimensions WxHxD	128 x 102 x 32 mm	200.4 x 146.5 x 34 mm	271 x 213 x 36.4 mm
	Panel Cutout	119 x 93 mm	192 x 138 mm	260 x 202 mm
	Weight	Approx. 0.25 kg	Approx. 0.52 kg	Approx. 1 kg
	Mount	Panel mount	Panel mount	Panel mount
Environment	Protection Structure	NEMA4 / IP65 Compliant Front Panel	NEMA4 / IP65 Compliant Front Panel	NEMA4 / IP65 Compliant Front Panel
	Storage Temperature	-20° ~ 60° C (-4° ~ 140° F)	-20° ~ 60° C (-4° ~ 140° F)	-20° ~ 60° C (-4° ~ 140° F)
	Operating Temperature	0° ~ 55° C (32° ~ 131° F)	0° ~ 55° C (32° ~ 131° F)	0° ~ 55° C (32° ~ 131° F)
	Relative Humidity	10% ~ 90% (non-condensing)	10% ~ 90% (non-condensing)	10% ~ 90% (non-condensing)
	Vibration Endurance	10 to 25Hz (X, Y, Z direction 2G 30 minutes)	10 to 25Hz (X, Y, Z direction 2G 30 minutes)	10 to 25Hz (X, Y, Z direction 2G 30 minutes)
	Vibration Endurance	10 to 25Hz (X, Y, Z direction 2G 30 minutes)	10 to 25Hz (X, Y, Z direction 2G 30 minutes)	10 to 25Hz (X, Y, Z direction 2G 30 minutes)
Certificate	CE	CE marked	CE marked	CE marked
	UL	N/A	N/A	N/A
Software		Weincloud	EasyAccess 2.0 (Optional)	EasyAccess 2.0 (Optional)

* MT8106iP: Only Tx & Rx (no RTS/CTS) may be used for COM1 RS-232 when COM3 RS-232 is also used.

* 본 사양은 성능 향상을 위해 변경될 수 있습니다.

Dimensions Unit: mm

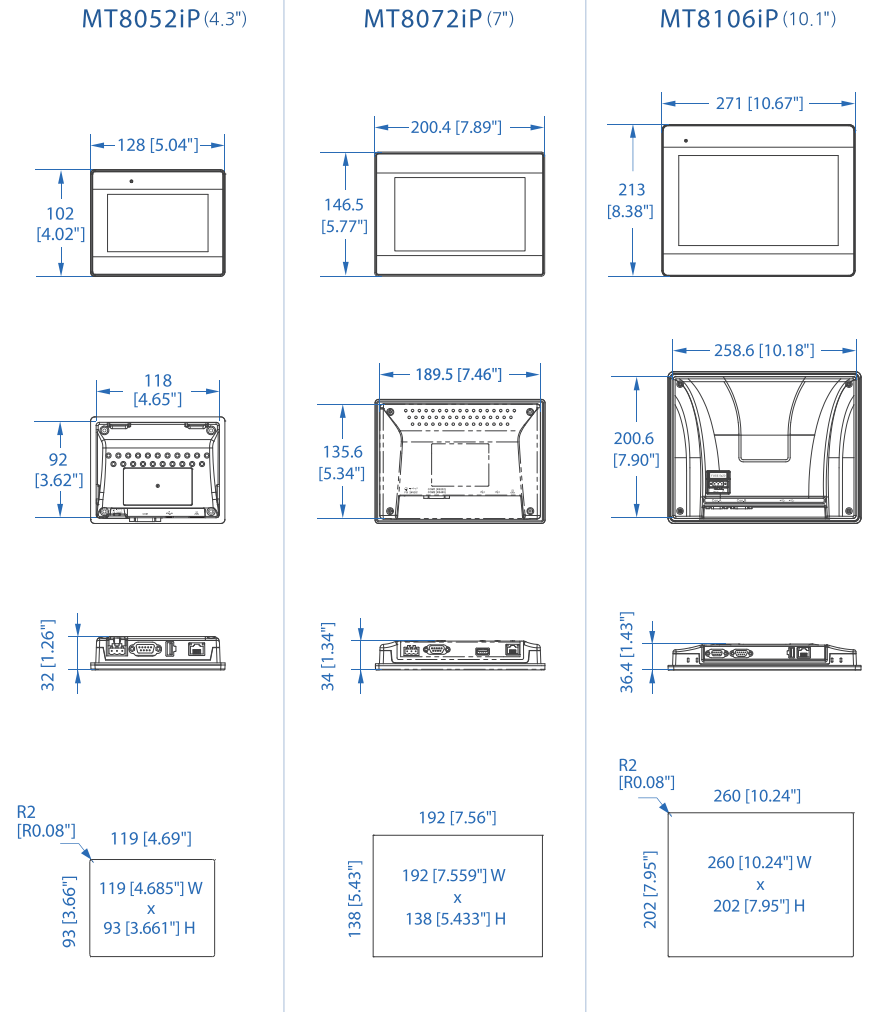

이지뷰 주식회사

주소: 서울특별시 금천구 가산디지털1로 2 우림라이온스밸리 2차 718호 Tel: 02) 2066-8121 Fax: 02) 2066-8127

www.easyview.kr

이지뷰 교육 : 본사에서 진행 (교육일정은 사이트 참조)

A/S 센터 : 서울특별시 금천구 가산디지털1로 2 우림라이온스밸리 2차 718호 Tel: 02) 2038-8177 Fax: 02) 2066-8127

대구남부 지원센터 : 대구시 북구 유통단지 25 전자상가 5동 111호 Tel: 053) 593-8121