



Eagle Eye High-Capacity CMVR

520, 620, 820

The Brivo Eagle Eye Cloud Managed Video Recorder (CMVR) stores video onsite while providing remote access to all cameras through the Brivo Eagle Eye AI Video (video management system). CMVRs also offer the ability to redundantly retain video both onsite and in the cloud. The CMVR provides video storage, video buffering, a secure connection, bandwidth management, and camera monitoring.

These high-capacity class CMVRs are designed with redundant power supplies and redundant storage systems to provide maximum reliability. Our systems utilize RAID (Redundant Array of Independent Disk) storage to ensure critical video content availability, so you can access your cameras when and where you need them. Our CMVRs can be combined and configured to support any number of cameras, ensuring they are tailored to your needs.

System Administration

- 100% browser-based; no software necessary
- Granular user permissions for enhanced security
- Multisite support to ensure complete coverage across all of your locations
- Point-and-click video sharing for optimized incident communication
- Centralized management provides a single hub to access all of your cameras

Recording Features

- Video encrypted in transit and at rest
- Fully cloud managed
- Intelligent Bandwidth Management with local buffering
- Motion or continuous recording
- Optional audio recording

Web Interface & Mobile Features

- Native iOS and Android apps
- View live and recorded video
- Compatible with all modern browsers
- Motion detection with alerts
- Map and floor-plan display



Brivo Eagle Video is a fully managed cloud video surveillance solution, delivering an end-to-end video management system that's simple to deploy and easy to use. It supports all modern browsers and works on Windows, Mac, and even Linux with no plugins to install. With our fully mobile capabilities, you can view video anytime, anywhere. The fully functional iOS and Android applications provide complete access to live and recorded video and can also be used to install, configure, and manage the system.

Brivo provides a cloud-based video management system. The Brivo Eagle Eye Bridge is installed on-site, connects to your cameras, records video locally, and then securely synchronizes both video and metadata to the Brivo Eagle Eye Cloud Data Center. It's a robust, secure appliance specifically designed to overcome the demands of transmitting high-resolution video via the internet.

Comprehensive Camera Support

At Brivo, we believe camera compatibility is important. There's no need to be locked into a single camera vendor. Businesses need the flexibility to work with the cameras that they choose. Brivo Eagle Eye Bridges and CMVRs support ONVIF Profile S IP cameras. Brivo Eagle Eye Combo Bridges and CMVRs support both IP and NTSC and PAL analog cameras.

Security Simplified

With Brivo Eagle Eye Complete Privacy Encryption™, video is fully encrypted during transmission and at rest. The Brivo Eagle Eye Bridge has no open ports to the Internet, eliminating security vulnerabilities commonly found in other systems and eliminating the need for router or firewall adjustments.

BRIVO EAGLE EYE HIGH CAPACITY CMVR SPECIFICATIONS

			
MODEL	CMVR 520	CMVR 620	CMVR 820
Max Cameras*	Up to 50 IP Cameras @4MP	Up to 100 IP Cameras @4MP	Up to 165 IP Cameras @4MP
Max Analytic Count**	20	30	40
LPR Support**	Yes	Yes	Yes
Storage Capacity	64 TB (raw), 48 TB (useable) RAID 5 (40 days for 50 cameras @ 4MP)	96 TB (raw), 72 TB (useable) RAID 5 (30 days for 100 cameras @ 4MP)	192 TB (raw), 160 TB (useable) RAID 6 (40 days for 165 cameras @ 4MP)
POE Camera Ports	None	None	None
Network Ports	Dual 2.5 Gigabit	Dual 2.5 Gigabit	Dual Gigabit
Video Output**	HDMI (2), DP (2)	HDMI (2), DP (2)	HDMI (2), DP (2)
Dimension	483 × 559 × 45 mm 19 × 22 × 1.75 in 1U	483 × 559 × 45 mm 19 × 22 × 1.75 in 1U	483 × 686 × 89 mm 19 × 27 × 3.50 in 2U
Weight	12.25 kg 27.00 lbs	12.25 kg 27.00 lbs	23.5 kg 51.9 lbs
Maximum Power Consumption	Internal 100–240 VAC, 500 W	Internal 100–240 VAC, 500 W	Dual Internal 100–240 VAC, 800 W
Operating Temperature Range	0-35° C 32-95° F	0-35° C 32-95° F	0-35° C 32-95° F
Operating Humidity Range	0–70%	0–70%	0–70%
Certifications	FCC, UL, PSE, CE, BIS, RCM, RoHS, WEEE	FCC, UL, PSE, CE, BIS, RCM, RoHS, WEEE	FCC, UL, PSE, CE, BIS, RCM, RoHS, WEEE
Eagle Eye Rapid Replacement Part Numbers	EN-RR520-1 (Monthly) EN-RR520-12 (Yearly)	EN-RR620-1 (Monthly) EN-RR620-12 (Yearly)	EN-RR820-1 (Monthly) EN-RR820-12 (Yearly)

* Typical - please utilize the Brivo Eagle Eye Video Bridge Wizard for precise capacity.

** If using LPR, see the Brivo Eagle Eye License Plate Recognition Data Sheet for all bridge specs.

Network Features

- Automatic network configuration
- Secure camera network (dual network ports)
- No inbound connections needed
- Packet loss detection/reporting
- Network disconnected alerts

Management Features


- Remote management
- Automatic camera discovery
- Automatic camera configuration
- Advanced motion detection
- Local video buffering
- Configuration synced to Cloud
- Camera trouble alerts
- Internet outage alerts
- Fully cloud managed

Standard Support (Included)

- Free of charge with an active subscription
- Bridge - no cost replacement, CMVR - 2 year warranty
- 24/7 email and web support
- 8 am to 6 pm phone support

Brivo Eagle Eye Rapid Replacement and Extended Warranty (Recommended)

- Brivo's comprehensive program for hardware warranty and upgrades.
- Extends warranty up to 20 years
 - Full equipment upgrade every 6 years upon request
 - 24/7 priority support via phone, email, and web
 - Overnight cross shipping of warranty replacement if needed

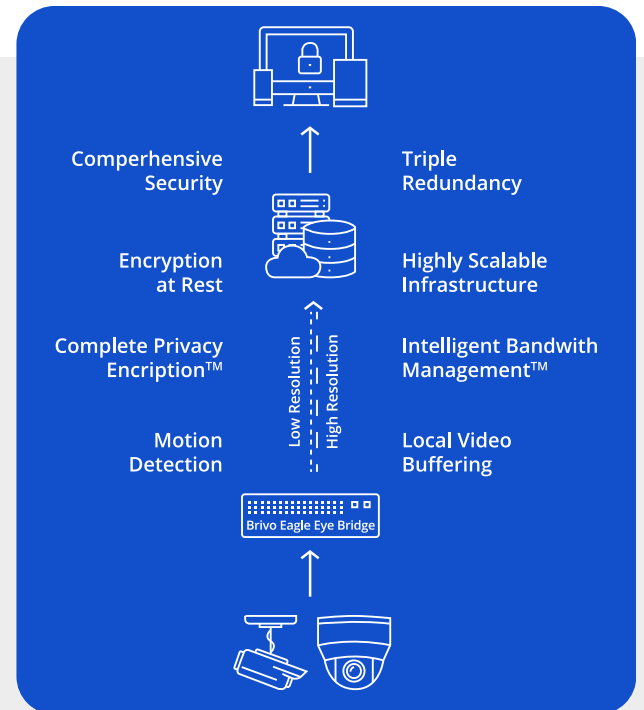

Contact us at brivo.com or call us at 866.692.7486 to learn more.