



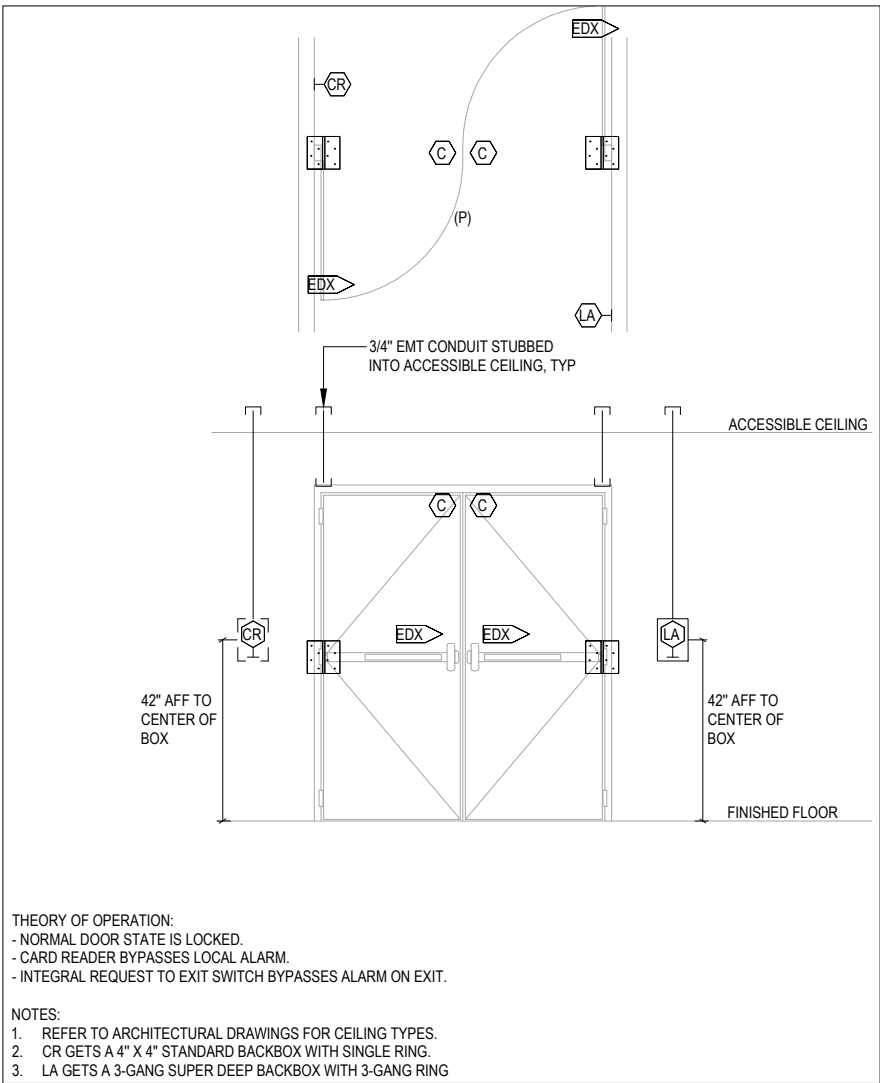


DOUBLE DOOR - EXIT DEVICE, CARD READER, S DOOR

SCALE: NONE

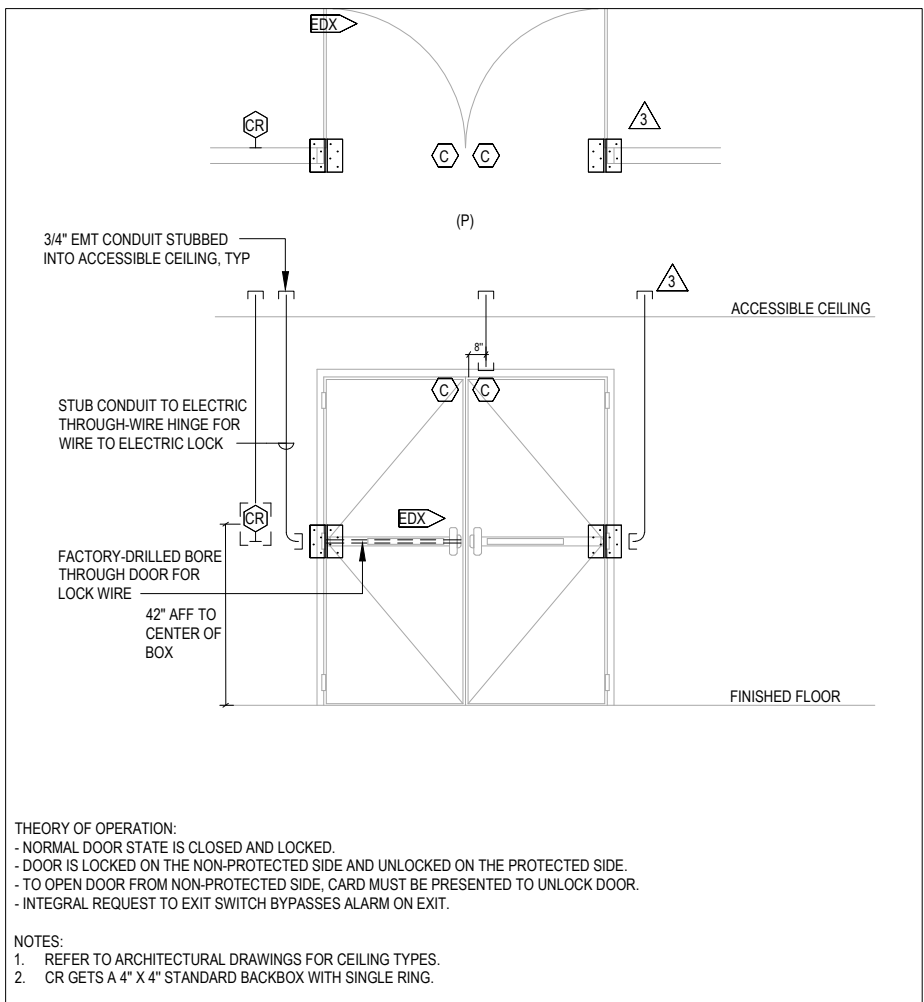


DOUBLE DOOR - EXIT DEVICE, CARD READER

SCALE: NONE

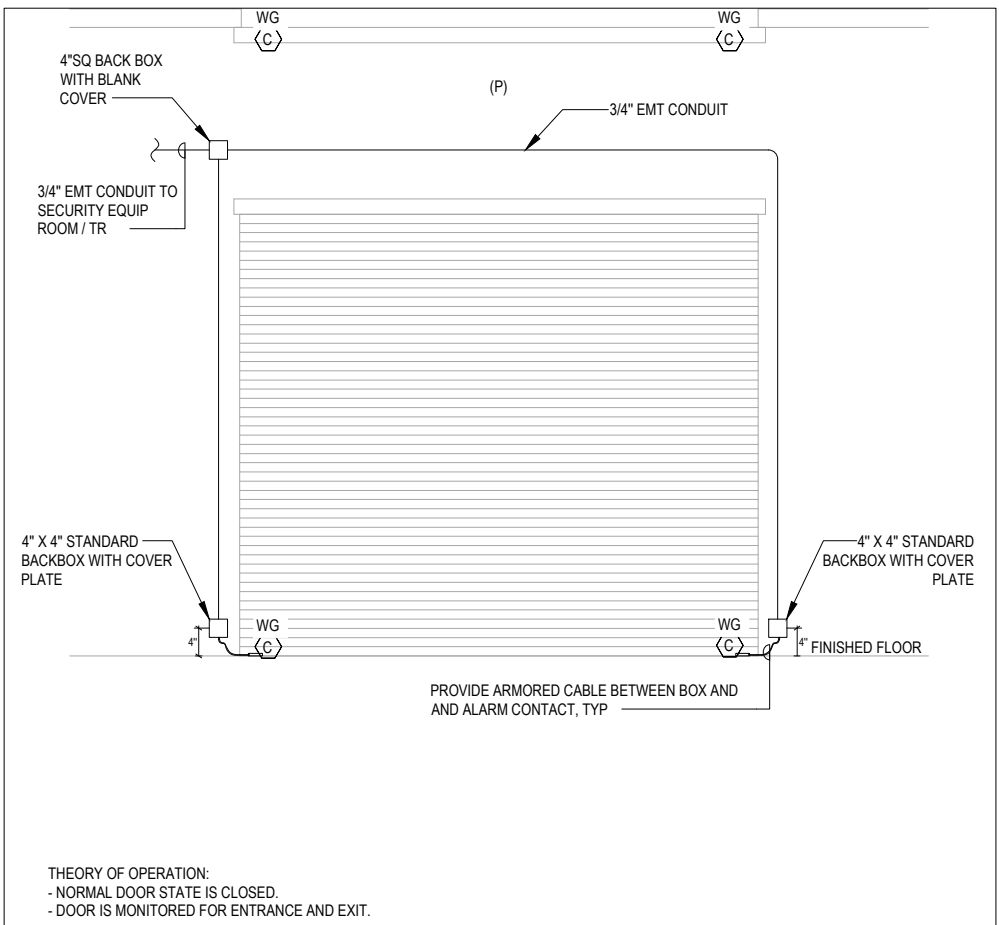


COILING DOOR - MONITORED

SCALE: NONE

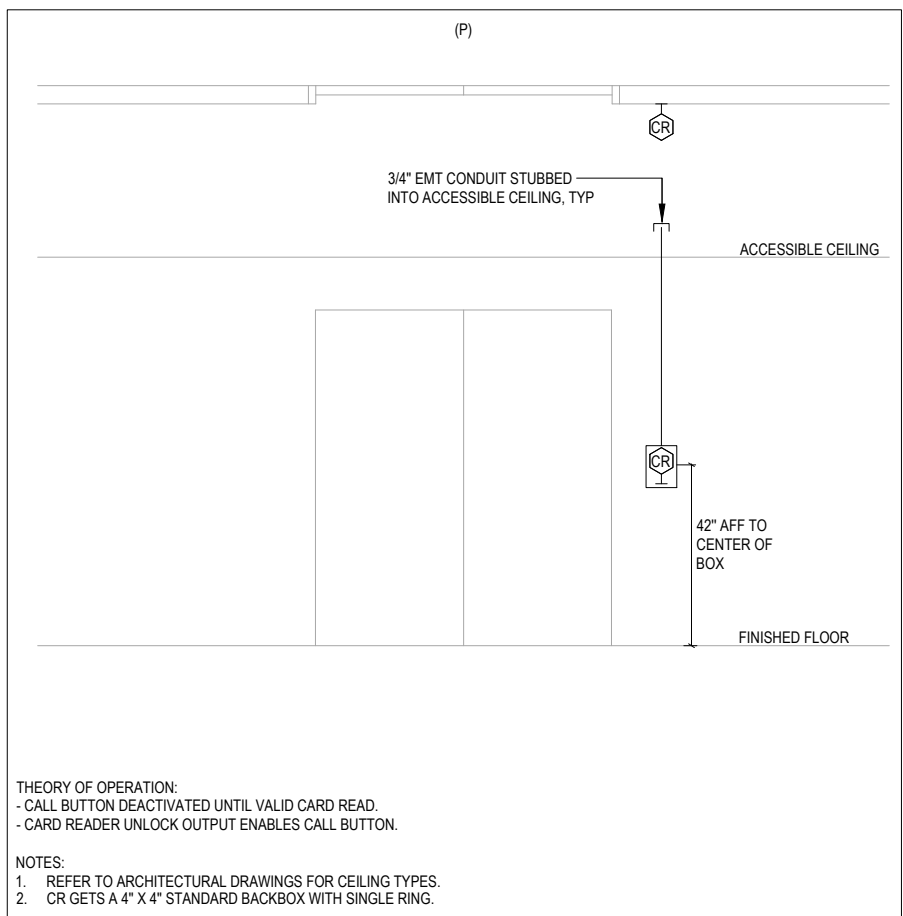


CARD READER - ELEVATOR HALL

SCALE: NONE

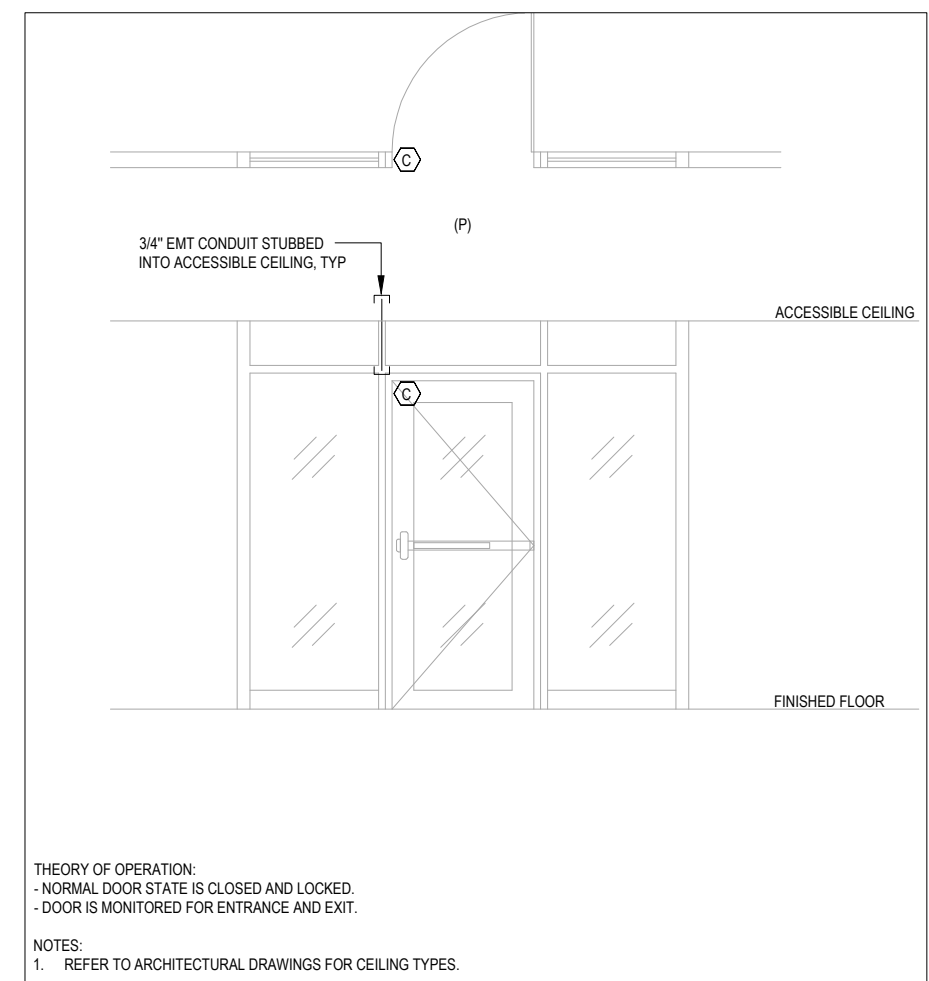


SINGLE DOOR - EXIT DEVICE, MONITORED

SCALE: NONE

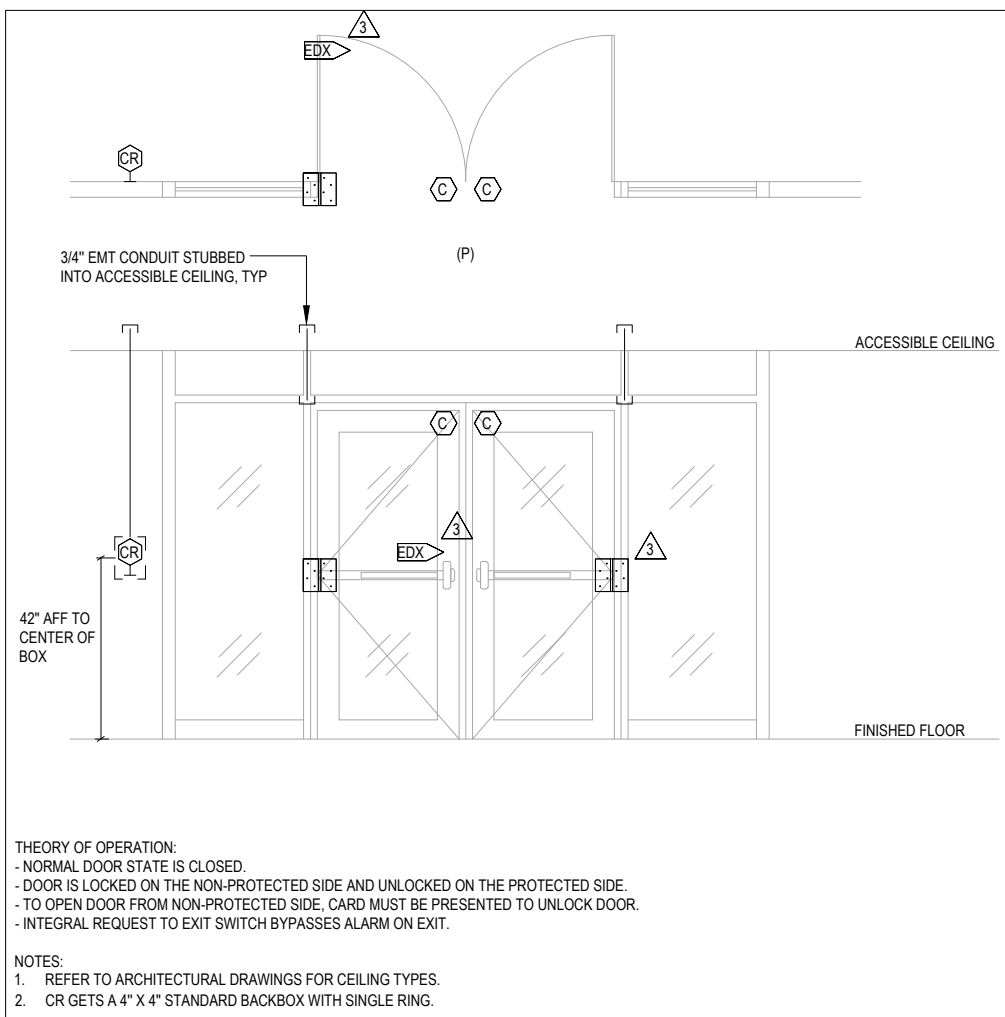


DOUBLE DOOR - EXIT DEVICE, CARD READER

SCALE: NONE

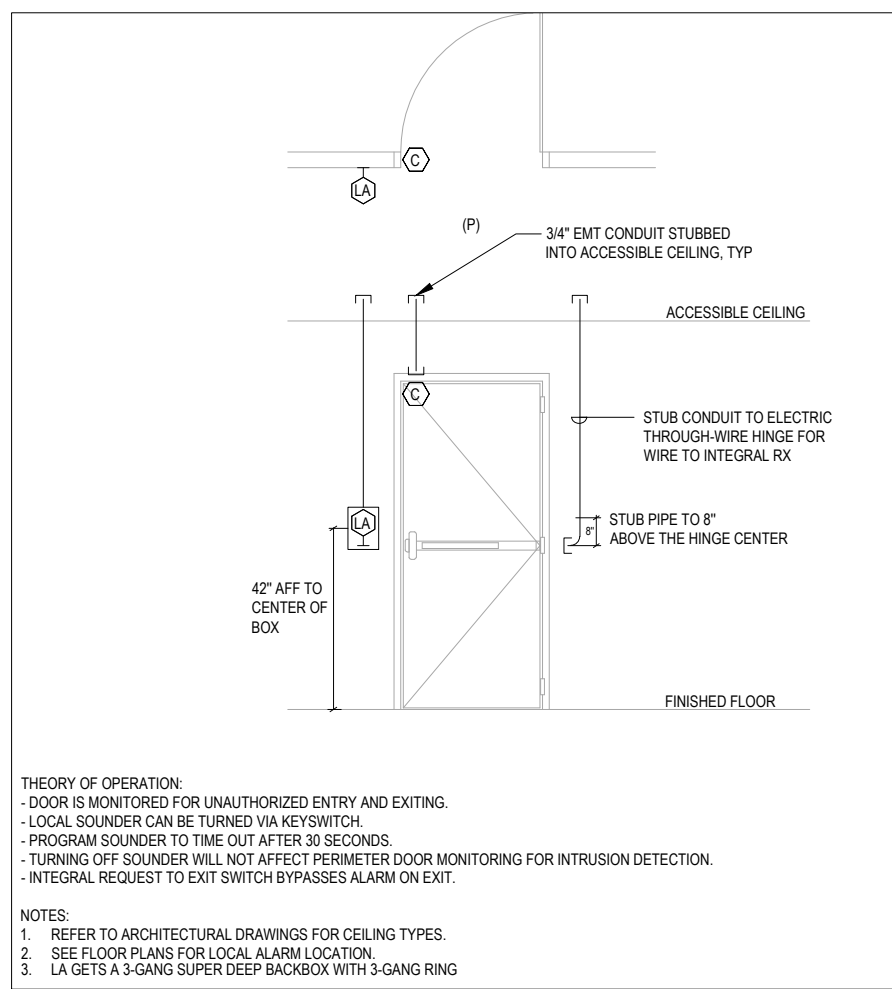


SINGLE DOOR - ALARM MONITORED, LOCAL ALARM

SCALE: NONE

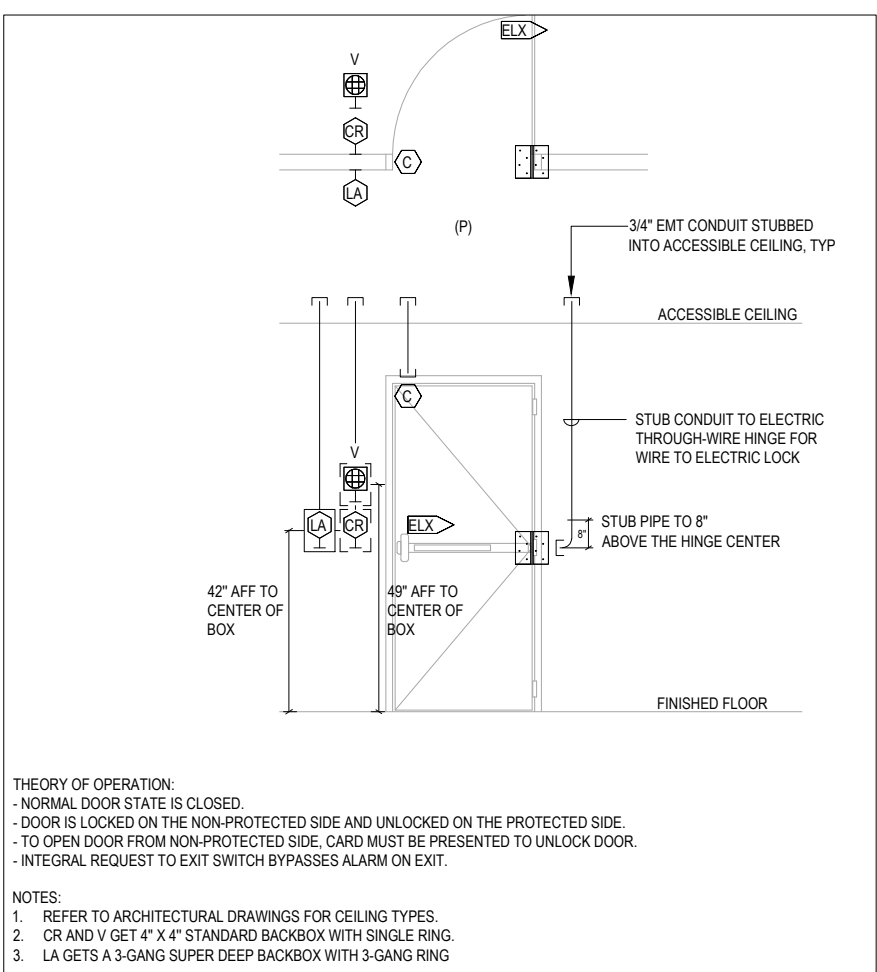


SINGLE DOOR - ELECTRIC LOCK, CARD READER, INTERCOM

SCALE: NONE

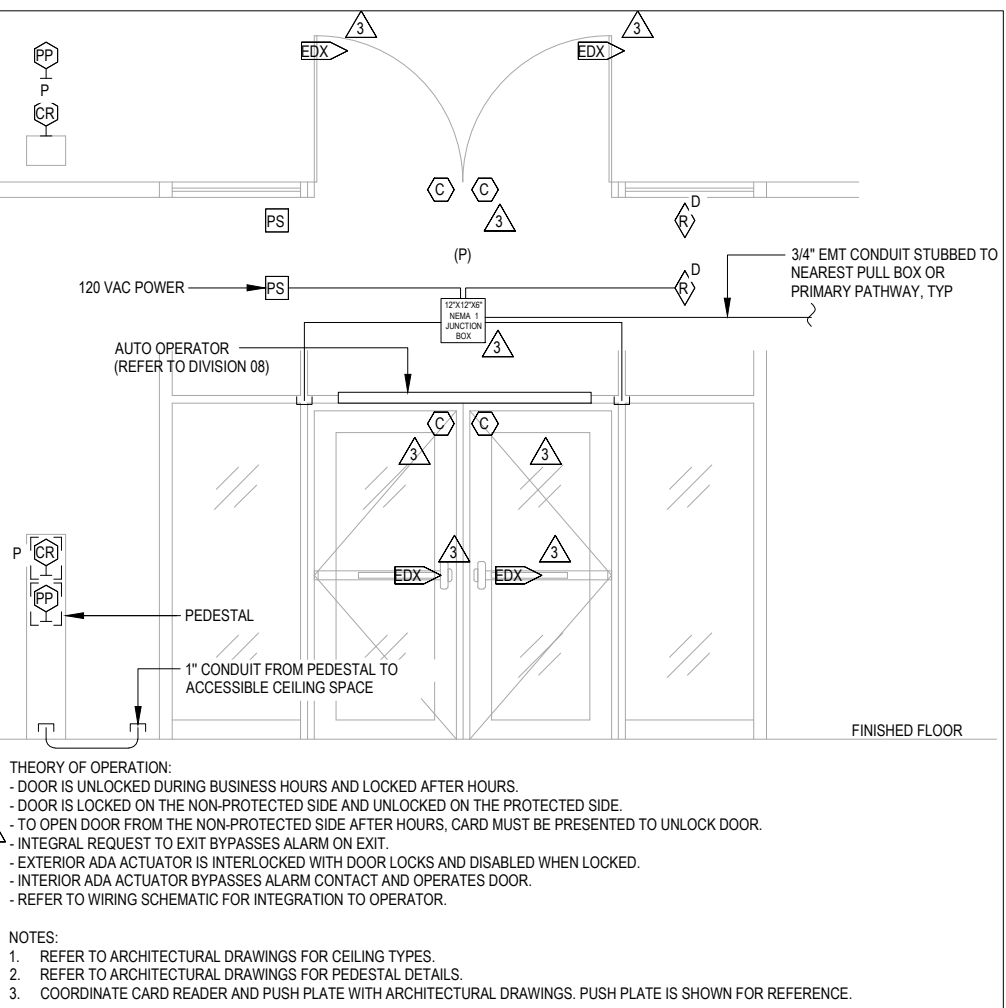


DOUBLE DOOR - AUTO-OPERATOR, CARD READER

SCALE: NONE

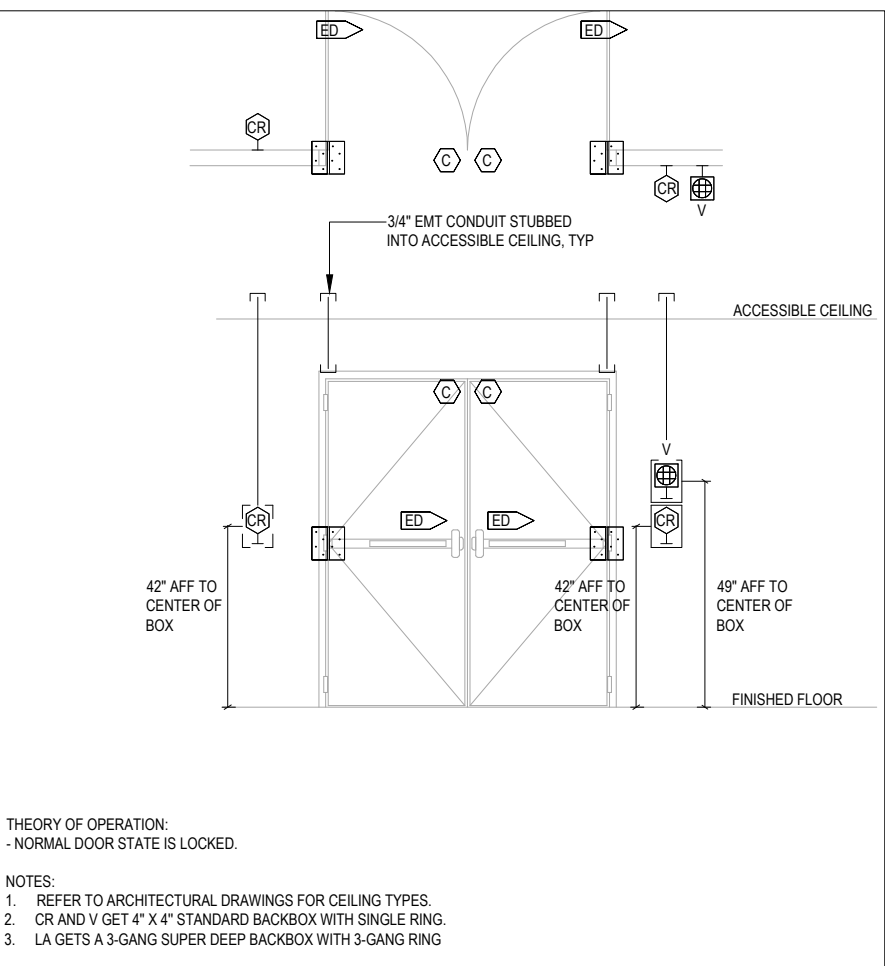


DOUBLE DOOR - EXIT DEVICE, CARD READER PAIR, INTERCOM

SCALE: NONE

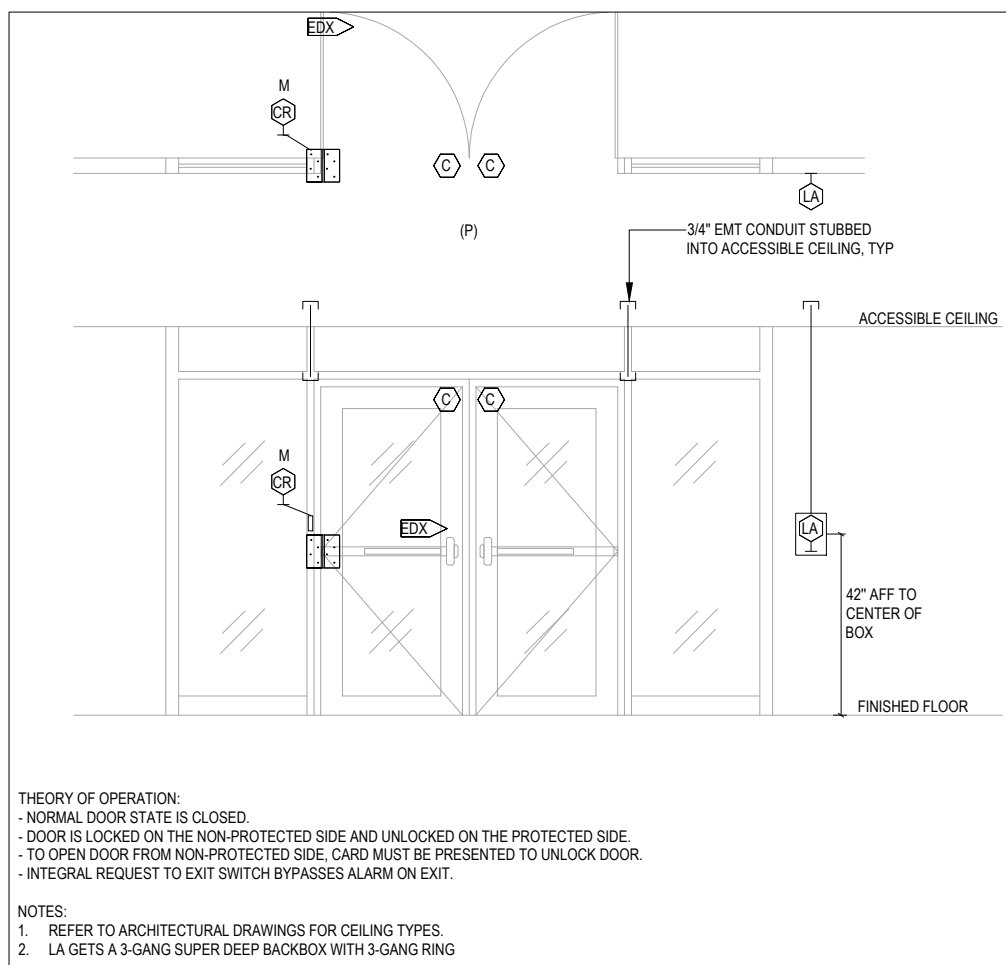

DOUBLE DOOR - EXIT DEVICE, CARD READER, LOCAL ALARM

SCALE: NONE

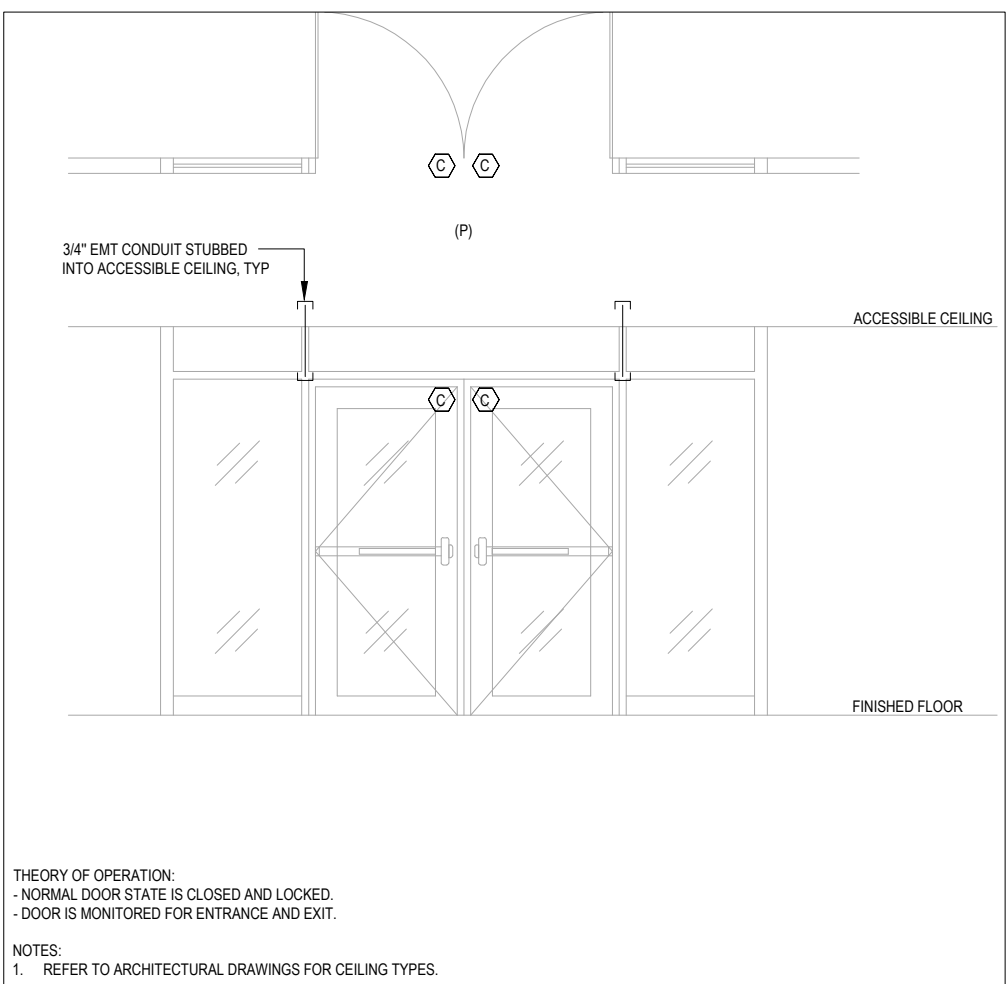

DOUBLE DOOR - EXIT DEVICE, MONITORED

SCALE: NONE

DOOR DETAIL SHEET NOTES

1. REFER TO SHEET TO D1 FOR ABBREVIATIONS, GENERAL NOTES, AND SYMBOLS DEFINITIONS.
2. THE DIAGRAMS ON THIS SHEET ARE SHOWN AS A GUIDELINE FOR ROUGH-IN CONFIGURATION. INDIVIDUAL DOORS MAY VARY. ADJUST THE INSTALLATION TO SUIT EACH INSTANCE, INCLUDING CONDUIT ROUTING CONFIGURATION AND QUANTITY, AND DEVICE LOCATIONS.
3. REFER TO THE DOOR SCHEDULE FOR INDIVIDUALLY ASSIGNED DOOR DETAILS.
4. SUBMIT INDIVIDUAL DOOR DETAILS TO MATCH PROJECT REQUIREMENTS.
5. DASHED COMPONENTS AND LINES INDICATE ITEMS ON THE OPPOSITE SIDE OF THE WALL.
6. PROVIDE (1) 1\"/>
7. INSTALL JUNCTION BOXES AND POWER SUPPLIES ABOVE ACCESSIBLE CEILINGS ON THE PROTECTED SIDE OF DOORS. WHERE COMPONENTS OCCUR BELOW CEILINGS, OR IN OPEN TO ABOVE AREAS, INSTALL JUNCTION BOXES FLUSH TO WALL AND INSTALL CONDUITS CONCEALED WITHIN THE WALL.
8. TERMINATE SECURITY CABLE TO TRANSFER HINGE AND LOCK BODY. COORDINATE INSTALLATION WITH THE DOOR HARDWARE PROVIDER.
9. FOR DOORS WITH FAIL SAFE LOCKING HARDWARE AND IN THE PATH OF EGRESS, ACTIVATION OF THE BUILDING FIRE ALARM SYSTEM WILL AUTOMATICALLY UNLOCK FAIL SAFE DOORS IN THE PATH OF EGRESS. DOORS WILL REMAIN LATCHED. PROVIDE FIRE ALARM SYSTEM INTERFACE RELAY ADJACENT TO FAIL SAFE LOCK POWER SUPPLY. COORDINATE WITH ARCHITECTURAL DRAWINGS, DOOR HARDWARE SCHEDULE AND SPECIFICATIONS, AND FIRE ALARM DRAWINGS FOR DOORS IN THE PATH OF EGRESS.
10. DOORS AND FRAMES ARE FACTORY-FABRICATED FOR SECURITY DEVICES INCLUDING LOCK WIRE PATHWAY.



STAMP



DRG. STAMP

REV.	DATE	DESCRIPTION
1	04/20/2025	ASSEMBLY E - ISSUED FOR PERMIT
2	04/20/2025	ISSUED FOR CONSTRUCTION
3	04/20/2025	DYNAMIC SECURITY PLANS

ST. IGNATIUS COLLEGE PREPARATORY

2001 37th Ave, San Francisco, CA 94116

DETAILS - SECURITY

NONE

T6.13