

Part Number 2ELEM-10-OSDP

CABLE OSDP COMPLIANT

■ 0275/0725 FT ●

SMARTWIRE(TM) PRO A/V

A B C D E 0 1 2 3 4 5 6 7 8 9



CABLE SPECIFICATIONS

CABLE #1 DESCRIPTION: 18 AWG 2 Conductor Twisted Bare Copper
CONDUCTOR: 18 AWG 16 Strand, Bare Copper
INSULATION: Low-Smoke PVC .011"
COLOR CODE: Black/Red
SHIELD: N/A
DRAIN WIRE: N/A

CABLE #2 DESCRIPTION: 22 AWG 1 Twisted Pair Shielded Bare Copper Low-Cap
CONDUCTOR: 22 AWG 7 Strand, Tinned Copper
INSULATION: Fluorofoam .020"
COLOR CODE: Green/White
SHIELD: Aluminum/Mylar
DRAIN WIRE: 24 AWG 7 Strand Tinned Copper

OVERALL Plenum Composite Cable UL Type CL3P/CMP
Outer Jacket: Low-Smoke PVC .015" Nom.
JACKET COLOR: White Jacket
Outer Jacket MARKING: SMARTWIRE PRO A/V A B D E 0 1 2 3 4 5 6 7 8 9
18 AWG 2 + 22 AWG 1 PR SHLD DATA (UL) CL3P OR CMP C(UL) US FT-6 75C ROHS
OVERALL DIAMETER: .217" Nom.
CABLE WEIGHT: 30 Lbs/Mft.

NOTE CABLE#1 AND CABLE #2 ARE CABLE TOGETHER WITH ONE OVERALL CMP JACKET

ELECTRICAL DATA OSDP

CAPACITANCE 12.5 pF/ft.

IMPEDANCE 120 OHMS

INDUSTRY STANDARDS

FLAME RATING Approved For Plenum Use Without Conduit Per NFPA 262 Flame Test


AGENCY APPROVALS UL Listed Type CL3P or CMP; C(UL), RoHS Compliant, Made in the USA



JACKET

INSULATION

CONDUCTORS

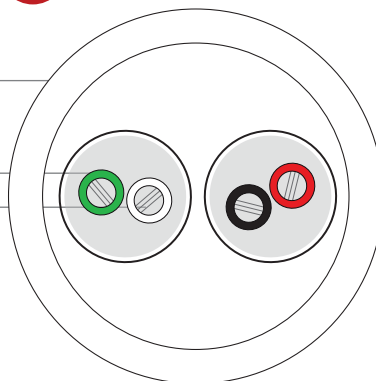

All specifications referenced are nominal measurements unless otherwise noted.



WINDY CITY WIRE • T 800.379.1191 • windycitywire.com

© Windy City Wire, Cable Technology & Products, LLC.
All rights reserved. REVISED 11262025