




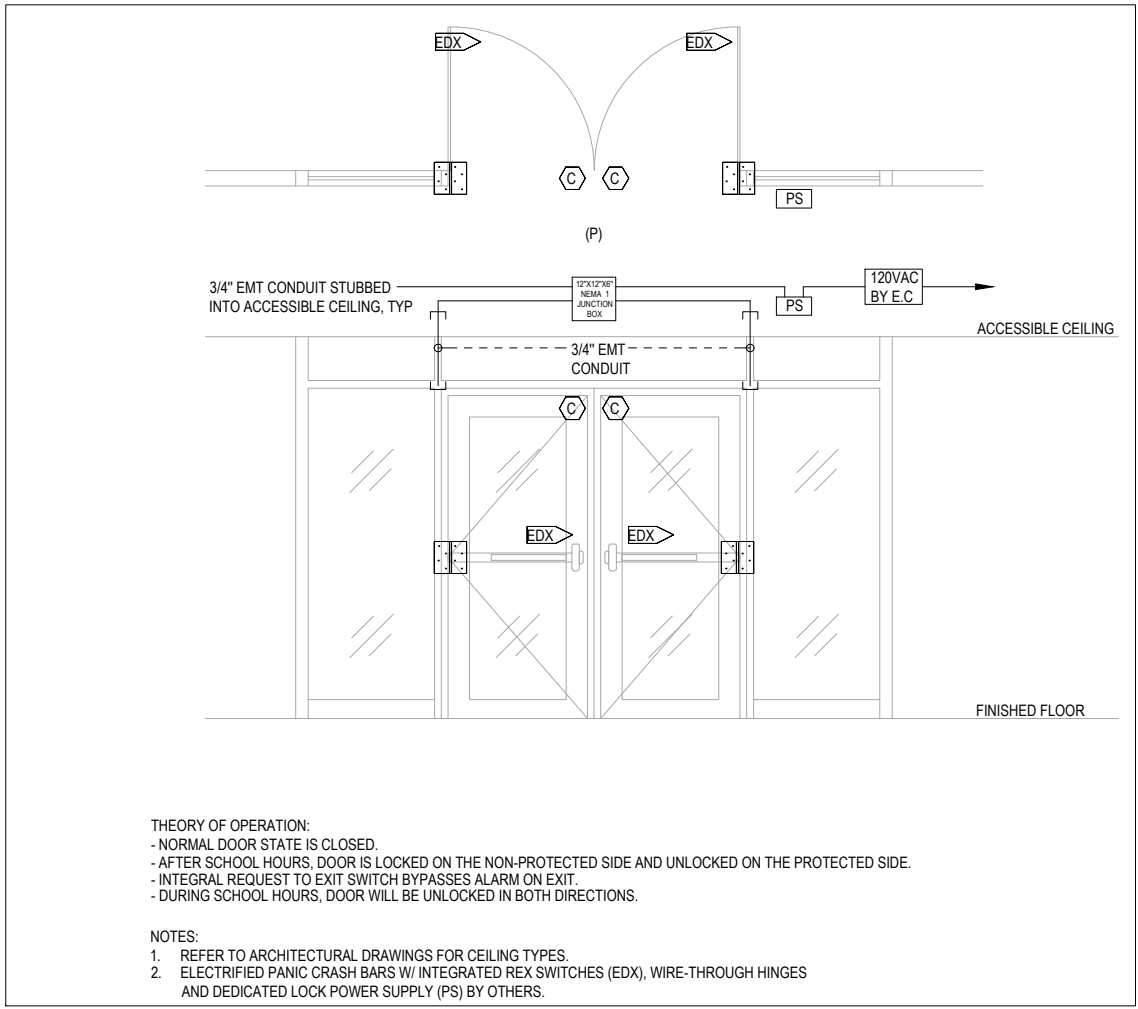


4 DOUBLE DOOR - EXIT DEVICE - UNLOCK ONLY
SCALE: NONE

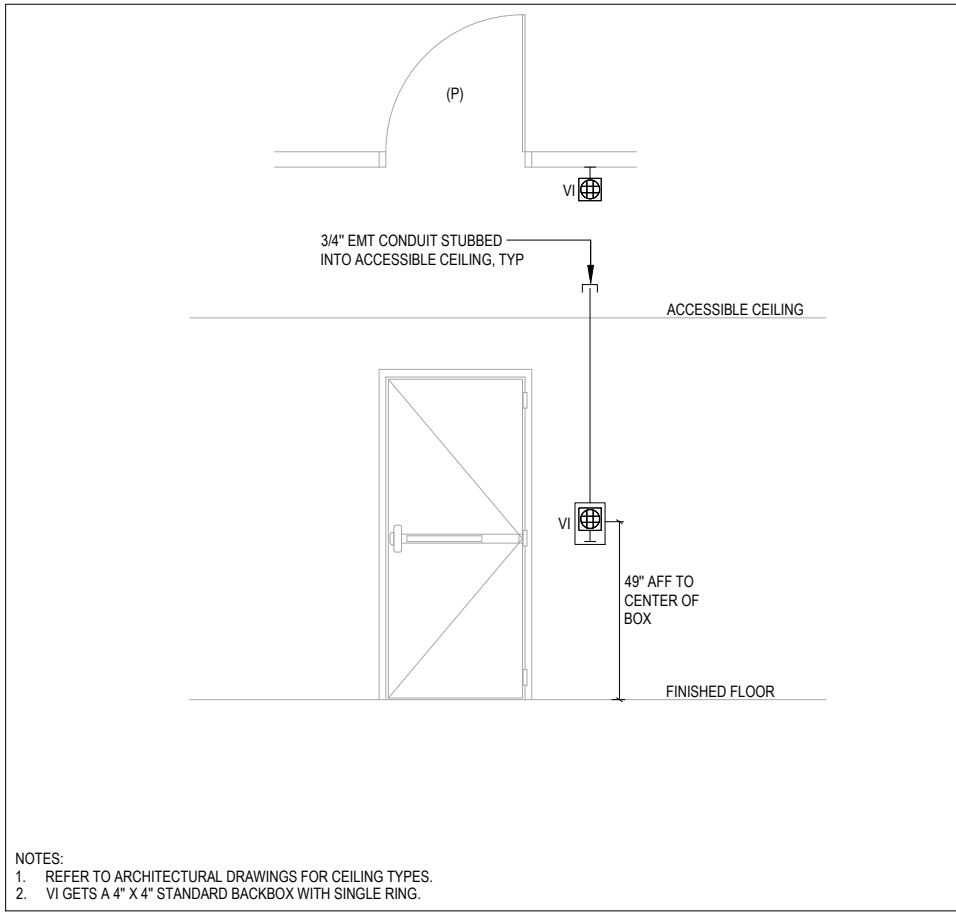

3 IP VIDEO INTERCOM
SCALE: NONE

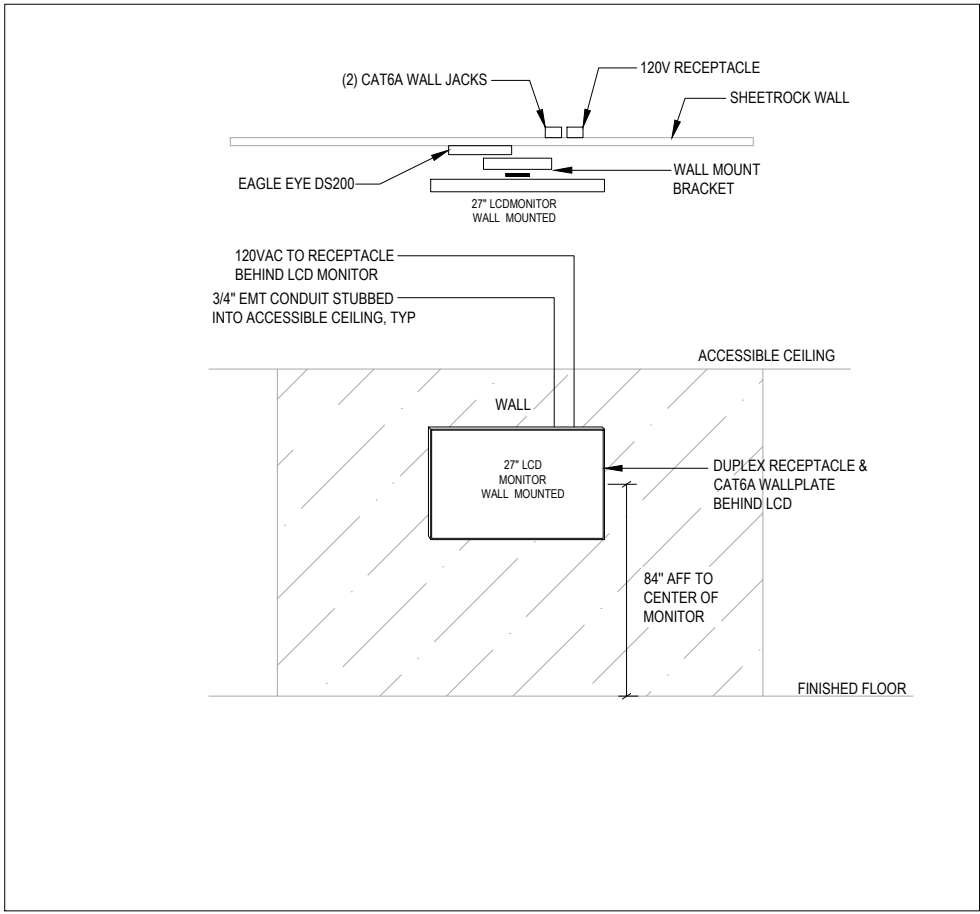

2 CAMERA VIEWING STATION
SCALE: NONE

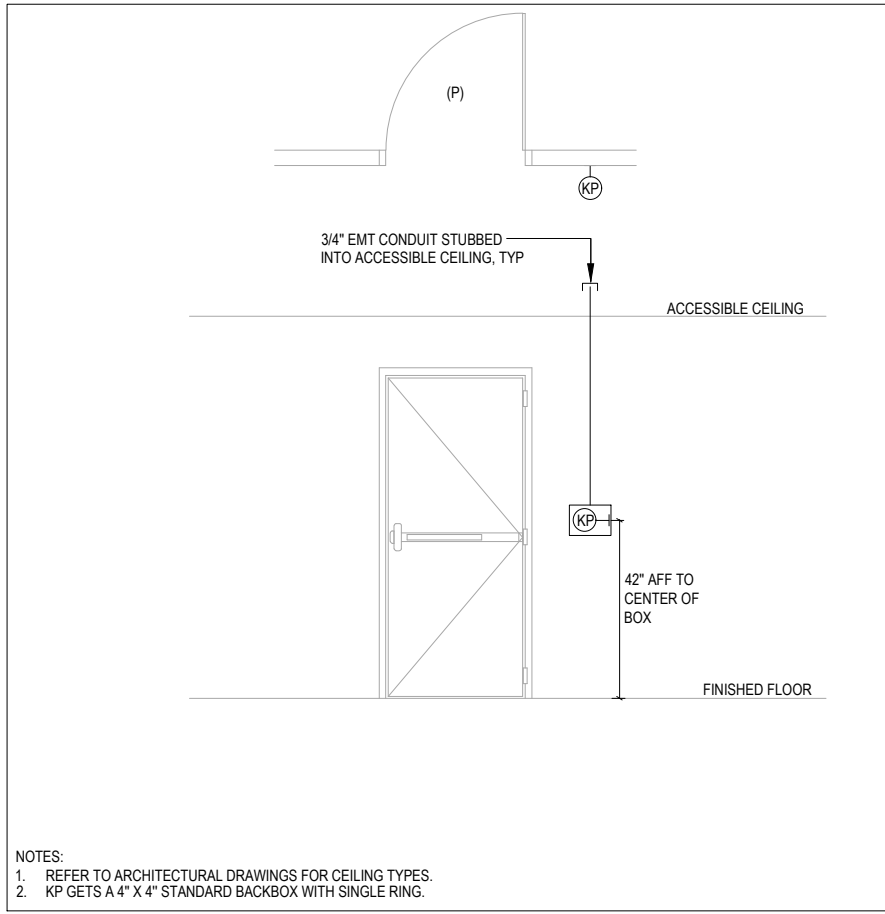

1 KEYPAD (ARMING/DISARMING)
SCALE: NONE

- DOOR DETAIL SHEET NOTES
1. REFER TO SHEET T01 FOR ABBREVIATIONS, GENERAL NOTES, AND SYMBOLS DEFINITIONS.

2. THE DIAGRAMS ON THIS SHEET ARE SHOWN AS A GUIDELINE FOR ROUGH-IN CONFIGURATION. INDIVIDUAL DOORS MAY VARY. ADJUST THE INSTALLATION TO SUIT EACH INSTANCE, INCLUDING CONDUIT ROUTING CONFIGURATION AND QUANTITY, AND DEVICE LOCATIONS.

3. REFER TO THE DOOR SCHEDULE FOR INDIVIDUALLY ASSIGNED DOOR DETAILS.

4. SUBMIT INDIVIDUAL DOOR DETAILS TO MATCH PROJECT REQUIREMENTS.

5. DASHED COMPONENTS AND LINES INDICATE ITEMS ON THE OPPOSITE SIDE OF THE WALL.


6. PROVIDE (1) 3/4\"/>

7. INSTALL JUNCTION BOXES AND POWER SUPPLIES ABOVE ACCESSIBLE CEILING ON THE PROTECTED SIDE OF DOORS WHERE COMPONENTS OCCUR BEHIND CEILING. ON AN OPEN TO ABOVE AREA, INSTALL JUNCTION BOXES FLUSH TO WALL AND INSTALL CONDUITS CONCEALED WITHIN THE WALL.

8. TERMINATE SECURITY CABLE TO TRANSFER HINGE AND LOCK BODY. COORDINATE INSTALLATION WITH THE DOOR HARDWARE PROVIDER.

9. FOR DOORS WITH FAIL SAFE LOCKING HARDWARE AND IN THE PATH OF EGRESS, ACTIVATION OF THE BUILDING FIRE ALARM SYSTEM WILL AUTOMATICALLY UNLOCK FAIL SAFE DOORS IN THE PATH OF EGRESS. DOORS WILL REMAIN LATCHED. PROVIDE FIRE ALARM SYSTEM INTERFACE RELAY ADJACENT TO FAIL SAFE LOCK POWER SUPPLY. COORDINATE WITH ARCHITECTURAL DRAWINGS, DOOR HARDWARE SCHEDULE AND SPECIFICATIONS, AND FIRE ALARM DRAWINGS FOR DOORS IN THE PATH OF EGRESS.

10. DOORS AND FRAMES ARE FACTORY-FABRICATED FOR SECURITY DEVICES INCLUDING LOCK WIRE PATHWAY.

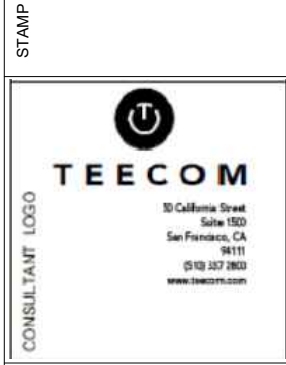

REV.	DATE	DESCRIPTION
1	09/14/2025	ADDED NAME ISSUED FOR PERMIT
2	09/14/2025	ADDED DOOR TYPE
3	09/22/2025	ADDED DOOR TYPE

ST. IGNATIUS COLLEGE PREPARATORY

2201, 37th Ave, San Francisco, CA 94116

DETAILS - SECURITY