a

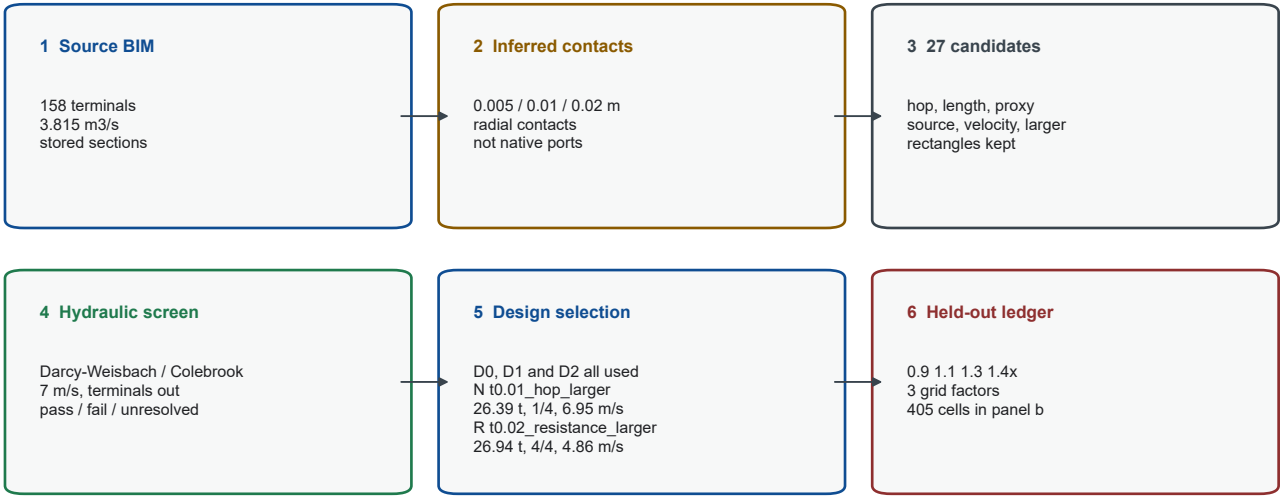
1 Source BIM
158 terminals
3.815 m3/s
stored sections
2 Inferred contacts
0.005 / 0.01 / 0.02 m
radial contacts
not native ports
3 27 candidates
hop, length, proxy
source, velocity, larger
rectangles kept
4 Hydraulic screen
Darcy-Weisbach / Colebrook
7 m/s, terminals out
pass / fail / unresolved
5 Design selection
D0, D1 and D2 all used
N t0.01_hop_larger
26.39 t, 1/4, 6.95 m/s
R t0.02_resistance_larger
26.94 t, 4/4, 4.86 m/s
6 Held-out ledger
0.9 1.1 1.3 1.4x
3 grid factors
405 cells in panel b

b

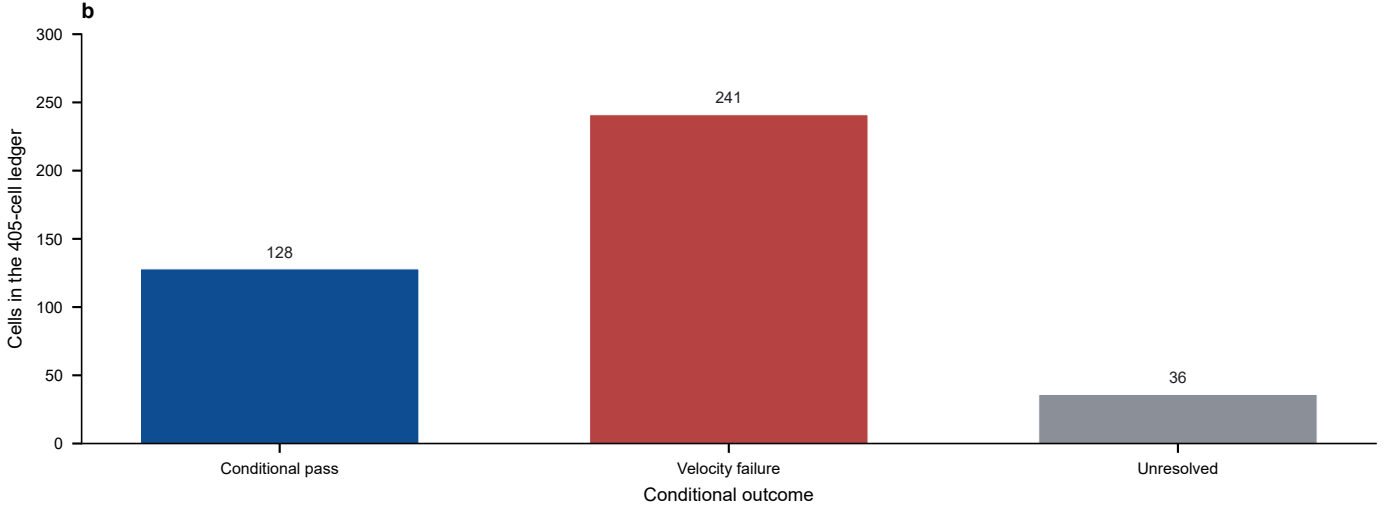
Cells in the 405-cell ledger
300
250
200
150
100
50
0
128
241
36
Conditional pass
Velocity failure
Unresolved
Conditional outcome