

Energy

Dyrehaugen Web Notebook

2021-05-15

Contents

1	Energy	5
2	Energy Overview	7
2.1	Energy Civilization	7
2.2	World Energy Outlook	7
3	Energy Demand	9
3.1	Energy Transition not Enough	9
4	Energy Intensity	13
4.1	Power Density	13
5	Energy Development	17
6	Energy Transition	19
6.1	Minerals in Transition	21
7	Batteries	25
7.1	Lithium-ion	25
8	Long-duration Storage	33
8.1	Pumped Hydro	33
8.2	Flow Batteries	34
8.3	Mechanical Energy Storage	34
8.4	Thermal Storage	34
8.5	Software (Market Flex)	35
8.6	QuantumScape	35
9	Bio Fuel	39
10	Fuel Cells	43
11	Geothermal	45
11.1	Heat Storage	46
11.2	Deep Drilling	46

12 Hydro Power	49
13 Hydrogen	51
13.1 Hydrogen Aviation	51
14 Nuclear	53
14.1 Fukushima	55
14.2 James Hansen's Position	56
14.3 Fusion - ITER	57
15 Renewable	59
16 Solar	61
16.1 Software drives Solar Costs	61
16.2 Efficiency	62
17 Wind	65
17.1 Icing	65
17.2 Bladeless	65
18 Varia	67
18.1 US Legislation	67
19 Energy Use	69
19.1 Energy Efficiency	70
19.2 Urbanization	72
20 Energy Poverty	75
21 Carbon intensity of Energy	77
22 Rebound Effect	79
23 Fossil Subsidies	81
24 Norway	85
I Appendices	89
A About	91
B Links	93
C NEWS	95
C.1 210427 HeatCrete Thermal Storage	95
C.2 210121 "Gas is over"	96

1

Energy



2

Energy Overview

2.1 Energy Civilization

From early humans rubbing sticks together to make fire, to the fossil fuels that drove the industrial revolution, energy has played a central role in our development as a species. But the way we power our societies has also created humanity's biggest challenge. It's one that will take all our ingenuity to solve.

Energy is the key to humanity's world domination.

We live in a fossil fuel society

But while they have lifted ever more of us out of agrarian hardship, and created our global economy and high living standards, the catastrophic climate change they are creating now threatens to derail that society.

Just as two centuries ago we reached the limits of what agriculture could do, now global warming is imposing a limit on what coal, oil and gas can safely do.

It has created the greatest challenge human society has ever faced - moving back to relying on the daily influx of energy from the Sun to meet the huge energy needs of eight billion people and counting.

Rowlatt (BBC) The Real Reason Humans are the Dominant Species

2.2 World Energy Outlook

The World Energy Outlook, the IEA's flagship publication, provides a comprehensive view of how the global energy system could develop in the coming decades. This year's exceptional circumstances require an exceptional approach. The usual long-term modelling horizons are kept but the focus for the World

Energy Outlook 2020 is firmly on the next 10 years, exploring in detail the impacts of the Covid-19 pandemic on the energy sector, and the near-term actions that could accelerate clean energy transitions.

The analysis targets the key uncertainties facing the energy sector in relation to the duration of the pandemic and its implications, while mapping out the choices that would pave the way towards a sustainable recovery. The strategic insights from the WEO-2020 are based on detailed modelling of different potential pathways out of the crisis, covering all regions, fuels and technologies and using the latest data on energy markets, policies and costs.

(IEA pdf at 120 Euro!! - Why theneed IEA to sell their publications?)

Ever since the agency was founded in 1974 to measure the world's energy systems and anticipate changes, the yearly World Energy Outlook has been a must-read document for policymakers the world over.

Over the last two decades, however, the IEA has consistently failed to see the massive growth in renewable energy coming. Not only has the organisation underestimated the take-up of solar and wind, but it has massively overstated the demand for coal and oil.

IEA 2020-edition

Incredibly cheap Chinese Solar

The Chinese approach to renewables is all about energy security," Mathews says. "At the scale from which they're building new industries, they would need colossal imports of conventional fossil fuels, which would cripple them economically.

"They can get around that problem, which is a geopolitical obstacle, by manufacturing their own energy equipment."

One such innovation is the stackable solar cell. Though still a niche technology very much in the early stages, the basic idea is to lay a material over a solar cell in order to boost its power output.

"We think a 40% module, rather than the 22% you can do nowadays with PERC, is what the industry will be doing once we perfect this stacking approach," Green says. "We're just trying to find a new cell that will have all the qualities of silicon that we can stack on top of silicon."

"The International Energy Agency now says solar is providing the cheapest energy the world has ever seen. But we're headed towards a future of insanely cheap energy."

"It's a fundamentally different world we're moving into."

Guardian

3

Energy Demand

Humanity's rate of energy consumption (i.e., power) of 16.1 TW in 2010 is projected to increase by 94 – 247% by 2050, with a reference scenario at 140% given by SSP2 and RCP 4.5 (van Ruijven et al., 2019). On track with these expectations, humanity reached 18.9 TW in 2018 - a yearly 2% growth since 2010.

Leiva (2021) Why the energy transition is not enough

3.1 Energy Transition not Enough

Leiva Abstract

Efforts to accommodate the growth in global energy consumption within a fragile biosphere are primarily focused on managing the transition towards a low-carbon energy mix. We show evidence that a more fundamental problem exists through a scaling relation, akin to Kleiber's Law, between society's energy consumption and material stocks. Humanity's energy consumption scales at 0.78 of its material stocks, which implies predictable environmental pressure regardless of the energy mix. If true, future global energy scenarios imply vast amounts of materials and corresponding environmental degradation, which have not been adequately acknowledged. Thus, limits to energy consumption are needed regardless of the energy mix to stabilize human intervention in the biosphere.

Leiva Memo

We show evidence that the continued increase of energy throughput faces a more fundamental problem. The use of energy requires prime movers such as people, engines, computers, etc. that are built from materials found originally in nature. Moreover, the use of energy inevitably rearranges materials in the environment. This posits a problem that goes beyond the carbon content and specific material requirements of given technologies, and thus cannot be solved

through substitution. Higher power rates need and provoke more materials (metals and others) being rearranged from otherwise healthy ecosystems into social structures such as rms, cities, and governments and into goods such as furniture, electronics, and food. In fact, the 20th century witnessed a 9-fold increase in humanity's power alongside a 16-fold increase in its material stocks (Krausmann et al., 2017). We contend that the ecosystem degradation (MEA, 2005), biodiversity loss (IPBES, 2019), and dangerous human intervention in the Earth system (Steffen et al., 2015) that followed from such harvesting of the biosphere could have only partially been avoided with a low-carbon energy mix.

We evaluate what we believe is the rst preliminary evidence of a coupling, akin to Kleiber's Law in biological organisms, between power and the material stocks of social systems.

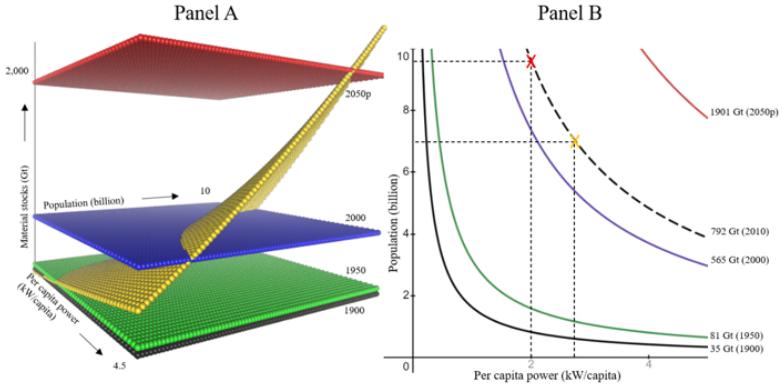


Figure: Panel A depicts Extended-Kleiber's Law relation between per capita power, population, and material stocks. The yellow plane shows the 0.78 scaling of material stocks as a function of per capita power and population. In 1900, a population of 1.6 billion people averaging 0.8 kW/capita implied material stocks of 35 Gt (black plane). In 1950, a population of 2.5 billion averaging 1.3 kW/capita implied materials stocks of 81Gt (green plane). In 2000, a population of 6.1 billion people averaging 2.1 kW/capita implied material stocks of 565 Gt (blue plane). In 2050, a projected 9.7 billion people averaging 4.0 kW/capita implies material stocks of 1901 G (red plane). The rapidly increasing distance between the material stock planes at equal 50-year intervals depicts the Great Acceleration. Panel B shows the intersections of the yellow plane at each material stock plane of Panel A to depict iso-material stock curves: the compensation between population and per capita power to maintain the respective material stock levels. Note that these curves only show point estimates of the Extended Kleiber's Law and therefore need not show the exact historical values of population and per capita power. The dashed-black line in Panel B shows the 2010 iso-material stock curve (2010 level not shown in Panel A). The line depicts 792

Gt of material stocks with 6.9 billion people averaging 2.8 kW/capita (orange marker, actual data for 2010 is 6.9 billion people averaging 2.3 kW/capita). The dashed-black line implies that maintaining Humanity's materials stock at 792 Gt while growing to 9.7 billion people requires 2.0 kW/capita (red marker).

If true, this relation implies a strict limit to power growth that cannot be addressed with low-carbon energy sources.

Current projections of energy consumption and population growth imply unsustainable levels of material stocks as they imply considerable additional harvesting of the biosphere.

Current material stocks can be maintained while accommodating population growth through 2050 if a 2.0 kW/capita limit is established. Although this limit has been shown to be enough for a dignified life, it implies a considerable degrowth in more than half of the world's countries.

Theory

Why do social systems' power and mass scale this way? One idea is based on fractal geometry (West et al., 1999), where the invariant "length" could be given by the individual person. Brown et al. (2011) use this idea arguing that "The energy and other resources that sustain these systems [animals and economies] are supplied by hierarchically branching networks, such as the blood vessels and lungs of mammals and the oil pipelines, power grids, and transportation networks of nations. Models of these networks suggest that three-quarter-power scaling optimizes distribution of resources". Another idea is based on size-dependent limitation of resource storage (Maino et al., 2014; Thommen et al., 2019), where the role of macromolecules could be played by energy goods. A third idea is based on the interaction of physiological features with environmental conditions (Koziowski & Weiner, 1997), where growth and reproduction could be given by an economy's aggregate investment and consumption. In any case, noting that the theoretical basis of Kleiber's Law remains controversial after 80 years of research (Escala, 2019; Hulbert, 2014), finding a theoretical explanation for an extended Kleiber's Law remains as future research that may become foundational science towards Humankind's sustainability. In the meantime, further data on mass and energy of nations is important to broaden the empirical basis of this relationship.

If population reductions are not an option, the most reasonable response would be a worldwide 2.0 kW/capita limit.

A specific limit at 2.0 kW/capita has been proposed by the 2000-watt society since 1998 based on the per capita power of western Europe during the 60s and the dignified life it enabled, and according to our results, it is coincidentally the value required to maintain material stocks in check below 800 Gt globally by 2050 given expected population levels.

Leiva (2021) Why the energy transition is not enough (pdf)

Kleiber's Law (Wikipedia)

4

Energy Intensity

Energy intensity is a measure of the energy inefficiency of an economy. It is calculated as units of energy per unit of GDP.

Wikipedia

GDP and energy consumption per capita variables are cointegrated and Granger cause each other. First conclusion would be that energy consumption per capita affects GDP per capita. In other words, a growth or reduce in energy consumption will increase or decrease GDP. Energy consumption plays an important role on economic growth, directly on labor and capital component and indirectly on production process as well. Electric consumption is an incentive factor and indispensable insurance for a sustainable economic growth. Second conclusion would be that GDP per capita affects energy consumption per capita. That is, an increase or decrease GDP per capita will increase or decrease energy consumption per capita. Developing countries that are increasing their aggregate GDP and their production are subject to demand more and more energy sources. Countries that are in short providing the appropriate energy demand will be importing energy. This might eventually cause current and trade deficit.

Yildirim (2017) Economic Growth and Energy Consumption OECD (pdf)

4.1 Power Density

Smil (Book)

In this book, Vaclav Smil argues that power density is a key determinant of the nature and dynamics of energy systems. Any understanding of complex energy systems must rely on quantitative measures of many fundamental variables. Power density—the rate of energy flux per unit of area—is an important but largely overlooked measure. Smil provides the first systematic, quantitative appraisal of power density, offering detailed reviews of the power densities

of renewable energy flows, fossil fuels, thermal electricity generation, and all common energy uses.

Smil shows that careful quantification, critical appraisals, and revealing comparisons of power densities make possible a deeper understanding of the ways we harness, convert, and use energies. Conscientious assessment of power densities, he argues, proves particularly revealing when contrasting the fossil fuel-based energy system with renewable energy conversions.

Smil explains that modern civilization has evolved as a direct expression of the high power densities of fossil fuel extraction. He argues that our inevitable (and desirable) move to new energy arrangements involving conversions of lower-density renewable energy sources will require our society—currently dominated by megacities and concentrated industrial production—to undergo a profound spatial restructuring of its energy system.

Vaclav Smil (2015) Power Density (Book)

Smil (Primer)

Many factors combine to determine their technical difficulty, their cost and their environmental impacts. A great deal of attention has been recently paid to the pace of technical innovation needed for the shift from the world dominated by fossil fuel combustion to the one relying increasingly on renewable energy conversions, to the likely costs and investment needs of this transitions, and to its environmental benefits, particularly in terms of reduced CO₂ emissions. Inexplicably, much less attention has been given to a key component of this grand transition, to the spatial dimension of replacing the burning of fossil fuels by the combustion of biofuels and by direct generation of electricity using water, wind, and solar power. Perhaps the best way to understand the spatial consequences of the unfolding energy transition is to present a series of realistic power density calculations for different modes of electricity generation in order to make revealing comparisons of resources and conversion techniques. Detailed calculations will make it easy to replicate them or to change the assumptions and examine (within realistic constraints) many alternative outcomes.

Energy Density vs Power Density

Energy density is easy – power density is confusing. Energy density is simply the amount of energy per unit weight (gravimetric energy density) or per unit volume (volumetric energy density). With energy expressed (in proper scientific terms) in joules or less correctly in calories (and in the US, the only modern state that insists on using outdated non-metric measures, in BTUs), with weight in grams (and their multiples), and with volume in cubic centimeters, liters (dm³) or cubic meters, energy density is simply joules per gram (J/g) or joules per cubic centimeter (J/cm³) or, more commonly, megajoules per kilogram (MJ/kg) and megajoules per liter (MJ/L) or gigajoules per ton (GJ/t) and gigajoules per cubic meter (GJ/m³).

Power density is a much more complicated variable. Power density expressed

as energy flux per unit of horizontal surface universal. W/m^2 of horizontal area of land or water surface has been receiving more attention because of the growing interest in renewable energy resources and their commercial conversions to fuels and electricity. Invariably, power densities of these stocks and flows are considerably lower than power densities and uses of fossil fuels, those highly concentrated stores of ancient photosynthetic production – and these differences are a key factor in determining the potential contribution of renewable energies to the world’s future fuel and electricity supply.

Table 4.1: Low-High Power Density estimate

Power Source	Power	Density (W/m^2)
Natural Gas	200	2000
Coal	100	1000
Solar (PV)	4	9
Solar (CSP)	4	10
Wind	0.5	1.5
Biomass	0.5	0.6

Implications of these differences are manifold. Changing the power density-determined infrastructure of energy systems that were created over more than a century for electricity generation from fossil fuel combustion will not be easy. A fossil-fuelled civilization has been securing the supply of its most flexible form of energy by “shifting downward,” that is by generating electricity with power densities 1-3 orders of magnitude higher than the common power densities with which electricity is used in buildings, factories and cities. In a civilization that would rely only on renewable energy flows, but that would inherit today’s urban and industrial systems, we would produce electricity at best with the same power densities with which they would be used — but more often we would have to concentrate diffuse flows of solar radiation, wind, and biomass in order to bridge power density gaps of 2-3 orders of magnitude. This new energy infrastructure would increase fixed land requirements and preempt any other form of land use in areas devoted to PV cells, heliostats or fast-growing wood plantations. Most of the area occupied by large wind farms could be used for crops or grazing but other land uses would be excluded, and large areas dotted with wind turbines would require construction and maintenance of access roads as well as the creation of buffer zones not suitable for permanent human habitation. And in all cases of renewable energy conversion, much more land would be needed for more extensive transmission rights-of-way in order to export electricity from sunny and windy regions, or from areas suited for mass-scale biomass production, to major urban and industrial areas.

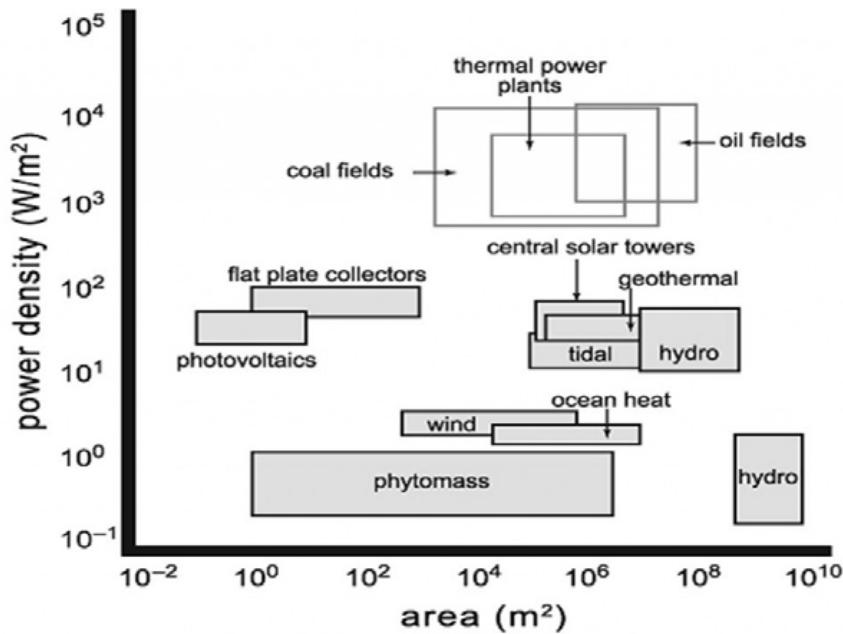


Figure: Power densities of fossil fuel extraction, thermal electricity generation and renewable modes of electricity production.

As a result, these new energy infrastructures would have to be spread over areas ten to a thousand times larger than today's infrastructure of fossil fuel extraction, combustion and electricity generation: this is not an impossible feat, but one posing many regulatory (environmental assessments of affected areas, rights-of-way permission and inevitable lawsuits), technical and logistic challenges. Higher reliance on renewable energies may be desirable (mainly because of perceived environmental and strategic reasons) and technical advances would also make it an increasingly appealing economic choice — but inherently low power densities of these conversions will require a new system of fuel and electricity supply that will be able to substitute for today's dominant practices only after decades of gradual development.

Vaclav Smil (2010) Power Density Primer (pdf)

5

Energy Development

Energy development is the field of activities focused on obtaining sources of energy from natural resources. These activities include production of conventional, alternative and renewable sources of energy, and for the recovery and reuse of energy that would otherwise be wasted. Energy conservation and efficiency measures reduce the demand for energy development, and can have benefits to society with improvements to environmental issues.

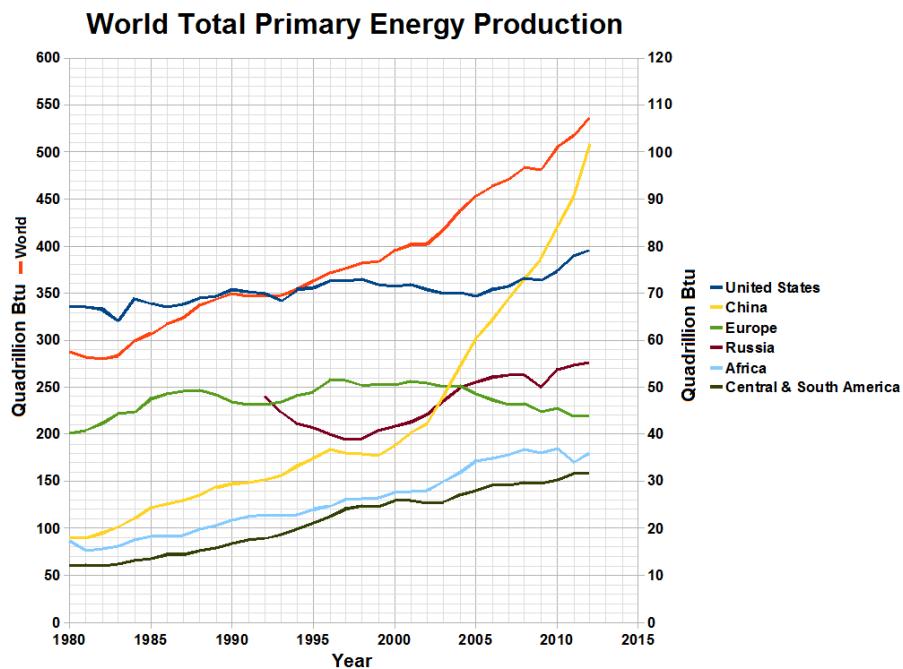


Figure: World total primary energy production in quadrillion Btu. Note: world total on left y-axis, while regional figures are shown on right y-axis (approx. figures in parenthesis for 2010 and 2011, respectively).

World (510) China (97) United States (78) Russia (56) Europe (45) Africa (37)
Central and South America (30)

Wikipedia

Conversion: 1 Btu = 0.0002932972222222 kWh

1 quadrillion = 10^{15}

unitjuggler

6

Energy Transition

Thompson

Vaclav Smil has repeatedly pointed out that a green energy revolution would be qualitatively different than any energy change in human history because it involves moving from more concentrated to less concentrated energy, rather than in the opposite direction.

However much companies and governments promise dramatic and rapid change, their deeds and small-print rhetoric point to the hard consequences of this reality.

BP may be heralding a low carbon energy future, but its own 2020 annual report presumes the world will still be using between 80 and 100 million barrels of oil a day in 2040. The same report says that ‘significant levels of investment are required for there to be sufficient supplies of oil to meet demand in 2040.’ It takes some cognitive dissonance to believe this oil could still be produced whilst investors shut capital out of the privately-owned oil industry; that is, unless it is accepted that all future oil comes from Russia’s Rosneft and the Middle Eastern state-owned oil companies and is so expensive as to act as an impediment to growth. Still owning 19.75 per cent of Rosneft, BP has clearly hedged how it thinks the energy future will play out.

To think about the energy-origins of western prosperity opens up difficult truths about the place of European empire and the United States’ Middle Eastern wars in the economic history of the twentieth and early twenty-first century. Part of climate idealism contains a desire to leave this unpalatability behind, replacing fossil-fuel imperialism with climate justice. But after the Second World War, western economic life depended on the oil that came out of the Persian Gulf, through the Suez Canal, and into pipelines running to the Mediterranean. The counter-factual that eliminates past wrongs takes a lot else with it, including that which most people in western democracies have little inclination to forsake.

Given that battery production presently relies on cobalt mining done in grim conditions in the Democratic Republic of Congo, sometimes with child labour, and much of the solar-grade polysilicon used in solar panels is produced in Xinjiang, green energy will bring less ethical relief than often supposed.

Our cognitive struggles with energy matters extend to our concepts of historical time. Both the dread of a coming apocalypse and a faith in endless human innovation and moral improvement appear hardwired into western culture, first from Christianity, and then its secular offshoot the Enlightenment. When confronted with collective existential questions, western minds reach rather easily to millenarian fears and hopes. Christianity began, after all, with the expectation of an apocalypse and the imminent arrival of God's kingdom. Although the Roman Catholic Church made Latin Christianity worldly, and Augustine slammed down millenarianism as delusional, the original Christian spirit lingered, readily available as a lens to give moral meaning to past sins in times of social and economic crisis. The apparent ideational clarity of the apocalyptic moment now permeates radical climate activism, captured in Extinction Rebellion's name, as well as the movement's performative, and at times itinerant, political style.

Helen Thopmson

Tooze

Net-zero at zero net cost?

The big question is thus not how to mobilise the new money but how to ensure investment happening anyway flows in the right direction. McKinsey trumpets the conclusion that the overall cost to the EU of achieving net-zero by 2050 will be zero: energy savings will cover the costs of the investment. This is great news.

But, as McKinsey knows only too well, that is not how trillions of investment are normally justified. They have to produce an adequate rate of return—opportunity cost is the measure that matters. It is a matter not of physical constraints but of political economy and on that score the news is less good.

According to McKinsey, between now and 2050, almost half the necessary investment will not meet standard investment criteria. Up to 2030, due to the high cost of renewable technologies in their early stages, less than 40 per cent will be justifiable on commercial grounds. In industry and buildings, two sectors where emissions are hard to abate, a tiny fraction of the necessary investment will generate an adequate profit.

It is in closing the gap between the investment that McKinsey has defined as necessary and that which it has defined as justifiable from a business point of view that government comes in.

If the gap were to be closed by public expenditure, Europe's governments would, according to McKinsey, need to mobilise €4.9 trillion in subsidies over 30 years. That is the amount of profit taxpayers would need to offer investors to get them

interested in the energy transition—€365 for every man, woman and child in the EU27, every year for 30 years. Painful and unfair, no doubt, but hardly inconceivable.

In any case, the public purse is only one way of driving business investment. An alternative is to use carbon pricing. McKinsey estimates that with a carbon price of €100 per ton 80 per cent of the necessary investment could be justified on commercial grounds. The funds generated from an emissions-trading system could then be recycled in subsidies and other promotional spending. In hard-to-abate sectors, direct interventions would remain indispensable.

Adam Tooze

6.1 Minerals in Transition

Carbon Tracker on IEA Study

The IEA's latest piece on minerals[1] critical to the energy transition gives a rather pessimistic spin to what was some very positive data. Looked at from a wider perspective, the note provides another useful source of analytical support for the energy transition.

The IEA looked into the amount of minerals needed to fuel the energy transition, and pretty quickly worked out 'there is no shortage of resources'. The world has plenty of lithium, nickel, rare earth metals and so on. This is what the United States Geological Survey (USGS) has been saying for a while,[2] and fits with the work done by the Energy Transitions Commission[3] on mineral availability.

The IEA notes for example that we have 170 times as much lithium reserves as annual demand and that our lithium reserves have increased by 42% over the last eight years as higher prices and the prospect of rising demand have drawn out new investment. Under the IEA's 1.5 degrees scenario, we will need about twice the amount of critical minerals by 2040 (six times as much for the clean energy industry, but that is only part of global demand), and the IEA put forward a series of sensible suggestions (increase recycling, invest in new supply and so on) to ensure that we get it.

However, their take then turns gloomier as we are warned about how hard this is going to be. Impressive charts show that the average electric vehicle uses 210kg of critical minerals compared to only 35kg for an ICE car and that a MW of solar generation capacity needs 6.5 tonnes of critical minerals compared to a coal plant which needs only 3 tonnes. We are then encouraged to think about all the ESG issues and environmental issues associated with the surge in mineral usage and to worry about supplier concentration, water usage, pollution and depletion.

Stand back a moment however, and you can see immediately that the IEA are very selective in their presentation of the data. They look only at the stocks

(the assets you need to build the generator or car) not the flows (the energy you need to run them). But the flows of energy are 2-3 orders of magnitude larger than the stocks, and this means that many of their conclusions are more useful for fossil fuel advocates than for policymakers.

One way to demonstrate this is to look at the weight of the material that is required for a fossil fuel system versus a renewable system, as weight is a pretty good proxy for environmental impact. All that coal and oil has to be extracted and converted and shipped around, and at every stage it requires complex and heavy equipment which has an impact on communities and air quality. So we take IEA data to compare below the critical mineral requirement of the renewable system with the energy requirement of the fossil system, to get a more appropriate comparison. There are of course other materials like steel and cement to consider when building transition infrastructure, and other areas like transport networks, but it is safe to say that these will weigh considerably more for the heavy molecules of the fossil system than the light electrons of the renewable system.

For example, take those 6.5 tonnes (half of it from silicon which is not exactly a rare mineral) that you need to build 1MW of solar capacity. It turns out that this is an absolutely immaterial number compared to the weight of the coal that is used to generate electricity. Over its lifetime of 30 years, 1MW of solar capacity will generate over 40,000 MWh of electricity, so the mineral requirement is just 0.15kg per MWh. Compare that to a coal fired generation station where the critical mineral requirement is indeed a bit less, but you need 350 kg of coal to generate that MWh.[4] On this calculation, coal generation will need more than 2,000 times more material by weight than solar generation.

It is a similar story in the transport sector. The average car uses about a tonne of oil a year, or 15 tonnes over its lifetime. Compare that with the 210kg of critical minerals that the EV needs and the weight of the oil is 71 times higher than the weight of the minerals. You burn the oil only once, but the minerals can and will be recycled many times.

carbonTracker

IEA Study

Minerals are essential components in many of today's rapidly growing clean energy technologies – from wind turbines and electricity networks to electric vehicles. Demand for these minerals will grow quickly as clean energy transitions gather pace. This new World Energy Outlook Special Report provides the most comprehensive analysis to date of the complex links between these minerals and the prospects for a secure, rapid transformation of the energy sector.

Alongside a wealth of detail on mineral demand prospects under different technology and policy assumptions, it examines whether today's mineral investments can meet the needs of a swiftly changing energy sector. It considers the task ahead to promote responsible and sustainable development of mineral resources,

and offers vital insights for policy makers, including six key IEA recommendations for a new, comprehensive approach to mineral security.

IEA Study (pdf)

7

Batteries

The battery market has seen dozens of chemistries come and go, but four have stuck and scaled to achieve mass-market penetration: lead acid, nickel-cadmium (Ni-Cd), nickel-metal hydride (NiMH) and lithium-ion (Li-ion).

Most of the developing world still uses lead-acid batteries, a \$45 billion global market. But lithium-ion batteries have been gaining ground rapidly in wealthy markets.

LIBs have hit on a combination of anode, cathode and electrolyte that performs well enough along several criteria (especially cost) to work for most short-duration applications today. They have become cheap, and manufacturing capacity has converged around them.

Roberts

7.1 Lithium-ion

Lithium-ion Batteries (LIBs)

Roberts

The global market for EV batteries alone is expected to hit almost \$1 trillion by 2030. The more energy-dense, cheap and safe LIBs can get, the faster the electrification of transportation will happen. LIBs are being used both for distributed, building-level energy storage and for large, grid-scale storage installations.

The global storage market is expected to grow at an average of 31 percent a year over the coming decade, reaching 741 gigawatt-hours of cumulative capacity by 2030. The vast bulk of the demand for batteries is going to come from transportation

In 2019, the three chemists behind the initial development of lithium-ion technology won the Nobel Prize in chemistry. LIBs boast incredibly high energy density and specific energy, which is to say, they cram lots of oomph into a small, lightweight package, and they are capable of cycling many more times than their predecessors.

Lithium-ion battery pack prices, which were above \$1,100 per kilowatt-hour in 2010, have fallen 89% in real terms to \$137/kWh in 2020. By 2023, average prices will be close to \$100/kWh. With foreseeable improvements in LIB chemistry, prices could hit \$40 or even \$30/kWh in coming decades. LIBs are going to hit limits, even if it's just the base price of raw materials, before they become economical for long-duration grid storage. They are being installed for 4- to 6-hour storage applications, sometimes 8 hours, and someday may even aspire to 12 hours. But beyond that — for the weekly or even seasonal storage a renewables-based grid will need — some other technology or technologies will have to step in.

Before Tesla was founded, Li-ion batteries were almost exclusively used in consumer electronics — mainly laptops and cell phones. At the time of the launch of the Tesla Roadster in 2008, the total global Li-ion manufacturing capacity was approximately 20 GWh per year. By 2030, we expect over 2,000 GWh of annual production capacity based on already announced plans by cell manufacturers. That would be 100× growth in 22 years.

LIBs do face restraining pressures, especially materials and safety concerns.

Roberts

LIBs have been around in commercial form since the early 1990s, though obviously they've improved quite a bit since then.

Today's most common and popular LIBs use graphite (carbon) as the anode, a lithium compound as the cathode and some organic goo as an electrolyte. They boast two key advantages over prior battery chemistries.

First, they need very little electrolyte. They are what's known as "intercalation" batteries, which means the same lithium ions nestled (intercalated) in the structure of the anode transfer to be intercalated in the cathode during discharge. The electrolyte only has to serve as a conduit; it doesn't have to store many ions. Consequently, the cell doesn't need much of it. Saving on electrolyte saves space and weight. (Bonus: The process is almost perfectly reversible, which gives LIBs their high cycle life.)

Second, LIBs squeeze lots of energy into a small space. Lithium is the lightest metal (at the upper left corner of the periodic table) and extremely energy-dense, so LIB cells can work with electrodes only 0.1 millimeters thick. (Compare lead-acid electrodes, which are several millimeters thick.) This also makes LIBs smaller and lighter.

Even the biggest grid battery is just stacks upon stacks of cells, like Lego bricks.

LIBs are extremely modular — they can be scaled precisely to need.

The most common LIB chemistries used today are lithium nickel manganese cobalt oxide (NMC) and lithium nickel cobalt aluminum (NCA), which use compounds of those metals as the cathode. Lithium and nickel turn out to be a knockout combo: light and energy-dense.

Some batteries, particularly those with cobalt, are prone to “thermal runaway,” which means that if one cell goes haywire and heats up, it heats up the next one, and so on and so on in a self-reinforcing process that results in fires

List of LIB chemistries:

Lithium nickel manganese cobalt oxide (NMC cathode)

Lithium nickel cobalt aluminum (NCA cathode)

Lithium ferro phosphate or lithium iron phosphate (LFP cathode)


Lithium manganese oxide (LMO cathode) and lithium manganese nickel oxide (LMNO cathode)

Lithium sulfur (Li-S, sulfur cathode)

Lithium metal (anode) and solid state

Lithium titanate (LTO anode)

Lithium air (Li-air, lithium anode)

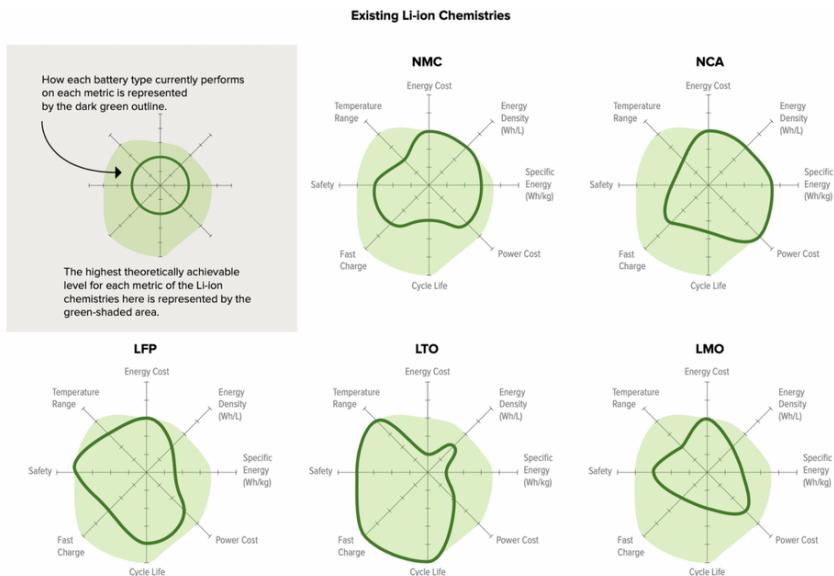

Cobalt, used in standard NMC and NCA chemistries, is highly toxic, comes almost entirely from the Democratic Republic of the Congo, and is mined in terrible working conditions that frequently spur charges of human rights abuses. Nickel and lithium are less nasty in and of themselves, but they may run into supply constraints as the market grows. (Nickel, in particular, is a source of current stress.)

Smart manufacturers such as Tesla and others are diversifying their battery

lines in anticipation of supply issues, trying to evolve away from cobalt and attempting to secure a steady supply of lithium and nickel.

Roberts

Sionic

Sionic is betting that its approach will prove to be easier and cheaper to adopt for the companies that have already sunk massive investment into their factories.

Instead of re-engineering silicon to tamp down on its propensity to expand and contract during cycling, Sionic uses low-cost micron silicon and designs around that property.

"If you fight physics, physics always wins," said Sionic CTO Surya Moganty. "We are controlling, or engineering, that expansion of silicon so it does not cause problems."

Sionic also leans on its corporate pedigree to design an electrolyte that's optimized for safe performance with the new anode. That's important, because changing one key component of a battery typically affects how the other pieces perform.

Spector/Canary

Lition-ion Varieties

There are a few clear leaders — lithium nickel manganese cobalt oxide (NMC), lithium nickel cobalt aluminum (NCA), and lithium ferro phosphate (LFP).

Most EV makers use NMC batteries; Tesla uses NCA. In the past, it's been difficult to push down the amount of cobalt in these batteries (it plays an important balancing role), but manufacturer LG recently introduced an NMC 811 battery: 80 percent nickel, 10 percent manganese, 10 percent cobalt. GM will use them in its new line, including in the Hummer, and Tesla will put them in some of its Model 3s in China.

Most big battery manufacturers, including Panasonic (which supplies many of Tesla's batteries), have vowed to gradually reduce and eventually eliminate cobalt.

Nickel is the key to energy density. Tesla, VW, and others are working on special high-nickel battery varieties that will be used for specialty vehicles that require extra-high energy density, like larger SUVs and trucks.

But not every vehicle needs that, and nickel supply constraints are looming, so work is also being done to further boost manganese — a much more stable, abundant material — and reduce cobalt.

Silicon Anodes

Many LIB developers are experimenting with silicon as an anode coating, partially or completely replacing graphite.

Silicon holds on to nine times more lithium ions than graphite, so energy density improves (range expands by 20 percent), and a silicon battery can charge and discharge much more quickly than graphite batteries, so power density improves as well. But silicon expands when it absorbs ions, so it breaks down quickly; cycle life is still much lower than graphite.

Automotive cells with NCA or NCM cathodes paired with Si-dominant anodes will increase energy density by up to 50%, thereby dropping the \$/kWh cost by 30-40% in less than a decade.

Silicon-as-anode doesn't operate via intercalation. Instead of nestling into the anode, ions react with the silicon and bond with it, a process called "conversion." That makes it more difficult to peel the ions off without damage, but it can hold way more ions.

Fluorides Cathodes

Metal fluoride-based cathodes (like iron fluoride or copper fluoride) and sulfur-based cathodes — which also operate via conversion rather than intercalation and can also store more ions.

It's plausible that with a conversion cathode and an engineered low-swell silicon anode, the cycle life of Li-ion can be extended all the way to 10,000 full cycles while also having the highest energy density.

Only that combination — a conversion-based anode and a conversion-based cathode — that can bring LIB prices down to “~\$50/kWh by 2030 and ~\$30/kWh by 2040.

Lithium ferro phosphate (LFP)

LFP use a lithium-iron compound as cathode.

A few years ago, it looked like LFPs were going to be displaced by NMCs and NCAs, but lately they've made a comeback and now have a decent case that they could take the lead in the EV and stationary storage markets. They have already captured almost half of the Chinese EV market.

LFPs use lithium ferrophosphate (LiFePO₄) as the cathode, replacing nickel, manganese, and/or aluminum. The advantages relative to nickel-based competitors:

cheaper on a materials basis (though not yet on \\$/kWh);

higher cycle life (Matt Roberts, previously executive director of the Energy Storage Association,

higher power density;

high safety and low toxicity ("They're almost literally bulletproof, in that they can't catch fire

replaces problematic and/or rare metals with iron, which is safe and abundant.

In exchange for these advantages, LFPs offer lower energy density (there are fewer spaces for ions to intercalate). However, because they are so safe, LFPs do not require the same protective packaging as NMCs and NCAs, so they can gain some of that efficiency back at the pack level. Tesla says that, while LFPs have 50 percent of the energy density of their high-nickel competitors, an LFP-based vehicle can still get 75 percent of the range.

Current LFPs are not going to feature in high-performance vehicles, but most vehicles aren't that. They are "good enough, essentially, for any kind of commuter car," Schick says. "I think you're going to see a whole bunch of economy cars that are LFP." LFP will be used in taxis, ride-share vehicles, and fleet vehicles, along with scooters and rickshaws and motorcycles. It will be the cheap, reliable, everyday option.

LFP in energy storage markets

Energy density is also less important in the energy-storage market, where price, capacity, and safety rule.

LFP's high cycle life and low costs make them attractive in the grid-storage market

As for distributed, behind-the-meter storage, in some markets like California and New York City, Tesla home batteries (still NMC) are not allowed inside garages, thanks to the risk of thermal runaway, which can lead to fires. LFPs have passed an extensive regimen of safety tests and will be available everywhere; that gives them a tangible market advantage.

With sufficient manufacturing scale, the price of any battery approaches the price of its materials, and LFP uses incredibly cheap materials.

Of all the lithium-ion chemistries, LFP may play the largest role in accelerating the world's transition to sustainable energy.

Lithium manganese oxide (LMO) and lithium manganese nickel oxide (LMNO)

Manganese is abundant, safe, and stable at a wide variety of temperatures, though its energy density is lower than cobalt or nickel. Because LMOs don't contain cobalt and avoid the threat of thermal runaway, they are used in medical equipment, as well as power tools, electric bikes, and EVs.

Lithium sulfur (Li-S)

Li-S burst on the scene to some excitement in the late '00s, demonstrating that a cell with lithium as the anode and sulfur as the cathode — two elements with extremely low atomic weight — could double the specific energy of conventional LIBs. Plus sulfur is incredibly cheap.

One problem is that sulfur has very low conductivity, so something (usually carbon) has to be added to pull in the ions. More importantly, Li-S batteries

degrade quite quickly and have low cycle life. To date, they remain commercially unavailable.

Lithium metal anodes

Solid lithium metal makes for a great anode, in that it is highly prone to releasing electrons and ions. The problem is that lithium is highly reactive and ions tend to form “dendrites,” or tree-like formations, that reduce energy density and cycle life and increase the chances of a short or fire. It was problems with lithium’s reactivity that originally led to the addition of graphite to the anode, so the ions could intercalate rather than plating.

Solid Electrolytes (solid-state)

The liquid electrolytes used in most LIBs limit the kinds of electrodes that can be used and the shape of the battery cell; plus, they are often flammable, a safety hazard.

“While there are technical reasons why this technology appears to be the holy grail of batteries,” writes SILA Nanotechnologies, “the reality is that even if the technology works (and that is a big ‘if’ after 40 years of development) it is unlikely to find more than niche opportunities in the market.”

Lithium titanium oxide (LTO)

LTO batteries have lithium-titanate nanocrystals coating the anode, which increases surface area and allows for many more electrons to be released much faster than graphite. Consequently, they have incredibly high power density (they can release energy quickly) and can recharge faster than any other LIB. They also have high cycle life and high recharging efficiency.

They are lower voltage than conventional LIBs and thus have lower energy density, but because of this they are also extremely safe to operate.

Amazing performance - Crazy price.

Lithium-air (Li-air)

Li-air, which uses lithium metal as the anode, a variety of materials as the electrolyte (that’s where research is most intensive), and as the cathode ... air.

Li-air has incredibly high specific energy (energy per unit of weight), theoretically as high as the specific energy of gasoline. In practice, only a fraction of that potential has been demonstrated, but even that fraction is about five times the specific energy of conventional LIBs.

All sorts of improvements in electrolytes, cycle life, and scalability will be needed before Li-air will become practical, but in terms of 2030 dark horses, this is one to watch.

Roberts

8

Long-duration Storage

We soft

The potential is great and the grid surely needs it, but long-duration energy storage still has a long way to go.

Long-duration storage can accelerate the retirement of peaker plants, defer upgrades of transmission and distribution infrastructure, and improve the dispatchability of renewables such as solar and wind – theoretically, at least.

Systems with more than 100 hours of energy storage capacity provide the most benefit to the grid.

Long-duration storage can reduce the costs of deeply decarbonized electricity systems by 10 percent if the storage technology's costs are below \$20/kilowatt-hour. The savings could reach as high as 40 percent if long-duration storage costs could be reduced to \$1/kilowatt-hour.

Economic long-duration energy storage doesn't exist. Yet.

Today's high-growth, gigawatt-scale energy storage market is absolutely dominated by lithium-ion batteries with short durations ranging from minutes to a few hours and used largely in ancillary, not energy, applications.

8.1 Pumped Hydro

Pumped storage (which consists of pumping water from a low reservoir to a higher-elevation reservoir, and then releasing that water to spin turbines and generate power) accounts for 95% of all utility-scale energy storage in the U.S.

America's 43 pumped storage plants were mostly built between 1960 and 1990 to support nuclear power and have a total combined capacity of roughly 100

gigawatts of storage. There are a number of new plants in development that are being built, in this case, to help support renewables rather than nuclear.

The problems with new pumped hydro projects: "They cost billions of dollars and take years to build, and can run afoul of environmental opposition

8.2 Flow Batteries

Flow batteries circulate a liquid electrolyte through stacks of electrochemical cells and have long held the promise of 10-hour durations, tens of thousands of cycles, minimal degradation and no limitations on depth of discharge. This performance promise has lured venture capital investment and research and development — but so far, the investments have yielded few commercial, competitive flow battery products.

8.3 Mechanical Energy Storage

Compressed-air energy storage remains a contender. The Los Angeles Department of Water and Power selected Range Energy and Mitsubishi Power Systems to develop underground salt caverns to store high pressure air (or someday hydrogen)

Raise a rail car, a huge weight and a water column, respectively, with low-cost or curtailed energy, generating power when the mass is lowered.

Quidnet will use excess renewable energy to store pressurized water underground in dry oil and gas wells.

HydroStor

Construction entails digging large-diameter shafts underground, one of which will be filled with water from aboveground tanks. Compressors on the surface will push air into the cavern, where it presses against the column of water to maintain a steady pressure. When released, that compressed air will spin 100-megawatt turbines that regenerate power. All that construction work is expected to take three to four years.

Canary Hydrostor

8.4 Thermal Storage

Thermal storage uses excess or curtailed power to charge a thermal "battery" made of materials such as molten salt or cryogenic liquids.

HeatCrete

Norway-headquartered EnergyNest makes its own branded ThermalBattery product which essentially stores heat in a patented form of concrete, which it

has dubbed Heatcrete. A heat transfer fluid (HTF) at high temperatures passes through steel pipes cast into the ‘battery’, in technology that the company claims enables storage of energy at very low CapEx cost, using low-cost materials in a simple design. EnergyNest has previously said the Heatcrete materials can last 30 to 50 years of use without degradation.

EnergyNest

CanaryMedia

8.5 Software (Market Flex)

Lee Kasten, a WECC-based power system operator, suggests that we should rely on software and markets, not hardware: “Where possible, we should use software over hardware. For example, don’t build a battery that costs a billion dollars, only works 2% of the time and only moves around 100 [gigawatt-hours] of electricity. Build an energy-imbalance market or an extended day-ahead market for \$50 million or \$100 million that moves around hundreds of gigawatts of electricity. Give all consumers price signals, and then watch the flexible consumers adapt to those price signals using software to manage existing loads.”


Wesoff (canary Media)

8.6 QuantumScape

Wesoff

QuantumScape claims to have solved the solid-state battery riddle that has stumped generations of battery scientists. It has created a commercially viable, rechargeable lithium metal battery with enough oomph to make it a contender to displace the internal combustion engine.

With potential energy density exceeding 400 watt-hours per kilogram, solid-state battery deployment could mark the tipping point for adoption of electric vehicles and open up massive transportation markets. QuantumScape’s battery employs lithium metal anodes (referred to by the company as “solid state”), which could be the key to the next wave of EV battery performance gains, according to the findings from BMW shown in the chart below.

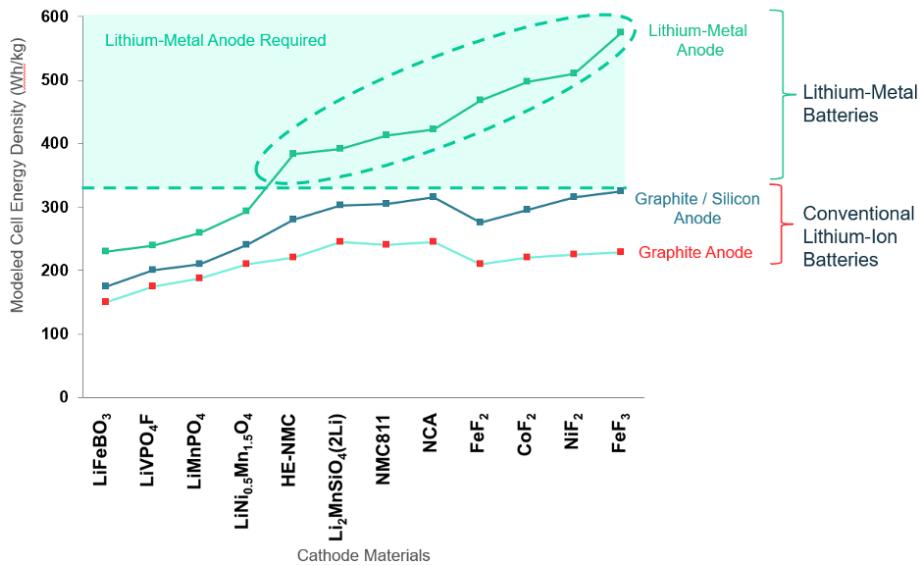


Among its many innovations, QuantumScape has replaced the polymer separator used in conventional lithium-ion batteries with a ceramic separator, enabling the use of an anode of metallic lithium instead of one made of carbon or carbon-silicon. The metallic lithium anode is formed *in situ* when the finished cell is charged.

A viable lithium-metal anode would allow higher energy density than is possible with conventional anodes and therefore longer driving range with the potential of faster charging, long cycle life and improved safety – qualities that are fundamental to changing the minds of those reluctant to purchase an EV.

“I believe that retail investors and perhaps even the technical staff at Volkswagen have been severely underestimating the scale of the challenges facing QuantumScape. Manufacturing defect-free ceramic separators at meters-per-second speed is very unlike other manufacturing challenges faced by the battery or PV industry previously. This is insanely hard. Elon Musk always pounds his chest about “production hell” and how difficult making cars is. Making these ceramic separators will be at least 10× harder than any technical challenge Tesla [has] faced.”

A business parallel with solar that the storage industry might want to avoid is how the photovoltaic market coalesced around a narrow set of Chinese-made silicon technologies after a U.S. venture capital frenzy that set the solar investment clock back a decade. Manufacturability, cost reduction and actual industrial policy won the solar market for China, rather than exotic science.

QuantumScape is still a development-stage startup facing enormous technology and scaling risk as it attempts to move from lab to production.

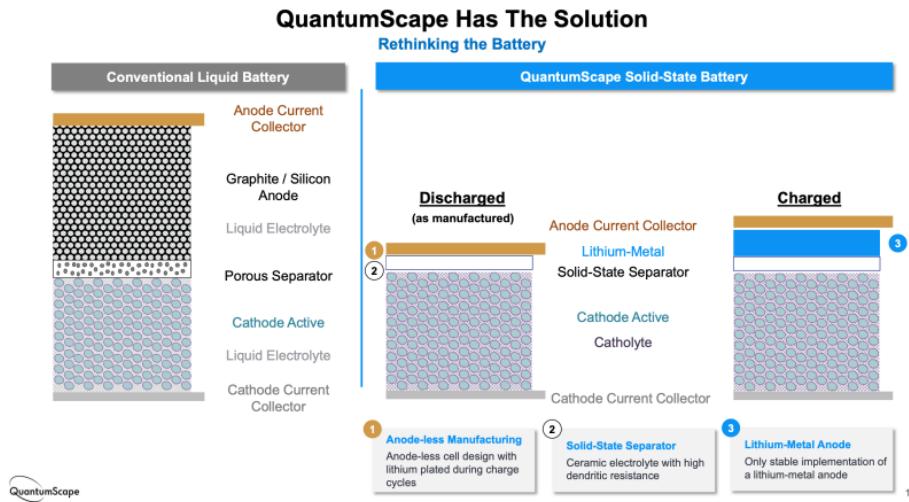

Wesoff

Quantumscape Scam?

SPAC's are free to promote absurd financial projections and timelines that are illegal in a typical IPO. The current SPAC mania is partly fueled by insiders exploiting this loophole to lure retail investors, setting them up as bagholders for the pump and dump, when the lockup expires and they cash in. We think QS is a textbook case.

Scorpion (2021) QuantumScape SPAC Scam (pdf)

Massive investments in lithium-ion (Li-ion) battery manufacturing capacity, which is expected to more than triple to 1.3 TWh by 2023.

Li-ion batteries' scaling pathway is unlike that for silicon photovoltaic cells; investment continues to differentiate among chemistries with performance attributes that are best suited to specific use cases.

Solid-state technology is poised to massively disrupt the storage industry by unlocking new opportunities for cheap, safe, and high-performing batteries.

Meeting electricity goals for <2C° global temperature increase may require deploying batteries much faster than Li-ion price decreases are predicted to enable (unless demand flexibility can be increased).

High renewable penetration modeling scenarios generally assume that 3%–7% of the total installed renewable capacity is required as additional interday energy storage to account for forecast and demand uncertainty.

If 60% of the 6,500 GW of current global electricity generation capacity were met with variable renewable energy, it would require between 120 and 280 GW of long duration storage, or enough capacity to power France plus Germany.

RMI Breakthrough Batteries (pdf)

9

Bio Fuel

Beslik

Biomass is defined as any plant matter used directly as fuel or converted into other forms before combustion. Included are wood, vegetal waste (including wood waste and crops used for energy production), animal materials/wastes, sulphite lyes (also known as “black liquor”) and other solid biomass. The word biofuel is usually reserved for liquid or gaseous fuels, used for transportation.

Currently biomass covers approximately 10 percent of the global energy supply, of which two-thirds is used in developing countries for cooking and heating.

Biomass currently represents almost 60% of the EU’s renewable energy, more than solar and wind power combined, according to the EU’s statistical office, Eurostat.

In the EU, Germany is the leading producer of solid biomass. Production volumes reached an estimated 12.8 million metric tons of oil equivalent, which was 2.6 million metric tons more than France, ranked second. Total primary energy production in the EU amounted to 96.9 million metric tons in 2019.

One of the biggest problems related to large scale biomass supply is the energy density that is needed to decarbonise heavy CO₂ emitting industries.

Last year, a group of climate activists filed a lawsuit against the EU to challenge the notion that forest biomass is carbon neutral, a principle which is currently enshrined in the bloc’s renewable energy directive.

According to this group “the treatment of biomass as carbon neutral runs counter to scientific findings” which shows that burning wood for energy typically emits 1.5 times more CO₂ than coal and 3 times more than natural gas, the plaintiffs claimed.

The European Court of Justice dismissed the case, saying the activists had failed

to demonstrate how the directive was of “individual concern” to them. Which is by all means almost funny.

Like fossil fuels, biomass releases carbon dioxide emissions upon combustion. While there is an argument for carbon balancing – due to the carbon dioxide that is removed from the atmosphere by trees and plants during their lifetimes via photosynthesis – these are nevertheless emissions that could be avoided if other renewable sources like wind or solar were used instead.

In addition to CO₂, burning biomass fuels results in the release of various other harmful gases such as carbon monoxide, NO_x (nitrogen oxides), and VOCs (volatile organic compounds), which all contribute to air pollution.

Providing the feedstocks used in biomass power plants – frequently in the form of wood pellets – requires large areas of forest and woodland to be cut down. Proponents will argue that all trees are replaced with new ones, that can grow, remove carbon, and be used for future energy needs.

But this cycle requires strict adherence to sustainable land management and responsible agriculture throughout the supply chain. And as biomass power stations grow in number, demand for these materials will multiply accordingly – exerting greater pressure on a natural resource that is already under threat from other industries.

There are biodiversity considerations too, because while an area of forest might be replaced to grow anew over time, the wildlife and ecosystems that are displaced by these actions are faced with a more immediate challenge that is not solved by planting young trees.

Beslik

Swiss voting

A majority of Swiss voters also backed a free trade deal with Indonesia, which would expand palm oil imports at lower tariffs. Indonesia, a world away, is the site of a vast ecocide, destroying tropical forests (which are also carbon sinks) on an immense scale, driving countless species, including the Orang Utan, extinct, to make way for palm oil plantations. The palm oil goes to us consumers in the West. Roughly half of palm oil ends up burned in our cars as biodiesel, thanks to European Union rules aiming to replace fossil fuels with bio-based fuels. This rule arguably kick-started the ecocide in Indonesia — the clear result of problem shifting (from climate disaster to biodiversity calamity, although in fact the climate benefits of bioenergy are extremely dubious) rather than tackling the root cause: unsustainable overconsumption. The other half of palm oil ends up in food and cosmetics, and can easily be substituted with other, slightly more expensive, ingredients.

In this case, a majority of the Swiss people voted, in full knowledge, to continue to participate in ecocide and exploitation, far across the world, for cheaper access to various goods including palm oil, and for preferential terms for Swiss firms in

Indonesia. They decided that a few economic advantages in consumption and production were worth it: they made the calculus, and decided that ecocide was worth it. It's one thing when your government or business leaders decide that ecocide is worth it to gain economic advantage. It's something else entirely to be walking around the streets of a country where a majority of the people you meet and greet made the ghastly calculation to be complicit in ecocide for a few more francs.


A few months ago, a majority of the Swiss population voted differently, but in vain. They voted to curb multinational corporations, and hold them accountable for human rights violations (including environmental damage) overseas. Sadly, this majority was not sufficient: a majority of cantons (regions) was also necessary, and this fell woefully short. A majority of people in the rural cantons, the places upheld as the heartland of traditional Swiss values by the far-right, voted to continue to allow multinational corporations based in Switzerland to violate human rights and degrade the environment overseas with complete impunity. Again, a few more Swiss francs are worth more than child labour or poisoning local populations. Nice values, eh?

Steinberger

10

Fuel Cells

Fuel cells are scaling up exactly as solar and wind did in previous decades.

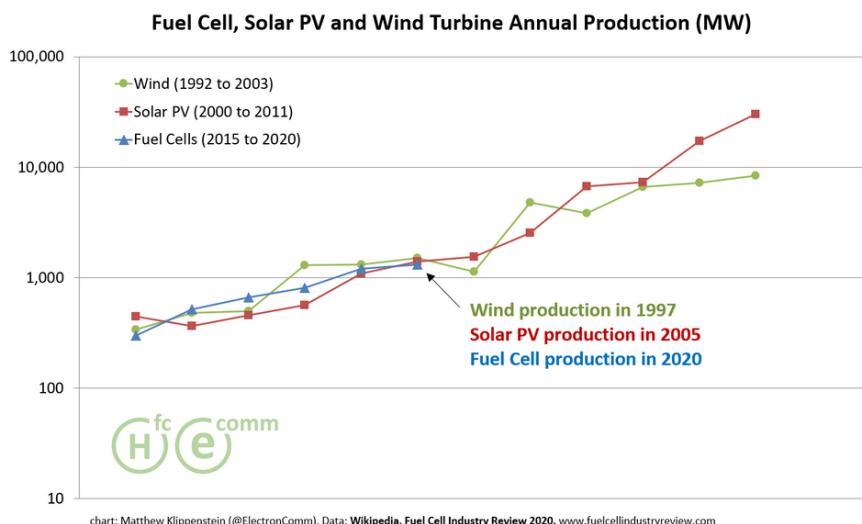

Fuel cells electrochemically convert hydrogen and oxygen into direct-current electricity.

Fuel cells employ an assortment of electrolytes, catalysts and temperatures. But in almost all cases, the membranes are expensive to fabricate, and the technologies require precious metal catalysts (typically platinum or palladium) or high process temperatures. Input fuels range from natural gas to methanol to hydrogen. Ongoing research and development efforts, some led by the DOE, are underway to reduce the need for expensive metals and to improve the reliability and lifetime of the fuel cell stack.

Common technologies include proton-exchange membrane (PEM), solid oxide (SOFC), phosphoric acid (PAFC) and molten carbonate (MCFC). There are a number of other technologies, all adept at destroying investor capital. GE, GM, Hyundai, Honda, Johnson Matthey, Panasonic, Siemens, Samsung, LG, Sharp, Toshiba and Toyota have all invested in (and in many cases ultimately abandoned) fuel cell technology.

Bloom Energy, Doosan and FuelCell Energy build large stationary fuel cells, using SOFC, PAFC and MCFC technologies, respectively. Plug Power, on the other hand, targets its PEM fuel cell system at powering forklifts and other vehicles in the enormous materials handling market.

While Bloom's and FuelCell Energy's equipment runs on natural gas, Plug Power's PEM fuels cells run on pure "five nines" hydrogen and work most productively with a hydrogen infrastructure at the customer site.

The U.S. Department of Energy continues to fund fuel cell development, most recently with \$33 million to support hydrogen and fuel cell research and development, infrastructure supply-chain development and validation, and cost analysis activities.

Wesoff

11

Geothermal

It is the only other thing that you could essentially attach to the current grid, almost anywhere in the world — in fact, below current cities. It seems like science fiction, right? Drilling to the center of the earth? But it's not. It's a super exciting clean power generation area

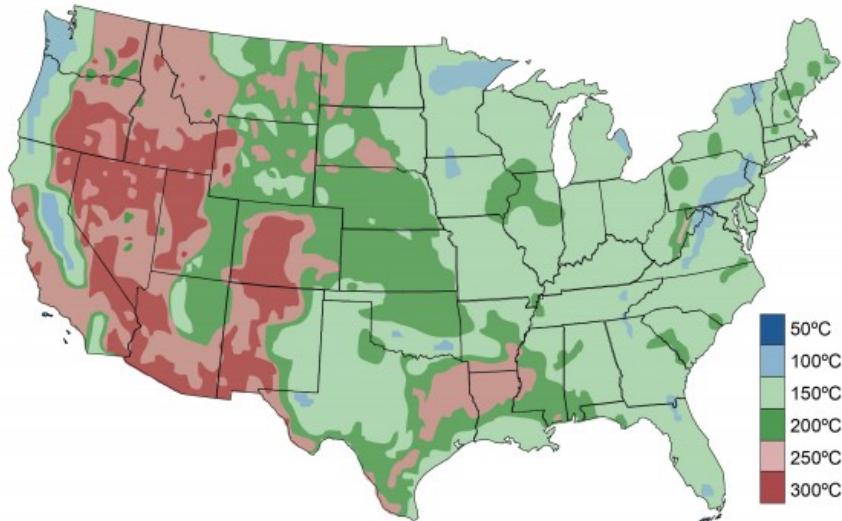


Figure: U.S. geothermal resources at 10 kilometers depth

CanaryMedia

Enthalpy

Enthalpy is a property of a thermodynamic system, defined as the sum of the system's internal energy and the product of its pressure and volume, $H = U + pV$. It is a convenient state function standardly used in many measurements in chemical, biological, and physical systems at a constant pressure. The pressure-volume term expresses the work required to establish the system's physical dimensions, i.e. to make room for it by displacing its surroundings. As a state function, enthalpy depends only on the final configuration of internal energy, pressure, and volume, not on the path taken to achieve it.

The unit of measurement for enthalpy in the International System of Units (SI) is the joule. Other historical conventional units still in use include the British thermal unit (BTU) and the calorie.

The total enthalpy of a system cannot be measured directly because the internal energy contains components that are unknown, not easily accessible, or are not of interest in thermodynamics. In practice, a change in enthalpy (ΔH) is the preferred expression for measurements at constant pressure, because it simplifies the description of energy transfer. When matter transfer into or out of the system is also prevented, the enthalpy change equals the energy exchanged with the environment by heat.

[Enthalpy - Wikipedia](#)

11.1 Heat Storage

Low Enthalpy Aquifer Technology

Ruden Energy

11.2 Deep Drilling

11.2.1 Ultra Deep Drilling

Quaise Energy Inc. has teamed with the Laboratory for Scientific Computing (LabSC) to develop computational models of the interaction of high-energy beams with geological materials. The models developed will provide understanding of the fundamental physics underlying the operation of a gyrotron-powered millimeter-wave (MMW) energy drilling system developed by Quaise, a spin-off company born from research at MIT (Massachusetts Institute of Technology) Plasma Science and Fusion Center.

This new, breakthrough technology will be used for MMW drilling to reach depths of 10-20 km below the earth's surface, which is beyond what can be accomplished today using conventional drilling. Deep drilling will enable harvesting supercritical geothermal energy with power densities several orders of magnitudes larger than wind or solar energy, thus opening the opportunity for

accessing a clean, carbon-free and power-dense energy source anywhere around the world.

The successful development of a commercial system has to overcome technical challenges related to the interaction of millimeter electromagnetic waves with basement rock formations at extreme conditions and far-field transport of material.

Think Geoenergy (News)

North Sea Geothermal

Platforms in the UK North Sea could be converted to run on geothermal energy, providing power to the offshore field facilities or feeding power to markets in Europe via trans-North Sea interconnector grids.

Traditionally, once an oil or gas field reaches the end of its productive life, its production platform is decommissioned. The structure may be removed and taken ashore for recycling/reuse, or part of the platform may remain on the seabed, perhaps creating an artificial reef. However, another alternative is becoming a more viable option – re-using the platform to extract geothermal energy. If applied to redundant platforms in the North Sea, this could create a whole new industry employing thousands of workers in new productive jobs in the offshore and onshore support sectors.

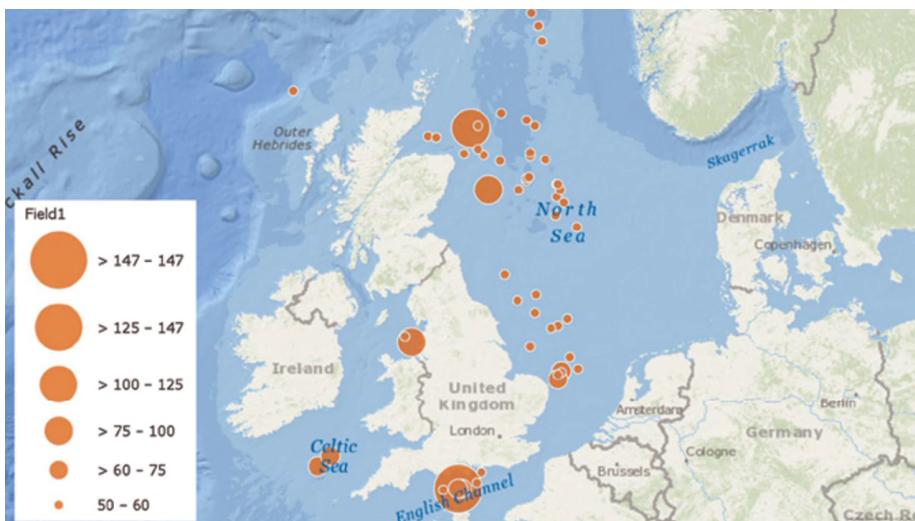


Figure: UK 50 hottest geothermal gradient wells by degrees C.

The UK continental shelf (UKCS) where many platforms are situated has a relatively thin earth's crust – around 10 km (6.2 mi) thick compared to 40-70 km (25-43 mi) thick on land – which gives the wells their high bottomhole temperatures. There are more than 50 wells in the region with a geothermal gradient more than 122°F (50°C)/km, the highest being 296°F (147°C)/km. At Total's

Elgin-Franklin high-pressure/high-temperature (HP/HT) gas condensate development in the UK central North Sea, one of the wells was drilled to a depth of 6,100 m (20,013 ft), with a temperature of 387°F (197°C) and a pressure of 16,750 psi (1,155 bar).

Heat from these wells could be employed to generate electricity on board the platform that could in turn be routed to the UK's national grid via subsea cables. North Sea platforms have the advantage of being surrounded by cold sea water, which is at a much lower temperature than the onshore air cooling towers that are the conventional means of condensing a generating plant's working fluids after they have passed through the turbines.

It would also be possible to re-inject waste heat remaining in the fluids back into the subsurface oil-bearing level to increase field pressure and flows, thereby enhancing secondary oil recovery and extending field life. Furthermore, discovery of further oil fields might follow when drilling to greater depths to tap the geothermal energy beneath the platforms.

Geothermal energy has huge potential when set in context against other energy reserves. All fossil fuels, i.e. coal, oil and gas, come from the earth's crust. The crust makes up only 0.4% of the total mass of the planet, the remaining 99.6% being hotter than 932°F (500°C) within the crust, increasing to 9,032°F (5,000°C) at the core. The pressures within the earth are constantly generating this heat naturally. This means that geothermal energy is infinite in its nature, as it is naturally renewable.

Recent research carried out in Russia, in the Kola Peninsula, has revealed moving fluids and open fractures at depths more than 12 km (7.5 mi). This discovery has led to a review of current deep geological thinking and has opened the development of geothermal energy extraction for electrical power generation.

There are three types of geothermal energy. One – Geo-pressure – is where you have a high wellhead pressure, to which you can attach a hydroelectric type turbine to generate the power or electrical power from a natural gas letdown station. The twin screw turbine design from Langson Energy produces 1 MW electrical output, operating in temperatures from 350-550°F (177-288°C) and up to pressures of 600 psi (42 bar). This is already deployed by the natural gas industry to generate power, where the gas mains changes pressure to use the power instead of it being wasted. A second is created by separating the gas from the oil/water brine and using it like a diesel-type generator, i.e. burning the gas to produce power, which could provide an alternative to flaring on certain offshore installations. The third involves using the temperature, as in the high-pressure steam, steam, Organic Rankine Cyclerturbine system. This approach could be applied to platforms or on a nearby support vessel.

12

Hydro Power

Today the technical potential for hydropower development around the world is much greater than the actual production: the percent of potential hydropower capacity that has not been developed is 71% in Europe, 75% in North America, 79% in South America, 95% in Africa, 95% in the Middle East, and 82% in Asia-Pacific.

This is significant if you think about transition we need to make.

Due to the political realities of new reservoirs in western countries, economic limitations in the third world and the lack of a transmission system in undeveloped areas, perhaps 25% of the remaining technically exploitable potential can be developed before 2050, with the bulk of that being in the Asia-Pacific area.

Some countries have already developed their hydropower potential and have very little room for growth: Switzerland for example produces 88% of its potential and Mexico 80%.

Today we have around 1,300 GW of installed hydropower capacity globally. According to the International Renewable Energy Agency (IRENA)'s Global Renewables Outlook 2020, this figure will need to grow by around 60 per cent by 2050 to help limit the rise in global temperature to well below 2 degrees Celsius above pre-industrial levels.

While a large hydropower facility can often provide low-cost electricity for 50 to 100 years after being built, the upfront construction costs can be large. This, combined with the fact that suitable places for reservoirs are becoming rarer over time, means that large-scale hydropower plant construction costs may continue to rise.

A study by researchers from IIASA and China investigated the impacts of different levels of global warming on hydropower potential and found that this type of electricity generation benefits more from a 1.5°C than a 2°C climate scenario.

Environmental concerns about dams typically centre on their blockage of fish migrations or their upstream impacts, such as the inundation of habitats and the displacement of human communities. However, dams can cause serious downstream impacts as well. Although the public generally thinks of threats to aquatic organisms solely in terms of water quality, hydrological alteration – the modification of downstream water flow regimes caused by dams and infrastructure – is one of the primary causes of the degradation of freshwater ecosystems worldwide.

Unfortunately, hydropower's global track record of managing environmental and social impacts and assuring equitable distribution of social benefits has been less than stellar. So the occasional generality thrown out by the most vigorous proponents, that hydro is 'environmentally friendly', rings hollow and calls for a more careful analysis.

No hydropower project is likely to be 100% sustainable. All projects must be viewed as more or less sustainable.

To address the environmental and social concerns and guide the pursuit of sustainability, several entities have developed policies that articulate 'sustainable hydro power', including Green Hydro in Switzerland and the Low Impact Hydropower Institute in the US, in addition to the guidance on sustainability presented in the World Commission on Dams report.


Recently, the International Hydropower Association (IHA) has developed both sustainability guidelines and a sustainability assessment protocol. Collectively, these documents describe specific measures for hydropower planning and operation that can be used to evaluate the sustainability of a hydro project or programme.

Beslik

13

Hydrogen

Siemens Gamesa and Siemens Energy have announced plans to invest €120m (\$146m) in a five-year strategy to unlock the potential of harvesting green hydrogen from offshore windpower.

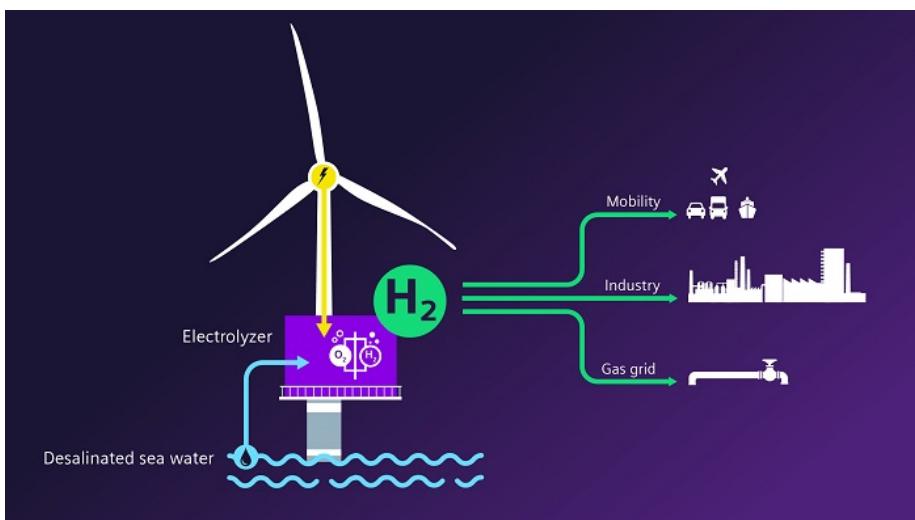

The companies are collaborating on a solution to integrate an electrolyzer into an offshore wind turbine as a single synchronized system to directly produce green hydrogen.

13.1 Hydrogen Aviation

Heynes

In 2008, Boeing flew the first hydrogen-powered aircraft whilst ZeroAvia flew

the world's first hydrogen-powered commercial aircraft in 2020. But the main industry player, already in the works to present hydrogen-powered aircraft to the market, is Airbus.

For hydrogen-powered aircraft, hydrogen can be used in two ways: as a fuel source for fuel cells, when hydrogen reacts with oxygen to produce electricity that powers the engine or alternatively it can be used directly as a fuel source in a modified engine.

Airbus is looking at both these methods for aircraft with the company presenting three models of modified aircraft that would be operated using hydrogen and has already committed to have the first aircraft in service by 2035.

Because hydrogen can be extracted from water, airports could generate their own hydrogen fuel, reducing the need for fuel transportation, eliminating related emissions and possible transportation safety hazards.

The potential of hydrogen as aviation fuel is undeniable, but there is still a long way to go. The constantly growing attention to aviation sustainability will act as a catalyst in making a hydrogen-powered aircraft a reality.

Revolutionary hydrogen technology for aviation and urban air mobility has been unveiled today (2nd March) by HyPoint – and the Californian fuel cell specialist is expecting to start shipping the product in 2022.

HyPoint says its NASA award-winning turbo air-cooled hydrogen fuel cell system will cut years off commercial delivery timelines for hydrogen aircrafts and unlock the emerging hydrogen aviation market.

The company claims its technology delivers an unprecedented combination of specific power and energy density and has passed key validation testing to prove its technical viability.

Heynes

14

Nuclear

Beslik

The nuclear dilemma.

Nuclear power is dead. Long live nuclear power. Nuclear power is the only way forward. Nuclear power is too dangerous. Nuclear power is the safest power source around. Nuclear is nothing. Nuclear is everything.

When I started looking at this I was stunned by how the same numbers and indicators can be interpreted in so fundamentally different ways.

The same basic data set – nuclear plants currently in existence, those under construction, the status of new technologies, the history of costs and delays, and a few striking accidents – produces totally contradictory opinions and predictions.

Nuclear power is a Rorschach test: You see what you want to see, a rosy nuclear future or an old-world dinosaur in a slow-death spiral. It's a reflection of your own views on the energy present and future.

In all likelihood, no one will be proven right or wrong for decades.

The state of nuclear power

Nuclear power today accounts for around 10 percent of the total electricity generation around the world.

This varies sharply by country. In the U.S. the rate is about 20 percent, in Russia and Germany it is a bit lower than that, while some other European countries get 40 and 50 percent from nuclear reactors.

France has long led the way proportionally, at more than 70 percent (it has the second most total reactors, behind the U.S.). China, though building rapidly, drew less than 3 percent of its power from nuclear in 2014.

There are 442 reactors currently in operation globally, and the International Atomic Energy Agency says that 66 are currently under construction. Twenty-four of those are in China; no other country is currently building more than eight.

Read more here

and here.

In general, the more experience accumulated with a given technology, the less it costs to build. This has been dramatically illustrated with the falling costs of wind and solar power.

Nuclear, however has bucked the trend, instead demonstrating a sort of “negative learning curve” over time.

The nuclear industry’s main hope for future expansion lies in a new generation of small modular reactors (SMRs) that generate less than 300 MW each and are amenable to assembly-line construction.

These are still under development, however, with none licensed or under construction.

In the U.S. nuclear power generates as much as \$50 billion each year from electricity sales and revenue, and provides around 100,000 jobs.

A handful of companies and governments are working to develop small-scale nuclear reactors (SMRs) that proponents say are safer, cheaper, and more compatible with renewables than traditional nuclear power.

But critics contend the new technology doesn’t address concerns about safety and radioactive waste.

Small modular reactors suffer from many of the same problems as large reactors, most notably safety issues and the unresolved problem of what to do with long-lived radioactive waste. And opponents say that even in a smaller form, nuclear power is expensive — it’s one of the costliest forms of energy, requiring substantial government subsidies to build and run, not to mention insure.

In 80-odd years of nuclear power, in which more than 450 commercial reactors, many experimental stations and tens of thousands of nuclear warheads have been built, great stockpiles of different levels of waste have accumulated.

About 0.2–3% by volume is high-level waste. Mostly derived from civil reactor fuel, this is some of the most dangerous material known on Earth, remaining radioactive for tens of thousands of years. It requires cooling and shielding indefinitely and contains 95% of the radioactivity related to nuclear power generation.

Further 7% or so by volume, known as intermediate waste, is made up of things like reactor components and graphite from reactor cores. This is also highly

dangerous, but it can be stored in special canisters because it does not generate much heat.

Around 22,000 cubic meters of solid high-level waste has accumulated in temporary storage but not been disposed of (moved to permanent storage) in 14 western countries, along with unknown amounts in China, Russia and at military stations.

A further 460,000 cubic meters of intermediate waste is being stored, and about 3.5 million cubic meters of low-level waste.

Some 34,000 cubic meters of new high-level and intermediate waste is generated each year by operating civil reactors,

The bitter reality is that there is no scientifically proven way of disposing of the existential problem of high- and intermediate-level waste. The truth is that whatever efforts are made to bury and forget it, it will not go away.

Nuclear stands for 10% of world energy supply.

Beslik

14.1 Fukushima

Release of radioactive waste into sea

Japan has announced it will release more than 1m tonnes of contaminated water from the wrecked Fukushima nuclear power plant into the sea, a decision that has angered neighbouring countries, including China, and local fishers.

Official confirmation of the move, which came more than a decade after the nuclear disaster, will deal a further blow to the fishing industry in Fukushima, which has opposed the measure for years.

The prime minister, Yoshihide Suga, told a meeting of ministers on Tuesday that the government had decided that releasing the water into the Pacific Ocean was the “most realistic” option, and “unavoidable in order to achieve Fukushima’s recovery”.

The plant’s operator, Tokyo Electric Power [Tepco], and government officials say tritium, a radioactive material that is not harmful in small amounts, cannot be removed from the water, but other radionuclides can be reduced to levels allowed for release.

China denounced the plan as “extremely irresponsible”, and accused Japan of reaching the decision “without regard for domestic and foreign doubts and opposition”.

“This approach is extremely irresponsible and will seriously damage international public health and safety and the vital interests of the people of neighbouring countries,” the Chinese foreign ministry said in a statement on its website.

South Korea summoned Japan's ambassador, Koichi Aiboshi, the broadcaster YTN reported, while a high-level government official said Seoul "firmly opposes" the move, a view also expressed by Taiwan's Atomic Energy Council.

The US was supportive, describing Japan's decision-making process as "transparent".

The announcement drew swift condemnation from environmental groups.

About 1.25m tonnes of water has accumulated at the site. It includes water used to cool the plant, as well as rain and groundwater that seeps in daily. The radioactive water, which increases in quantity by about 140 tonnes a day, is now being stored in more than 1,000 tanks, and space at the site is expected to run out around next autumn.

The International Atomic Energy Agency supports the decision, since radioactive elements, except tritium, will be removed from the water or reduced to safe levels before it is discharged. The IAEA has also pointed out that nuclear plants around the world use a similar process to dispose of wastewater.

Experts say tritium is only harmful to humans in large doses and with dilution the treated water poses no scientifically detectable risk.

Local fishing communities say the water's release will undo years of hard work to rebuild consumer confidence in their seafood.

Japanese officials have objected to media descriptions of the water as "contaminated" or "radioactive", insisting that it be described as "treated".

Shaun Burnie, senior nuclear specialist with Greenpeace East Asia, said that claim was "clearly false". "If it was not contaminated or radioactive they would not need approval (to release the water) from Japan's nuclear regulator," he said. "The water in the tanks is indeed treated, but it is also contaminated with radioactivity. The Japanese government has been deliberately seeking to deceive over this issue, at home and abroad."

Guardian (210413)

14.2 James Hansen's Position

James Hansen obviously thinks climate cannot be saved without nuclear power

Development and deployment of 4 th generation nuclear power to the point that modular nuclear reactors provide electricity cheaper than coal. By 4 th generation I refer to all modern passively-safe reactors, whether thorium or uranium fueled – even nuclear fusion, which at long last is now closer than 50 years away.

The preposterous fear of nuclear waste from power plants – which is held in containers where it harms nobody – is hyped, while poorly-contained waste

from other energies is ignored. Waste from heavily-subsidized fossil fuels is spewed in the air freely. About 20,000 people per day die of outdoor and indoor air pollution – much of that pollution being waste from fossil fuel combustion. People drop like flies from that pollution – more than are killed by pandemics and wars combined – but politicians pay little heed.

Even 2nd generation nuclear power plants can be operated safely. The one serious accident in the U.S. – at Three-Mile Island – caused no deaths. Modern nuclear reactors that shut down in case of an anomaly and cool the nuclear fuel without need for external power are our safest energy. Neither the Chernobyl nor Fukushima accidents would have occurred with modern nuclear power.

Passive safety features are available that allow reactor shutdown and cooling without external power or operator intervention.

[James Hansen: Planet.Chapter47]

14.3 Fusion - ITER

ITER was set in motion at the Geneva Superpower Summit in November 1985, when the idea of a collaborative international project to develop fusion energy for peaceful purposes was proposed by General Secretary Gorbachev of the former Soviet Union to US President Ronald Reagan.

The People's Republic of China and the Republic of Korea joined the Project in 2003, followed by India in 2005. Selecting a location for ITER was a lengthy procedure that was concluded in 2005, when the ITER Members unanimously agreed on the site proposed by the European Union. The ITER installation would be built near Aix-en-Provence in southern France.

More than 200 tokamaks around the world have paved the way to the ITER experiment.

Conceived as the last experimental step to prove the feasibility of fusion as a large-scale and carbon-free source of energy, ITER will be the world's largest tokamak, with ten times the plasma volume of the largest tokamak operating today.

ITER

15

Renewable

Solar and wind potential is far higher than that of fossil fuels and can meet global energy demand many times over, unlocking huge benefits for society.

With current technology and in a subset of available locations we can capture at least 6,700 PWh p.a. from solar and wind, which is more than 100 times global energy demand. Opportunities unlocked

The collapse in renewable costs in the last three years means that half of this solar and wind technical potential now has economic potential, and by the end of the decade it will be over 90%.

The land required for solar panels alone to provide all global energy is 450,000 km², 0.3% of the global land area of 149 million km². This differs by country as highlighted below.

carbonTracker

16

Solar

16.1 Software drives Solar Costs

Software will eat solar: Driving utility-scale solar prices below 1 cent per kilowatt-hour by 2025

Terabase Energy is on a mission to get utility-scale solar power prices below \$0.01 per kWh by 2025 using software, as opposed to the DOE's hardware strategy.

Terabase Energy is on a mission to drive down utility-scale solar power prices to less than \$0.01 per kilowatt-hour by 2025, by using software, automation and modeling to optimize power-plant operation. The VC-funded startup just acquired another startup to help realize that goal.

Terabase's aggressive cost target far exceeds the U.S. DOE's SunShot 2030 goal of \$0.03 per kWh for utility-scale photovoltaics by 2025. The DOE's most recent solar funding went toward hardware improvements in nonsilicon solar approaches such as perovskites, cadmium-telluride thin films and next-generation concentrated solar power. The DOE target cuts the cost of solar energy by 60% within the next 10 years.

But the 82% reduction in solar cost over the last decade (according to the International Renewable Energy Agency) came from economies of scale, better technology and supply chains at largely silicon-based solar plants, not the alternative technologies being funded by the DOE.

And even silicon module pricing might be nearing the bottom of the cost curve: "The era of ever-declining solar module prices is largely behind us," according to Yan Zhuang, president of Canadian Solar's manufacturing operation, as reported in pv magazine. Global commodities such as aluminum and glass are a larger part of the solar module bill of materials. Software is eating solar

It's software, not hardware, that's going to drive down utility-scale solar costs,

according to Terabase, a startup that closed a \$6 million Series A round late last year and has already made a small acquisition to further develop its platform. Terabase just acquired REPlant Solutions, a spinout of First Solar that makes solar power plant controls and has developed a 1.5-kilovolt direct-current (DC) architecture and a DC trunk bus.

REPlant's plant controller operates the solar power plant, acting as the ring-master in an increasingly complicated process.

Matt Campbell, Terabase CEO, tells Canary Media: "In the future...PV plants will become even more demanding, requiring sophisticated plant controls, the integration of storage, and hybridization with wind and other forms of generation." The acquisition of REPlant adds advanced supervisory control and data acquisition (SCADA) and other controls systems to Terabase's toolbox.

REPlant has an installed base of more than 10 gigawatts across 80 solar plants.

Big solar is more manufacturing than construction

While solar hardware has gotten cheaper, soft costs are still stubborn and represent a more significant piece of the total project cost (a similar situation to the residential and commercial solar segments).

"We have to keep fighting to reduce the cost," said Campbell. "There's a big difference between solar at 1 cent per kWh versus 1.5 cents per kWh."

In an earlier interview, Campbell said that he wants to eliminate the construction mindset: "Utility-scale solar is more manufacturing than construction, with tens of thousands of identical units. It's not complex like a dam. It's just big. [...] It needs to be managed like row-crop farming and more of a modern, integrated supply chain. Most projects are still managed on Excel spreadsheets."

The way to get to super-cheap solar, according to the CEO, is with smart software "across the whole life cycle" — from procurement, to oversight of construction, to operations — "all on a common interconnected digital platform."

Terabase recently provided digital and engineering services for the 800-megawatt Siraj-1 solar power plant in Qatar, which will sell its power for \$0.01449/kWh. (These low utility-scale solar cost numbers tend to happen in global markets with lower labor costs than the U.S.)

CanaryMedia: Software drives Solar

16.2 Efficiency

Stevenson

To make a really efficient device, it is tempting to pick a material that absorbs all the Sun's radiation – from the high-energy rays in the ultraviolet, through to the visible, and out to the really long wavelengths in the infrared. That

approach might lead you to build a cell out of a material like mercury telluride, which converts nearly all of the Sun’s incoming photons into current-generating electrons. But there is an enormous price to pay: each photon absorbed by this material only produces a tiny amount of energy, which means that the power generated by the device would be pitiful.

A better tactic is to pick a semiconductor with an absorption profile that optimizes the trade-off between the energy generated by each captured photon and the fraction of sunlight absorbed by the cell. A material at this sweet spot is gallium arsenide (GaAs). Also used in smartphones to amplify radio-frequency signals and create laser-light for facial recognition, GaAs has long been one of the go-to materials for engineering high-efficiency solar cells. These cells are not perfect, however – even after minimizing material defects that degrade performance, the best solar cells made from GaAs still struggle to reach efficiencies beyond 25%.

Further gains come from stacking different semiconductors on top of one another, and carefully selecting a combination that efficiently harvests the Sun’s output. This well-trodden path has seen solar-cell efficiencies climb over several decades, along with the number of light-absorbing layers. Both hit a new high last year when a team from the National Renewable Energy Laboratory (NREL) in Golden, Colorado, unveiled a device with a record-breaking efficiency of 47.1% – tantalizingly close to the 50% milestone (*Nature Energy* 5 326). Until then, bragging rights had been held by structures with four absorbing layers, but the US researchers found that six is a “natural sweet spot”, according to team leader John Geisz.

Getting this far has not been easy, because it is far from trivial to create layered structures from different materials. High-efficiency solar cells are formed by epitaxy, a process in which material is grown on a crystalline substrate, one atomic layer at a time. Such epitaxial growth can produce the high-quality crystal structures needed for an efficient solar cell, but only if the atomic spacing of each material within the stack is very similar. This condition, known as lattice matching, restricts the palette of suitable materials: silicon cannot be used, for example, because it is not blessed with a family of alloys with similar atomic spacing.

Devices with multiple materials – referred to as multi-junction cells – have traditionally been based on GaAs, the record-breaking material for a single-junction device. A common architecture is a triple-junction cell comprising three compound semiconductors: a low-energy indium gallium arsenide (InGaAs) sub-cell, a medium-energy sub-cell of GaAs and a high-energy sub-cell of indium gallium phosphide (InGaP). In these multi-junction cells, current flows perpendicularly through all the absorbing layers, which are joined in series. With this electrical configuration, the thickness of every sub-cell must be chosen so that all generate exactly the same current – otherwise any excess flow of electrons would be wasted, reducing the overall efficiency.

Stevenson

17

Wind

17.1 Icing

Icing can cost wind turbines up to 80% of power production

Wind turbine blades spinning through cold, wet conditions can collect ice nearly a foot thick on the yard-wide tips of their blades.

That disrupts blade aerodynamics. That disrupts the balance of the entire turbine. And that can disrupt energy production by up to 80 percent.

TechExplore

17.2 Bladeless

David Yáñez, the inventor of Vortex Bladeless, based just outside Madrid, has pioneered a turbine design that can harness energy from winds without the sweeping white blades considered synonymous with wind power.

The design recently won the approval of Norway's state energy company, Equinor, which named Vortex on a list of the 10 most exciting startups in the energy sector. Equinor will also offer the startup development support through its tech accelerator programme.

The bladeless turbines stand at 3 metres high, a curve-topped cylinder fixed vertically with an elastic rod. To the untrained eye it appears to waggle back and forth, not unlike a car dashboard toy. In reality, it is designed to oscillate within the wind range and generate electricity from the vibration.

The turbine is no danger to bird migration patterns, or wildlife, particularly if used in urban settings. For the people living or working nearby, the turbine would create noise at a frequency virtually undetectable to humans.

Vortex is not the only startup hoping to reinvent wind power. Alpha 311, which began in a garden shed in Whitstable, Kent, has begun manufacturing a small vertical wind turbine that it claims can generate electricity without wind.

The 2 metre turbine, made from recycled plastic, is designed to fit on to existing streetlights and generate electricity as passing cars displace the air.

Perhaps the most ambitious divergence from the standard wind turbine has emerged from the German startup SkySails, which hopes to use an airborne design to harness wind power directly from the sky.

SkySails makes large fully automated kites designed to fly at altitudes of 400 metres to capture the power of high-altitude winds. During its ascent the kite pulls a rope tethered to a winch and a generator on the ground. The kite generates electricity as it rises into the sky and, once completely unspooled, uses only a fraction of the electricity generated to winch back towards the ground.

Today, the design can generate a maximum capacity of 100 to 200 kilowatts, but a new partnership with the German energy firm RWE could increase the potential output from kilowatts to megawatts. A spokesperson for RWE said the pair are currently looking for the ideal kite-flying site in the German countryside.



Guardian

18

Varia

18.1 US Legislation

Clips from ‘Volts’:

Congress in December 2020 passed an enormous \$900 billion coronavirus relief bill attached to an enormous \$1.4 trillion omnibus spending bill, adding up to a super-enormous \$2.3 trillion megabill — at 5,593 pages, the longest bill Congress has ever passed. Buried in that megabill is the most substantial energy legislation passed in the US in over a decade.

The legislation will include a bill that would sign the US on to the Kigali Amendment to the Montreal Protocol, which would reduce the use of hydrofluorocarbons (HFCs) by 85% over 15 years. HFCs (used in air-conditioning, refrigerants, aerosols, etc.) are potent greenhouse gases, so full international implementation of the amendment is projected to avoid 0.5°C worth of warming all on its own.

Nuclear power and carbon capture, utilization, and storage (CCUS) get the bulk of the funds.

There’s a ton of stuff on innovation, not only funding specific RDD&CA programs, but making more structural changes like establishing an Office of Technology Transitions in DOE and authorizing DOE to support regional clean-energy labs and incubators. There’s also a focus on funding demonstration and commercialization programs and technology transfer programs to accelerate innovation.

It authorizes the Federal Energy Regulatory Commission (FERC) “to compensate persons with scientific, technological, engineering, and mathematical skills at a higher level than the rate allowed under the civil service.” This is nifty because FERC cases are incredibly important to the future of the electricity system, and big utilities can afford to hire high-priced experts to testify; this gives FERC more ability to hire its own experts.

US Pandemic/Climate Energy Bill (Volts)

19

Energy Use

James Hansen obviously has not confidence in renewables

China and India have large, growing economies that depend on fossil fuels, especially coal. They are also global leaders in producing and installing renewable energies. Their enthusiasm for renewables is whetted by the opportunity to be global suppliers of renewable materials such as solar panels. Their own use of renewables is extensive and growing, but there is no realistic expectation that renewables will displace the need for baseload electric power.

Phase-out of fossil fuels in electricity production likely requires large expansion of renewable energies and at least a doubling or quadrupling of global nuclear power.

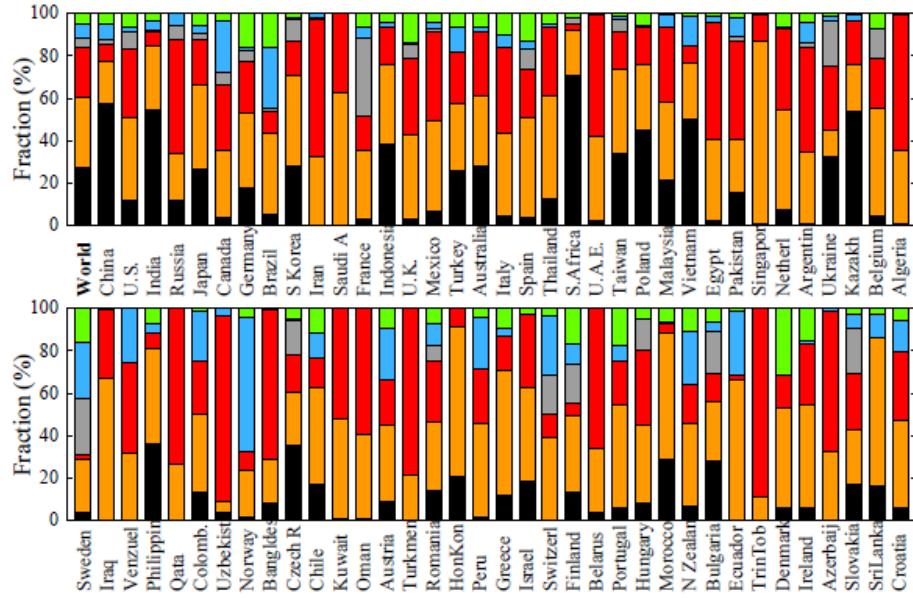


Fig. Energy consumption (percent) in 2019 by fuel in world and 71 nations: BP data (black = coal, orange = oil; red = gas; gray = nuclear; blue = hydro; green = renewable). [Source:James Hansen: Planet Ch47]

19.1 Energy Efficiency

19.1.1 Rebound effect

Rebound effect = Jevons Paradox

Lange

Literature on the rebound phenomenon has grown significantly over the last decade. However, the field is characterized by diverse and ambiguous definitions and by substantial discrepancies in empirical estimates and policy proposals. As a result, cumulative knowledge production is difficult. To address these issues, this article develops a novel typology. Based on a critical review of existing classifications, the typology introduces an important differentiation between the rebound mechanisms, which generate changes in energy consumption, and the rebound effects, which describe the size of such changes. Both rebound mechanisms and rebound effects can be analytically related to four economic levels – micro, meso, macro and global – and two time frames – short run and long run. The typology is populated with eighteen rebound mechanisms from the literature. This contribution is the first that transparently describes its criteria and methodology for developing a rebound typology and that gives clear definitions of all terms involved. The resulting rebound typol-

ogy aims to establish common conceptual ground for future research on the rebound phenomenon and for developing rebound mitigation policies.

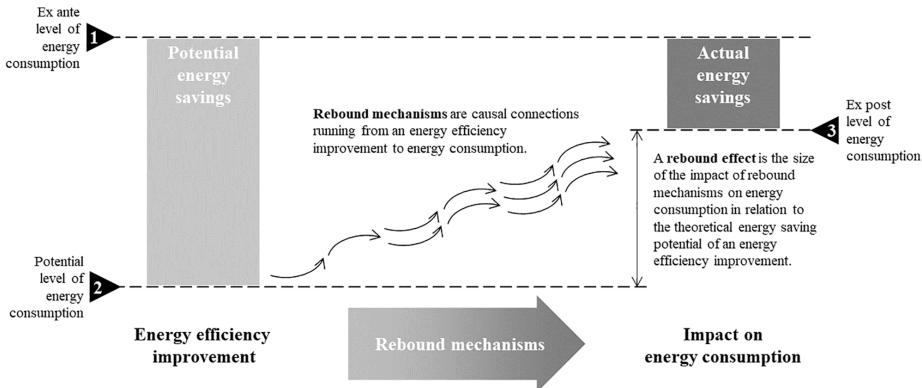


Figure: The relationship between energy efficiency improvements, rebound mechanisms and rebound effects. This figure presents the definitions and illustrates the conceptual distinction between rebound mechanisms and rebound effects. The size of the rebound effect is defined by the relationship between three levels of energy consumption: 1) “ex ante”, i.e. before the efficiency improvement, 2) “potential”, i.e. theoretically possible due to the efficiency improvement, and 3) “ex post”, i.e. actually realized by the efficiency improvement. Actual savings can be negative in case of backfire. Rebound mechanisms link the energy efficiency improvement to its actual impact on energy consumption.

While there are a variety of existing classifications of rebounds effects, few articles have focused on developing coherent and transparent typologies. This paper aims to advance the foundations of such a typology by systematically building on existing typologies and being clear in its definitions and its development. We see our attempt as a step towards developing a shared typology as envisaged by Dunlop [3]. A possible next step would be to challenge or advance this typology by attempting to incorporate non-economic rebound mechanisms and to see in how far and in what ways it would need to be adjusted. It is our hope that the transparency of our approach will provoke further critical debate within the community, at the end of which some form of agreed typology could emerge.

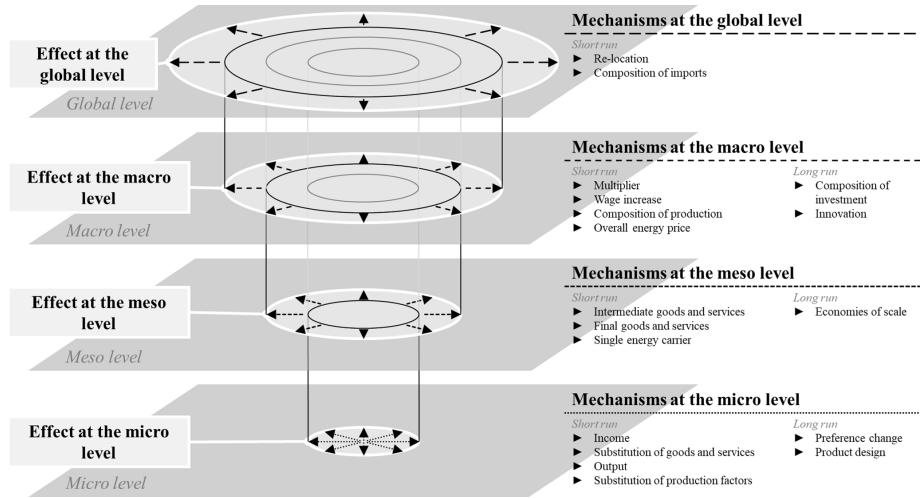



Figure: Rebound effects and mechanisms at different economic levels and time frames. This figure provides an overview of the central categories in our typology. Four stacked analytical levels on which the rebound effect can be measured are distinguished. At each level, several rebound mechanisms, which are represented by the arrows, cause an increase in energy consumption. The respective types of mechanisms are categorized into short run and long run mechanisms. The connecting lines between the levels indicate that the rebound effect at a lower level is part of the rebound effect at a higher level.

Lange (2021) Jevons Unravelled (pdf)

19.2 Urbanization

Fix (twitter)

Are cities sustainable? A loaded question, yes. But one we should think about nonetheless. Here's an undeniable fact: urbanization correlates strongly with energy use per person.

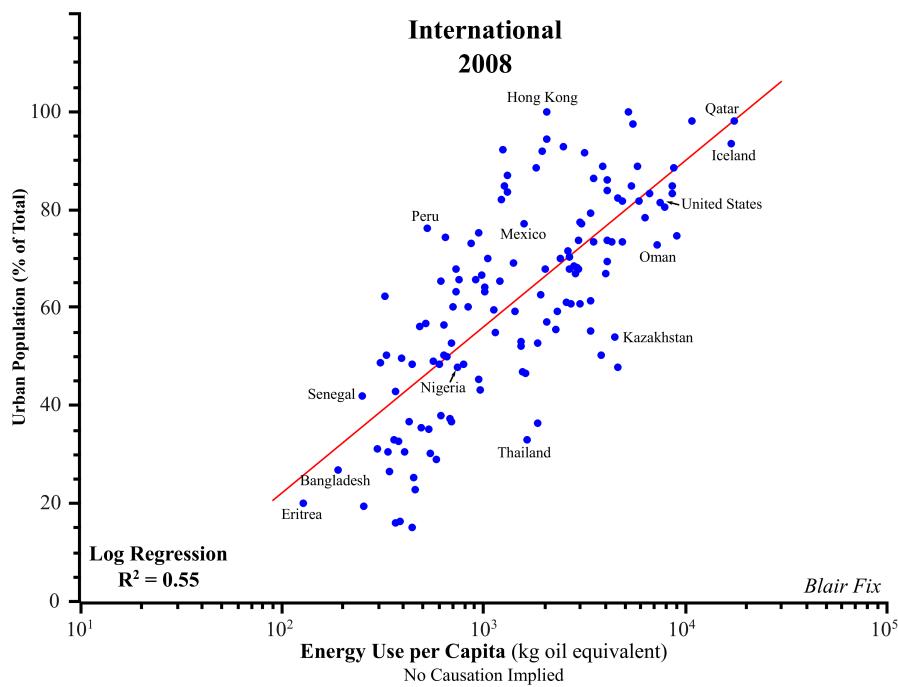

20

Energy Poverty

Without cheap, safe, low-carbon energy sources at scale we are stuck between the alternatives of high greenhouse gas emissions and energy poverty.

The world lacks safe, low-carbon, and cheap large-scale energy alternatives to fossil fuels. Until we scale up those alternatives the world will continue to face the two energy problems of today. The energy problem that receives most attention is the link between energy access and greenhouse gas emissions. But the world has another global energy problem that is just as big: hundreds of millions of people lack access to sufficient energy entirely, with terrible consequences to themselves and the environment.


The richest 1% in the EU emit on average 43 tonnes of CO₂ annually – 9-times as much as the global average of 4.8 tonnes. The problem is larger for the extremely rich.

The only countries that have emissions that are close to zero are those where the majority suffers from energy poverty.

Roser (2021) The World's Energy Problem

21

Carbon intensity of Energy

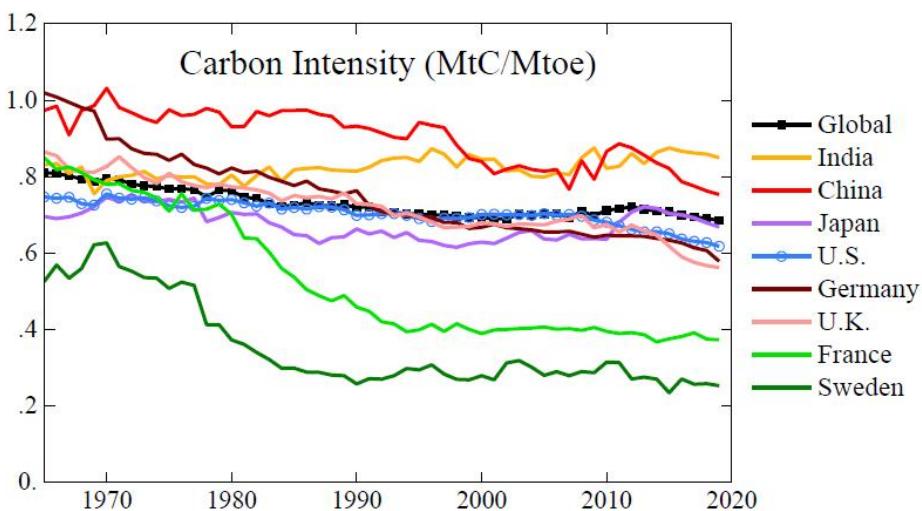

That chart – fossil fuel carbon (GtC) emitted per unit energy (Gt of oil equivalent) – is arguably the best summary of how well the world is doing in moving to carbon-free energy. Atmospheric CO₂ may approximately stabilize when we reach a carbon intensity near 0.25, but carbon intensity must be closer to zero to draw down atmospheric CO₂ and cool Earth to a level that stabilizes ice sheets and terminates tundra melt. Unfortunately, global carbon intensity remains stubbornly high – almost 0.7 – in part because emerging economies, such as China and India, get much of their energy from coal. Moreover, progress in reducing carbon intensity is inadequate in most nations worldwide. Sweden is a notable exception. How did Sweden do it? Once, when a Swedish minister showed a graph similar to Fig. 47.5, I asked how they achieved the rapid drop of carbon emissions between the mid-1970s and mid-1980s? The answer: “we introduced combined heat and power.” Wonderful! This suggests that if we get

the rest of the world to adopt combined heat and power, the global warming problem will be almost solved. Eh, not so much. A Swedish engineer told me that the main reason was that Sweden completed 10 nuclear power plants in that decade. I interpreted the conflicting answers as a difference between scientists and ministers. The scientist looks at numbers and facts objectively, while the minister bears politics in mind, and the Swedish government had become quite anti-nuclear. Both answers were true, but the minister was misleading – hiding the crucial information.

[James Hansen: *Sophies Planet Ch.47*]

22

Rebound Effect

First, note that when an energy service becomes more efficient, it also becomes less expensive. Say I trade in my old car in for a Prius, which is 20 percent more fuel efficient. Among other things, that means I spend (roughly) 80 percent what I used to spend to drive how much I used to drive.

That's money in my pocket I didn't have before. What do I do with it?

One thing I might do with it is buy more gas, i.e., drive more. In other words, I might respond to the lower cost of an energy service by increasing my demand for the service. The amount of primary energy I use for driving, which fell when I bought my Prius, would rebound back upward. That is the direct rebound effect.

Or, I might use the extra money to, say, buy an iPad. Thing is, manufacturing and operating an iPad requires energy. So even if the energy I devote to driving drops, my total energy use could rebound back upward. That is the indirect rebound effect.

(The same basic story applies to businesses. If their energy costs go down through energy efficiency, they invest some of the savings in more production, thus bumping their energy use back up.)

Stepping back, there's the question of economy-wide rebound effects. If we drive energy efficiency across the entire economy, then we lower what's called the energy intensity of the economy, that is, how much primary energy it takes to get a unit of GDP. When the economy as a whole is more energy efficient, it takes less energy to create wealth.

What is the macroeconomic effect of a drop in energy costs? The same effect we'd expect from a drop in labor costs or capital costs: faster growth. And insofar as stimulating growth means increasing energy use, that will wipe out some of the energy-saving gains of the efficiency.

David Roberts

23

Fossil Subsidies

This paper estimates the financial benefits accruing to fossil fuel producers (i.e., the producer incidence) that arise because of implicit fossil fuel subsidies in the United States. The analysis takes account of coal, natural gas, gasoline, and diesel, along with the implicit subsidies due to externalized environmental damages, public health effects, and transportation-related costs. The direct benefit to fossil fuel producers across all four fuels is estimated at \$62 billion per year, a sum calculated due to the higher price that suppliers receive because of inefficient pricing compared to the counterfactual scenario where environmental and public health externalities are internalized. A significant portion of these benefits accrue to relatively few companies, and specific estimates are provided for companies with the largest production. The financial benefit because of unpriced costs borne by society is comparable to 18% of net income from continuing domestic operations for the median natural gas and oil producer in 2017–2018, and it exceeds net income for the majority of coal producers. The results clarify what the domestic fossil fuel industry has at stake financially when it comes to policies that seek to address climate change, adverse health effects from local pollution, and inefficient transportation.

Producer Incidence

The producer benefits of interest—i.e., the producer incidence (PI)—are based on the higher price that suppliers receive because of inefficient pricing compared to the counterfactual scenario where environmental and public health externalities are internalized. The direct financial benefit to fossil fuel producers of inefficient pricing across all four fuels is estimated at \$62 billion per year on average, representing 11% of the total annual subsidy of \$568 billion. The total subsidy is equivalent to an average of 3% of US Gross Domestic Product and equals the estimated value of the environmental, public health, and transportation-related externalities on an annual basis. To be clear, the focus here is not on direct subsidy payments that reduce the costs of fossil fuels, but rather on the implicit

subsides that arise because of inefficient pricing that gives rise to social costs (1, 2, 6). While direct subsidy payments are common in many countries (7–9), they are not in the United States.

This paper also makes two methodological contributions to the literature on fossil fuel subsidies. First is a generalization and implementation of the standard International Monetary Fund (IMF) framework to separately estimate the PI and consumer incidence (CI). A key feature of existing studies—which focus on economic efficiency, environmental and health impacts, and government revenues—is the simplifying assumption of perfectly elastic supply. This implicitly assumes away fundamental concerns about the extent to which the fossil fuel industry benefits from subsidies and may therefore seek to prevent reform. The approach taken here uses empirically based estimates of supply elasticities to examine distributional implications, with a focus on PI.

Conceptual Framework

Implicit fossil fuel subsidies represent a hybrid of the standard tax and subsidy scenarios. This follows because externality-based, fossil fuel subsidies arise because of failure to implement efficient pricing, which confers an implicit subsidy. While different mechanisms are possible to establish efficient pricing, the most straightforward to illustrate the key points is Pigouvian taxation. Consider the market for a particular fossil fuel, characterized by the supply and demand curves in Fig. 1A. The initial equilibrium occurs at price p' and quantity Q' , which is not efficient because of external costs in the form of environmental damages and adverse health effects. Assume for simplicity that the marginal external costs, denoted MEC, are constant. A Pigouvian tax equals the MEC and places a wedge between the supply and demand curves. If implemented, the Pigouvian tax would establish the efficient quantity Q^* as the equilibrium and the prices buyers pay and sellers receive as p_b^* and p_s^* , respectively.

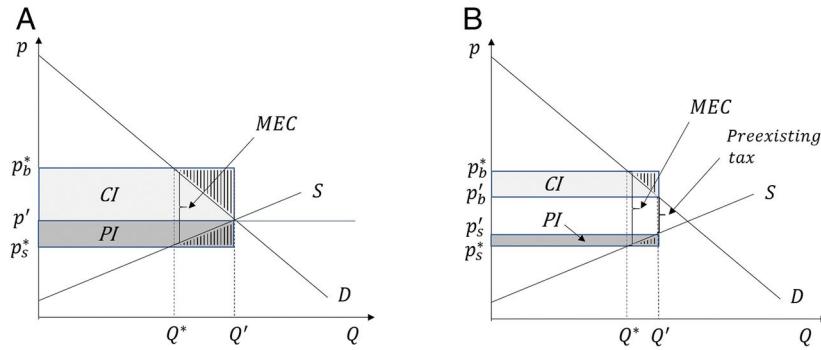


Figure: The PI and CI of an implicit fossil fuel subsidy. MEC represents the marginal external cost associated with each unit of Q . (A) The presence of no preexisting tax is assumed. The total implicit subsidy is the area $MEC \times Q'$. The incidence measures capture the gain in producer and consumer surplus from inefficient pricing, i.e., the respective shaded areas excluding the vertically hashed area.

triangles. (B) A case with a preexisting tax; the net corrective tax is the difference between the MEC and the preexisting tax.

The implicit fossil fuel subsidy is defined as the sum of all shaded areas in Fig. 1A; i.e., the rectangle equal to $MEC \times Q'$. This is an effective subsidy because it represents real costs borne by society—through environmental damages and adverse public health effects or foregone tax revenue—but not reflected in the market (1, 10). Of central interest here is the way that the total subsidy differentially benefits consumers and producers (i.e., the measures of incidence). The CI captures the change in net benefits to consumers (i.e., consumer surplus) because of the lower price they pay, and the PI captures the change in net benefits to producers (i.e., producer surplus) because of the higher price they receive. These measures are illustrated in Fig. 1A as the shaded areas labeled CI and PI, respectively, which do not include the vertically hashed triangles. The two regions represent the net gain to consumers and producers of maintaining inefficient pricing.

Previous research nevertheless implicitly assumes the PI is zero, which follows because of the simplifying assumption of perfectly elastic supply (1, 2, 6, 8–10). The assumption is reasonably motivated in previous analyses because of the focus on efficiency rather than distributional concerns between producers and consumers. The assumption is also reasonable in cases where the focus is on relatively small countries subject to the global supply of fossil fuels. The assumption does not, however, fully characterize markets in the United States, especially when it comes to coal and natural gas, which are less interconnected in a global market compared to oil. While less is known about supply elasticities compared to those for demand, existing research does provide a basis for informed assumptions that push away from the limiting case of perfect elasticity, especially for the United States.

A final piece of the model to consider is the possibility for preexisting subsidies or taxes. An explicit, preexisting subsidy would be a direct government payment to reduce the producer or consumer costs of fossil fuels, but as mentioned previously, these are not common in the United States. Instead, implicit market subsidies do arise because of existing tax preferences for oil and gas firms, which have been estimated to cost the US government roughly \$4 billion annually in foregone revenue (11). These subsidies are not accounted for in the present analysis because of the focus on nonmarket implicit subsidies. There are, however, preexisting taxes that affect the immediate applicability of Fig. 1A, and these must be taken into account to get an accurate measure of the fossil fuel subsidy in each case. Fig. 1B generalizes the framework to show how existing tax revenue associated with the initial equilibrium at Q' is not included in the overall subsidy. In this case, the implicit subsidy is based on the net corrective tax (i.e., MEC minus the preexisting tax). The measures of incidence differ as shown but still represent the difference in the respective surplus measures.

Overall Producer Incidence

The methodological approach for estimating the incidence of fossil fuel subsidies requires several steps, all of which are described in detail in SI Appendix. First is obtaining price and quantity data for the different fuels. Second is estimating the MEC associated with each fuel. Third is obtaining information on preexisting taxes in order to calculate the net corrective taxes. Fourth is an approach for generating counterfactual prices that would emerge with efficient pricing. Last is obtaining estimates of supply and demand elasticities.

Total Subsidy

The results indicate a total subsidy across all four fuels of \$592 billion in the most recent year, 2018. This number represents the external costs borne by society or foregone government revenue from inefficient pricing. Included in the external costs is the value of climate damages reflected in the social cost of carbon and adverse health effects from local pollution (SI Appendix, Fig. S1). The external costs for gasoline and diesel also include the value of congestion-based travel delays and accident fatalities, along with wear and tear on the roadways from heavy-duty, diesel fuel vehicles (SI Appendix, Fig. S1).

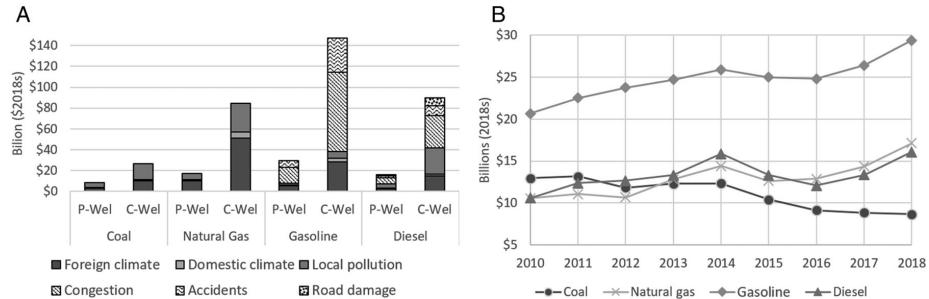


Figure: The PI and CI of the subsidy for all fuels. (A) The measures of PI and CI for all four fuels (coal, natural gas, gasoline, and diesel) for the most recent year, 2018. Data for all other years are available in SI Appendix. Each measure is further partitioned into the underlying externalities, which are proportionally the same between both measures of incidence for each fuel (SI Appendix, Fig. S1). (B) The trend in PI over time for each fuel. While the producer benefits to coal have decreased 33%, those for all other fuels have increased substantially: 42% for gasoline, 52% for diesel, and 63% for natural gas.

Kotchen (2021) Producer Benefits (pdf) SI (pdf)

24

Norway

Energifakta.no



Access to reasonably priced hydropower has shaped energy use in Norway. Everyone has access to electricity, which is used for more purposes than in most other countries. Norway has a large energy-intensive manufacturing sector, and electricity is much more widely used to heat buildings and water than in other parts of the world. Because such a large proportion of electricity is produced from renewable sources, greenhouse gas emissions associated with stationary energy use are low in Norway.

Norway's population has risen by nearly 1 million since 1990 - 22.3%.


1990: 4.241.473
2015: 5.188.607

Strong economic growth has resulted in a doubling of GDP since 1990. Both production of and demand for goods and services that use energy are growing steadily. However, final energy consumption has risen by only 16 %, so that the Norwegian economy has become gradually less energy-intensive.


Energifakta.no

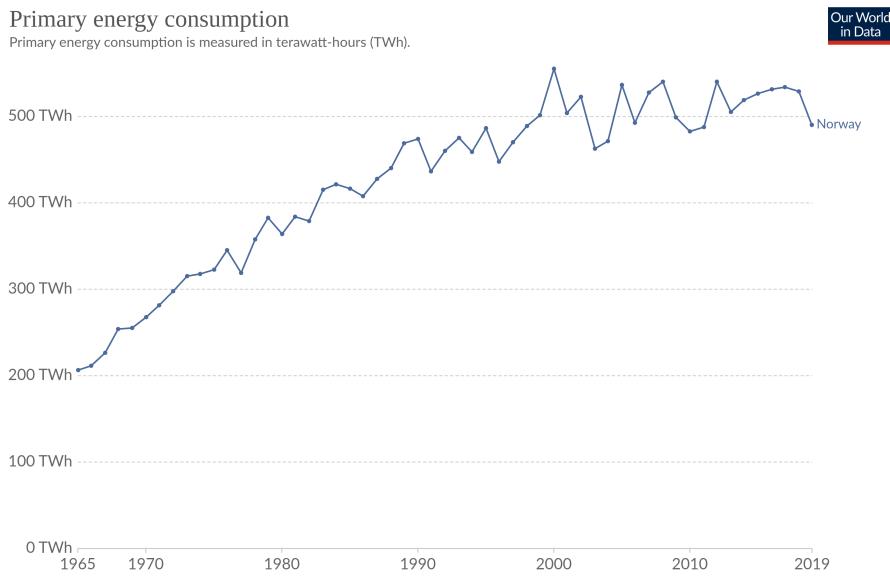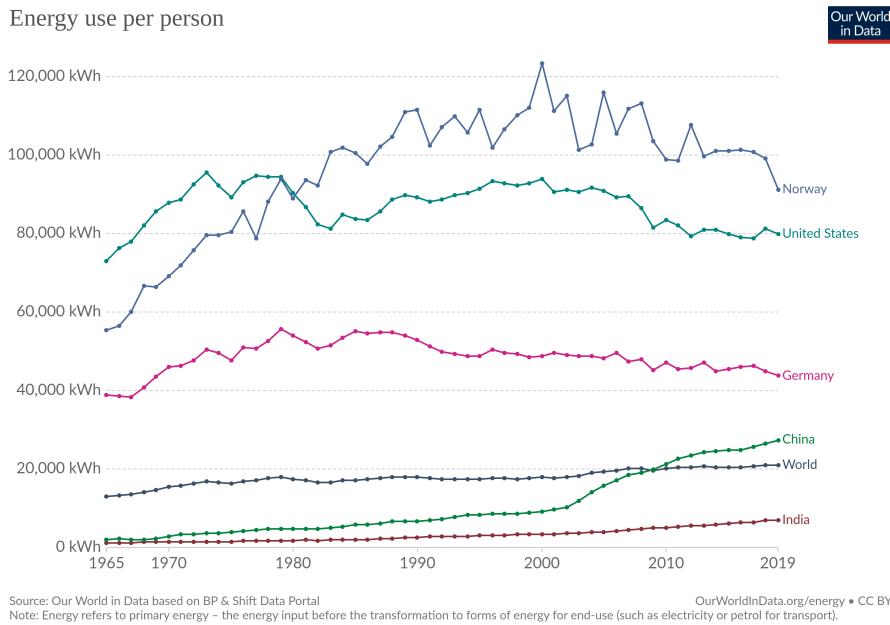

Our World in Data 500 Twh
SB 250 Twh

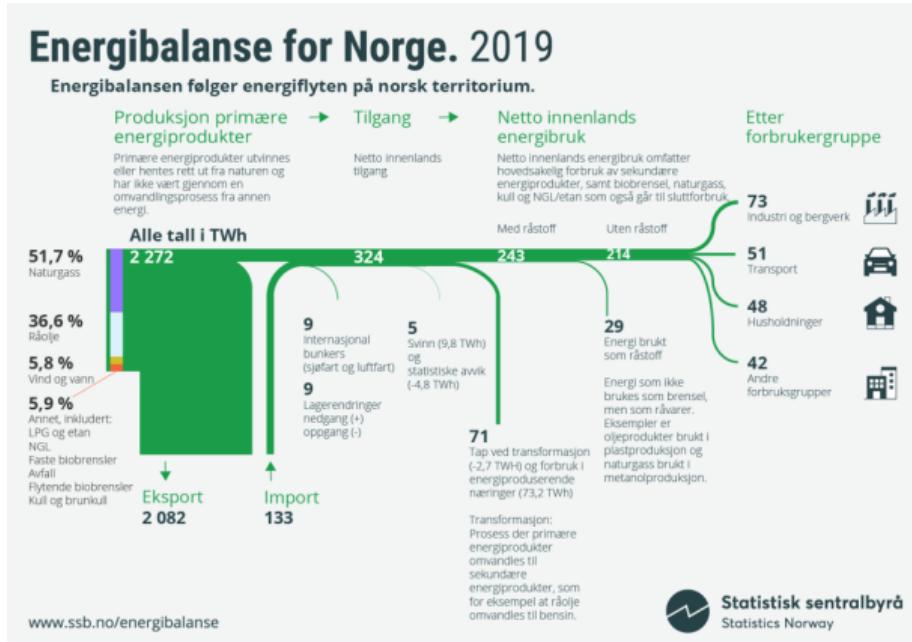

Source: SSN

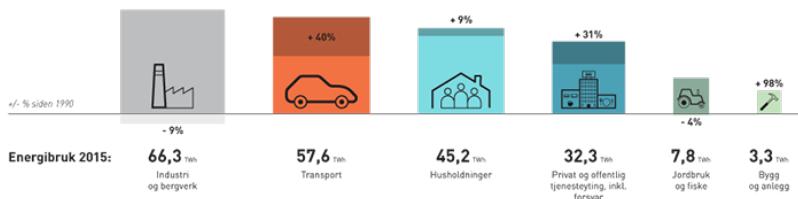

“Energy use refers to use of primary energy before transformation to other end-use fuels, which is equal to indigenous production plus imports and stock changes, minus exports and fuels supplied to ships and aircraft engaged in international transport.”

Conversion: Kilo of oil equivalent unit juggler

1 koe = 11.63 kWh

Worldbank/IEA/OECD: Norway 2015 : 5818 koe = 67663 kWh per capita
Our World in data : Norway 2015 : 101181 kWh per capita

Wikipedia: Energi i Norge

Part I

Appendices

Appendix A

About



Dyre Haugen and Dyrehaugen is Webian for *Jon Martin* - self-owned Globian, Webian, Norwegian and Canarian with a background from industrial research policy, urban planning and economic development consulting on global, regional and urban scales. I am deeply concerned about the (insane) way humanity (i.e. capitalism) interfere with nature. In an effort to gain insights in how and why this happens stuff is collected from around the web and put together in a linked set of web-sites. The sites are operated as personal notebooks. However, these days things can be easily published to the benefit of others concerned with the same issues. But be aware - this is not polished for presentation or peer-reviewed for exactness. I offer you just to have a look at my ‘work-desk’ as it appears in the moment. Any comment or suggestion can be mailed to dyrehaugen@gmail.com You can follow me on twitter as @dyrehaugen. Thanks for visiting!

Appendix B

Links

Current Dyrehaugen Sites:

- rcap - On Capitalism (loc)
- rclm - On Climate Change (loc)
- recs - On Economics (loc)
- rfin - On Finance (loc)
- rngy - On Energy (loc)
- renv - On Environment (loc)
- rsts - On Statistics (loc)
- rurb - On Urbanization (loc)
- rvar - On Varia (loc)
- rwsd - On Wisdom (loc)

Blogs:

- rde - Blog in English (loc)
- rdn - Blog in Norwegian (loc)

Discontinued:

- jdt - Collection (Jekyll) (loc)
- hdt - Collection (Hugo) (loc)

Not listed:

- (q:) dhe dhn jrw56
- (z:) rcsa rpad rstart

Appendix C

NEWS

C.1 210427 HeatCrete Thermal Storage

Norway-headquartered EnergyNest makes its own branded ThermalBattery product which essentially stores heat in a patented form of concrete, which it has dubbed Heatcrete. A heat transfer fluid (HTF) at high temperatures passes through steel pipes cast into the ‘battery’, in technology that the company claims enables storage of energy at very low CapEx cost, using low-cost materials in a simple design. EnergyNest has previously said the Heatcrete materials can last 30 to 50 years of use without degradation.

An investment worth €110 million (US\$131.5 million) has been agreed by ‘thermal battery’ manufacturer EnergyNest which would make infrastructure equity investor Infracapital its biggest shareholder.

Infracapital’s investment will be used by the thermal energy storage company towards delivering financed turnkey energy storage solutions in a range of international regions,

EnergyNest made its first large-scale deployment in a research and demonstration project in Abu Dhabi with Masdar Institute, a 1MWth system developed between 2013 and late 2015. As with providers of other novel energy storage technologies, the company has been seeking to commercialise its products and offerings over the past few years and claimed that 2020 was its strongest year to date.

In January last year Energy-Storage.news reported that the company was deploying a multi-megawatt solution at a brick making factory in Austria and in June announced a partnership with Siemens Energy to develop commercialised solutions — the pair had already worked together previously at the Abu Dhabi pilot project. A project with Italian energy major Eni at a solar energy plant is

also already underway and another with Norwegian chemical company Yara is in development to produce steam for industrial use.

EnergyStorage

EnergyNest

C.2 210121 “Gas is over”

Europe needs to acknowledge that its future is no longer with fossil fuels, said the President of the European Investment Bank as he presented the bank’s 2020 results on Wednesday (20 January).

“To put it mildly, gas is over,” Dr Werner Hoyer said at a press conference on the EIB’s annual results.

EIB Gas is over