


A




E




Q

aPrehliadky — calibration target T3




Print at 100 % (no fit-to-page), matte paper, mount on a rigid board.
Verify with a caliper: circle centres A-B = 247.00 mm (outer edges 271.00 mm) and the 200 mm scale; enter the value in the app (Target print check). Lay the target flat next to the subject; the circles work from 2 m, the QR is read when passing within ~1 m. Cut-out: ColorChecker Classic Mini.



B

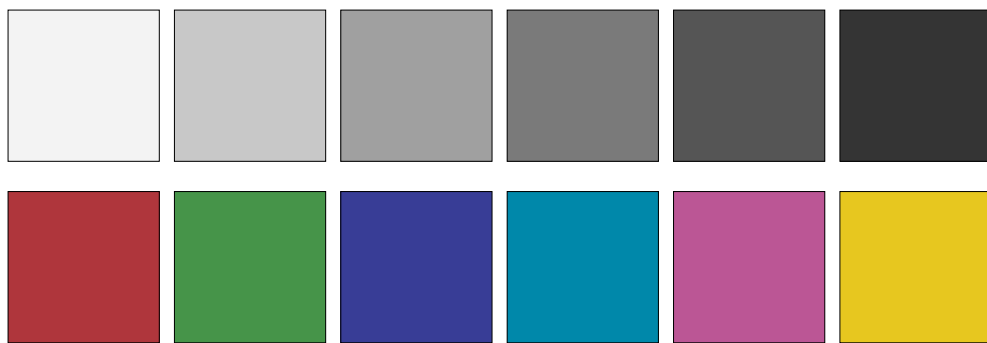

grey patches: 243 · 200 · 160 · 122 · 85 · 52 (sRGB) colour patches: indicative — binding colours come from the ColorChecker in the cut-out

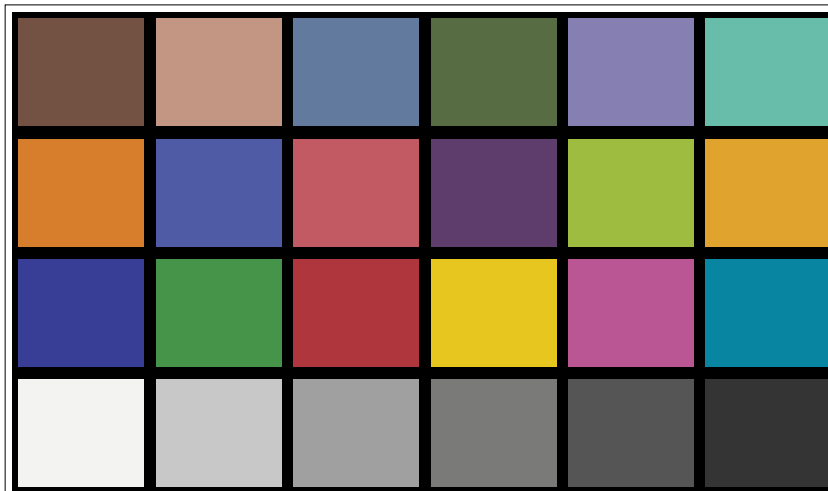



PRINT REFERENCE ONLY — FOR ORIENTATION ONLY — NOT A CERTIFIED ColorChecker. For forensic colour certification insert a genuine X-Rite / Calibrite ColorChecker Classic Mini.

D

Circle centres (mm): A-B 247.00 A-C 294.29 A-D 160.00 A-E 33.00 A-Q 101.43 B-C 160.00 B-D 294.29 B-E 214.00 B-Q 147.98 C-D 247.00 C-E 267.20 C-Q 205.08 D-E 163.37 D-Q 174.50 E-Q 69.12

The app finds the circles in every frame, triangulates their centres in the model and compares the distances with the reference — a model scale independent of LiDAR and of the camera path; the result is in the report and the certificate.



C