





K1_4M_SC4335

Schematic Revision 1.0









Title	Page
COVER	1
SYSTEM-ARCHITECTURE	2
T31-IO_CLK_FLASH_PWR	3
AUDIO_SENSOR_KEY	4
POWER-SUPPLY	5
REVISION-HISTORY	6

1. 4G模块的烧录和debug





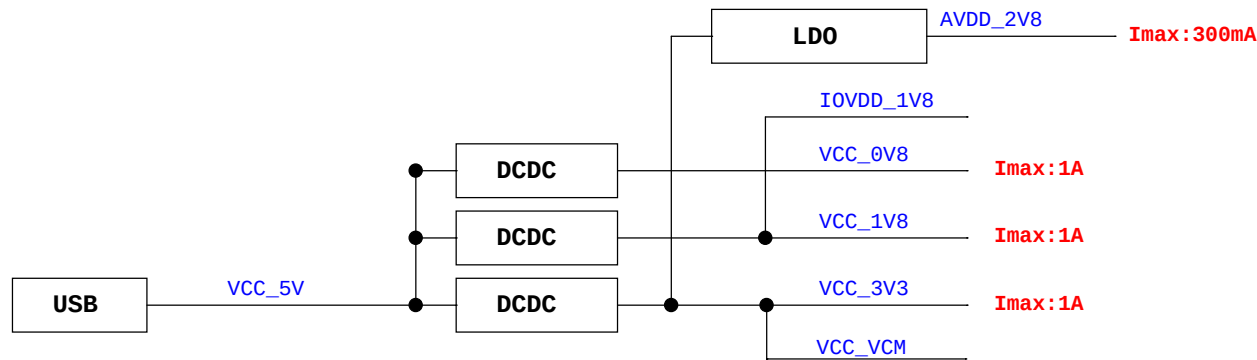
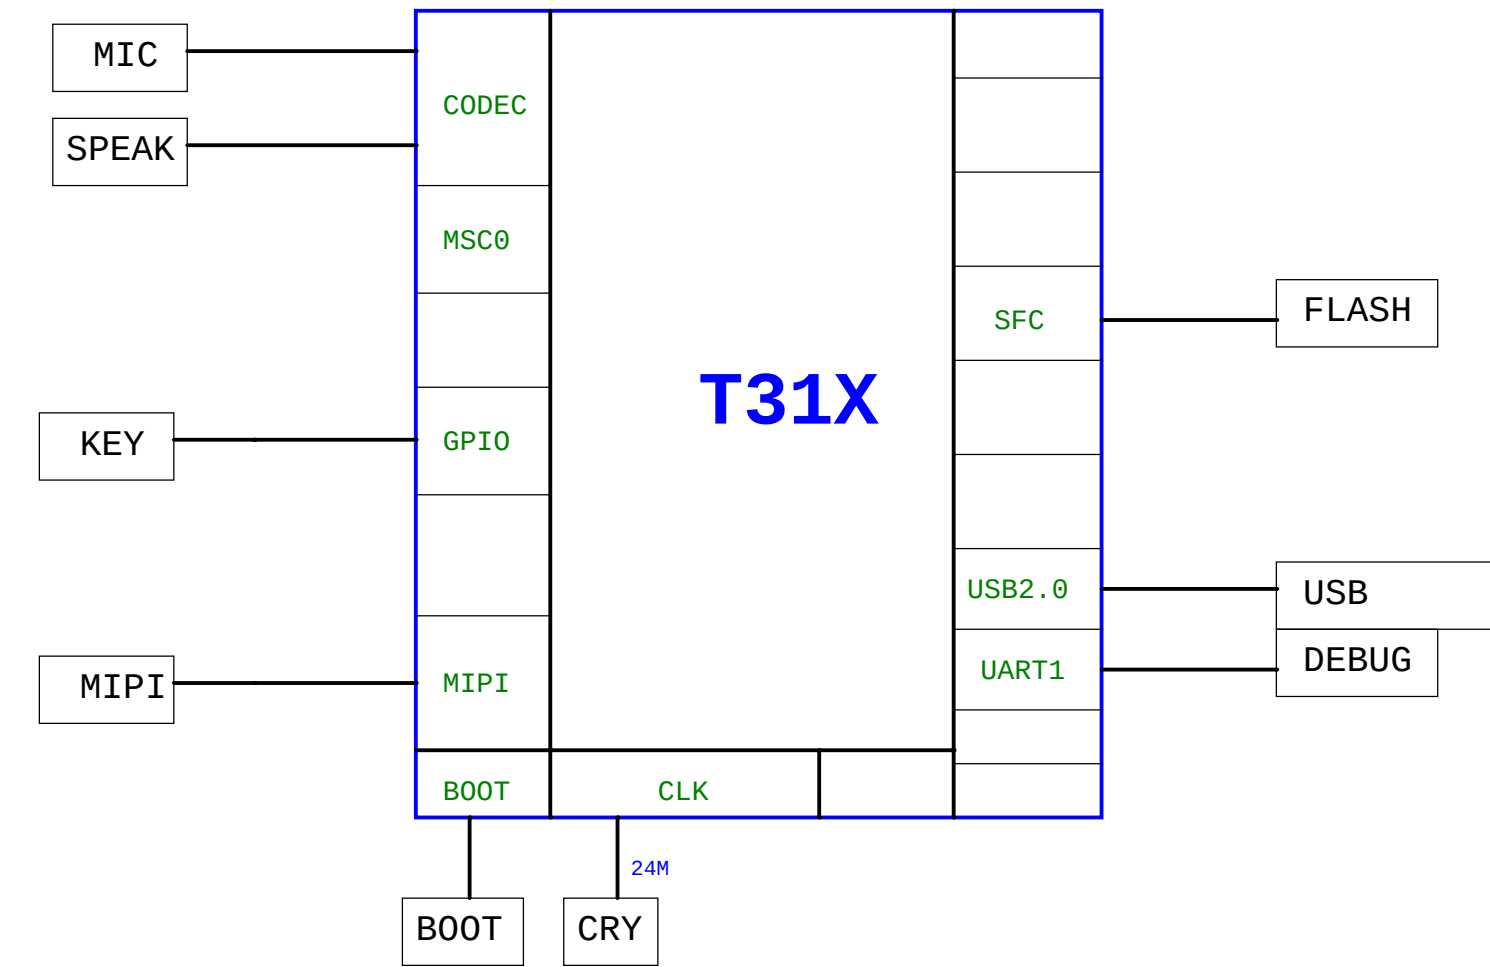


<Core Design>	
 ShenZhen LGS Technology Co.,Ltd 深圳市蓝格仕科技有限公司	
Title: T31X-SYSTEM-ARCHITECTURE	
Model No.: LGS-	Rev: V0
Drawing No.: SCH-XXXX-XX-00	Sheet: 2 of 7
Drawn By: KF.Lam	Date: 2024-04-12
Approved By:	Date:


POWER-SUPPLY

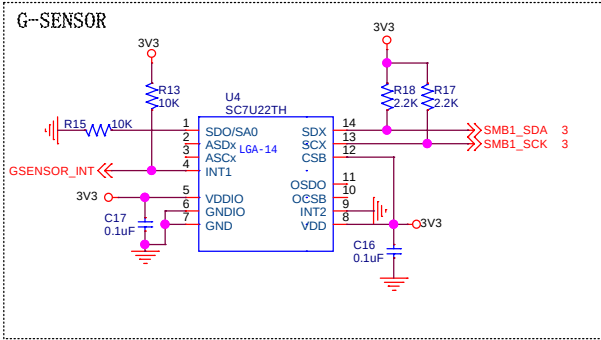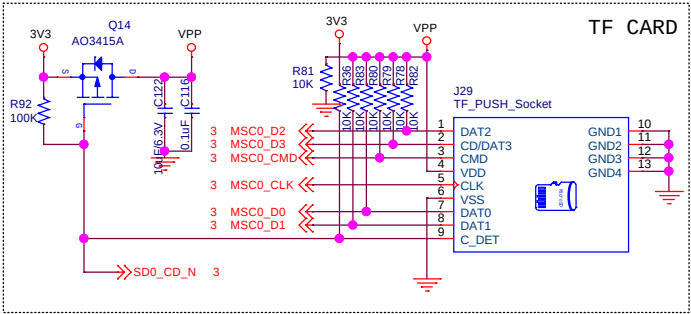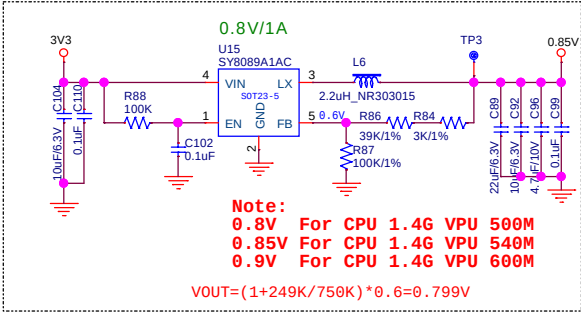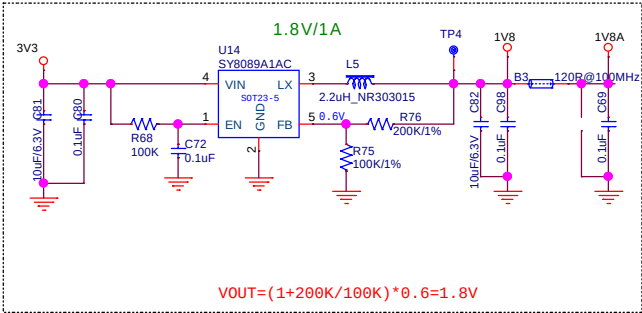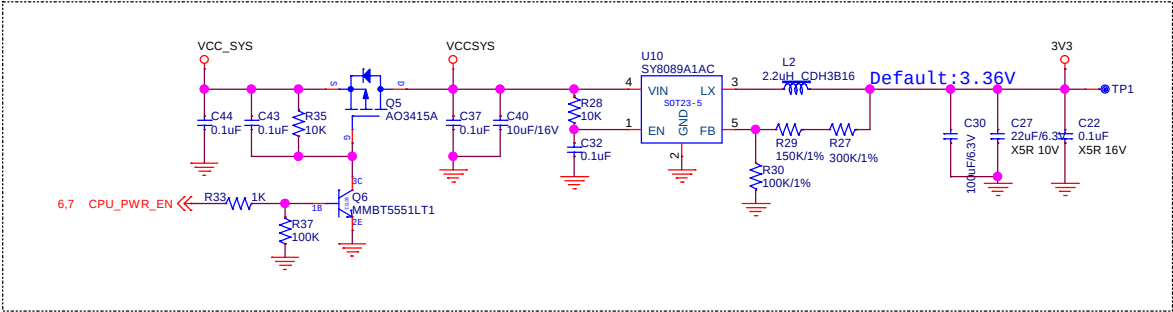

<Core Design>	
ShenZhen LGS Technology Co.,Ltd 深圳市蓝格仕科技有限公司	
Title: T31X-POWER-SUPPLY	
Model No.: LGS-	Rev: v0
Drawing No.: SCH-XXXX-XX-00	Sheet: 5 of 7
Drawn By: KF.Lam	Date: 2024-04-12
Approved By:	Date:

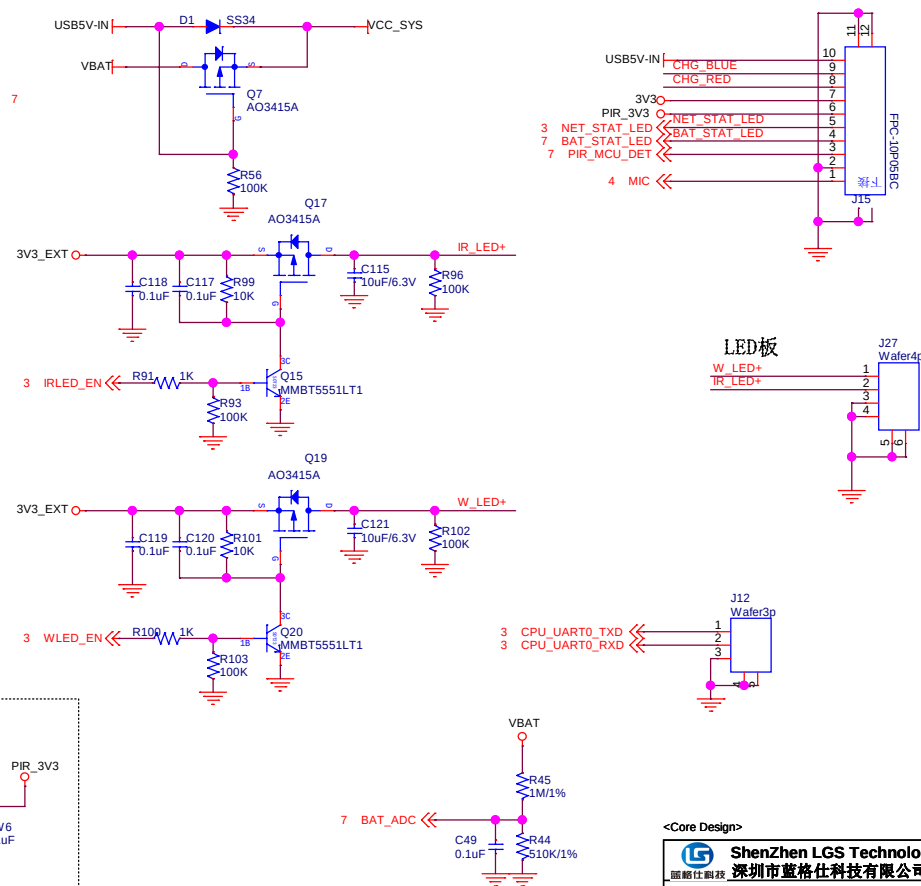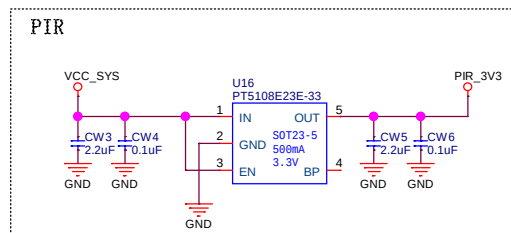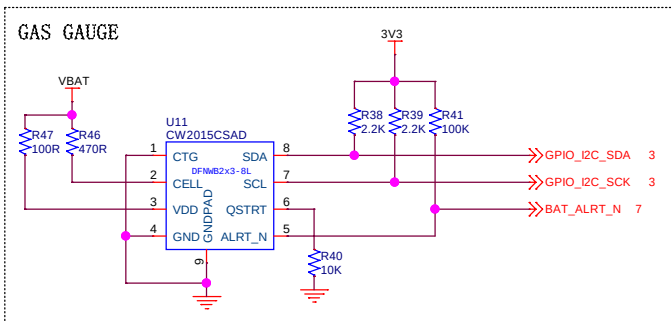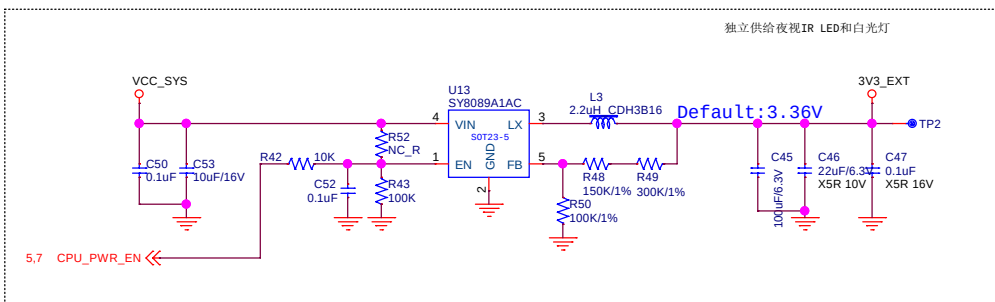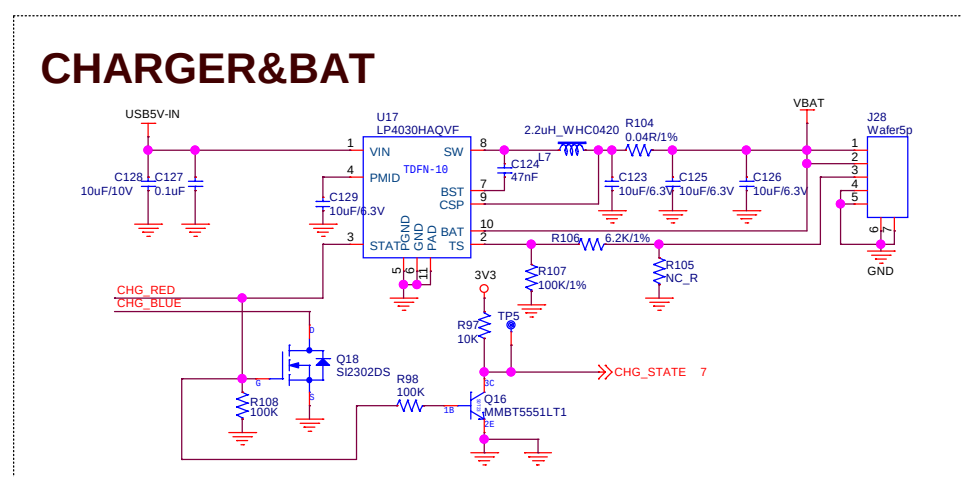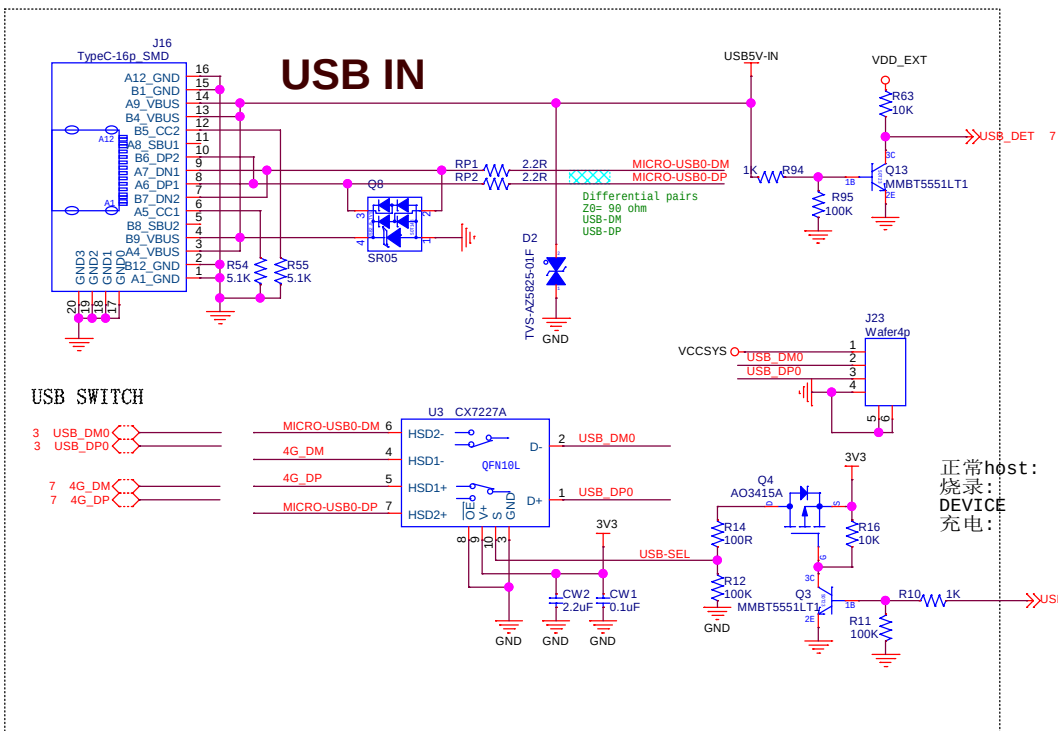

 Shenzhen LGS Technology Co., Ltd 深圳市蓝格仕科技有限公司	
Title: T31X-POWER-SUPPLY	
Model No.: LGS-	Rev: V0
Drawing No.: SCH-XXXX-XX-00	Sheet: 6 of 7
Drawn By: KF.Lam	Date: 2024-04-12
Approved By:	Date:

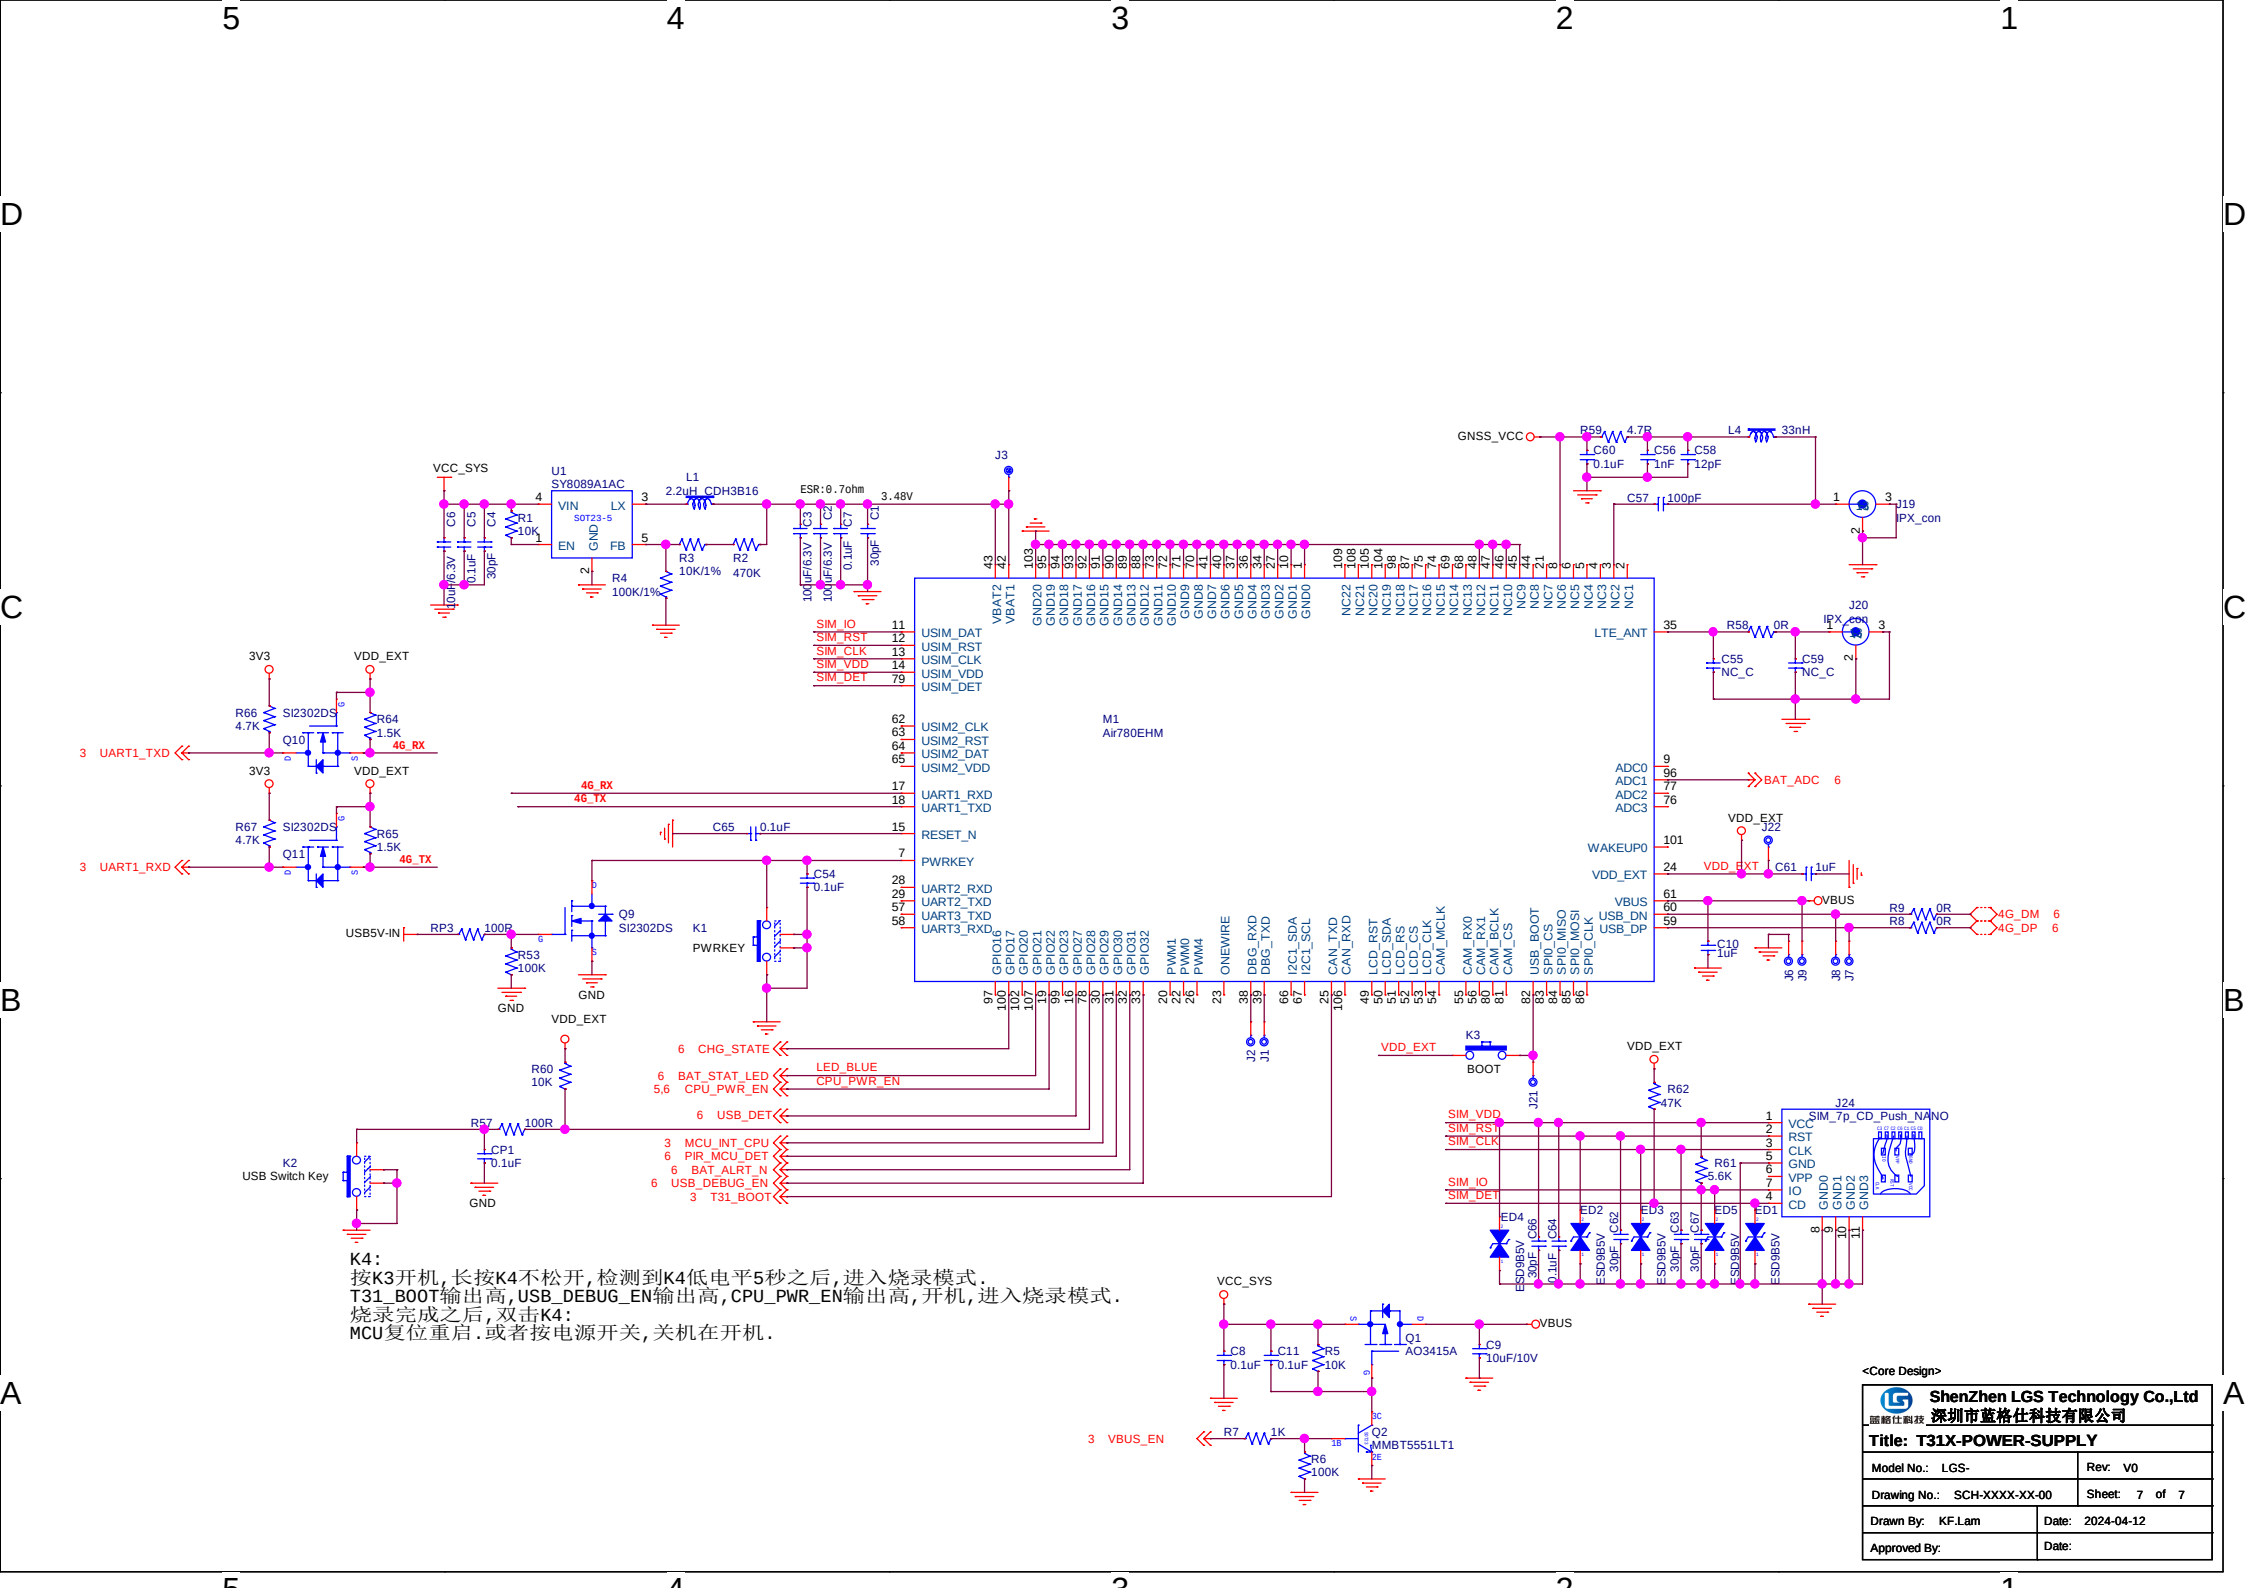

K4:
按K3开机,长按K4不松开,检测到K4低电平5秒之后,进入烧录模式。
T31_BOOT输出高,USB_DEBUG_EN输出高,CPU_PWR_EN输出高,开机,进入烧录模式。
烧录完成之后,双击K4:
MCU复位重启。或者按电源开关,关机在开机。

Shenzhen LGS Technology Co.,Ltd 深圳市蓝格仕科技有限公司	
Title: T31X-POWER-SUPPLY	
Model No.: LGS-	Rev: V0
Drawing No.: SCH-XXXX-XX-00	Sheet: 7 of 7
Drawn By: KF.Lam	Date: 2024-04-12
Approved By:	Date: