


NOTES: (UNLESS OTHERWISE SPECIFIED)

1. SPECIFICATIONS AND DOCUMENTS:  
1.1. ELECTRICAL CONNECTIONS SHALL BE IAW OH-INTERCONNECT.
2. ALL ITEMS NOT EXPLICITLY DEFINED IN THIS DRAWING ARE DEFINED BY THE MASTER CAD MODELS.  
ALL DIMENSIONS NOT DEFINED ON THIS DRAWING ARE CONTAINED WITHIN THE FOLLOWING  
MANUFACTURING FILES:  
2.1. DECALS: <PN>\_<DESCRIPTION>\_<REV>\_V<VERSION # OF MODEL>.PDF

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	11/16/2023	

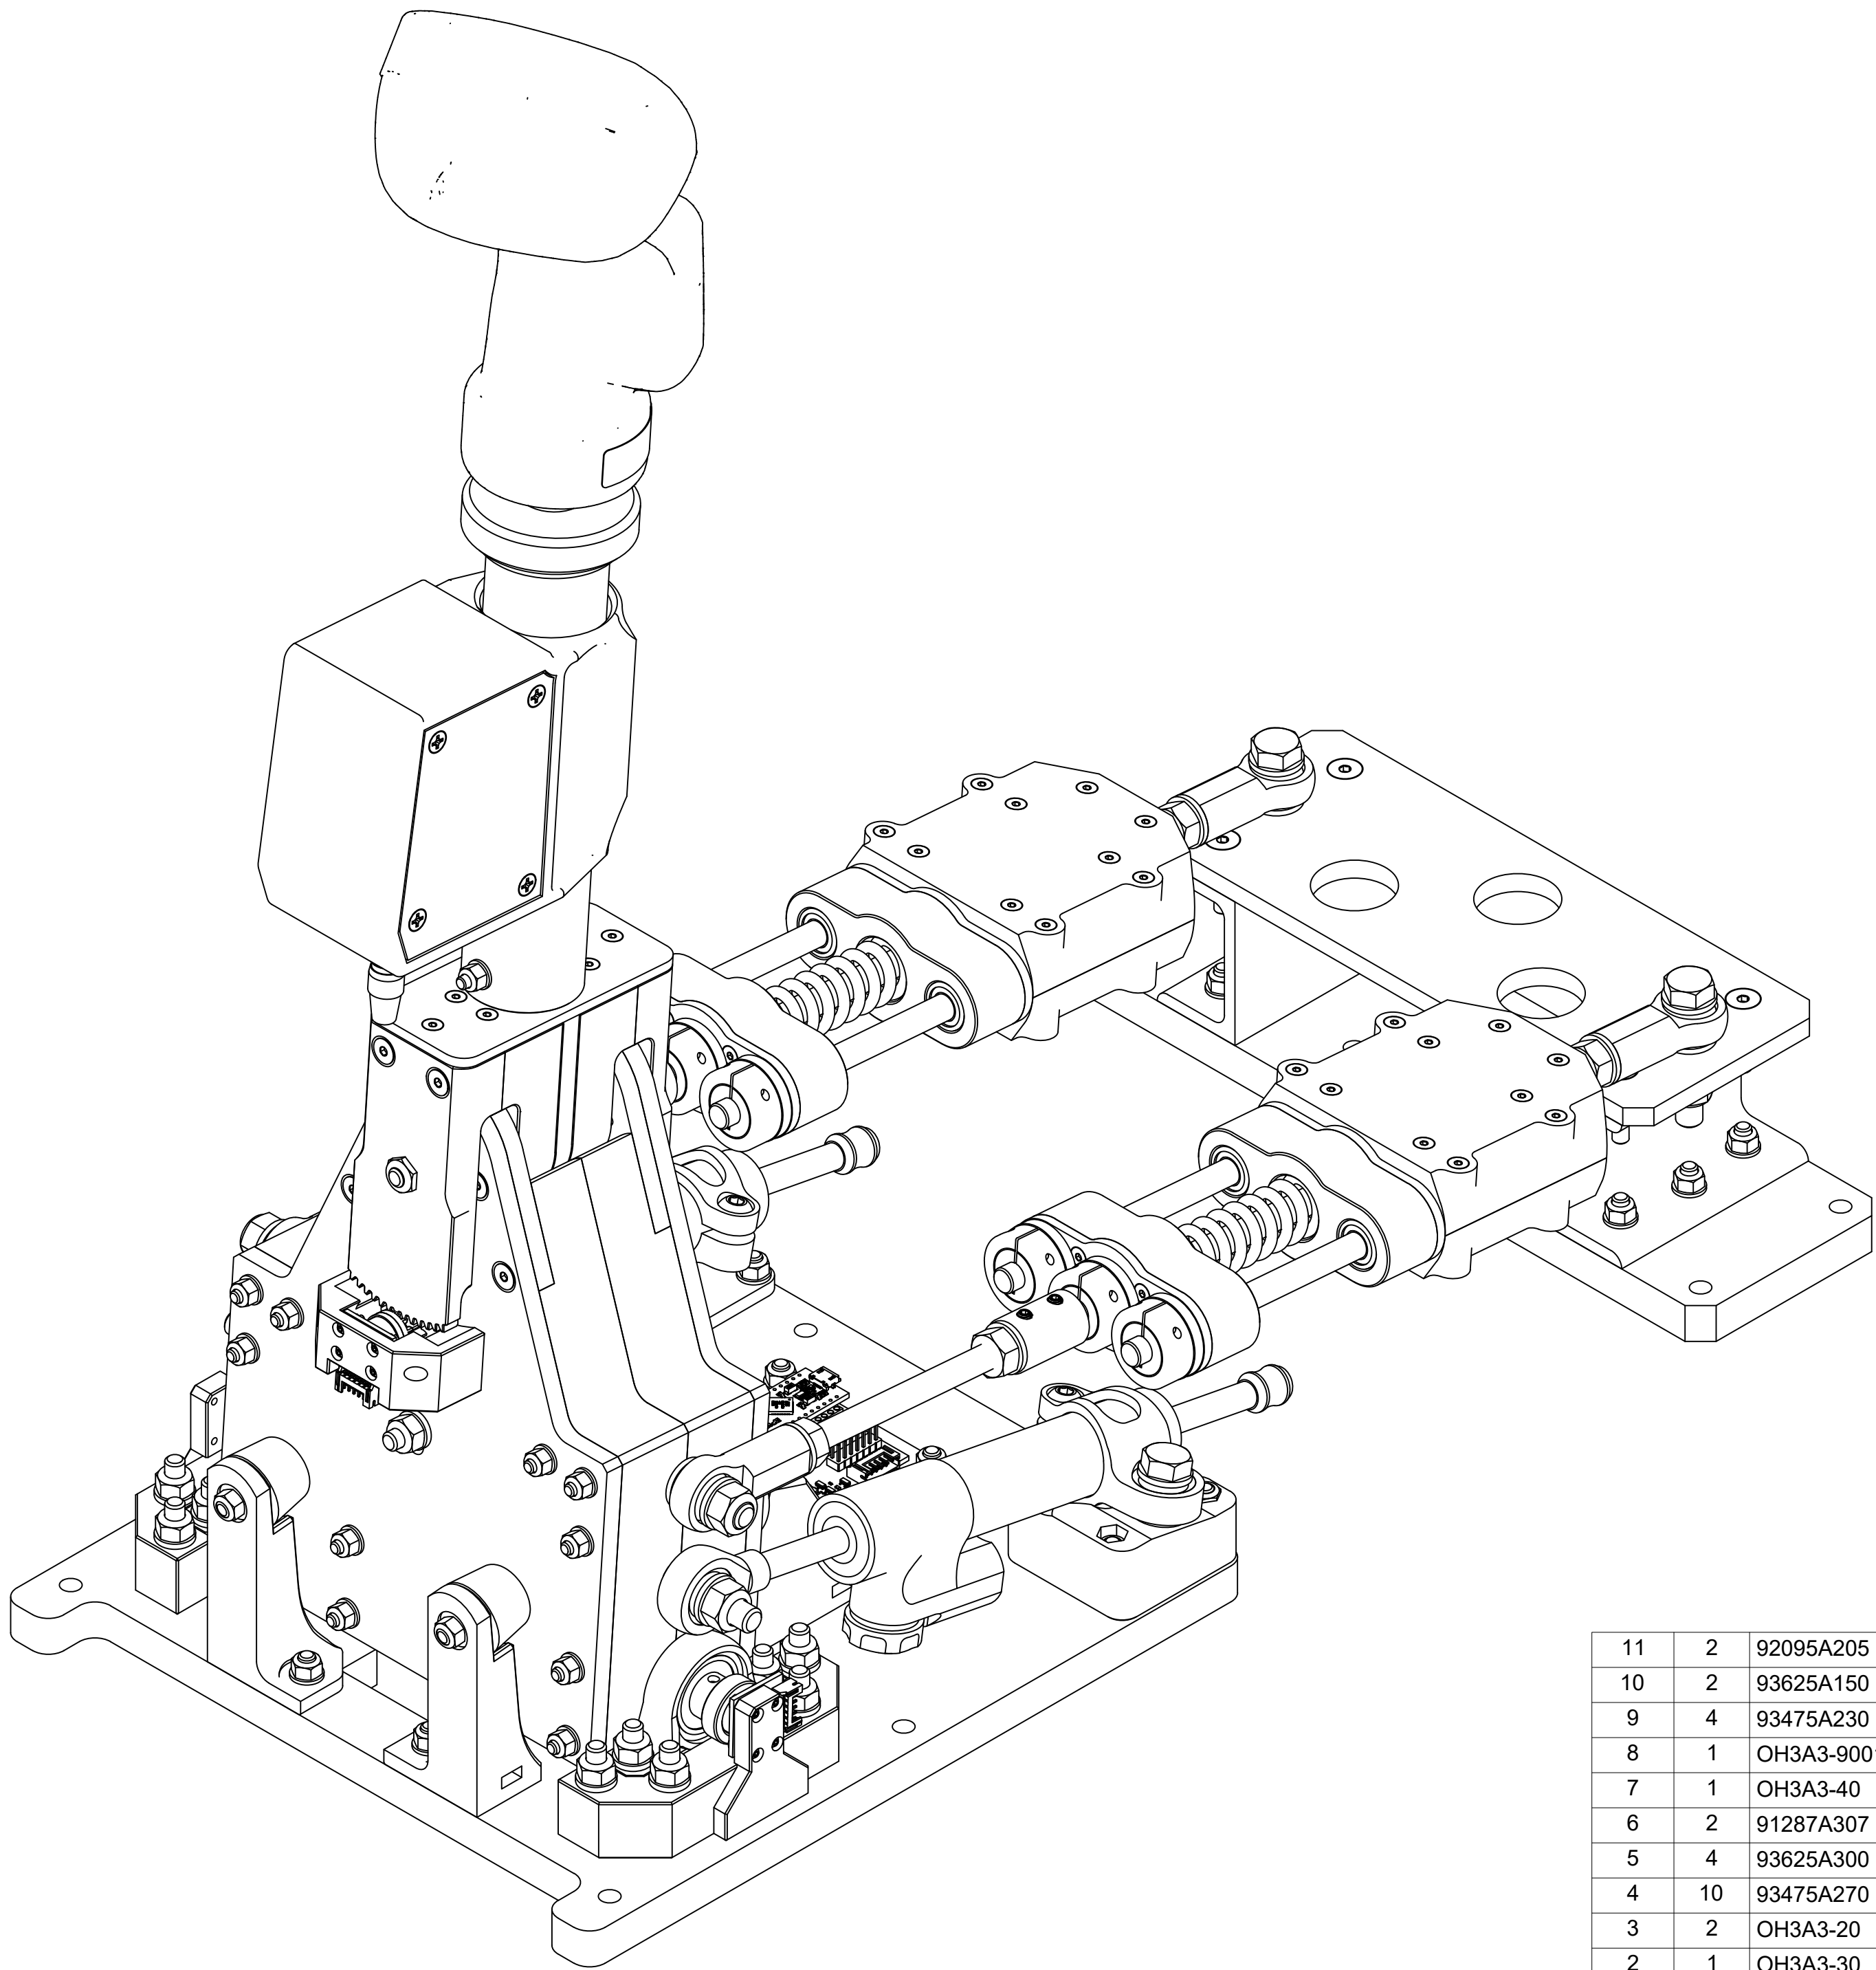


-1 ASSY

11	2	92095A205	BHCS, M4 X 0.7 MM THREAD, 45MM LONG	SS
10	2	93625A150	NYLOC HEX NUT, M4 X 0.7 MM	SS
9	4	93475A230	FLAT WASHER, M4	SS
8	1	OH3A3-9001	DECAL, GRIP ASSY	VYNL
7	1	OH3A3-40	ASSY, STICK EXTENSION	
6	2	91287A307	HHS, M8 X 1.25 MM THREAD, 45 MM LONG	SS
5	4	93625A300	NYLOC HEX NUT, M8 X 1.25MM	SS
4	10	93475A270	93475A270 - FLAT WASHER, M8	SS
3	2	OH3A3-20	ASSY, SSDCT	
2	1	OH3A3-30	ASSY, STATIC SSDCT ANCHOR	
1	1	OH3A3-10	ASSY, STICK PITCH AXIS	
ITEM	QTY	PART NUMBER	DESCRIPTION	MATERIAL

UNLESS OTHERWISE SPECIFIED:			PARTS LIST	
DIMENSIONS ARE IN INCHES. DUAL DIMENSIONS ARE IN MILLIMETERS AND ENCLOSED IN SQUARE BRACKETS. INTERPRET DRAWING IAW ASME Y14.100-2017. INTERPRET DIM AND TOL IAW ASME Y14.5-2009. REMOVE ALL BURRS AND SHARP EDGES TO .05 MAX. DIMENSIONS APPLY BEFORE FINISH.			UOS INCH TOLERANCES ARE: DECIMALS: ANGLES: .X ± .1 MACHINED ± 5° .XX ± .03 LOCATING ± 5° .XXX ± .010 FORMED ± 2° CHAMFERS ± 5° DRILLED HOLE DIAMETERS: .0135 - .125: +.004/- .001 .126 - .250: +.005/- .001 .251 - .500: +.006/- .001 .501 - .750: +.008/- .001 .751 - 1.000: +.010/- .001 1.001 - 2.000: +.012/- .001	
DESIGNED	E. SCOTT	05/05/2023		
CHECKED				
DRAWN	J. STEENSEN	05/05/2023		
SIZE	D	DWG NO	OH3A3-1	REV
SCALE	1:1.5	DO NOT SCALE DWG	SHEET 1/2	-



TITLE  
**ASSY, FLIGHT  
CONTROL STICK**  
CENTER TUB

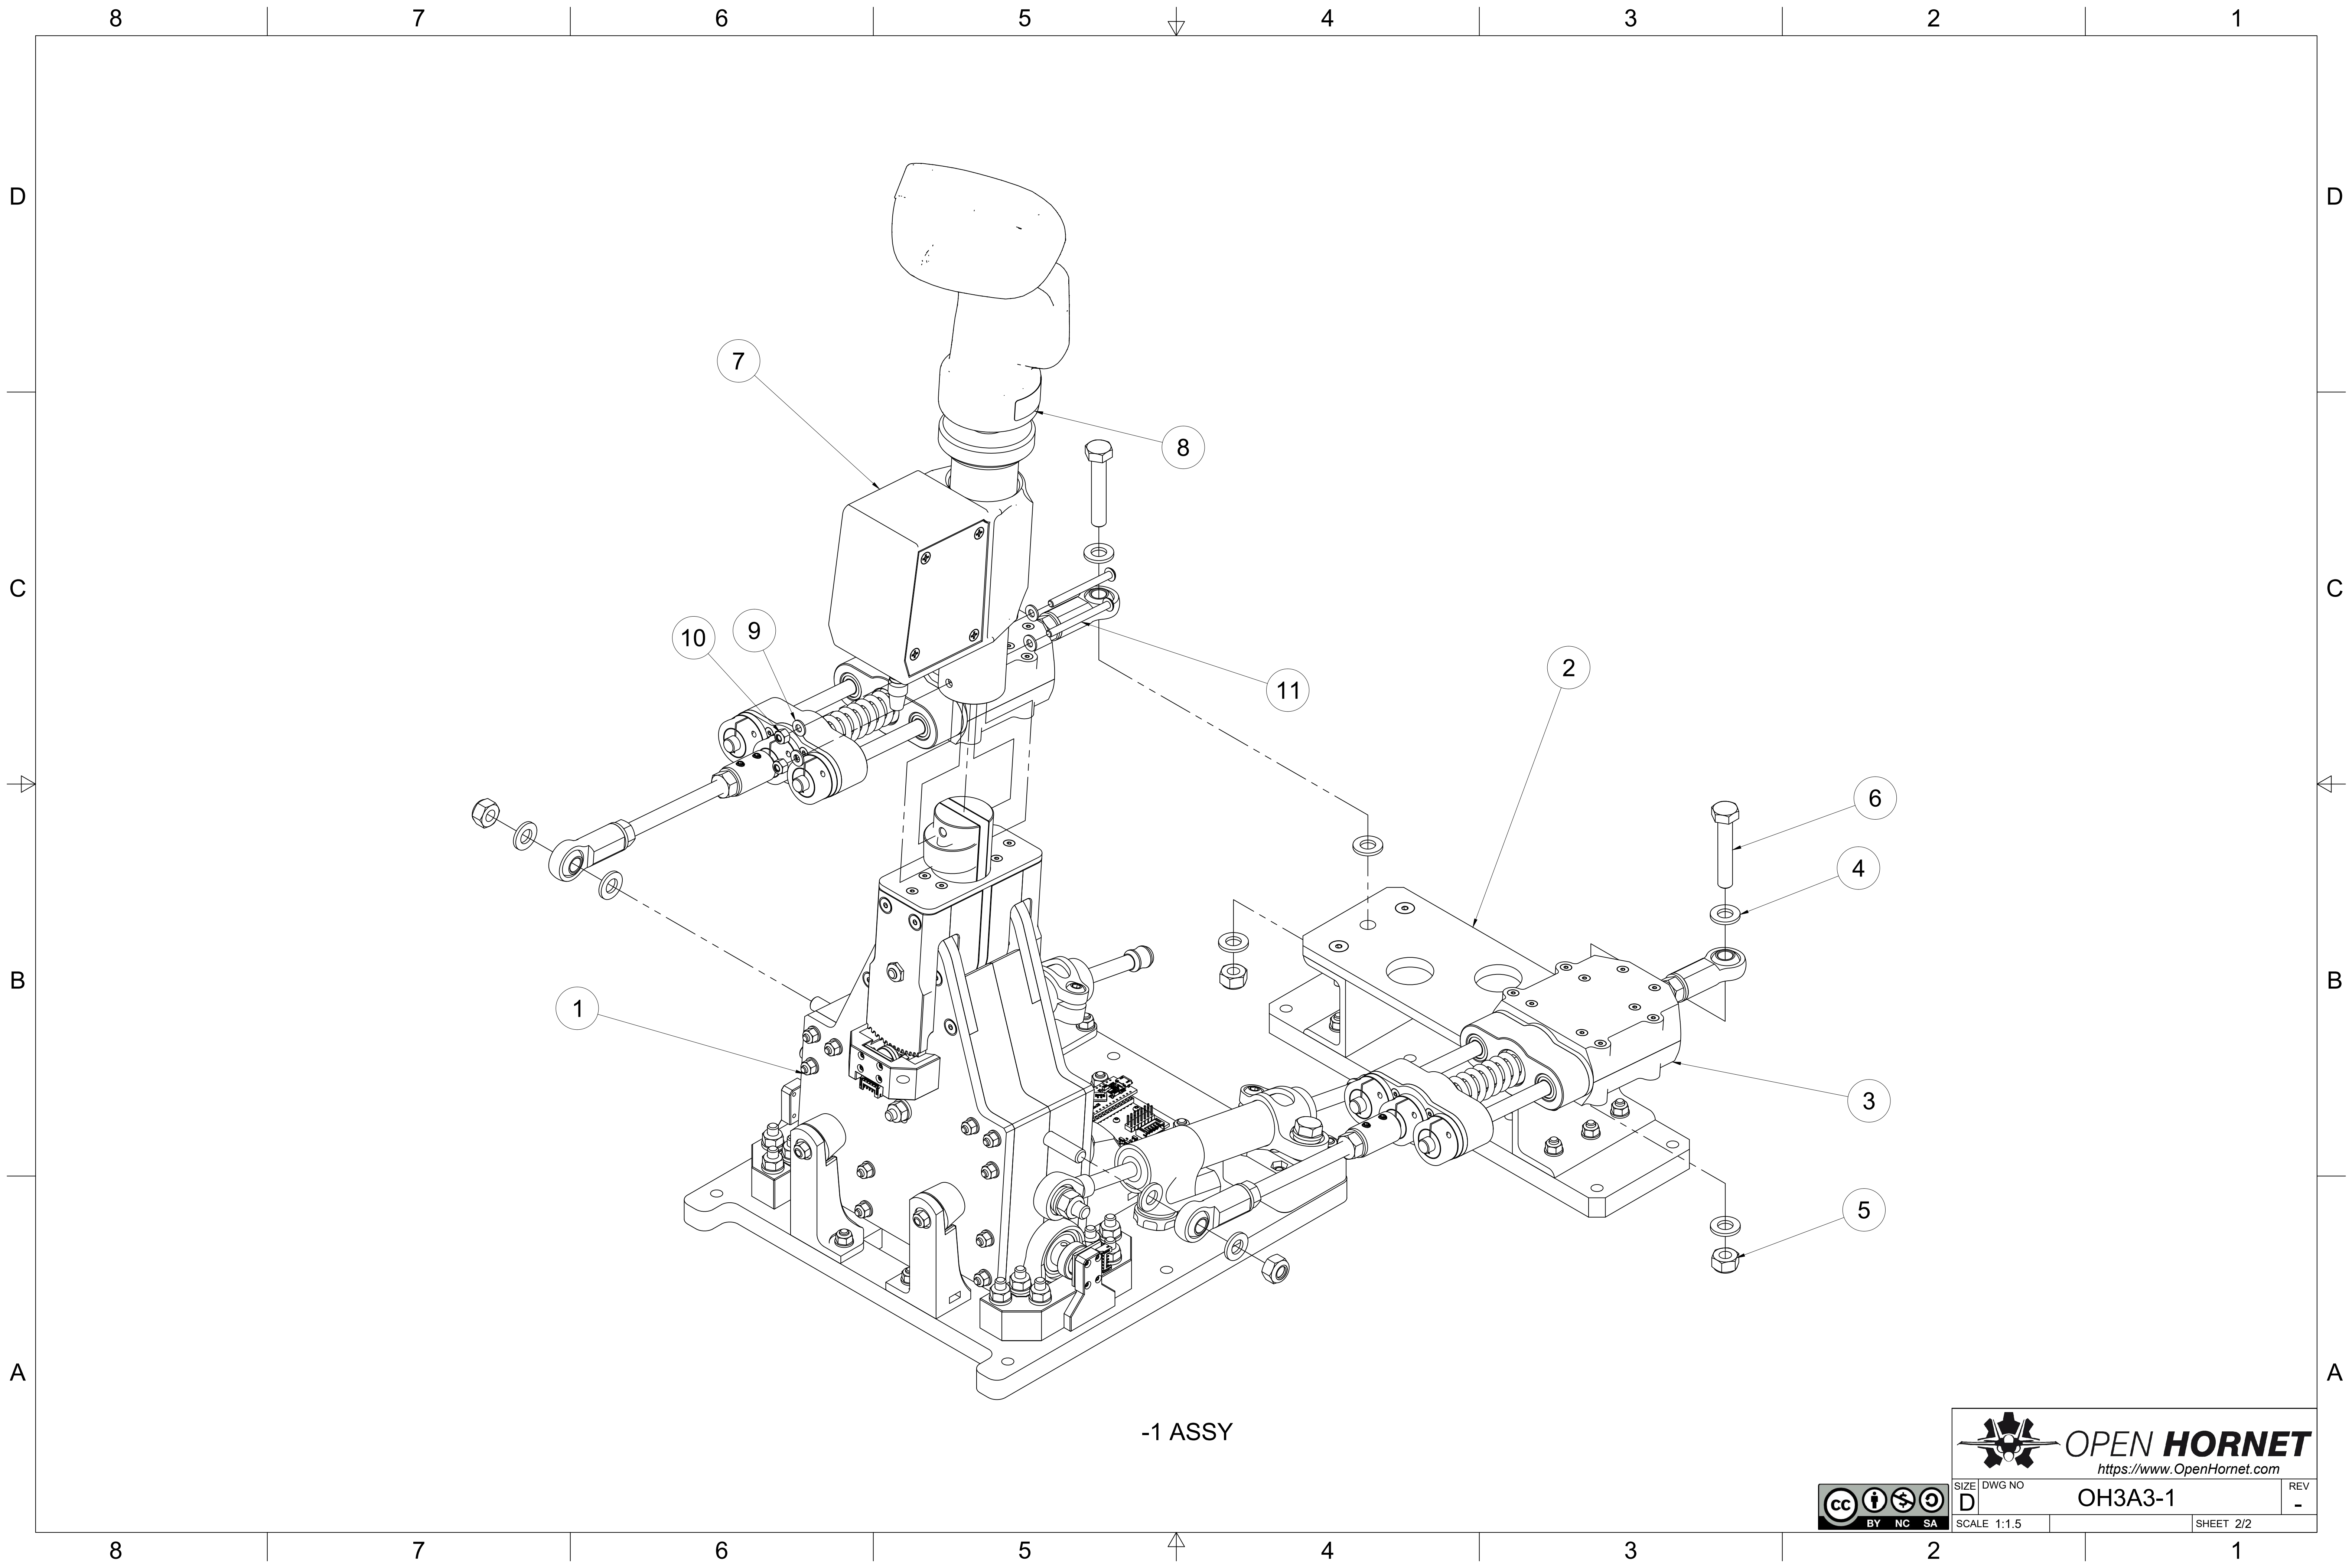

-1 ASSY